

MAXIM

High-Speed, CMOS, Quad, SPST Analog Switch

HI-201HS

General Description

Maxim's HI-201HS is a monolithic, CMOS, quad, single-pole-single-throw (SPST), high-speed analog switch featuring fast switching times (t_{OFF} , $t_{ON} \leq 50\text{ns}$) and low on resistance (50Ω max). It is pin compatible with the industry-standard DG201A.

Maxim's new high-voltage silicon-gate technology increases the maximum supply-voltage rating to 44V. This improvement allows continuous operation with $\pm 20\text{V}$ supplies, which is not permitted with the original manufacturer's devices. Maxim's HI-201HS operates from dual supplies ranging from $\pm 5\text{V}$ to $\pm 20\text{V}$, or from single supplies from $+12\text{V}$ to $+20\text{V}$. Logic levels are TTL-/CMOS-compatible with single or dual supplies within these ranges.

Maxim's HI-201HS is guaranteed not to latch up if power supplies are disconnected while the analog-switch inputs are present, provided the switch continuous-current ratings are not exceeded. When powered up, the HI-201HS will switch analog signals up to the power-supply rails.

Applications

Automatic Test Equipment (ATE)
Heads-Up Displays
Communication Systems
Sample-and-Hold Circuits
Military
Integrator Reset Circuits

Features

- ◆ Guaranteed Single-Supply Operation: $+12\text{V}$ to $+20\text{V}$
- ◆ Guaranteed Dual Supplies: $\pm 5\text{V}$ to $\pm 20\text{V}$
- ◆ Fast Switching Times:
 $t_{ON} = 30\text{ns}$
 $t_{OFF} = 40\text{ns}$
- ◆ Low, 50Ω Max On Resistance
- ◆ TTL-/CMOS-Compatible
- ◆ 44V Max Supply Rating


Ordering Information

PART	TEMP. RANGE	PIN-PACKAGE
HI3-0201HS-5	0°C to $+70^\circ\text{C}$	16 Plastic DIP
HI6-0201HS-5	0°C to $+70^\circ\text{C}$	16 Narrow SO
HI1-0201HS-5	0°C to $+70^\circ\text{C}$	16 Cerdip
HI0-0201HS-6	0°C to $+70^\circ\text{C}$	Dice*
HI3-0201HS-9	-40°C to $+85^\circ\text{C}$	16 Plastic DIP
HI6-0201HS-9	-40°C to $+85^\circ\text{C}$	16 Narrow SO
HI1-0201HS-9	-40°C to $+85^\circ\text{C}$	16 Cerdip
HI1-0201HS-2	-55°C to $+125^\circ\text{C}$	16 Cerdip
HI4-0201HS-8	-55°C to $+125^\circ\text{C}$	20 LCC**


* Contact factory for dice specifications.

** Contact factory for availability.

Functional Diagram

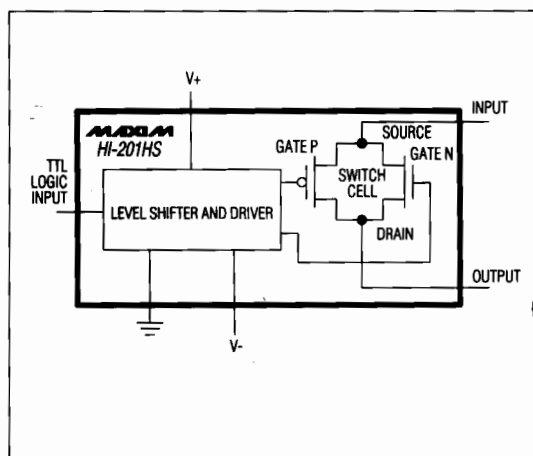

Pin Configurations

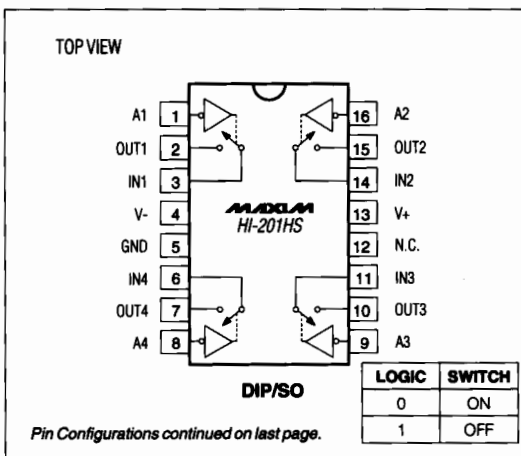

High-Speed, CMOS, Quad, SPST Analog Switch

ABSOLUTE MAXIMUM RATINGS

Voltage Referenced to V-
 V+ 44V
 GND 25V
 Digital Inputs Vs, V_D (Note 1) ... (V- - 4V) to (V+ + 4V) or 30mA
 (whichever occurs first)
 Current (any terminal, except S or D) 30mA
 Continuous Current, S or D 20mA
 Peak Current, S or D
 (pulsed at 1ms, 10% duty cycle max) 40mA

Continuous Power Dissipation (T_A = +70°C, Note 2)
 16-Pin DIP (derate 10.53mW/°C above +70°C) 842mW
 16-Pin Wide SO (derate 9.52mW/°C above +70°C) ... 762mW
 16-Pin Cerdip (derate 10.00mW/°C above +70°C) ... 800mW
 20-Pin LCC (derate 9.09mW/°C above +70°C) 727mW
 Operating Temperature Ranges:
 HI-0201HS-5/-6 0°C to +70°C
 HI-0201HS-9 -40°C to +85°C
 HI-0201HS-2/-8 -55°C to +125°C
 Storage Temperature Range -65°C to +150°C
 Lead Temperature (soldering, 10sec) +300°C

Note 1: Signals on S_x, D_x, or I_{Nx} exceeding V+ or V- are clamped by internal diodes. Limit forward current to maximum current ratings.

Note 2: All leads soldered or welded to PC board.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V+ = 15V, V- = -15V, GND = 0V, T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	HI-201HS-2/-8			HI-201HS-5/-6/-9			UNITS	
			MIN (Note 3)	TYP (Note 4)	MAX	MIN (Note 3)	TYP (Note 4)	MAX		
SWITCH										
Analog-Signal Range	VANALOG		-15		15	-15		15	V	
Drain-Source On Resistance (Note 5)	rDS (on)	VD = ±10V, VIN = 0.8V, IS = 1mA		30	50		30	50	Ω	
Source-Off Leakage Current	IS (off)	VIN = 3.0V	VS = 14V, VD = -14V	-1	±0.01	1	-1	±0.01	1	nA
			VS = -14V, VD = 14V	-1	±0.02	1	-1	±0.02	1	
Drain-Off Leakage Current	ID (off)	VIN = 3.0V	VD = 14V, VS = -14V	-1	±0.01	1	-1	±0.01	1	nA
			VD = -14V, VS = 14V	-1	±0.02	1	-1	±0.02	1	
Drain-On Leakage Current (Note 6)	ID (on)	VD = -14V, VIN = 0.8V	-1	±0.10	1	-1	±0.10	1	nA	
		VD = 14V, VIN = 0.8V	-1	±0.15	1	-1	±0.15	1		
LOGIC INPUT										
Input Current with Input Voltage High	IINH	VIN = 3.0V	-1	0	1	-1	0	1	μA	
		VIN = 15V	-1	0	1	-1	0	1		
Input Current with Input Voltage Low	IINL	VIN = 0.8V	-1	0	1	-1	0	1	μA	

High-Speed, CMOS, Quad, SPST Analog Switch

HI-201HS

ELECTRICAL CHARACTERISTICS (continued)

(V+ = 15V, V- = -15V, GND = 0V, TA = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	HI-201HS-2/-8			HI-201HS-5/-6/-9			UNITS
			MIN (Note 3)	TYP (Note 4)	MAX	MIN (Note 3)	TYP (Note 4)	MAX	
DYNAMIC									
Turn-On Time	ton	Figure 6	30	50		30	50		ns
Turn-Off Time	toff	Figure 6	40	50		40	50		ns
	toff2		150		150				
Output Settling Time			180			180			ns
Charge Injection	Q	CL = 1000pF, VGEN = 0V, RGEN = 0Ω	10			10			pC
Source-Off Capacitance	CS (off)	VS = 0V, VIN = 5V	f = 140kHz	10		10			pF
Drain-Off Capacitance	CD (off)	VS = 0V, VIN = 5V	f = 140kHz	10		10			pF
Channel-On Capacitance	CD (on) ⁺ CS (on)	VD = VS = 0V, VIN = 0V	f = 140kHz	30		30			pF
Off Isolation		VIN = 3VRMS, ZL = 1kΩ, f = 100kHz	72			72			dB
Crosstalk (Channel-to-Channel)		VS = 2.0V, f = 100kHz	90			90			dB
SUPPLY									
Positive Supply Current	I+	All channels on or off	-3.0	3.8	6.5	-3.0	3.8	6.5	mA
Negative Supply Current	I-		1.0			1.0			mA
Power-Supply Range for Continuous Operation	VOP	(Note 5)	±4.5		±20	±4.5		±20	V

High-Speed, CMOS, Quad, SPST Analog Switch

ELECTRICAL CHARACTERISTICS

(V+ = 15V, V- = -15V, GND = 0V, TA = TMIN to TMAX, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	HI-201HS-2/-8			HI-201HS-5/-6/-9			UNITS	
			MIN (Note 3)	TYP (Note 4)	MAX	MIN (Note 3)	TYP (Note 4)	MAX		
SWITCH										
Analog-Signal Range	VANALOG			-15		15	-15		15	V
Drain-Source On Resistance (Note 5)	rDS (on)	VD = ±10V, VIN = 0.8V, IS = 1mA				75			75	Ω
Source-Off Leakage Current	IS (off)	VIN = 3.0V	VS = 14V, VD = -14V	-100		100	-50		50	nA
			VS = -14V, VD = 14V	-100		100	-50		50	
Drain-Off Leakage Current	ID (off)	VIN = 3.0V	VD = 14V, VS = -14V	-100		100	-50		50	nA
			VD = -14V, VS = 14V	-100		100	-50		50	
Drain-On Leakage Current (Note 6)	ID (on)	VD = -14V, VIN = 0.8V		-100		100	-50		50	nA
		VD = 14V, VIN = 0.8V		-100		100	-50		50	
LOGIC INPUT										
Input Current with Input Voltage High	IINH	VIN = 3.0V		-1.0		1.0	-1.0		1.0	μA
		VIN = 15V		-1.0		1.0	-1.0		1.0	
Input Current with Input Voltage Low	IINL	VIN = 0.8V		-1.0		1.0	-1.0		1.0	μA
DYNAMIC										
Turn-On Time	ton	See Figure 6				75			75	ns
Turn-Off Time	toff	See Figure 6				75			75	ns
SUPPLY										
Positive Supply Current	I+	All channels on or off				10			10	mA
Negative Supply Current	I-	All channels on or off		6			6			mA

Note 3: The algebraic convention where the most negative value is a minimum and the most positive a maximum is used in this data sheet.

Note 4: Typical values are for DESIGN AID ONLY, not guaranteed or subject to production testing.

Note 5: Electrical characteristics, such as on resistance, will change when power supplies other than ±15V are used.

Note 6: ID(on) is leakage from driver into on switch.

High-Speed, CMOS, Quad, SPST Analog Switch

HI-201HS

Protecting Against Fault Conditions

Fault conditions occur when power supplies are turned off and input signals are still present, or when overvoltages occur at the inputs during normal operation. In either case, source-to-body diodes can be forward biased and conduct current from the signal source. If this current must be kept at low (μA) levels, we recommend adding external protection diodes (Figure 1).

To provide protection for overvoltages up to 20V above the supplies, place a 1N4001 or 1N914 type diode in series with the positive and negative supplies, as shown in Figure 1. Adding these diodes will reduce the analog-signal range to 1V below the positive supply and 1V above the negative supply.

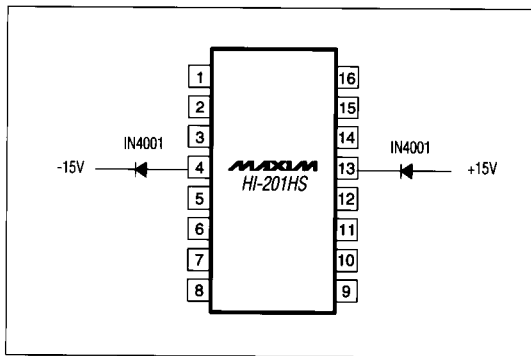


Figure 1. Protection Against Fault Conditions

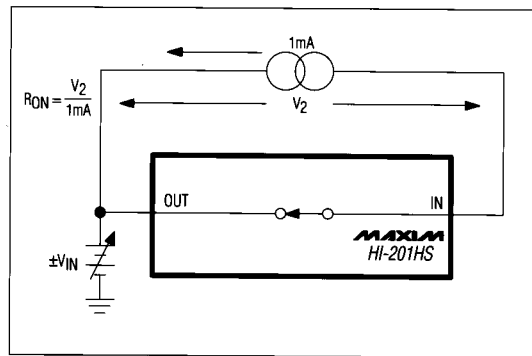


Figure 2. On Resistance

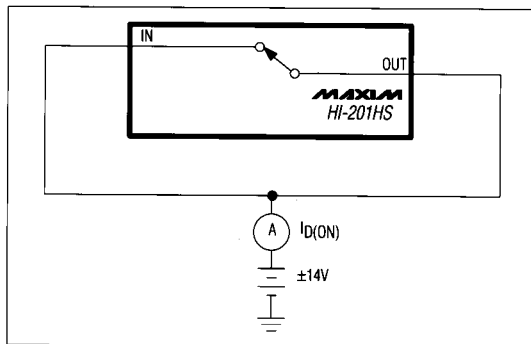


Figure 3. On Leakage Current

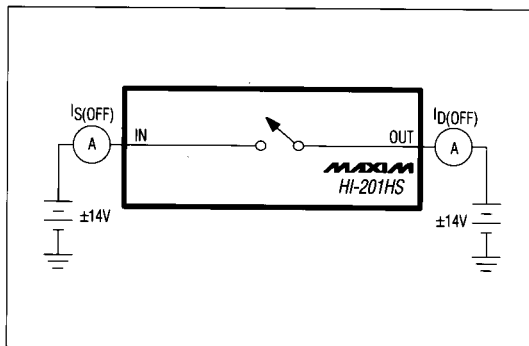


Figure 4. Off Leakage Current

High-Speed, CMOS, Quad, SPST Analog Switch

HI-201HS

Pin Configurations (continued)


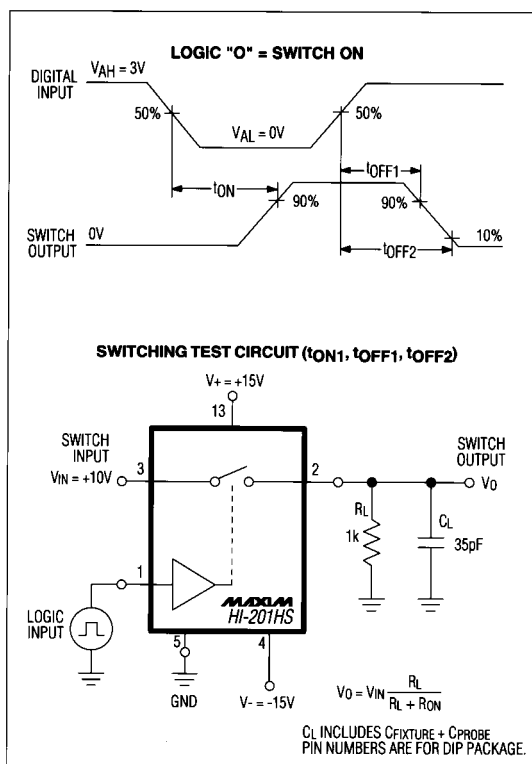




Figure 6. Switching-Time Test Circuit

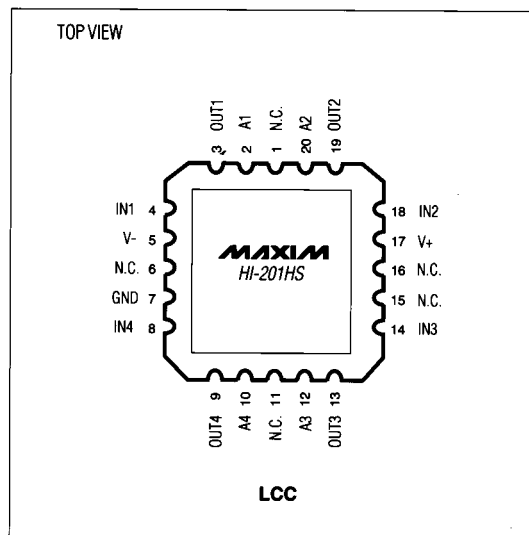

High-Speed, CMOS, Quad, SPST Analog Switch


Package Information

HI-201HS

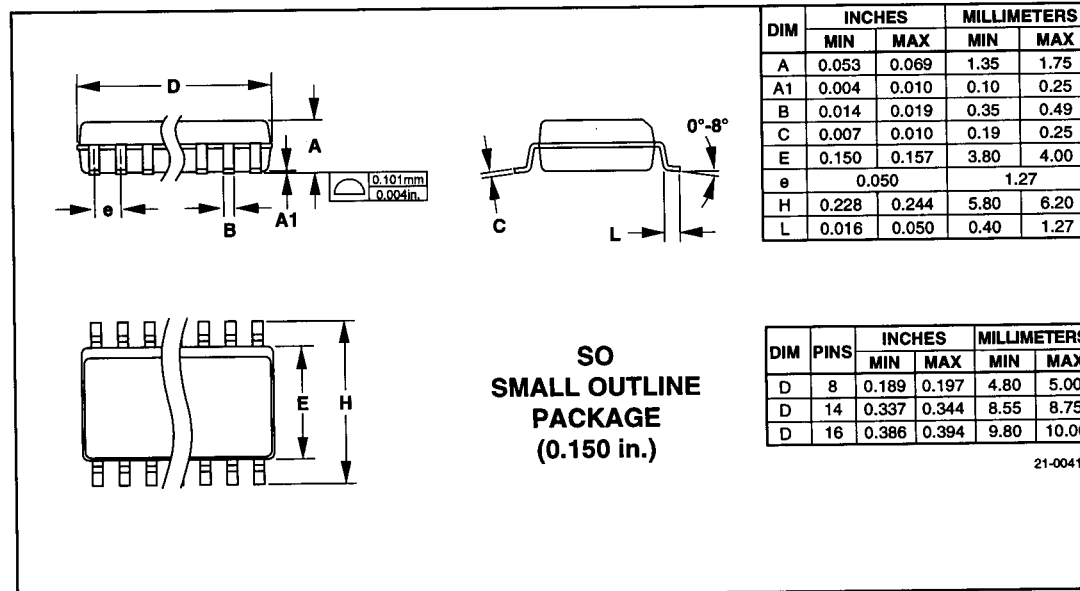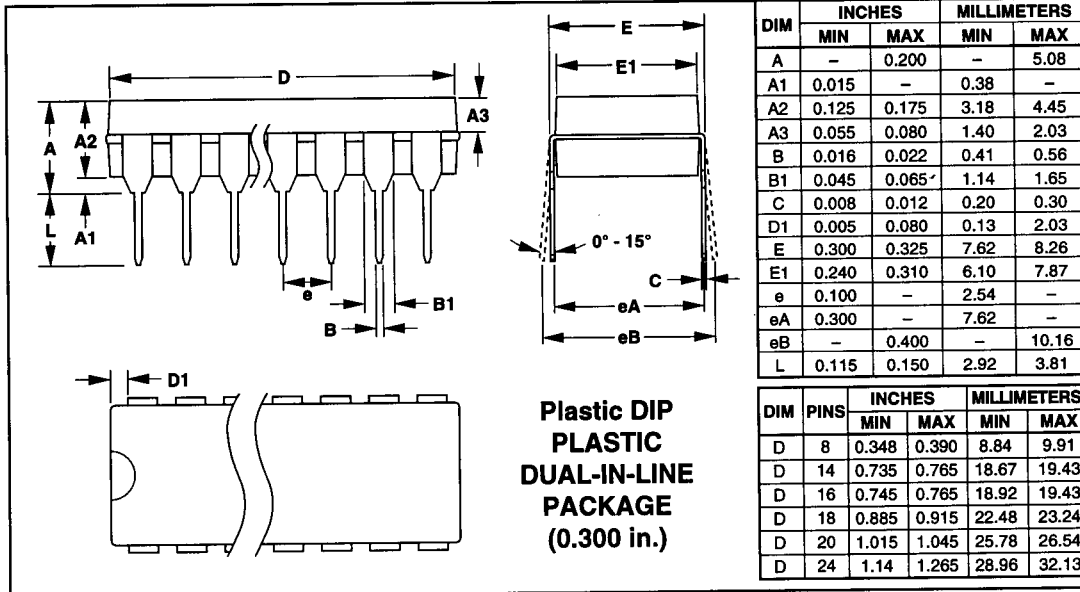

High-Speed, CMOS, Quad, SPST Analog Switch

Package Information (continued)

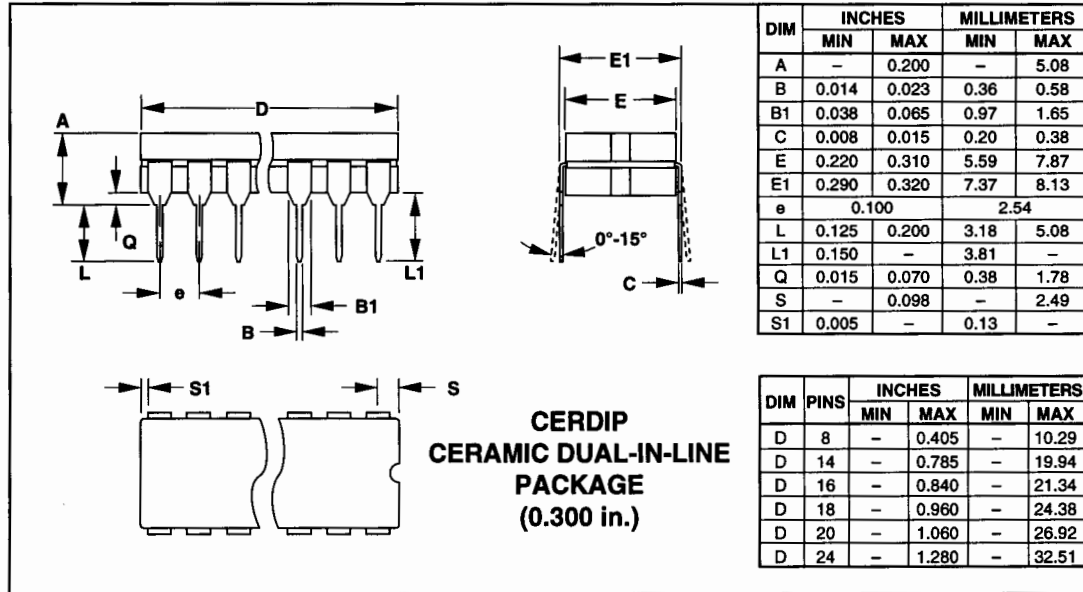

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

8 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600**

© 1994 Maxim Integrated Products

Printed USA

MAXIM is a registered trademark of Maxim Integrated Products.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru