

Surface Mount Fuse, 1.05 x 0.55 mm, Super-Quick-Acting FF, 32 VDC



UL 248-14 · 32VDC · Super-Quick-Acting FF

See below:
[Approvals and Compliances](#)

Description

- UL characteristic
- Low melting I²t-values, fast interruption
- Marking optional
- Impermeable to potting compound

Unique Selling Proposition

- Space constrained applications

Applications

- Secondary Protection
- Circuits without inrush
- Semiconductor protection
- Digital Consumer Electronics

References

[Packaging Details](#)

Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Packaging details](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Microsite](#)

Technical Data

| | | | |
|------------------------------|-------------------------------|------------------------------|---|
| Rated Voltage | 32VDC | Soldering Methods | Reflow Soldering Profile |
| Rated current | 0.25 - 5A | Solderability | 245 °C / 3 sec acc. to IEC 60068-2-58, Test Td |
| Breaking Capacity | 35A | Resistance to Soldering Heat | 260 +0/-5 °C / 30 sec acc. to IPC/JEDEC J-STD-020D, Level 1 |
| Characteristic | Super-Quick-Acting FF | Moisture Sensitivity Level | MSL 1, J-STD-020 |
| Mounting | PCB,SMT | Case Resistance | acc. to EIA/IS-722, Test 4.7 >100 MΩ (between leads and body) |
| Admissible Ambient Air Temp. | -55 °C to 90 °C | Flammability | min. UL 94V-1 (acc. to EIA/IS-722, Test 4.12) |
| Climatic Category | 55/125/21 acc. to IEC 60068-1 | Moisture Resistance Test | MIL-STD-202, Method 106 (50 cycles in a temp./mister chamber) |
| Material: Housing | Thermoset | Resistance to Solvents | MIL-STD-202, Method 215 |
| Material: Terminals | Gold-Plated Copper Alloy | Terminal Strength | MIL-STD-202, Method 211A (Deflection of board 1 mm for 1 minute) |
| Unit Weight | 0.004 g | | |
| Storage Conditions | 0 °C to 60 °C, max. 70% r.h. | | |
| Product Marking | see table of variants | | |

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: USF 0402

| Approval Logo | Certificates | Certification Body | Description |
|---|-------------------------------|--------------------|----------------------------------|
|  | UL Approvals | UL | UL File Number: E41599 |
|  | CSA Approvals | CSA | CSA Certification Record: 248899 |


Product standards

Product standards that are referenced

| Organization | Design | Standard | Description |
|--|-----------------------|--------------------|---|
|  | Designed according to | UL 248-14 | Low voltage fuses - Part 14: Additional fuses |
|  | Designed according to | CSA22.2 No. 248.14 | Low-Voltage Fuses - Part 14: Supplemental Fuses |




Application standards

Application standards where the product can be used


| Organization | Design | Standard | Description |
|--|--------------------------------|----------------|--|
|  | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment. |

Compliances

The product complies with following Guide Lines


| Identification | Details | Initiator | Description |
|--|--------------|-------------|---|
|  | RoHS | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863 |
|  | Halogen Free | SCHURTER AG | SCHURTER strives to offer our customers halogen free products. |
|  | REACH | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |

Dimension [mm]

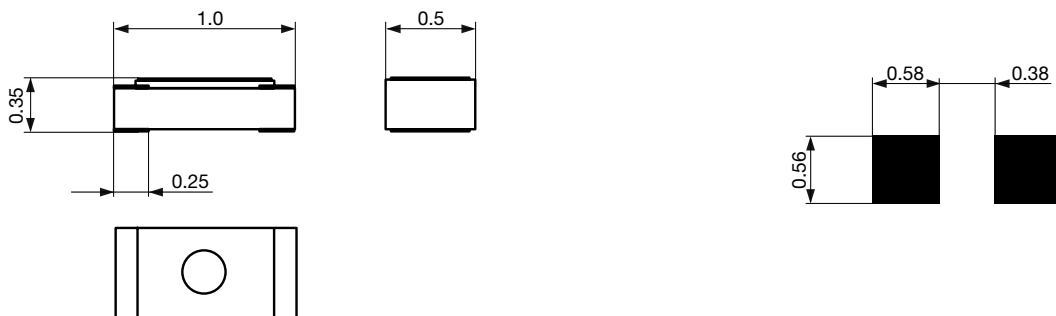

Soldering pads

Derating Curves

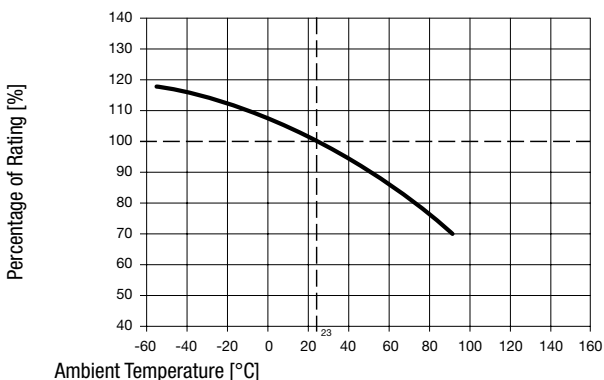

Pre-Arcing Time

| Rated Current I _n | 1.0 x I _n min | 2.0 x I _n max | 3.0 x I _n max |
|------------------------------|--------------------------|--------------------------|--------------------------|
| 0.25 A | 4 h | - | 5 s |
| 0.375 A - 5 A | 4 h | 5 s | 0.2 s |

Time-Current-Curves



All Variants

| Rated Current [A] | Rated Voltage [VDC] | Marking | Breaking Capacity | Power Dissipation 1.0 I _n typ. [mW] | Voltage Drop 1.0 I _n typ. [mV] | Cold Resistance typ. [mΩ] | Melting I ² t at 1 ms typ. [A ² s] |  | Order Number |
|-------------------|---------------------|---|-------------------|--|---|---------------------------|--|---|--------------|
| 0.25 | 32 |  | 1) | 23 | 92 | 360 | 0.0025 | ● ● | 3414.0111.26 |
| 0.375 | 32 |  | 1) | 32 | 85 | 193 | 0.0035 | ● ● | 3414.0112.26 |
| 0.5 | 32 |  | 1) | 47 | 93 | 160 | 0.0053 | ● ● | 3414.0113.26 |
| 0.75 | 32 |  | 1) | 76 | 102 | 105 | 0.012 | ● ● | 3414.0114.26 |
| 1 | 32 |  | 1) | 87 | 88 | 73 | 0.02 | ● ● | 3414.0115.26 |
| 1.25 | 32 |  | 1) | 120 | 96 | 60 | 0.035 | ● ● | 3414.0116.26 |
| 1.5 | 32 |  | 1) | 130 | 87 | 47 | 0.056 | ● ● | 3414.0117.26 |
| 1.75 | 32 |  | 1) | 142 | 81 | 39 | 0.075 | ● ● | 3414.0118.26 |
| 2 | 32 |  | 1) | 141 | 71 | 30 | 0.1 | ● ● | 3414.0119.26 |
| 2.5 | 32 |  | 1) | 138 | 55 | 20 | 0.156 | ● ● | 3414.0120.26 |
| 3 | 32 |  | 1) | 187 | 61 | 17 | 0.2032 | ● ● | 3414.0121.26 |
| 3.5 | 32 |  | 1) | 202 | 58 | 15 | 0.3017 | ● ● | 3414.0122.26 |
| 4 | 32 |  | 1) | 228 | 57 | 10.5 | 0.3084 | ● ● | 3414.0123.26 |
| 5 | 32 |  | 1) | 262 | 52 | 8.5 | 0.531 | ● ● | 3414.0124.26 |

1) 35 A @ 32 VDC

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit

.xx = .26

Blister Tape 33 cm Reel (10000 pcs.)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru