

Power PCB Relay RPII/1

- 1 pole 8/12/16A, 1 form C (CO) or 1 form A (NO) contact
- 4kV/8mm coil-contact
- Pinning 3.5 or 5mm (8/12A) and 5mm (16A)
- RoHS compliant (Directive 2002/95/EC)

Typical applications
Power supplies, domestic appliances, heating control, installation





Approvals	
VDE REG.-Nr. C894, UL E214025	
Technical data of approved types on request	

Contact Data	8A	12A	16A
Contact arrangement	1 form C (CO) or 1 form A (NO)		
Rated voltage	250VAC		
Max. switching voltage	400VAC		
Rated current	8A	12A	16A
Limiting making current	16A	20A	25A
Breaking capacity max.	2000VA	3000VA	4000VA
Contact material	AgNi0.15	AgCdO	AgCdO
Frequency of operation, with/without load	600/72000h ⁻¹		
Operate/release time typ.	8/2ms		
Bounce time typ., form A/form B	2/4ms		

Contact ratings			
Type	Contact	Load	Cycles
IEC61810			
RP310	A (NO)	16A, 250VAC resistive, 35°C	100x10 ³
RP410/418	A (NO)	12A, 250VAC resistive, 35°C	100x10 ³
RP410/418	C (CO)	10A, 250VAC resistive, 70°C	100x10 ³
RP411/418	A (NO)	8A, 250VAC resistive, 35°C	100x10 ³


Mechanical endurance >30x10⁶ operations



Coil Data	
Coil voltage range	5 to 110VDC
Operative range, IEC 61810	2

Coil versions, DC coil					
Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10% ¹⁾	Rated power mW
005	5	3.5	0.5	54	500
006	6	4.2	0.6	68	500
012	12	8.4	1.2	270	500
024	24	16.8	2.4	1100 ¹⁾	500
048	48	33.6	4.8	4400 ¹⁾	500
060	60	42.0	6.0	6540 ¹⁾	500
110	110	77.0	11.0	23100 ¹⁾	500

1) Coil resistance ±15%.
All figures are given for coil without pre-energization, at ambient temperature +20°C.
Other coil voltages on request.

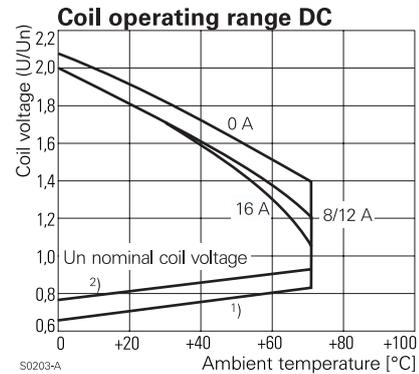

Insulation Data	
Initial dielectric strength	
between open contacts	1000V _{rms}
between contact and coil	4000V _{rms}
Clearance/creepage	
between contact and coil	≥8/8mm
Material group of insulation parts	IIIa


Power PCB Relay RPII/1 (Continued)

Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter	
Ambient temperature	-40 to +70°C
Category of environmental protection	RTII - flux proof, RTIII - wash tight
Vibration resistance (functional), form A/form B, 30 to 300Hz	10/2g
Shock resistance (destructive)	100g
Terminal type	PCB-THT
Weight	18g
Resistance to soldering heat THT, IEC 60068-2-20	
flux proof version	270°C/10s
wash tight version	260°C/5s
Packaging/unit	tube/20 pcs., box/500 pcs.

Dimensions


Dimensions in mm

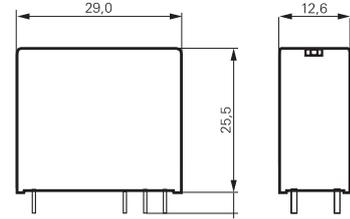


S0273-AA

PCB layout / terminal assignment


8/12A, pinning 3.5 mm









8/12A, pinning 5 mm



16A, pinning 5 mm



Bottom view on solder pins
Dimensions in mm



Product code structure

Typical product code **RP 3 1 0 024**

Type	RP Power PCB Relay RPII/1				
Version	3 16A, flux proof	7 16A, wash tight	1	0	024
	4 8/12A, flux proof	8 8/12A, wash tight			
Contact arrangement	1 1 form C contact (1 CO)	3 1 form A contact (1 NO)			
Contact material and pinning	1 AgNi0.15, 8A, pinning 5mm	0 AgCdO, 12/16A, pinning 5mm			
	2 AgNi0.15, 8A, pinning 3.5mm	8 AgCdO, 12A, pinning 3.5mm			
Coil	Coil code: please refer to coil versions table				

Power PCB Relay RPII/1 (Continued)

Product code	Version	Contact arrangement	Contact material	Pinning	Coil	Part number
RP310012	16A, flux proof	1 form C (CO) contact	AgCdO	5mm 16A	12VDC	2-1393230-9
RP310024					24VDC	3-1393230-2
RP310048					48VDC	3-1393230-3
RP330012		1 form A (NO) contact			12VDC	4-1393230-7
RP330024					24VDC	4-1393230-9
RP330048					48VDC	5-1393230-1
RP410024	12A, flux proof	1 form C (CO) contact		5mm 8/12A	24VDC	8-1393230-2
RP411024	8A, flux proof		AgNi0.15			9-1393230-5
RP412024				3.5mm		1-1393231-2
RP418012	12A, flux proof		AgCdO		12VDC	2-1393231-5
RP418024					24VDC	2-1393231-8
RP438012		1 form A (NO) contact			12VDC	5-1393231-0
RP710012	16A, wash tight	1 form C (CO) contact		5mm 16A		7-1393231-2
RP710024					24VDC	7-1393231-5
RP730012		1 form A (NO) contact			12VDC	8-1393231-2
RP818012	12A, wash tight			3.5mm		1-1393232-7

This list represents the most common types and does not show all variants covered by this datasheet.
Other types on request

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru