

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC | | DIST | | REVISIONS | | | |
|-----|-----|---------------------------|--|-----------|-----|------|--|
| P | LTR | DESCRIPTION | | DATE | DWN | APVD | |
| | D9 | REVISED PER ECO-12-012202 | | 03JUL12 | KH | MS | |

PHYSICAL PROPERTIES:
 HOUSING MATERIAL: PBT
 FLAMMABILITY: UL94V-0
 COLOR: BLACK

TERMINAL:
 TERMINALS: BRASS, TIN PLATED
 SCREWS: 6-32, STEEL, NICKEL PLATED

MECHANICAL:
 PITCH (TERMINAL SPACING): 9.50mm (.374")
 WIRE RANGE: 12-22 AWG
 RECOMMENDED TIGHTENING TORQUE: 12IN-LBS MAX.

ELECTRICAL PROPERTIES:
 MAXIMUM CURRENT: 20A
 OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
 OPERATING TEMP RANGE: -40°C TO 120°C

- ① SCREWS ON ONE SIDE IN WIRE READY POSITION.
- ② SEE FIGURE.
- ③ WHITE INK STAMP.
- ④ NICKEL PLATED BRASS SCREWS.
- ⑤ PRELIMINARY PART NUMBER.
- ⑥ TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.


| LOC | DIST | P | LTR | DESCRIPTION | DATE | DWN | APVD |
|------|------|-------|-------|--------------------------------|--------------------|------------|-------------|
| ⑤② | | | | 104.7 112.2 - - 10 4-1546307-7 | | | |
| ⑤② | | | | 104.7 112.2 - - 10 4-1546307-6 | | | |
| ⑤④ | | | | 104.7 112.2 - - 10 4-1546307-5 | | | |
| ⑤②① | | | | 104.7 112.2 - - 10 3-1546307-3 | | | |
| | | | | 104.7 112.2 - - 10 1-1546307-0 | | | |
| ⑤③②① | | | | 95.2 102.7 - 9 9 5-1546307-0 | | | |
| ⑤③②① | | | | 95.2 102.7 4 9 9 4-1546307-9 | | | |
| ③②① | | | | 95.2 102.7 4 9 9 4-1546307-8 | | | |
| | | | | 95.2 102.7 - - 9 1546307-9 | | | |
| | | | | 85.7 93.2 - - 8 1546307-8 | | | |
| | | | | 76.2 83.7 - - 7 1546307-7 | | | |
| ⑤④ | | | | 66.7 74.2 - - 6 4-1546307-4 | | | |
| | | | | 66.7 74.2 - - 6 1546307-6 | | | |
| ⑤② | | | | 57.2 64.7 - - 5 4-1546307-3 | | | |
| ⑤② | | | | 57.2 64.7 - - 5 4-1546307-2 | | | |
| ⑤② | | | | 57.2 64.7 - - 5 4-1546307-1 | | | |
| ⑤② | | | | 57.2 64.7 - - 5 4-1546307-0 | | | |
| ⑤④ | | | | 57.2 64.7 - - 5 3-1546307-9 | | | |
| | | | | 57.2 64.7 - - 5 1546307-5 | | | |
| ⑤②① | | | | 47.7 55.2 - - 4 3-1546307-2 | | | |
| | | | | 47.7 55.2 - - 4 1546307-4 | | | |
| ⑤② | | | | 38.2 45.7 - - 3 3-1546307-8 | | | |
| ⑤② | | | | 38.2 45.7 - - 3 3-1546307-7 | | | |
| ⑤② | | | | 38.2 45.7 - - 3 3-1546307-6 | | | |
| ⑤② | | | | 38.2 45.7 - - 3 3-1546307-5 | | | |
| ⑤④ | | | | 38.2 45.7 - - 3 3-1546307-4 | | | |
| | | | | 38.2 45.7 - - 3 1546307-3 | | | |
| | | | | 28.7 36.2 - - 2 1546307-2 | | | |
| | | DIM B | DIM A | QC TAB .187 45° ② | QC TAB .187 FLAT ① | NO OF POSN | PART NUMBER |

| | | | | |
|---|--|--------------------------|--|-------------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN S SCHLEGEL 20AUG2002 | STE TE Connectivity | |
| | | CHK C RICHARD 8/20/02 | | |
| DIMENSIONS: mm | | APVD C RICHARD 8/20/02 | NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/ WASHER | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | PRODUCT SPEC | APPLICATION SPEC | |
| 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 2° | | WEIGHT - | SIZE A3 | CAGE CODE 00779 |
| MATERIAL - | | FINISH - | DRAWING NO C-1546307 | RESTRICTED TO - |
| | | CUSTOMER DRAWING | | SCALE 1:1 SHEET 1 OF 3 REV D9 |


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.


| LOC | DIST | REVISIONS | | | |
|-----|------|-------------|------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| - | - | SEE SHEET 1 | - | - | - |







3-1546307-1



3-1546307-2



3-1546307-3

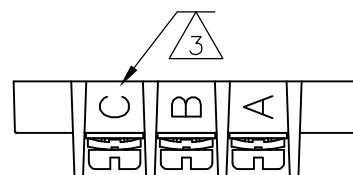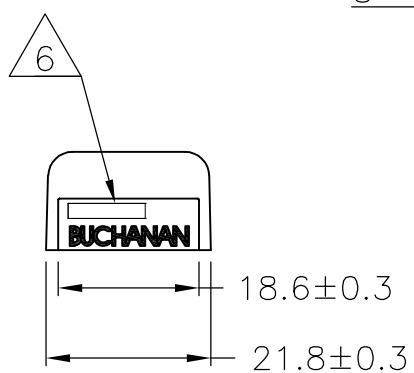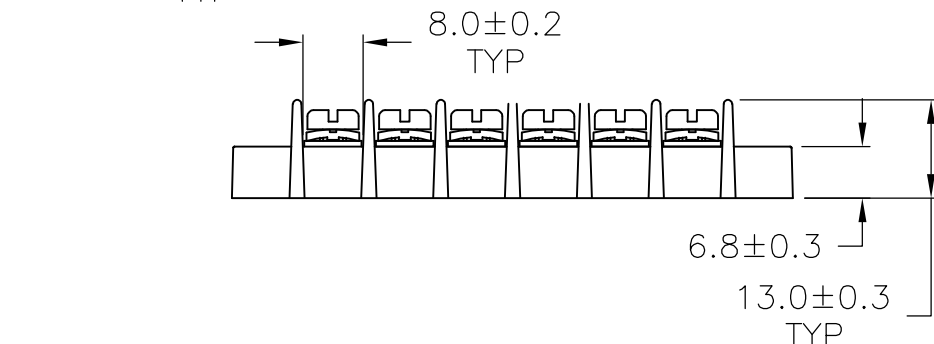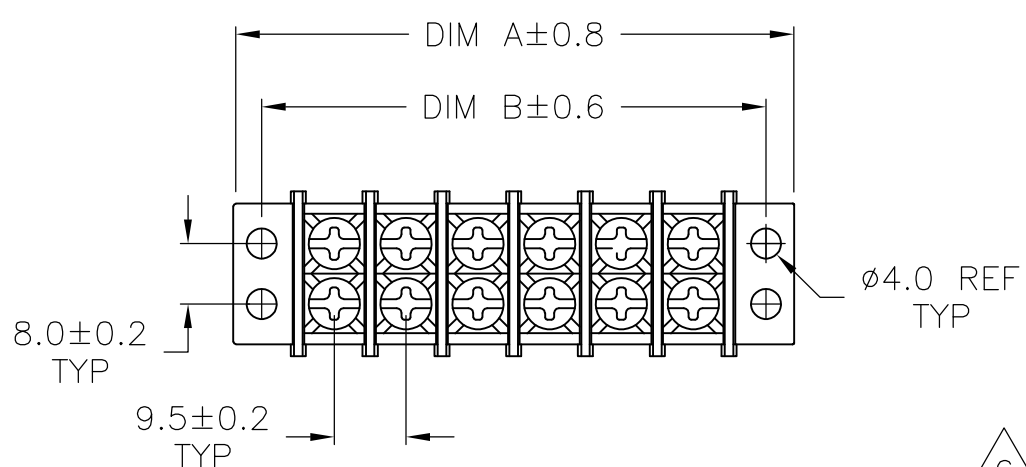




3-1546307-7




3-1546307-8



3-1546307-6

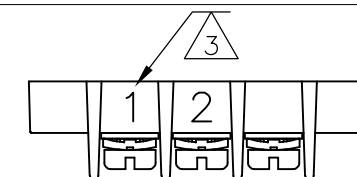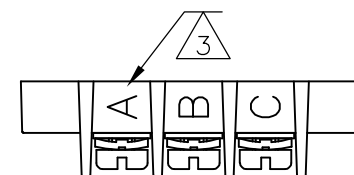


3-1546307-5

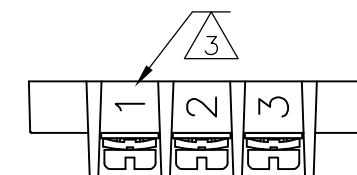

| | | | | | |
|-------|-------|---------------------|----------------------|------------|-------------|
| 294.7 | 302.2 | - | - | 30 | 3-1546307-0 |
| 285.2 | 292.7 | - | - | 29 | 2-1546307-9 |
| 275.7 | 283.2 | - | - | 28 | 2-1546307-8 |
| 266.2 | 273.7 | - | - | 27 | 2-1546307-7 |
| 256.7 | 264.2 | - | - | 26 | 2-1546307-6 |
| 247.2 | 254.7 | - | - | 25 | 2-1546307-5 |
| 237.7 | 245.2 | - | - | 24 | 2-1546307-4 |
| 228.2 | 235.7 | - | - | 23 | 2-1546307-3 |
| 218.7 | 226.2 | - | - | 22 | 2-1546307-2 |
| 209.2 | 216.7 | - | - | 21 | 2-1546307-1 |
| 199.7 | 207.2 | - | - | 20 | 3-1546307-1 |
| 199.7 | 207.2 | - | - | 20 | 2-1546307-0 |
| 190.2 | 197.7 | - | - | 19 | 1-1546307-9 |
| 180.7 | 188.2 | - | - | 18 | 1-1546307-8 |
| 171.2 | 178.7 | - | - | 17 | 1-1546307-7 |
| 161.7 | 169.2 | - | - | 16 | 1-1546307-6 |
| 152.2 | 159.7 | - | - | 15 | 1-1546307-5 |
| 142.7 | 150.2 | - | - | 14 | 1-1546307-4 |
| 133.2 | 140.7 | - | - | 13 | 1-1546307-3 |
| 123.7 | 131.2 | - | - | 12 | 1-1546307-2 |
| 114.2 | 121.7 | - | - | 11 | 1-1546307-1 |
| DIM B | DIM A | QC TAB .187 45° (2) | QC TAB .187 FLAT (1) | NO OF POSN | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.



| DIMENSIONS: | TOLERANCES UNLESS OTHERWISE SPECIFIED: |
|-------------|--|
| mm | |
| 0 PLC | ± - |
| 1 PLC | ± 0.3 |
| 2 PLC | ± 0.25 |
| 3 PLC | ± - |
| 4 PLC | ± - |
| ANGLES | ± 2' |
| MATERIAL | FINISH |
| - | - |

| | | |
|------------------|------------|-----------|
| DWN | S SCHLEGEL | 20AUG2002 |
| CHK | C RICHARD | 8/20/02 |
| APVD | C RICHARD | 8/20/02 |
| PRODUCT SPEC | - | - |
| APPLICATION SPEC | - | - |
| WEIGHT | - | - |
| CUSTOMER DRAWING | | |

STE TE Connectivity

9.50MM (.374) DBL ROW BARRIER STRIP W/ WASHER

SIZE: A3 CAGE CODE: 00779 DRAWING NO: C-1546307 RESTRICTED TO: -

SCALE: 1:1 SHEET: 2 OF 3 REV: D9

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC - -

DIST - -

P - -

LTR - -

REVISIONS


DESCRIPTION

DATE



DWN

APVD



SEE SHEET 1

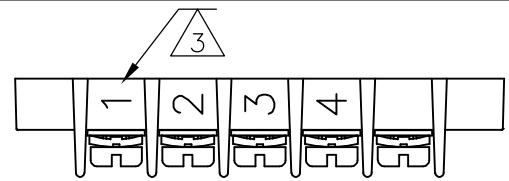


4-1546307-2

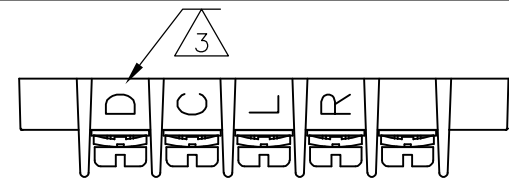


4-1546307-3

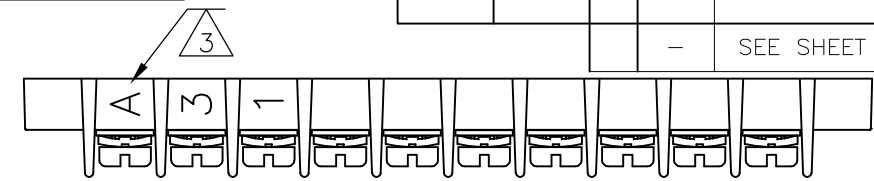


4-1546307-7

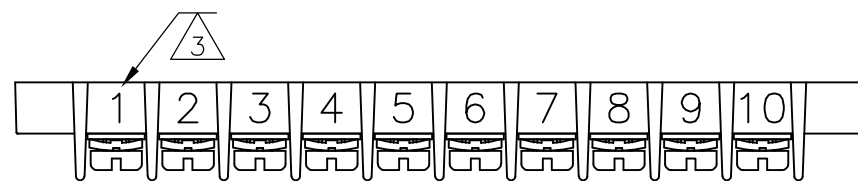



4-1546307-6

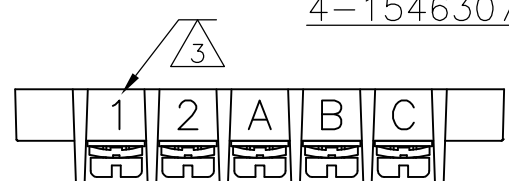


4-1546307-0

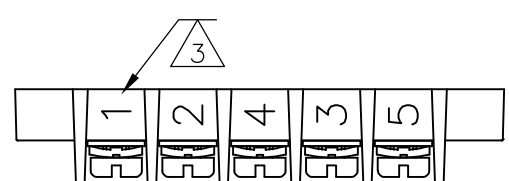


4-1546307-1

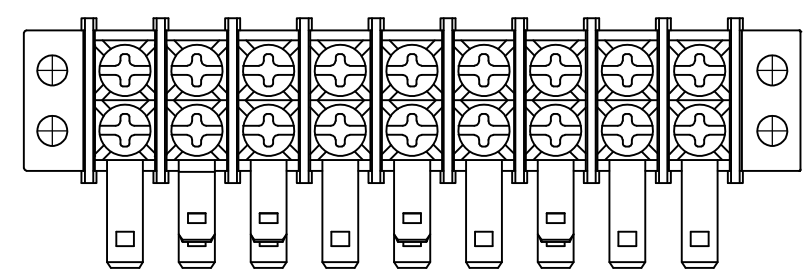

4-1546307-8



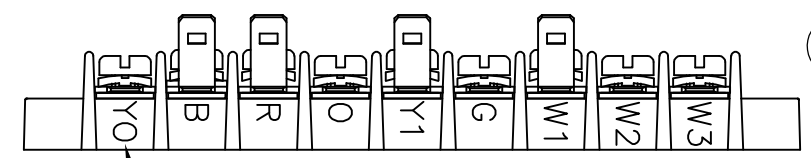


MARK BOTH SIDES

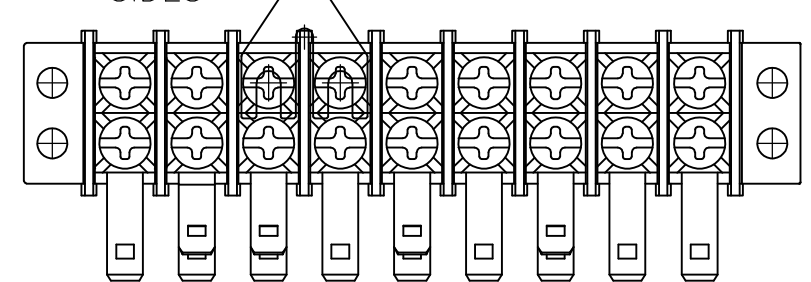


4-1546307-9


MARK BOTH SIDES

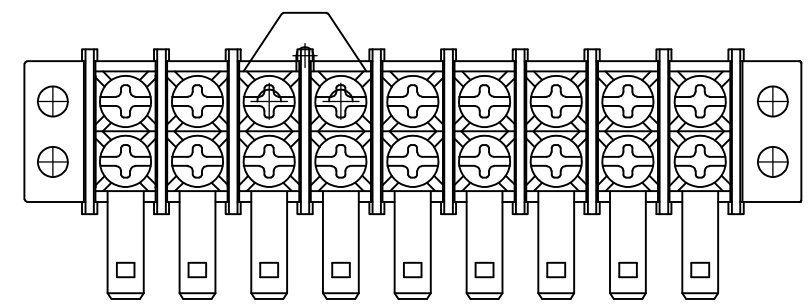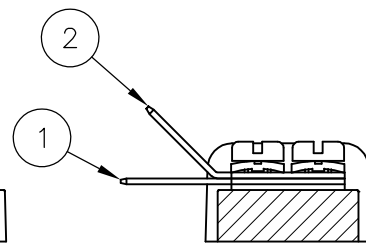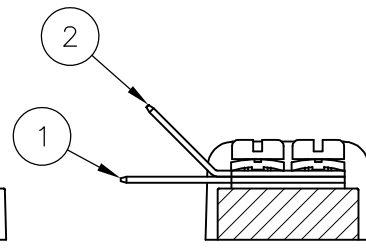

5-1546307-0



MARK BOTH SIDES

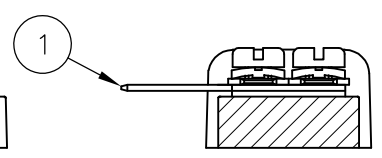

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | |
|-------------|--|
| DIMENSIONS: | |
| mm | |
| | |

| | |
|--|--------|
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | |
| 0 PLC | ± - |
| 1 PLC | ± 0.3 |
| 2 PLC | ± 0.25 |
| 3 PLC | ± - |
| 4 PLC | ± - |
| ANGLES | ± 2' |
| FINISH | - |

MATERIAL -

DWN 20AUG2002

S SCHLEGEL

CHK 8/20/02

C RICHARD

APVD 8/20/02

C RICHARD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -



NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/ WASHER

SIZE A3 CAGE CODE 00779 DRAWING NO C-1546307 RESTRICTED TO -

CUSTOMER DRAWING SCALE 1:1 SHEET 3 OF 3 REV D9

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru