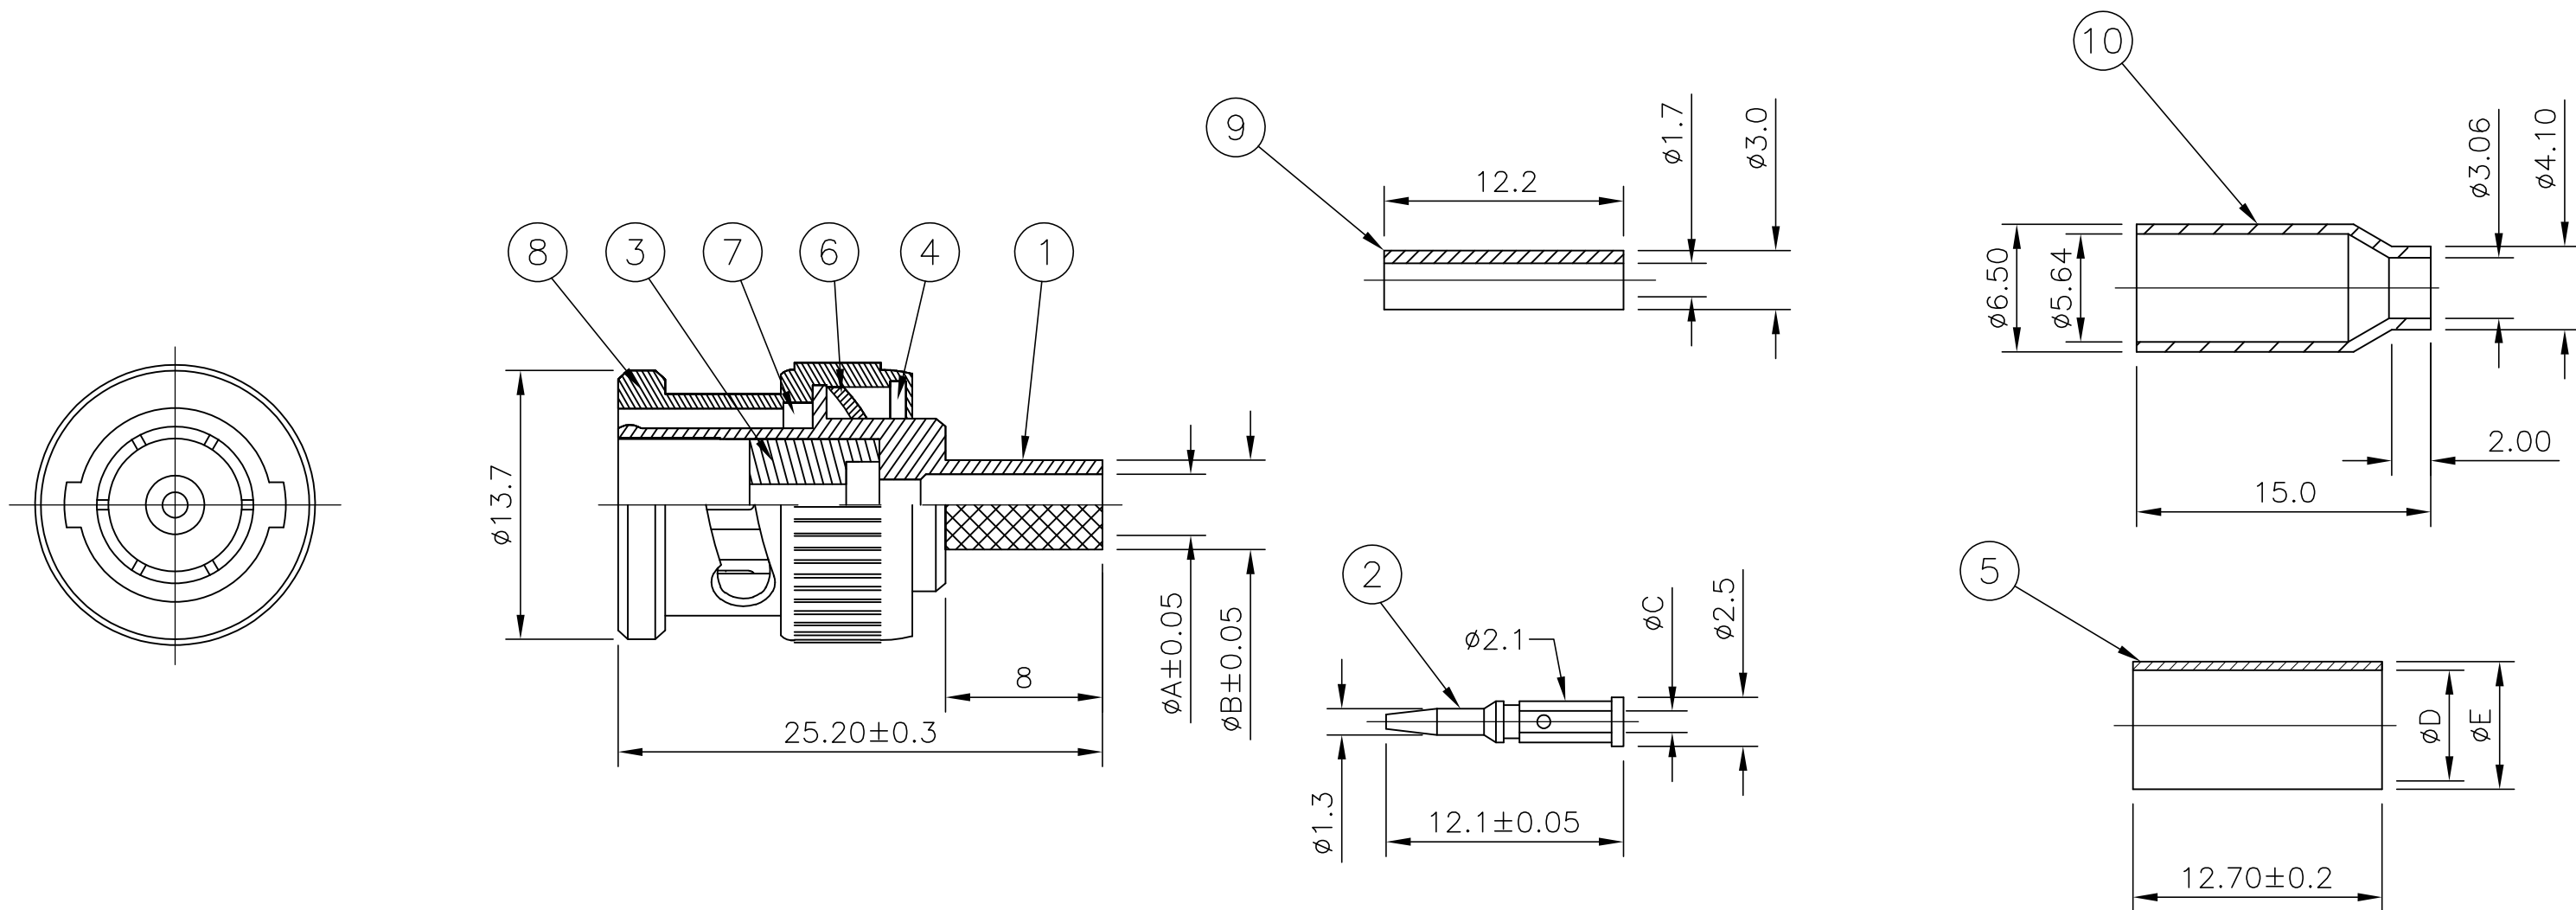


LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	OWN	APVD
			D1	REVISED PER ECO-11-005033	01APR11	RK	HMR
			E	REVISED PER ECO-12-002190	03FEB12	TITAN	MARTIN

NOTES

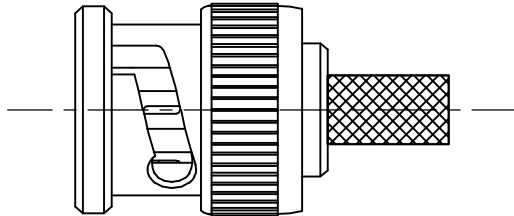


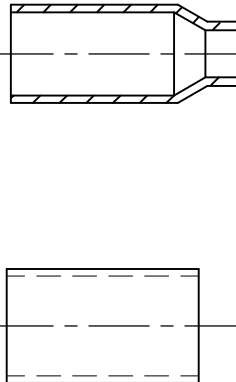
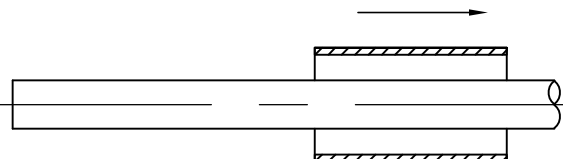
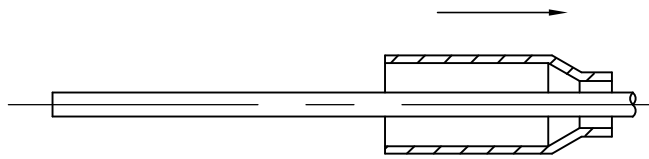
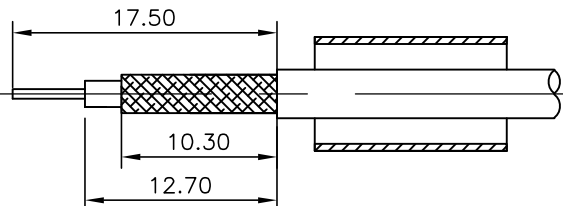
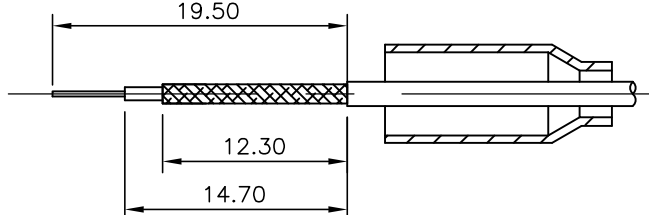


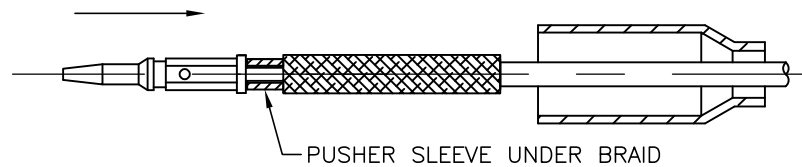

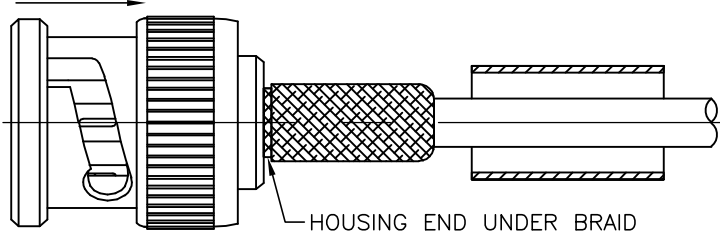
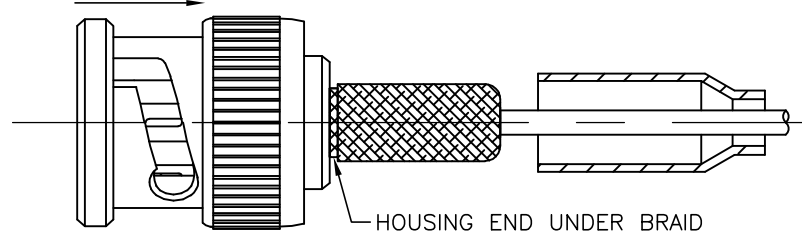
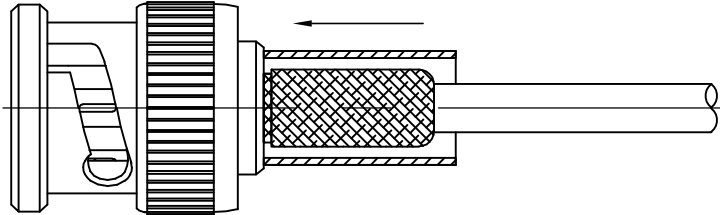

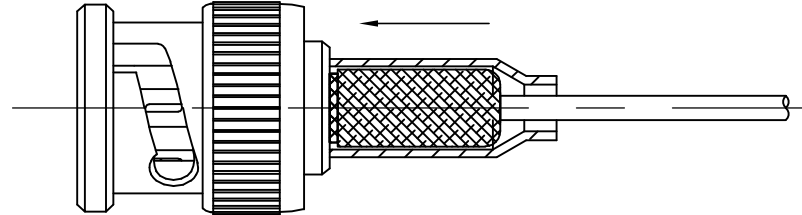


1. SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
2. 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
3. Au PLATING OVER Ni PLATING OVER Cu PLATING
4. Ni PLATING OVER Cu PLATING
5. HAND TOOL: 9-1478240-0
6. DIE SET: SEE TABLE
7. FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE
8. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

	-	-	0.4	4.5	3.1	9-1478242-0	RG179B/U, 187A/U, URM111	5-1634502-5
	-	-	0.4	4.5	3.1	9-1478242-0	RG179B/U, 187A/U, URM111	5-1634502-4
	7.5	6.6	0.7	5.45	3.8	9-1478242-0	RG59B/U, 62A/U, 140/U, 210/U, URM90, KX 6A, KX 25, KX 52, KX 53	5-1634502-3
	7.5	6.6	0.7	5.45	3.8	9-1478242-0	RG59B/U, 62A/U, 140/U, 210/U, URM90, KX 6A, KX 25, KX 52, KX 53	5-1634502-2
	6.4	5.4	0.7	4.5	3.1	9-1478242-0	E4205, NEK23795, SDTV-A-LFH, 36-516/519, IMAGE360, RA7000	5-1634502-1
	6.4	5.4	0.7	4.5	3.1	9-1478242-0	E4205, NEK23795, SDTV-A-LFH, 36-516/519, IMAGE360, RA7000	5-1634502-0
	E	D	C	B	A	DIE SET	CABLE GROUPS	PART NO.
DIMENSIONS								



OBSOLETE	1	1	-	-	-	1	BRASS		CRIMP SLEEVE	10
	1	1	-	-	-	1	NYLON		PUSHER SLEEVE	9
	1	1	1	1	1	1	ZINC ALLOY		BARREL	8
	1	1	1	1	1	1	SILCON RUBBER		GASKET	7
	1	1	1	1	1	1	SPRING STEEL		SPRING	6
	1	1	1	1	1	1	BRASS		CRIMP SLEEVE	5
	1	1	1	1	1	1	IRON		WASHER	4
	1	1	1	1	1	1	POLYMETHYLPENTENE		INSULATOR	3
	1	1	1	1	1	1	BRASS		CONTACT	2
	1	1	1	1	1	1	ZINC ALLOY		BODY	1
5	5	4	3	2	1	0	MATERIAL	DESCRIPTION	ITEM	
							PARTS LIST			
QUANTITY PER ASSY										

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RITA ZUO 19 Feb 09		 TE Connectivity					
		CHK ANSON MA 19 Feb 09							
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME BNC STRAIGHT PLUG HEX CRIMP 75 OHM —					
MM		APVD BOB ZHAO 19 Feb 09							
	0 PLC	±	0.5				PRODUCT SPEC 108-112000 APPLICATION SPEC SEE SHEET 2		
	1 PLC	±	0.3						
	2 PLC	±	0.2						
	3 PLC	±	—						
	4 PLC	±	—						
ANGLES				SIZE A2					
							CAGE CODE 00779		
MATERIAL	FINISH	WEIGHT —		DRAWING NO C-1634502					
SEE TABLE	SEE TABLE	CUSTOMER DRAWING					RESTRICTED TO —		
				SCALE NTS					
							SHEET 1 of 2		
				REV F					

4		3		2		1																			
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		JUNE , 2004.																					
© COPYRIGHT 2004 By -		ALL RIGHTS RESERVED.																							
LOC		DIST		REVISIONS																					
E		B		P	LTR	DESCRIPTION	DATE	DWN	APVD																
					-	SEE SHEET 1	-	-	-																
COMPONENTS																									
				MAIN BODY (ITEM 1,3,4,6,7 & 8)		CENTRE CONTACT (ITEM 2)		PUSHER SLEEVE (ITEM 9)																	
																									
																									
ASSEMBLY INSTRUCTION																									
CABLES: RG59B/U, 62A/U, 140/U, 210/U, URM90, KX 6A, KX 25, KX 52, KX 53, RG58C/U, 141A/U, URM43, 76, BELDEN 9907, KX 15					CABLES: RG179B/U, 187A/U, URM111																				
STEP 1 1. SLIDE METAL CRIMP FERRULE OVER CABLE 					STEP 1 1. SLIDE METAL CRIMP FERRULE OVER CABLE 																				
STEP 2 1. STRIP CABLE TO DIMENSIONS AS SHOWN 					STEP 2 1. STRIP CABLE TO DIMENSIONS AS SHOWN 																				
STEP 3 1. FIT CONTACT OVER CENTRE CONDUCTOR TO BUTT AGAINST DIELECTRIC. 2. CRIMP USING TOOL AS NOTES ON PAGE 1. 					RECOMMENDED CENTRE CONTACT A/F HEX 		STEP 3 1. SLIDE ITEM 10 PUSHER SLEEVE OVER DIELECTRIC BEFORE FITTING THE CONTACT. 2. FIT CONTACT OVER CENTRE CONDUCTOR TO BUTT AGAINST DIELECTRIC. 3. CRIMP USING TOOL AS NOTES ON PAGE 1. 			RECOMMENDED CENTRE CONTACT A/F HEX 															
STEP 4 1. PRESS SUB-ASSEMBLY INTO BODY, UNTIL CONTACT IS FULLY LOCATED BY AN AUDIBLE CLICK. 2. ENSURE THAT KNURLED HOUSING INSERTS BETWEEN THE DIELECTRIC AND CABLE BRAID. 					STEP 4 1. PRESS SUB-ASSEMBLY INTO BODY, UNTIL CONTACT IS FULLY LOCATED BY AN AUDIBLE CLICK. 2. ENSURE THAT KNURLED HOUSING INSERTS BETWEEN THE PUSHER SLEEVE AND CABLE BRAID. 																				
STEP 5 1. SLIDE CRIMP FERRULE ALONG THE CABLE UNTIL IT BUTTS AGAINST THE HOUSING BODY. 2. CRIMP USING TOOL AS NOTED ON PAGE 1. 3. CRIMP DIMENSION X IS:- RG59B (SEE PAGE 1 FOR FULL CABLE LIST) = 6.50 RG58C/U (SEE PAGE 1 FOR FULL CABLE LIST) = 5.60 					RECOMMENDED CRIMP SLEEVE A/F HEX 		STEP 5 1. SLIDE CRIMP FERRULE ALONG THE CABLE UNTIL IT BUTTS AGAINST THE BODY HOUSING. 2. CRIMP USING TOOL AS NOTED ON PAGE 1. 3. CRIMP DIMENSION AS SHOWN. 			RECOMMENDED CRIMP SLEEVE A/F HEX 															
					THIS DRAWING IS A CONTROLLED DOCUMENT.					DWN RITA ZUO 19 Feb 09		 TE Connectivity													
					DIMENSIONS: MM					TOLERANCES UNLESS OTHERWISE SPECIFIED					CHK ANSON MA 19 Feb 09		NAME BNC STRAIGHT PLUG HEX CRIMP 75 OHM -								
										0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		APVD BOB ZHAO 19 Feb 09		SIZE A2						CAGE CODE 00779			DRAWING NO 1634502		
					MATERIAL SEE TABLE					FINISH SEE TABLE		PRODUCT SPEC 108-112000 APPLICATION SPEC SHEET 2 WEIGHT -					SCALE NTS								

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru