

## Data Sheet

## AD8000

### FEATURES

#### High speed

**1.5 GHz, -3 dB bandwidth ( $G = +1$ )**

**650 MHz, full power bandwidth ( $G = +2$ ,  $V_o = 2 \text{ V p-p}$ )**

**Slew rate: 4100 V/ $\mu\text{s}$**

**0.1% settling time: 12 ns**

#### Excellent video specifications

**0.1 dB flatness: 170 MHz**

**Differential gain: 0.02%**

**Differential phase: 0.01°**

**Output overdrive recovery: 22 ns**

**Low noise: 1.6 nV/ $\sqrt{\text{Hz}}$  input voltage noise**

**Low distortion over wide bandwidth**

**75 dBc SFDR @ 20 MHz**

**62 dBc SFDR @ 50 MHz**

**Input offset voltage: 1 mV typ**

**High output current: 100 mA**

**Wide supply voltage range: 4.5 V to 12 V**

**Supply current: 13.5 mA**

**Power-down mode**

### APPLICATIONS

**Professional video**

**High speed instrumentation**

**Video switching**

**IF/RF gain stage**

**CCD imaging**

### GENERAL DESCRIPTION

The AD8000 is an ultrahigh speed, high performance, current feedback amplifier. Using ADI's proprietary eXtra Fast Complementary Bipolar (XFCB) process, the amplifier can achieve a small signal bandwidth of 1.5 GHz and a slew rate of 4100 V/ $\mu\text{s}$ .

The AD8000 has low spurious-free dynamic range (SFDR) of 75 dBc @ 20 MHz and input voltage noise of 1.6 nV/ $\sqrt{\text{Hz}}$ . The AD8000 can drive over 100 mA of load current with minimal distortion. The amplifier can operate on +5 V to  $\pm 6$  V. These specifications make the AD8000 ideal for a variety of applications, including high speed instrumentation.

With a differential gain of 0.02%, differential phase of 0.01°, and 0.1 dB flatness out to 170 MHz, the AD8000 has excellent video specifications, which ensure that even the most demanding video systems maintain excellent fidelity.

### CONNECTION DIAGRAMS

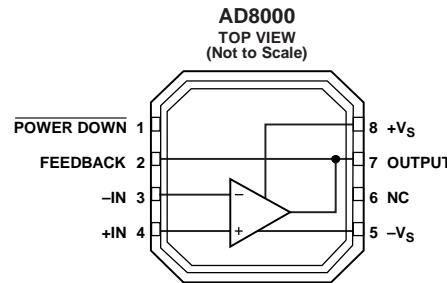


Figure 1. 8-Lead AD8000, 3 mm × 3 mm LFCSP\_VD (CP-8-2)  
65321-001

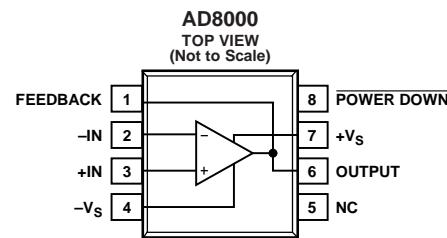


Figure 2. 8-Lead AD8000 SOIC\_N\_EP (RD-8-1)  
65321-002

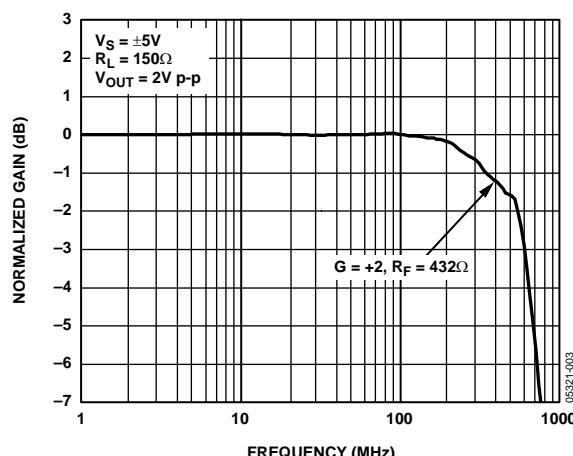


Figure 3. Large Signal Frequency Response

The AD8000 power-down mode reduces the supply current to 1.3 mA. The amplifier is available in a tiny 8-lead LFCSP package, as well as in an 8-lead SOIC package. The AD8000 is rated to work over the extended industrial temperature range (-40°C to +125°C). A triple version of the AD8000 (AD8003) is under-development.

Rev. B

Document Feedback

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

## TABLE OF CONTENTS

|                                            |    |                                    |    |
|--------------------------------------------|----|------------------------------------|----|
| Table of Contents .....                    | 2  | Video Line Driver.....             | 14 |
| Specifications with $\pm 5$ V Supply ..... | 3  | Low Distortion Pinout.....         | 15 |
| Specifications with +5 V Supply .....      | 4  | Exposed Paddle.....                | 15 |
| Absolute Maximum Ratings.....              | 5  | Printed Circuit Board Layout ..... | 15 |
| Thermal Resistance .....                   | 5  | Signal Routing.....                | 15 |
| ESD Caution.....                           | 5  | Power Supply Bypassing.....        | 15 |
| Typical Performance Characteristics .....  | 6  | Grounding.....                     | 16 |
| Test Circuits.....                         | 13 | Outline Dimensions.....            | 17 |
| Applications.....                          | 14 | Ordering Guide .....               | 17 |
| Circuit Configurations.....                | 14 |                                    |    |

## REVISION HISTORY

### 3/13—Rev. A to Rev. B

|                                        |    |
|----------------------------------------|----|
| Changes to Figure 1 and Figure 2 ..... | 1  |
| Change to Table 1 .....                | 3  |
| Changes to Table2.....                 | 4  |
| Updated Outline Dimensions .....       | 17 |
| Changes to Ordering Guide .....        | 17 |

### 3/10—Rev. 0 to Rev. A

|                                                                   |    |
|-------------------------------------------------------------------|----|
| Changes to Figure 1 and Figure 2 .....                            | 1  |
| Changes to Table 3.....                                           | 5  |
| Updated Outline Dimensions and Changes to<br>Ordering Guide ..... | 17 |

### 1/05—Rev. 0: Initial Version

## SPECIFICATIONS WITH $\pm 5$ V SUPPLY

At  $T_A = 25^\circ\text{C}$ ,  $V_S = \pm 5$  V,  $R_L = 150 \Omega$ , Gain = +2,  $R_F = R_G = 432 \Omega$ , unless otherwise noted. Exposed paddle should be connected to ground.

Table 1.

| Parameter                       | Conditions                                                                | Min          | Typ             | Max  | Unit                         |
|---------------------------------|---------------------------------------------------------------------------|--------------|-----------------|------|------------------------------|
| DYNAMIC PERFORMANCE             |                                                                           |              |                 |      |                              |
| –3 dB Bandwidth                 | $G = +1, V_O = 0.2$ V p-p, SOIC/LFCSP                                     |              | 1580/1350       |      | MHz                          |
|                                 | $G = +2, V_O = 2$ V p-p, SOIC/LFCSP                                       |              | 650/610         |      | MHz                          |
| Bandwidth for 0.1 dB Flatness   | $V_O = 2$ V p-p, SOIC/LFCSP                                               |              | 190/170         |      | MHz                          |
| Slew Rate                       | $G = +2, V_O = 4$ V step                                                  |              | 4100            |      | V/ $\mu$ s                   |
| Settling Time to 0.1%           | $G = +2, V_O = 2$ V step                                                  |              | 12              |      | ns                           |
| NOISE/HARMONIC PERFORMANCE      |                                                                           |              |                 |      |                              |
| Second/Third Harmonic           | $V_O = 2$ V p-p, $f = 5$ MHz, LFCSP only                                  |              | 86/89           |      | dBc                          |
| Second/Third Harmonic           | $V_O = 2$ V p-p, $f = 20$ MHz, LFCSP only                                 |              | 75/79           |      | dBc                          |
| Input Voltage Noise             | $f = 100$ kHz                                                             |              | 1.6             |      | nV/ $\sqrt{\text{Hz}}$       |
| Input Current Noise             | $f = 100$ kHz, –IN                                                        |              | 26              |      | pA/ $\sqrt{\text{Hz}}$       |
|                                 | $f = 100$ kHz, +IN                                                        |              | 3.4             |      | pA/ $\sqrt{\text{Hz}}$       |
| Differential Gain Error         | NTSC, $G = +2$                                                            |              | 0.02            |      | %                            |
| Differential Phase Error        | NTSC, $G = +2$                                                            |              | 0.01            |      | Degree                       |
| DC PERFORMANCE                  |                                                                           |              |                 |      |                              |
| Input Offset Voltage            |                                                                           | 1            | 10              |      | mV                           |
| Input Offset Voltage Drift      |                                                                           | 11           |                 |      | $\mu\text{V}/^\circ\text{C}$ |
| Input Bias Current (Enabled)    | + $I_B$                                                                   | –5           | +4              |      | $\mu\text{A}$                |
|                                 | – $I_B$                                                                   | –3           | +45             |      | $\mu\text{A}$                |
| Transimpedance                  |                                                                           | 570          | 890             | 1600 | k $\Omega$                   |
| INPUT CHARACTERISTICS           |                                                                           |              |                 |      |                              |
| Noninverting Input Impedance    |                                                                           | 2/3.6        |                 |      | M $\Omega$ /pF               |
| Input Common-Mode Voltage Range |                                                                           | –3.5 to +3.5 |                 |      | V                            |
| Common-Mode Rejection Ratio     | $V_{CM} = \pm 2.5$ V                                                      | –52          | –54             | –56  | dB                           |
| Overdrive Recovery              | $G = +1, f = 1$ MHz, triangle wave                                        |              | 30              |      | ns                           |
| POWER DOWN PIN                  |                                                                           |              |                 |      |                              |
| Power-Down Input Voltage        | Power-down                                                                |              | < + $V_S$ – 3.1 |      | V                            |
|                                 | Enabled                                                                   |              | > + $V_S$ – 1.9 |      | V                            |
| Turn-Off Time                   | 50% of power-down voltage to 10% of $V_{OUT}$ final, $V_{IN} = 0.3$ V p-p |              | 150             |      | ns                           |
| Turn-On Time                    | 50% of power-down voltage to 90% of $V_{OUT}$ final, $V_{IN} = 0.3$ V p-p |              | 300             |      | ns                           |
| Input Bias Current              |                                                                           |              |                 |      |                              |
| Enabled                         |                                                                           | –1.1         | +0.17           | +1.4 | $\mu\text{A}$                |
| Power-Down                      |                                                                           | –300         | –235            | –160 | $\mu\text{A}$                |
| OUTPUT CHARACTERISTICS          |                                                                           |              |                 |      |                              |
| Output Voltage Swing            | $R_L = 100 \Omega$                                                        | ±3.7         | ±3.9            |      | V                            |
| Output Voltage Swing            | $R_L = 1 \text{ k}\Omega$                                                 | ±3.9         | ±4.1            |      | V                            |
| Linear Output Current           | $V_O = 2$ V p-p, second HD < –50 dBc                                      |              | 100             |      | mA                           |
| Overdrive Recovery              | $G = +2, f = 1$ MHz, triangle wave                                        |              | 45              |      | ns                           |
|                                 | $G = +2, V_{IN} = 2.5$ V to 0 V step                                      |              | 22              |      | ns                           |
| POWER SUPPLY                    |                                                                           |              |                 |      |                              |
| Operating Range                 |                                                                           | 4.5          |                 | 12   | V                            |
| Quiescent Current               |                                                                           | 12.7         | 13.5            | 14.3 | mA                           |
| Quiescent Current (Power-Down)  |                                                                           | 1.1          | 1.3             | 1.65 | mA                           |
| Power Supply Rejection Ratio    | –PSRR/+PSRR                                                               | –56/–61      | –59/–63         |      | dB                           |

## SPECIFICATIONS WITH +5 V SUPPLY

At  $T_A = 25^\circ\text{C}$ ,  $V_S = +5 \text{ V}$ ,  $R_L = 150 \Omega$ , Gain = +2,  $R_F = R_G = 432 \Omega$ , unless otherwise noted. Exposed paddle should be connected to ground.

Table 2.

| Parameter                       | Conditions                                                                                                 | Min        | Typ             | Max              | Unit                         |
|---------------------------------|------------------------------------------------------------------------------------------------------------|------------|-----------------|------------------|------------------------------|
| DYNAMIC PERFORMANCE             |                                                                                                            |            |                 |                  |                              |
| –3 dB Bandwidth                 | $G = +1, V_O = 0.2 \text{ V p-p}$<br>$G = +2, V_O = 2 \text{ V p-p}$<br>$G = +10, V_O = 0.2 \text{ V p-p}$ | 980        | 477             | 328              | MHz                          |
| Bandwidth for 0.1 dB Flatness   | $V_O = 0.2 \text{ V p-p}$<br>$V_O = 2 \text{ V p-p}$                                                       | 136        | 136             | 2700             | MHz                          |
| Slew Rate                       | $G = +2, V_O = 2 \text{ V step}$                                                                           | 16         | 2700            | V/ $\mu\text{s}$ |                              |
| Settling Time to 0.1%           | $G = +2, V_O = 2 \text{ V step}$                                                                           |            |                 |                  | ns                           |
| NOISE/HARMONIC PERFORMANCE      |                                                                                                            |            |                 |                  |                              |
| Second/Third Harmonic           | $V_O = 2 \text{ V p-p}, 5 \text{ MHz, LFCSP only}$                                                         | 71/71      |                 |                  | dBc                          |
| Second/Third Harmonic           | $V_O = 2 \text{ V p-p}, 20 \text{ MHz, LFCSP only}$                                                        | 60/62      |                 |                  | dBc                          |
| Input Voltage Noise             | $f = 100 \text{ kHz}$                                                                                      | 1.6        |                 |                  | nV/ $\sqrt{\text{Hz}}$       |
| Input Current Noise             | $f = 100 \text{ kHz}, -\text{IN}$                                                                          | 26         |                 |                  | pA/ $\sqrt{\text{Hz}}$       |
|                                 | $f = 100 \text{ kHz}, +\text{IN}$                                                                          | 3.4        |                 |                  | pA/ $\sqrt{\text{Hz}}$       |
| Differential Gain Error         | NTSC, $G = +2$                                                                                             | 0.01       |                 |                  | %                            |
| Differential Phase Error        | NTSC, $G = +2$                                                                                             | 0.06       |                 |                  | Degree                       |
| DC PERFORMANCE                  |                                                                                                            |            |                 |                  |                              |
| Input Offset Voltage            |                                                                                                            | 1.3        | 10              |                  | mV                           |
| Input Offset Voltage Drift      |                                                                                                            | 18         |                 |                  | $\mu\text{V}/^\circ\text{C}$ |
| Input Bias Current (Enabled)    | $+I_B$                                                                                                     | −5         | +3              |                  | $\mu\text{A}$                |
|                                 | $-I_B$                                                                                                     | −1         | +45             |                  | $\mu\text{A}$                |
| Transimpedance                  |                                                                                                            | 440        | 800             | 1500             | k $\Omega$                   |
| INPUT CHARACTERISTICS           |                                                                                                            |            |                 |                  |                              |
| Noninverting Input Impedance    |                                                                                                            | 2/3.6      |                 |                  | M $\Omega/\text{pF}$         |
| Input Common-Mode Voltage Range |                                                                                                            | 1.5 to 3.6 |                 |                  | V                            |
| Common-Mode Rejection Ratio     | $V_{CM} = \pm 2.5 \text{ V}$                                                                               | −51        | −52             | −54              | dB                           |
| Overdrive Recovery              | $G = +1, f = 1 \text{ MHz, triangle wave}$                                                                 | 60         |                 |                  | ns                           |
| POWER DOWN PIN                  |                                                                                                            |            |                 |                  |                              |
| Power-Down Input Voltage        | Power-down                                                                                                 |            | < + $V_S - 3.1$ |                  | V                            |
|                                 | Enable                                                                                                     |            | > + $V_S - 1.9$ |                  | V                            |
| Turn-Off Time                   | 50% of power-down voltage to 10% of $V_{OUT}$ final, $V_{IN} = 0.3 \text{ V p-p}$                          | 200        |                 |                  | ns                           |
| Turn-On Time                    | 50% of power-down voltage to 90% of $V_{OUT}$ final, $V_{IN} = 0.3 \text{ V p-p}$                          | 300        |                 |                  | ns                           |
| Input Current Enabled           |                                                                                                            | −1.1       | +0.17           | +1.4             | $\mu\text{A}$                |
| Power-Down                      |                                                                                                            | −50        | −40             | −30              | $\mu\text{A}$                |
| OUTPUT CHARACTERISTICS          |                                                                                                            |            |                 |                  |                              |
| Output Voltage Swing            | $R_L = 100 \Omega$                                                                                         | 1.1 to 3.9 | 1.05 to 4.1     |                  | V                            |
|                                 | $R_L = 1 \text{ k}\Omega$                                                                                  | 1 to 4.0   | 0.85 to 4.15    |                  | V                            |
| Linear Output Current           | $V_O = 2 \text{ V p-p, second HD} < -50 \text{ dBc}$                                                       | 70         |                 |                  | mA                           |
| Overdrive Recovery              | $G = +2, f = 100 \text{ kHz, triangle wave}$                                                               | 65         |                 |                  | ns                           |
| POWER SUPPLY                    |                                                                                                            |            |                 |                  |                              |
| Operating Range                 |                                                                                                            | 4.5        | 12              |                  | V                            |
| Quiescent Current               |                                                                                                            | 11         | 12              | 13               | mA                           |
| Quiescent Current (Power-Down)  |                                                                                                            | 0.7        | 0.95            | 1.25             | mA                           |
| Power Supply Rejection Ratio    | −PSRR/+PSRR                                                                                                | −55/−60    | −57/−62         |                  | dB                           |

## ABSOLUTE MAXIMUM RATINGS

Table 3.

| Parameter                                     | Rating                                           |
|-----------------------------------------------|--------------------------------------------------|
| Supply Voltage                                | 12.6 V                                           |
| Power Dissipation                             | See Figure 4                                     |
| Common-Mode Input Voltage                     | $-V_S - 0.7 \text{ V}$ to $+V_S + 0.7 \text{ V}$ |
| Differential Input Voltage                    | $\pm V_S$                                        |
| Storage Temperature                           | $-65^\circ\text{C}$ to $+125^\circ\text{C}$      |
| Operating Temperature Range                   | $-40^\circ\text{C}$ to $+125^\circ\text{C}$      |
| Lead Temperature Range<br>(Soldering, 10 sec) | 300°C                                            |
| Junction Temperature                          | 150°C                                            |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### THERMAL RESISTANCE

$\theta_{JA}$  is specified for the worst-case conditions, that is,  $\theta_{JA}$  is specified for device soldered in the circuit board for surface-mount packages.

Table 4. Thermal Resistance

| Package Type      | $\theta_{JA}$ | $\theta_{JC}$ | Unit |
|-------------------|---------------|---------------|------|
| SOIC-8            | 80            | 30            | °C/W |
| 3 mm × 3 mm LFCSP | 93            | 35            | °C/W |

### Maximum Power Dissipation

The maximum safe power dissipation for the AD8000 is limited by the associated rise in junction temperature ( $T_J$ ) on the die. At approximately 150°C, which is the glass transition temperature, the properties of the plastic change. Even temporarily exceeding this temperature limit can change the stresses that the package exerts on the die, permanently shifting the parametric performance of the AD8000. Exceeding a junction temperature of 175°C for an extended period of time can result in changes in silicon devices, potentially causing degradation or loss of functionality.

The power dissipated in the package ( $P_D$ ) is the sum of the quiescent power dissipation and the power dissipated in the die due to the AD8000 drive at the output. The quiescent power is the voltage between the supply pins ( $V_S$ ) times the quiescent current ( $I_S$ ).

$$P_D = \text{Quiescent Power} + (\text{Total Drive Power} - \text{Load Power})$$

$$P_D = (V_S \times I_S) + \left( \frac{V_S}{2} \times \frac{V_{OUT}}{R_L} \right) - \frac{V_{OUT}^2}{R_L}$$

RMS output voltages should be considered. If  $R_L$  is referenced to  $-V_S$ , as in single-supply operation, the total drive power is  $V_S \times I_{OUT}$ . If the rms signal levels are indeterminate, consider the worst case, when  $V_{OUT} = V_S/4$  for  $R_L$  to midsupply.

$$P_D = (V_S \times I_S) + \frac{(V_S/4)^2}{R_L}$$

In single-supply operation with  $R_L$  referenced to  $-V_S$ , worst case is  $V_{OUT} = V_S/2$ .

Airflow increases heat dissipation, effectively reducing  $\theta_{JA}$ . Also, more metal directly in contact with the package leads and exposed paddle from metal traces, through holes, ground, and power planes reduces  $\theta_{JA}$ .

Figure 4 shows the maximum safe power dissipation in the package vs. the ambient temperature for the exposed paddle SOIC (80°C/W) and the LFCSP (93°C/W) package on a JEDEC standard 4-layer board.  $\theta_{JA}$  values are approximations.

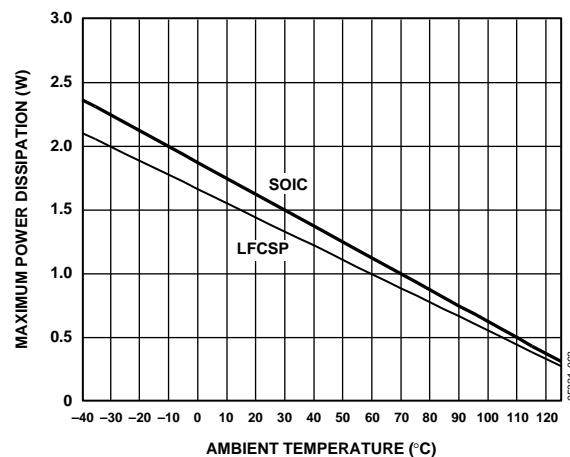








Figure 4. Maximum Power Dissipation vs. Temperature for a 4-Layer Board

### ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation and loss of functionality.



## TYPICAL PERFORMANCE CHARACTERISTICS

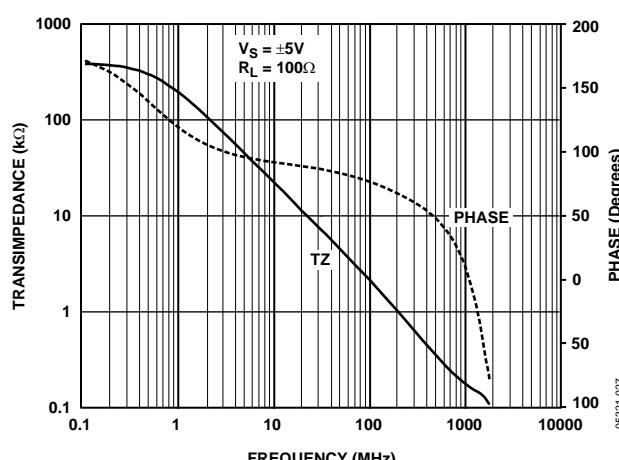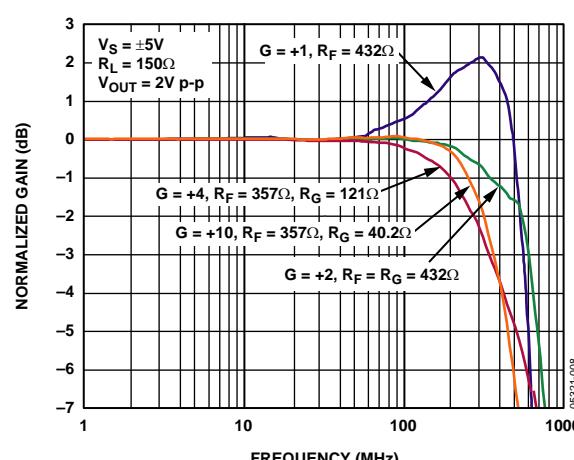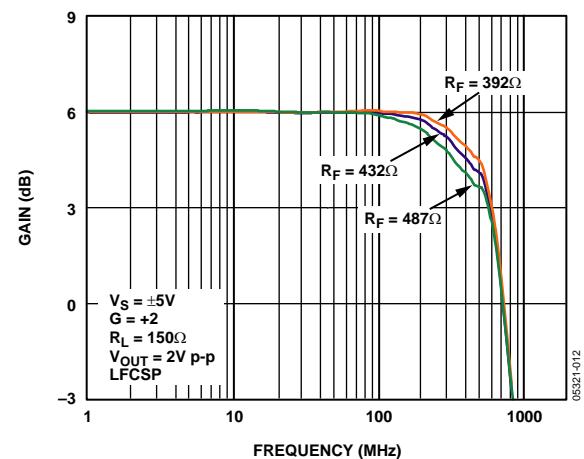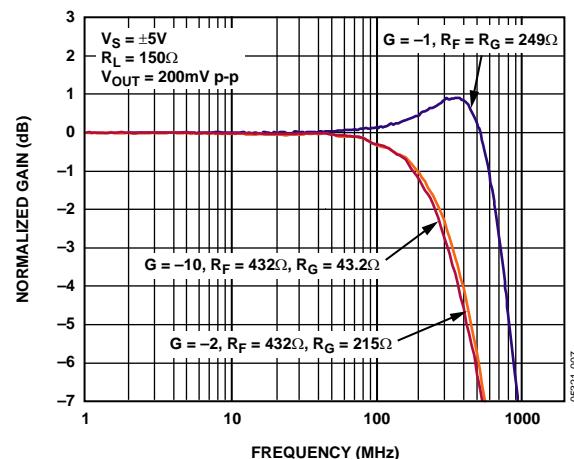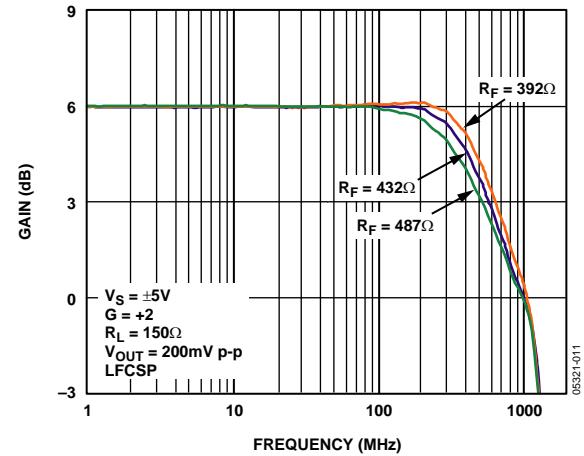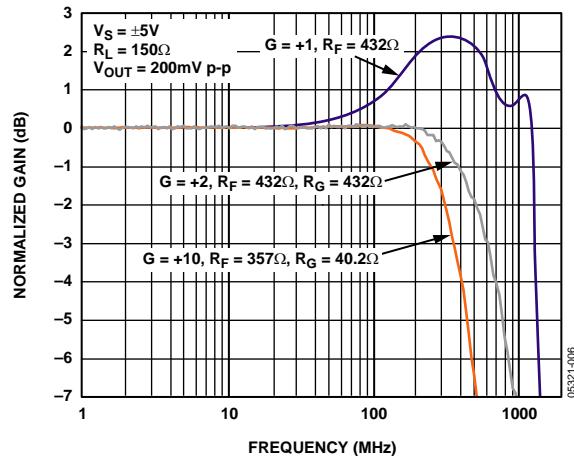

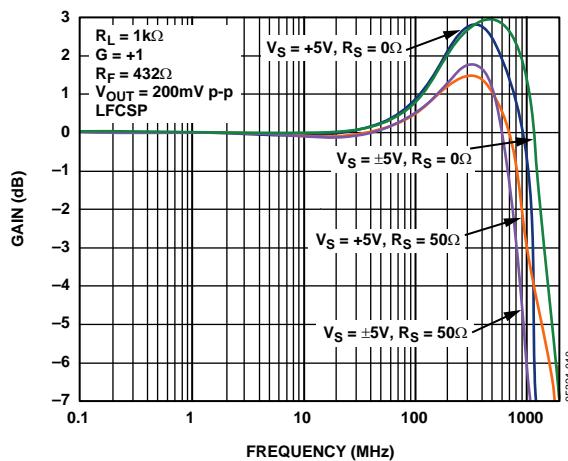


Figure 11. Small Signal Frequency Response vs. Supply Voltage

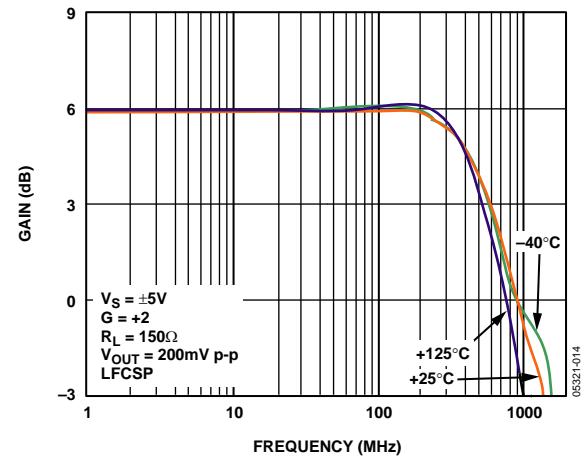


Figure 14. Small Signal Frequency Response vs. Temperature

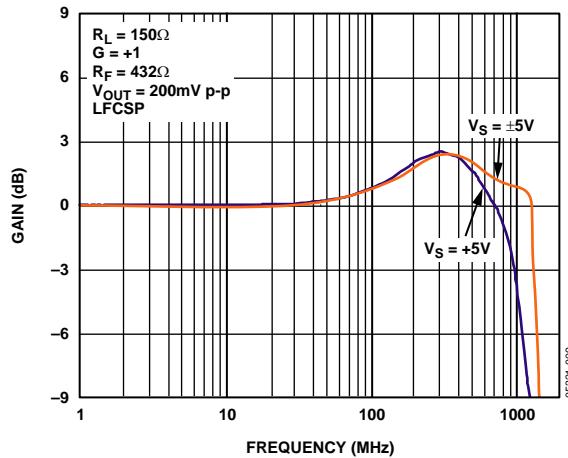


Figure 12. Small Signal Frequency Response vs. Supply Voltage

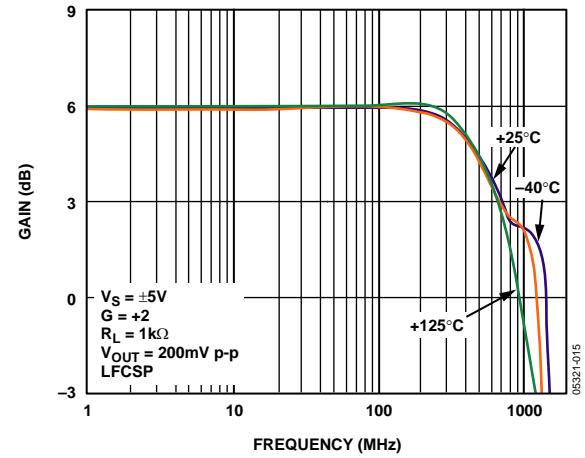


Figure 15. Small Signal Frequency Response vs. Temperature

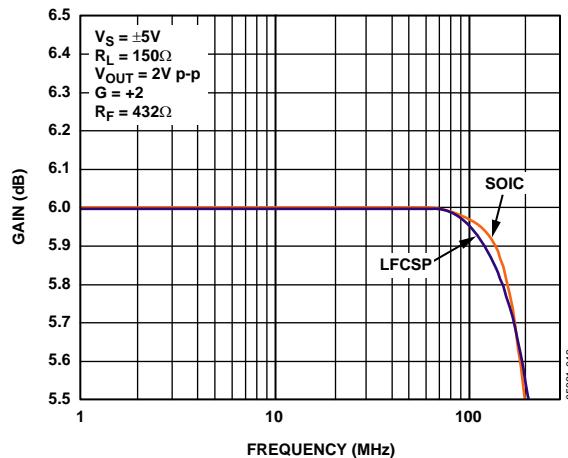


Figure 13. 0.1 dB Flatness

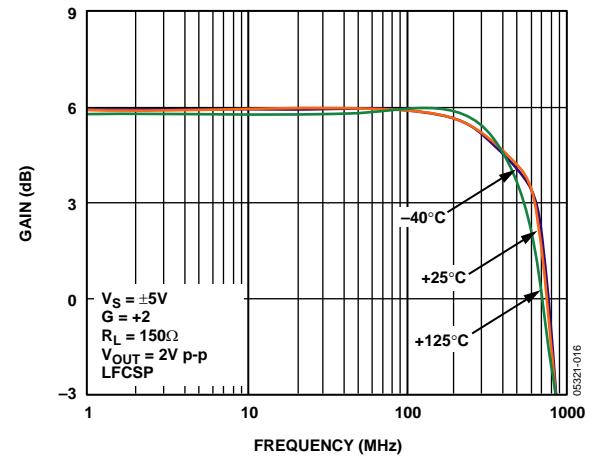
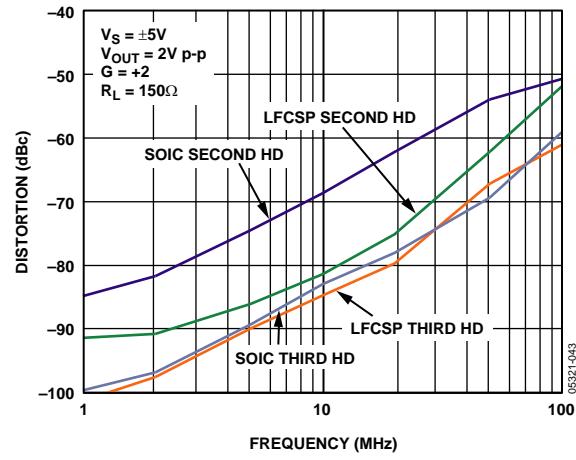
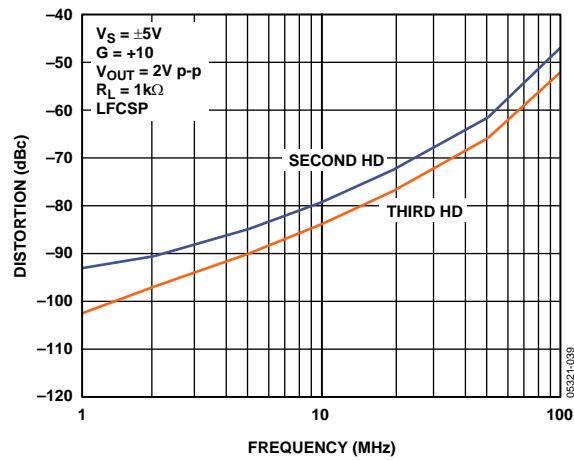
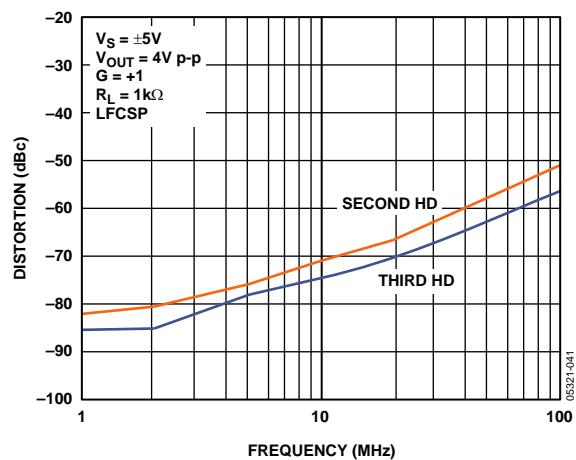
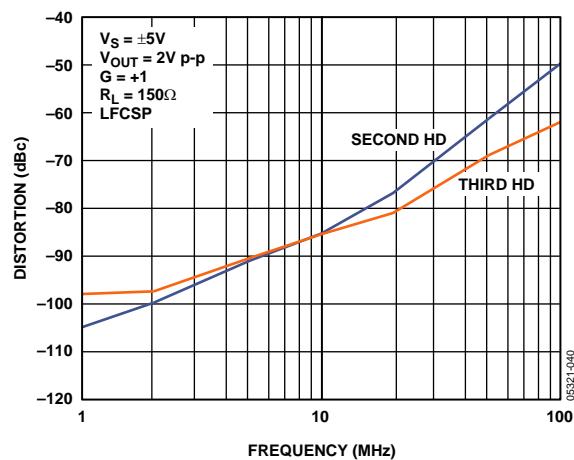
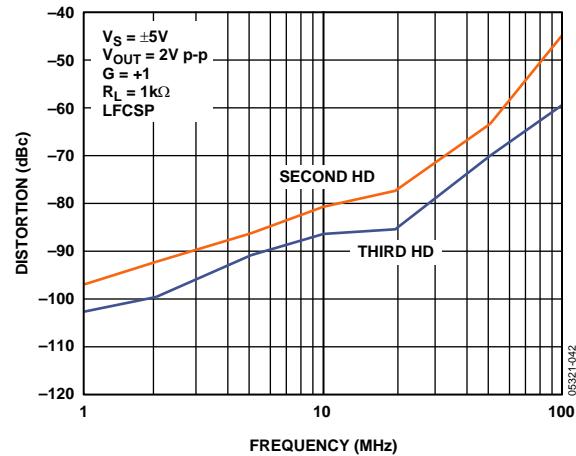
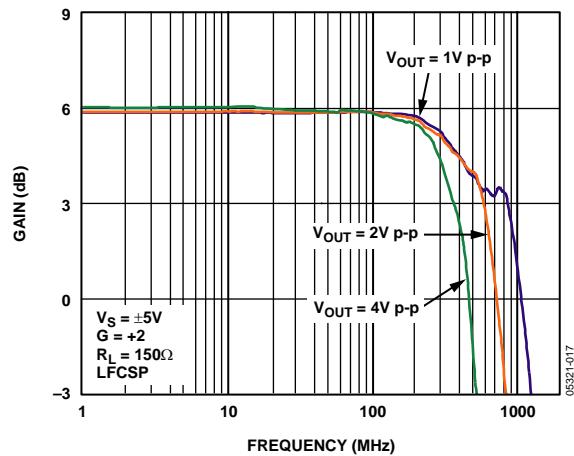


Figure 16. Large Signal Frequency Response vs. Temperature



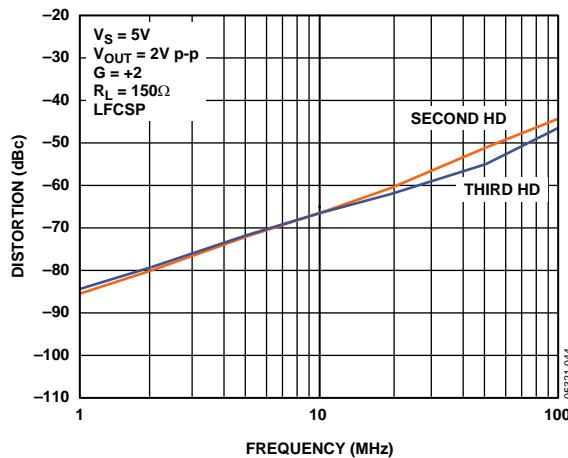


Figure 23. Harmonic Distortion vs. Frequency

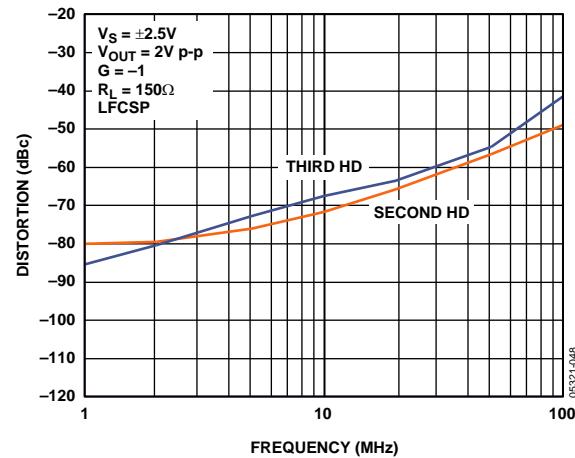


Figure 26. Harmonic Distortion vs. Frequency

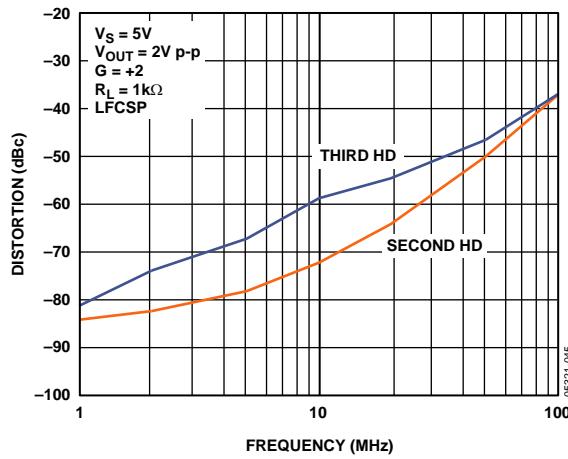


Figure 24. Harmonic Distortion vs. Frequency

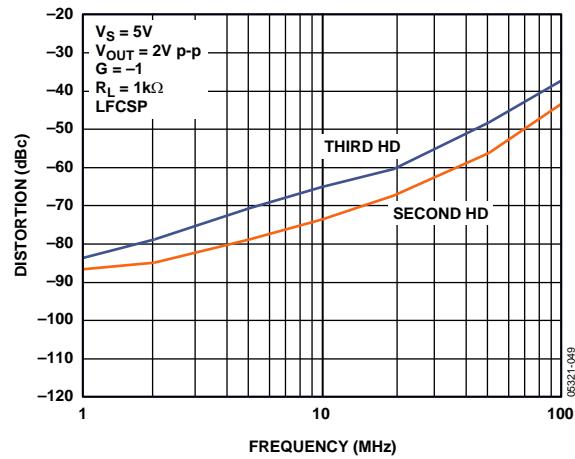


Figure 27. Harmonic Distortion vs. Frequency

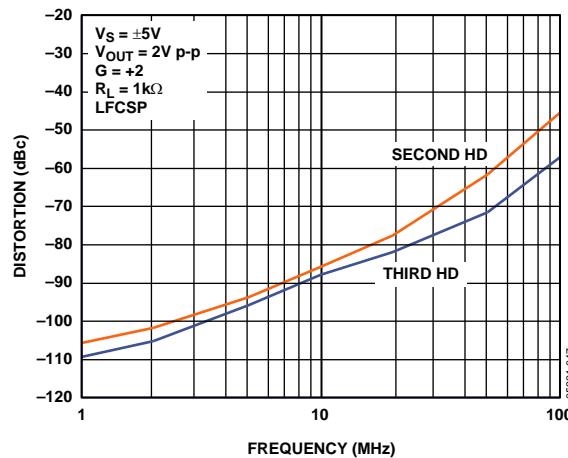


Figure 25. Harmonic Distortion vs. Frequency

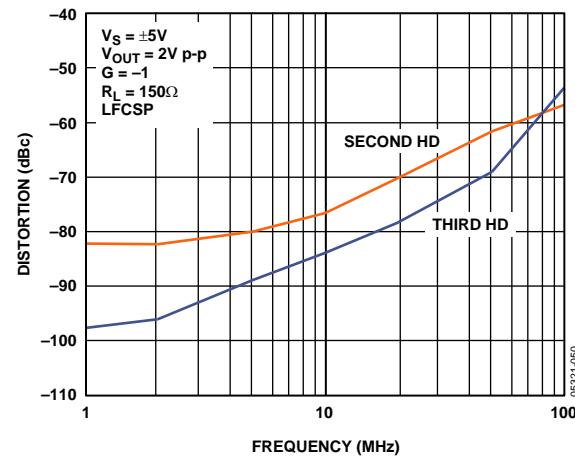
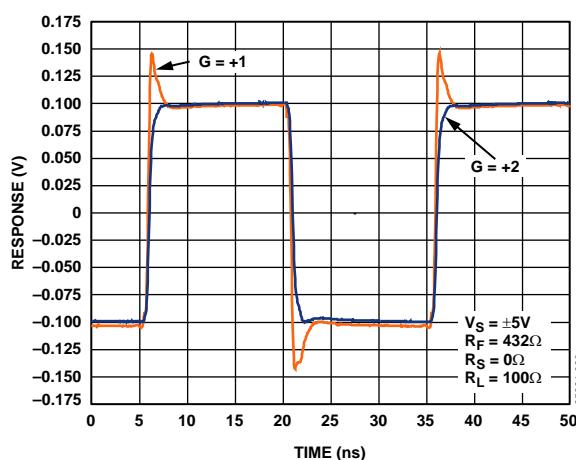
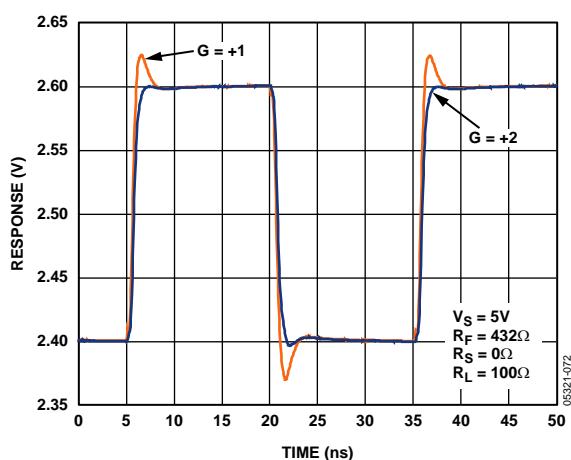
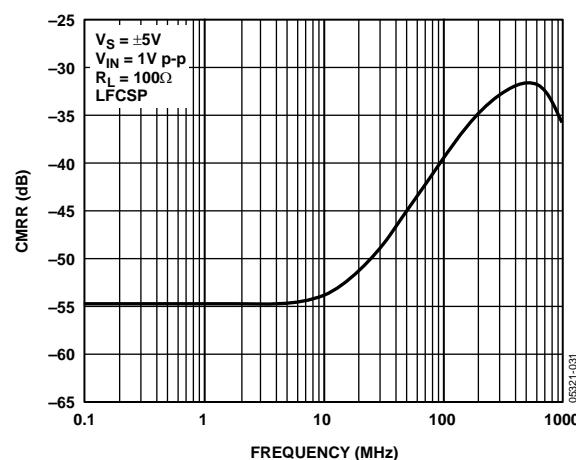
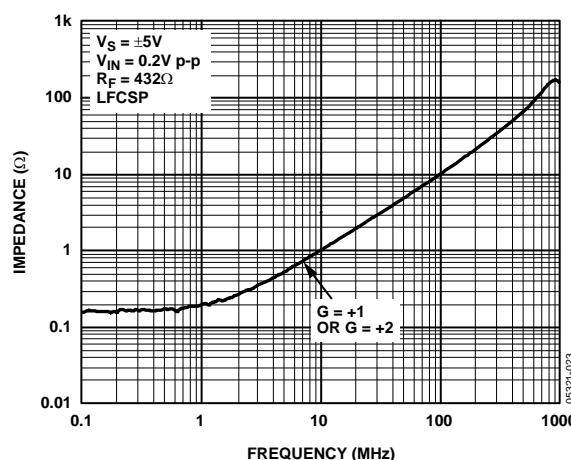
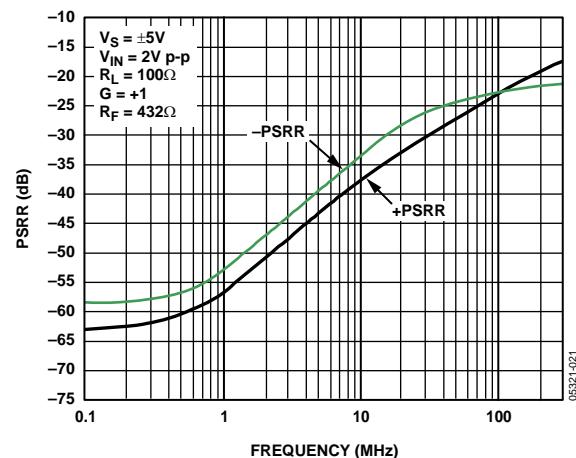
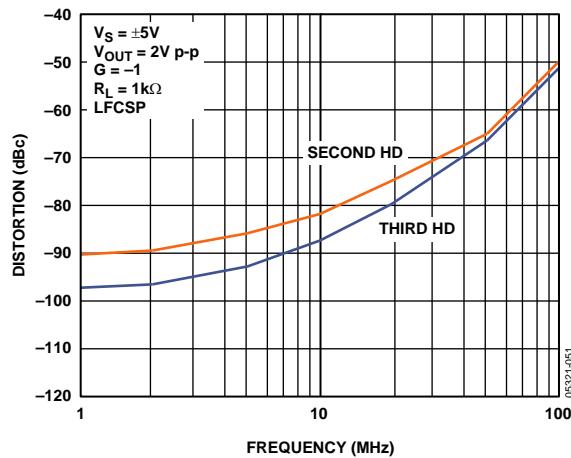


Figure 28. Harmonic Distortion vs. Frequency



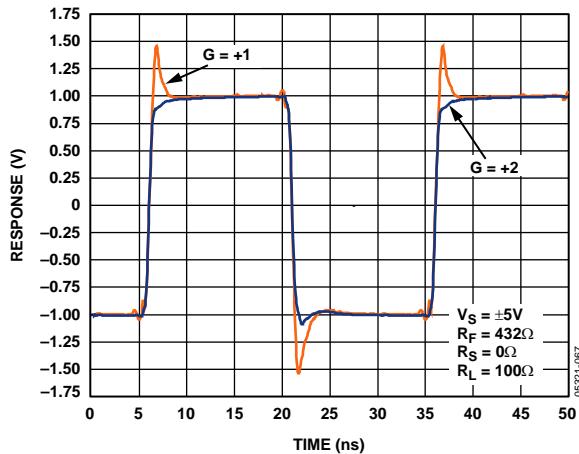


Figure 35. Large Signal Transient Response

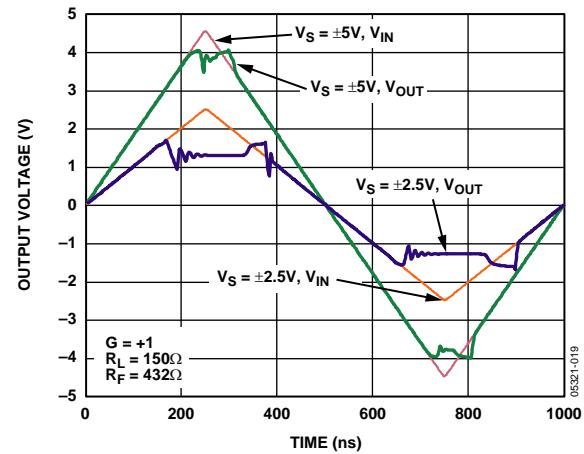


Figure 38. Input Overdrive

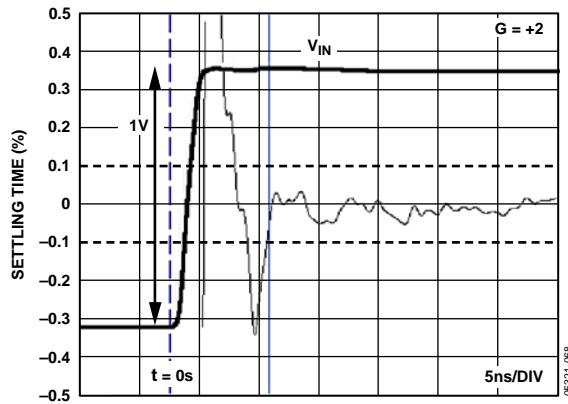


Figure 36. Settling Time

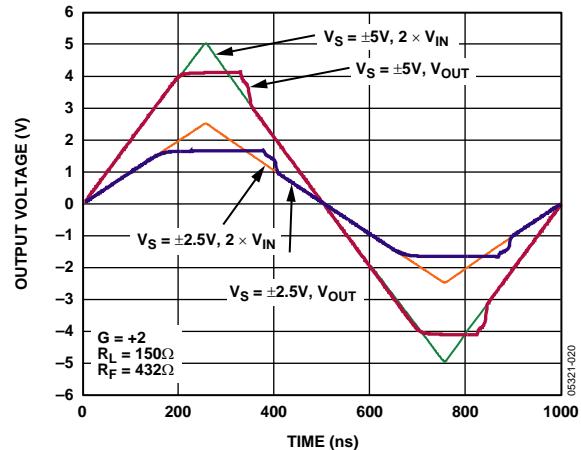


Figure 39. Output Overdrive

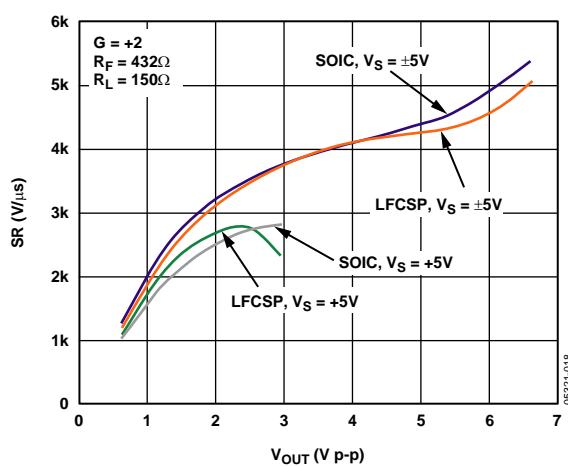


Figure 37. Slew Rate vs. Output Level

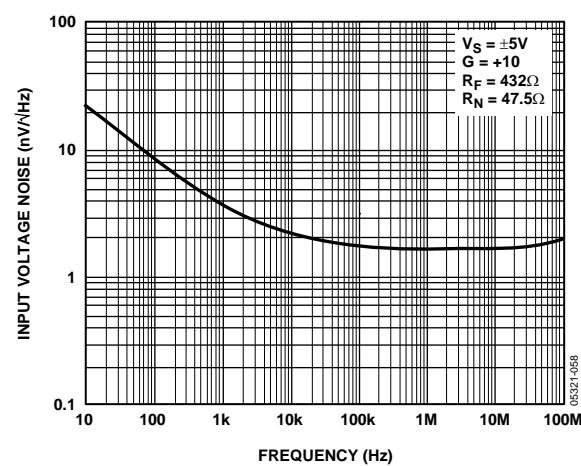


Figure 40. Input Voltage Noise

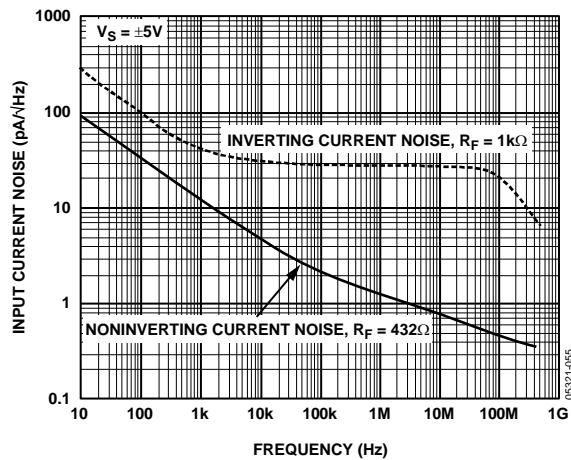


Figure 41. Input Current Noise

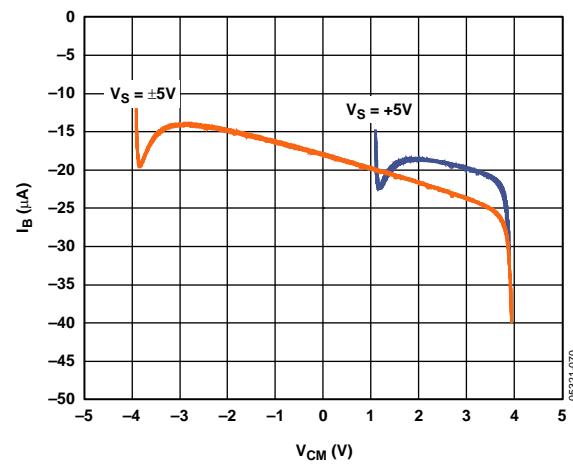


Figure 44. Input Bias Current vs. Common-Mode Voltage

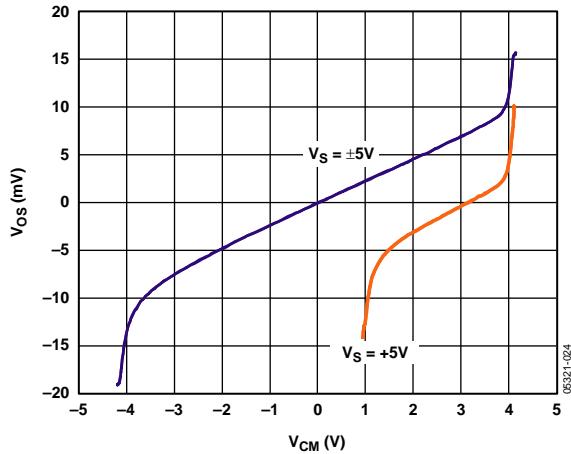
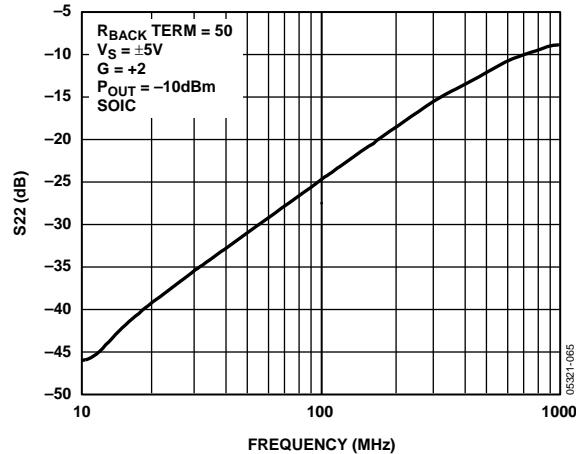
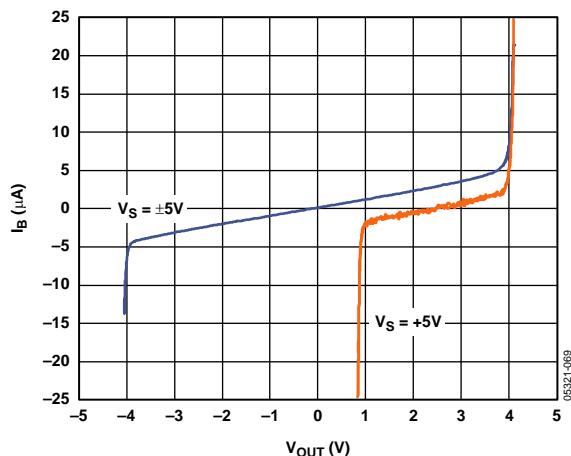
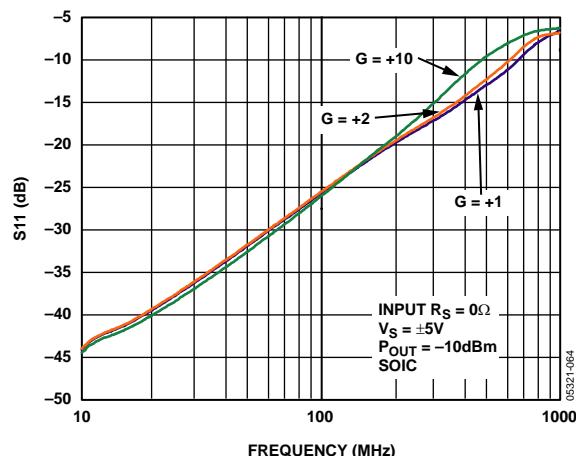
Figure 42. Input  $V_{0S}$  vs. Common-Mode VoltageFigure 45. Output Voltage Standing Wave Ratio ( $S_{22}$ )

Figure 43. Input Bias Current vs. Output Voltage

Figure 46. Input Voltage Standing Wave Ratio ( $S_{11}$ )

## TEST CIRCUITS

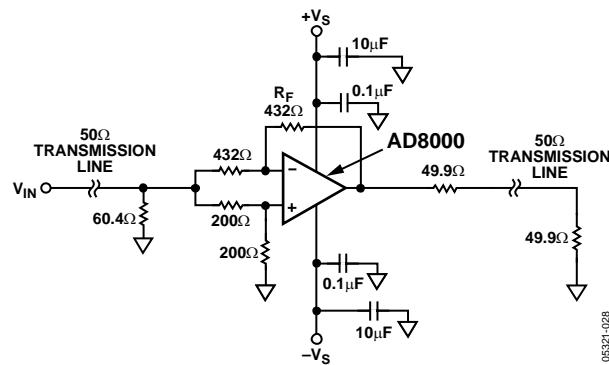


Figure 47. CMRR

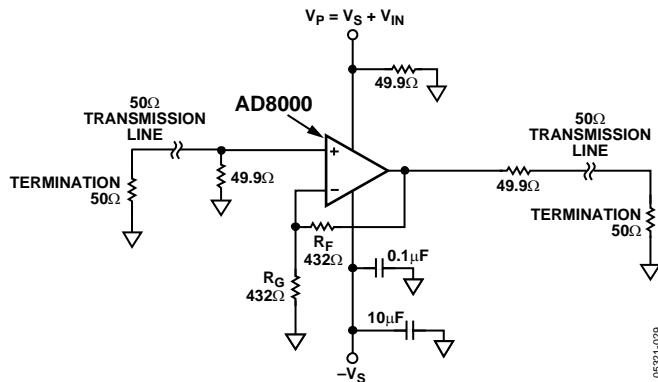


Figure 48. Positive PSRR

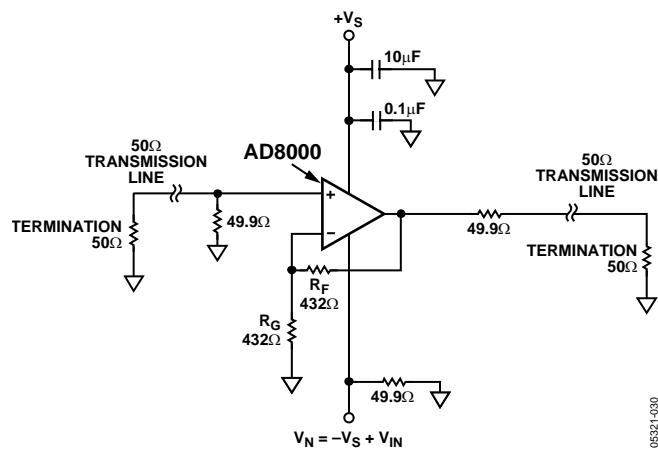


Figure 49. Negative PSRR

## APPLICATIONS

All current feedback amplifier operational amplifiers are affected by stray capacitance at the inverting input pin. As a practical consideration, the higher the stray capacitance on the inverting input to ground, the higher  $R_F$  needs to be to minimize peaking and ringing.

## CIRCUIT CONFIGURATIONS

Figure 50 and Figure 51 show typical schematics for non-inverting and inverting configurations. For current feedback amplifiers, the value of feedback resistance determines the stability and bandwidth of the amplifier. The optimum performance values are shown in Table 5 and should not be deviated from by more than  $\pm 10\%$  to ensure stable operation. Figure 8 shows the influence varying  $R_F$  has on bandwidth. In noninverting unity-gain configurations, it is recommended that an  $R_S$  of  $50\ \Omega$  be used, as shown in Figure 50.

Table 5 provides a quick reference for the circuit values, gain, and output voltage noise.


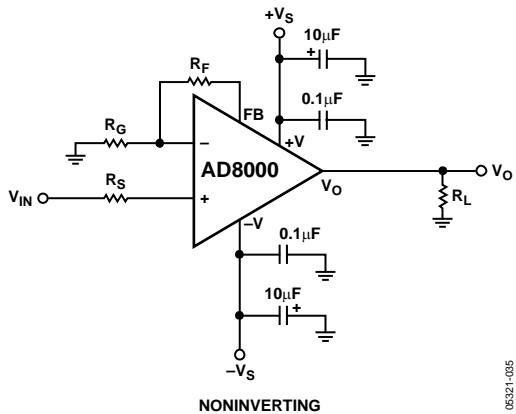


Figure 50. Noninverting Configuration

05321-035

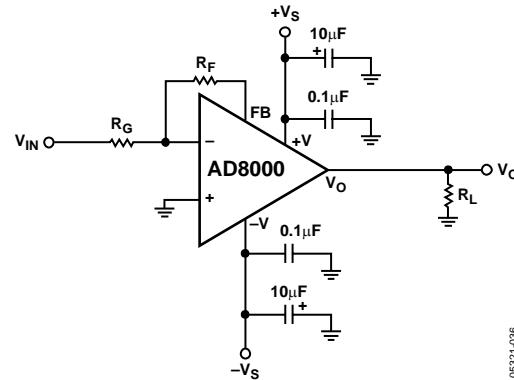


05321-036

Figure 51. Inverting Configuration

05321-036

## VIDEO LINE DRIVER

The AD8000 is designed to offer outstanding performance as a video line driver. The important specifications of differential gain ( $0.02\%$ ), differential phase ( $0.01^\circ$ ), and 650 MHz bandwidth at 2 V p-p meet the most exacting video demands. Figure 52 shows a typical noninverting video driver with a gain of +2.

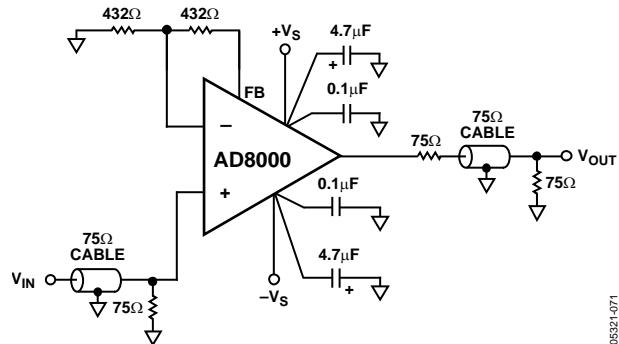

05321-071

Figure 52. Video Line Driver

Table 5. Typical Values (LFCSP/SOIC)

| Gain | Component Values ( $\Omega$ ) |       | -3 dB SS Bandwidth (MHz) |      | -3 dB LS Bandwidth (MHz) |      | Slew Rate (V/ $\mu$ sec) | Output Noise (nV/ $\sqrt{\text{Hz}}$ ) | Total Output Noise Including Resistors (nV/ $\sqrt{\text{Hz}}$ ) |
|------|-------------------------------|-------|--------------------------|------|--------------------------|------|--------------------------|----------------------------------------|------------------------------------------------------------------|
|      | $R_F$                         | $R_G$ | LFCSP                    | SOIC | LFCSP                    | SOIC |                          |                                        |                                                                  |
| 1    | 432                           | ---   | 1380                     | 1580 | 550                      | 600  | 2200                     | 10.9                                   | 11.2                                                             |
| 2    | 432                           | 432   | 600                      | 650  | 610                      | 650  | 3700                     | 11.3                                   | 11.9                                                             |
| 4    | 357                           | 120   | 550                      | 550  | 350                      | 350  | 3800                     | 10                                     | 12                                                               |
| 10   | 357                           | 40    | 350                      | 365  | 370                      | 370  | 3200                     | 18.4                                   | 19.9                                                             |

## LOW DISTORTION PINOUT

The AD8000 LFCSP features ADI's new low distortion pinout. The new pinout lowers the second harmonic distortion and simplifies the circuit layout. The close proximity of the non-inverting input and the negative supply pin creates a source of second harmonic distortion. Physical separation of the non-inverting input pin and the negative power supply pin reduces this distortion significantly, as seen in Figure 22.

By providing an additional output pin, the feedback resistor can be connected directly across Pin 2 and Pin 3. This greatly simplifies the routing of the feedback resistor and allows a more compact circuit layout, which reduces its size and helps to minimize parasitics and increase stability.

The SOIC also features a dedicated feedback pin. The feedback pin is brought out on Pin 1, which is typically a No Connect on standard SOIC pinouts.

Existing applications that use the standard SOIC pinout can take full advantage of the performance offered by the AD8000. For drop-in replacements, ensure that Pin 1 is not connected to ground or to any other potential because this pin is connected internally to the output of the amplifier. For existing designs, Pin 6 can still be used for the feedback resistor.

## EXPOSED PADDLE

The AD8000 features an exposed paddle, which can lower the thermal resistance by 25% compared to a standard SOIC plastic package. The paddle can be soldered directly to the ground plane of the board. Figure 53 shows a typical pad geometry for the LFCSP; the same type of pad geometry can be applied to the SOIC package.

Thermal vias or "heat pipes" can also be incorporated into the design of the mounting pad for the exposed paddle. These additional vias improve the thermal transfer from the package to the PCB. Using a heavier weight copper on the surface to which the amplifier's exposed paddle is soldered also reduces the overall thermal resistance "seen" by the AD8000.

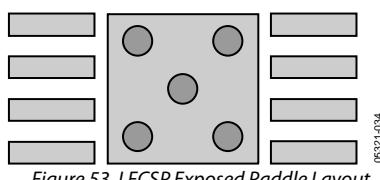


Figure 53. LFCSP Exposed Paddle Layout

## PRINTED CIRCUIT BOARD LAYOUT

Laying out the printed circuit board (PCB) is usually the last step in the design process and often proves to be one of the most critical. A brilliant design can be rendered useless because of a poor or sloppy layout. Since the AD8000 can operate into the R<sub>F</sub> frequency spectrum, high frequency board layout considerations must be taken into account. The PCB layout, signal routing, power supply bypassing, and grounding all must be addressed to ensure optimal performance.

## SIGNAL ROUTING

The AD8000 LFCSP features the new low distortion pinout with a dedicated feedback pin and allows a compact layout. The dedicated feedback pin reduces the distance from the output to the inverting input, which greatly simplifies the routing of the feedback network.

To minimize parasitic inductances, ground planes should be used under high frequency signal traces. However, the ground plane should be removed from under the input and output pins to minimize the formation of parasitic capacitors, which degrades phase margin. Signals that are susceptible to noise pickup should be run on the internal layers of the PCB, which can provide maximum shielding.

## POWER SUPPLY BYPASSING

Power supply bypassing is a critical aspect of the PCB design process. For best performance, the AD8000 power supply pins need to be properly bypassed.

A parallel connection of capacitors from each of the power supply pins to ground works best. Paralleling different values and sizes of capacitors helps to ensure that the power supply pins "see" a low ac impedance across a wide band of frequencies. This is important for minimizing the coupling of noise into the amplifier. Starting directly at the power supply pins, the smallest value and sized component should be placed on the same side of the board as the amplifier, and as close as possible to the

amplifier, and connected to the ground plane. This process should be repeated for the next larger value capacitor. It is recommended for the AD8000 that a 0.1  $\mu$ F ceramic 0508 case be used. The 0508 offers low series inductance and excellent high frequency performance. The 0.1  $\mu$ F case provides low impedance at high frequencies. A 10  $\mu$ F electrolytic capacitor should be placed in parallel with the 0.1  $\mu$ F. The 10  $\mu$ F capacitor provides low ac impedance at low frequencies. Smaller values of electrolytic capacitors can be used, depending on the circuit requirements. Additional smaller value capacitors help to provide a low impedance path for unwanted noise out to higher frequencies but are not always necessary.

Placement of the capacitor returns (grounds), where the capacitors enter into the ground plane, is also important. Returning the capacitors grounds close to the amplifier load is critical for distortion performance. Keeping the capacitors distance short, but equal from the load, is optimal for performance.


In some cases, bypassing between the two supplies can help to improve PSRR and to maintain distortion performance in crowded or difficult layouts. This is as another option to improve performance.

Minimizing the trace length and widening the trace from the capacitors to the amplifier reduce the trace inductance. A series inductance with the parallel capacitance can form a tank circuit, which can introduce high frequency ringing at the output. This additional inductance can also contribute to increased distortion due to high frequency compression at the output. The use of vias should be minimized in the direct path to the amplifier power supply pins since vias can introduce parasitic inductance, which can lead to instability. When required, use multiple large diameter vias because this lowers the equivalent parasitic inductance.

## GROUNDING

The use of ground and power planes is encouraged as a method of proving low impedance returns for power supply and signal currents. Ground and power planes can also help to reduce stray trace inductance and to provide a low thermal path for the amplifier. Ground and power planes should not be used under any of the pins of the AD8000. The mounting pads and the ground or power planes can form a parasitic capacitance at the amplifiers input. Stray capacitance on the inverting input and the feedback resistor form a pole, which degrades the phase margin, leading to instability. Excessive stray capacitance on the output also forms a pole, which degrades phase margin.

## OUTLINE DIMENSIONS

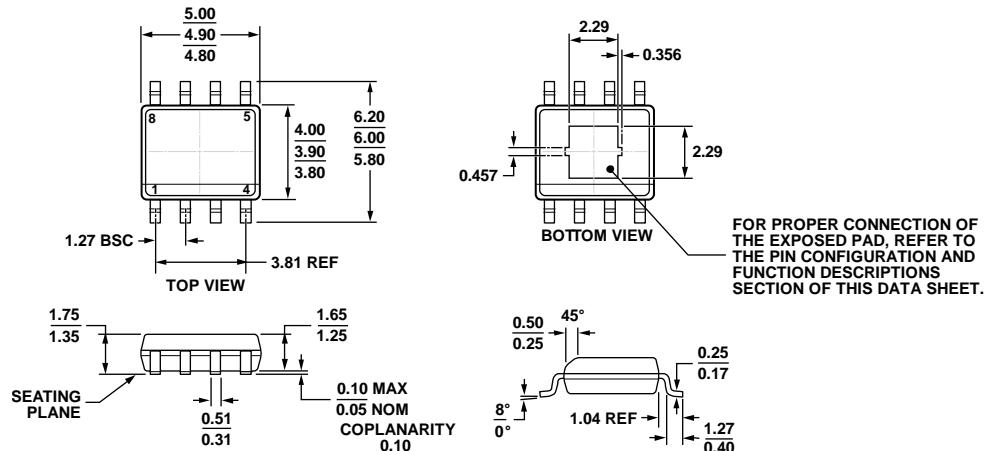


COMPLIANT TO JEDEC STANDARDS MS-012-AA

Figure 54. 8-Lead Standard Small Outline Package, with Exposed Pad [SOIC\_N\_EP]

Narrow Body (RD-8-1)

Dimensions shown in millimeters and (inches)

06-02-2011-B

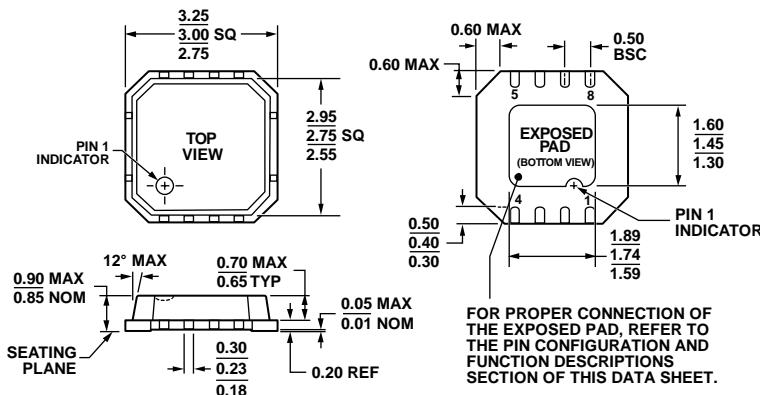

04-04-2012-A

Figure 55. 8-Lead Lead Frame Chip Scale Package [LFCSP\_VD]

3 mm × 3 mm Body, Very Thin, Dual Lead

(CP-8-2)

Dimensions shown in millimeters

## ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Description | Package Option | Branding | Ordering Quantity |
|--------------------|-------------------|---------------------|----------------|----------|-------------------|
| AD8000YRDZ         | -40°C to +125°C   | 8-Lead SOIC_N_EP    | RD-8-1         |          | 1                 |
| AD8000YRDZ-REEL    | -40°C to +125°C   | 8-Lead SOIC_N_EP    | RD-8-1         |          | 2,500             |
| AD8000YRDZ-REEL7   | -40°C to +125°C   | 8-Lead SOIC_N_EP    | RD-8-1         |          | 1,000             |
| AD8000YCPZ-R2      | -40°C to +125°C   | 8-Lead LFCSP_VD     | CP-8-2         | HNB      | 250               |
| AD8000YCPZ-REEL    | -40°C to +125°C   | 8-Lead LFCSP_VD     | CP-8-2         | HNB      | 5,000             |
| AD8000YCPZ-REEL7   | -40°C to +125°C   | 8-Lead LFCSP_VD     | CP-8-2         | HNB      | 1,500             |
| AD8000YCPZ-EBZ     |                   | Evaluation Board    |                |          |                   |
| AD8000YRD-EBZ      |                   | Evaluation Board    |                |          |                   |

<sup>1</sup> Z = RoHS Compliant Part.

**NOTES**

**NOTES**

**NOTES**

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru