
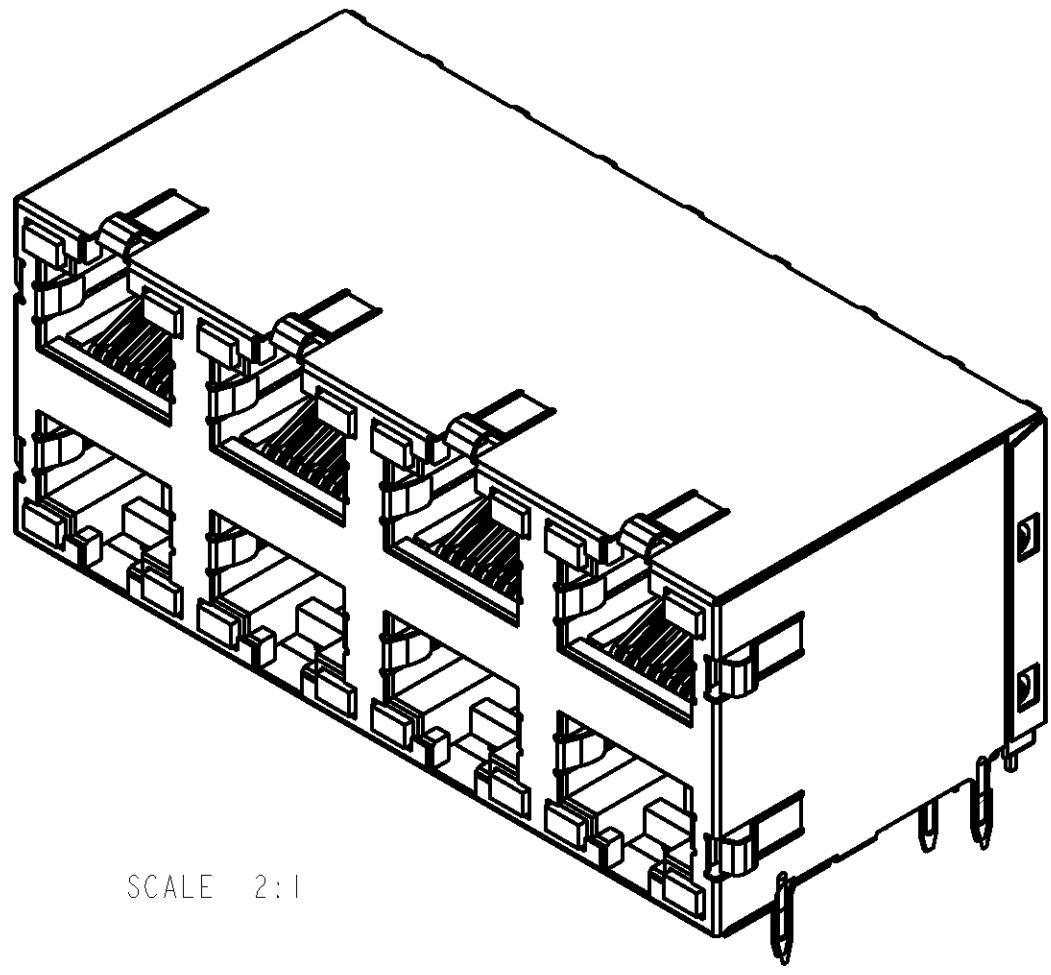
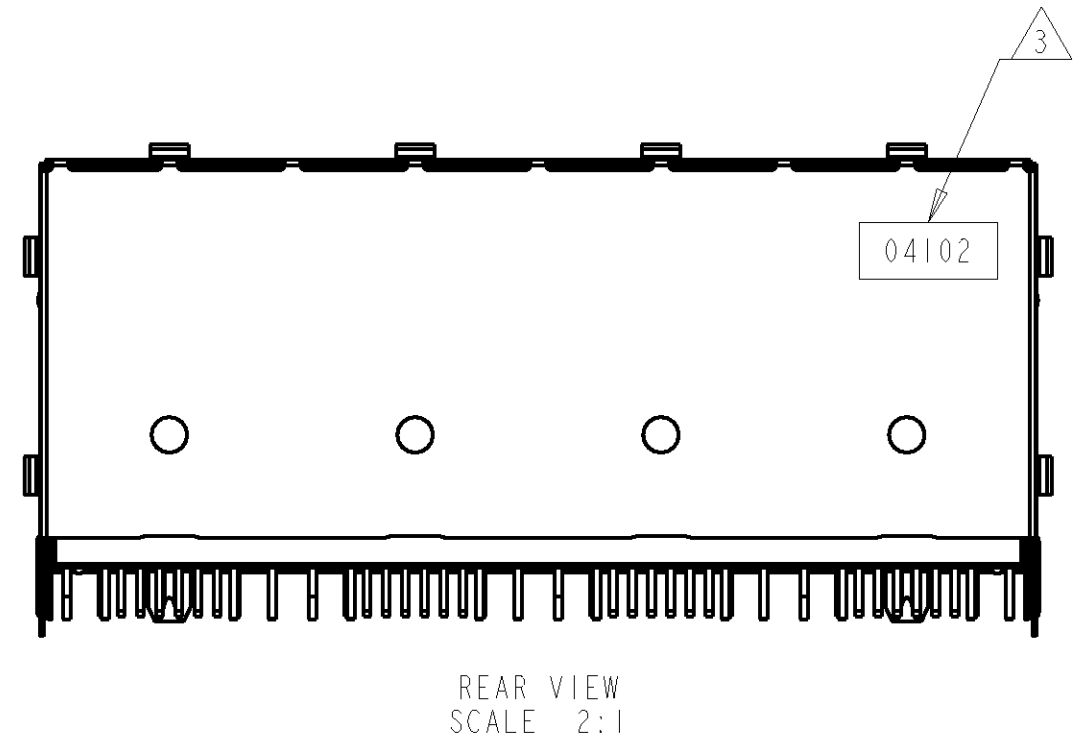
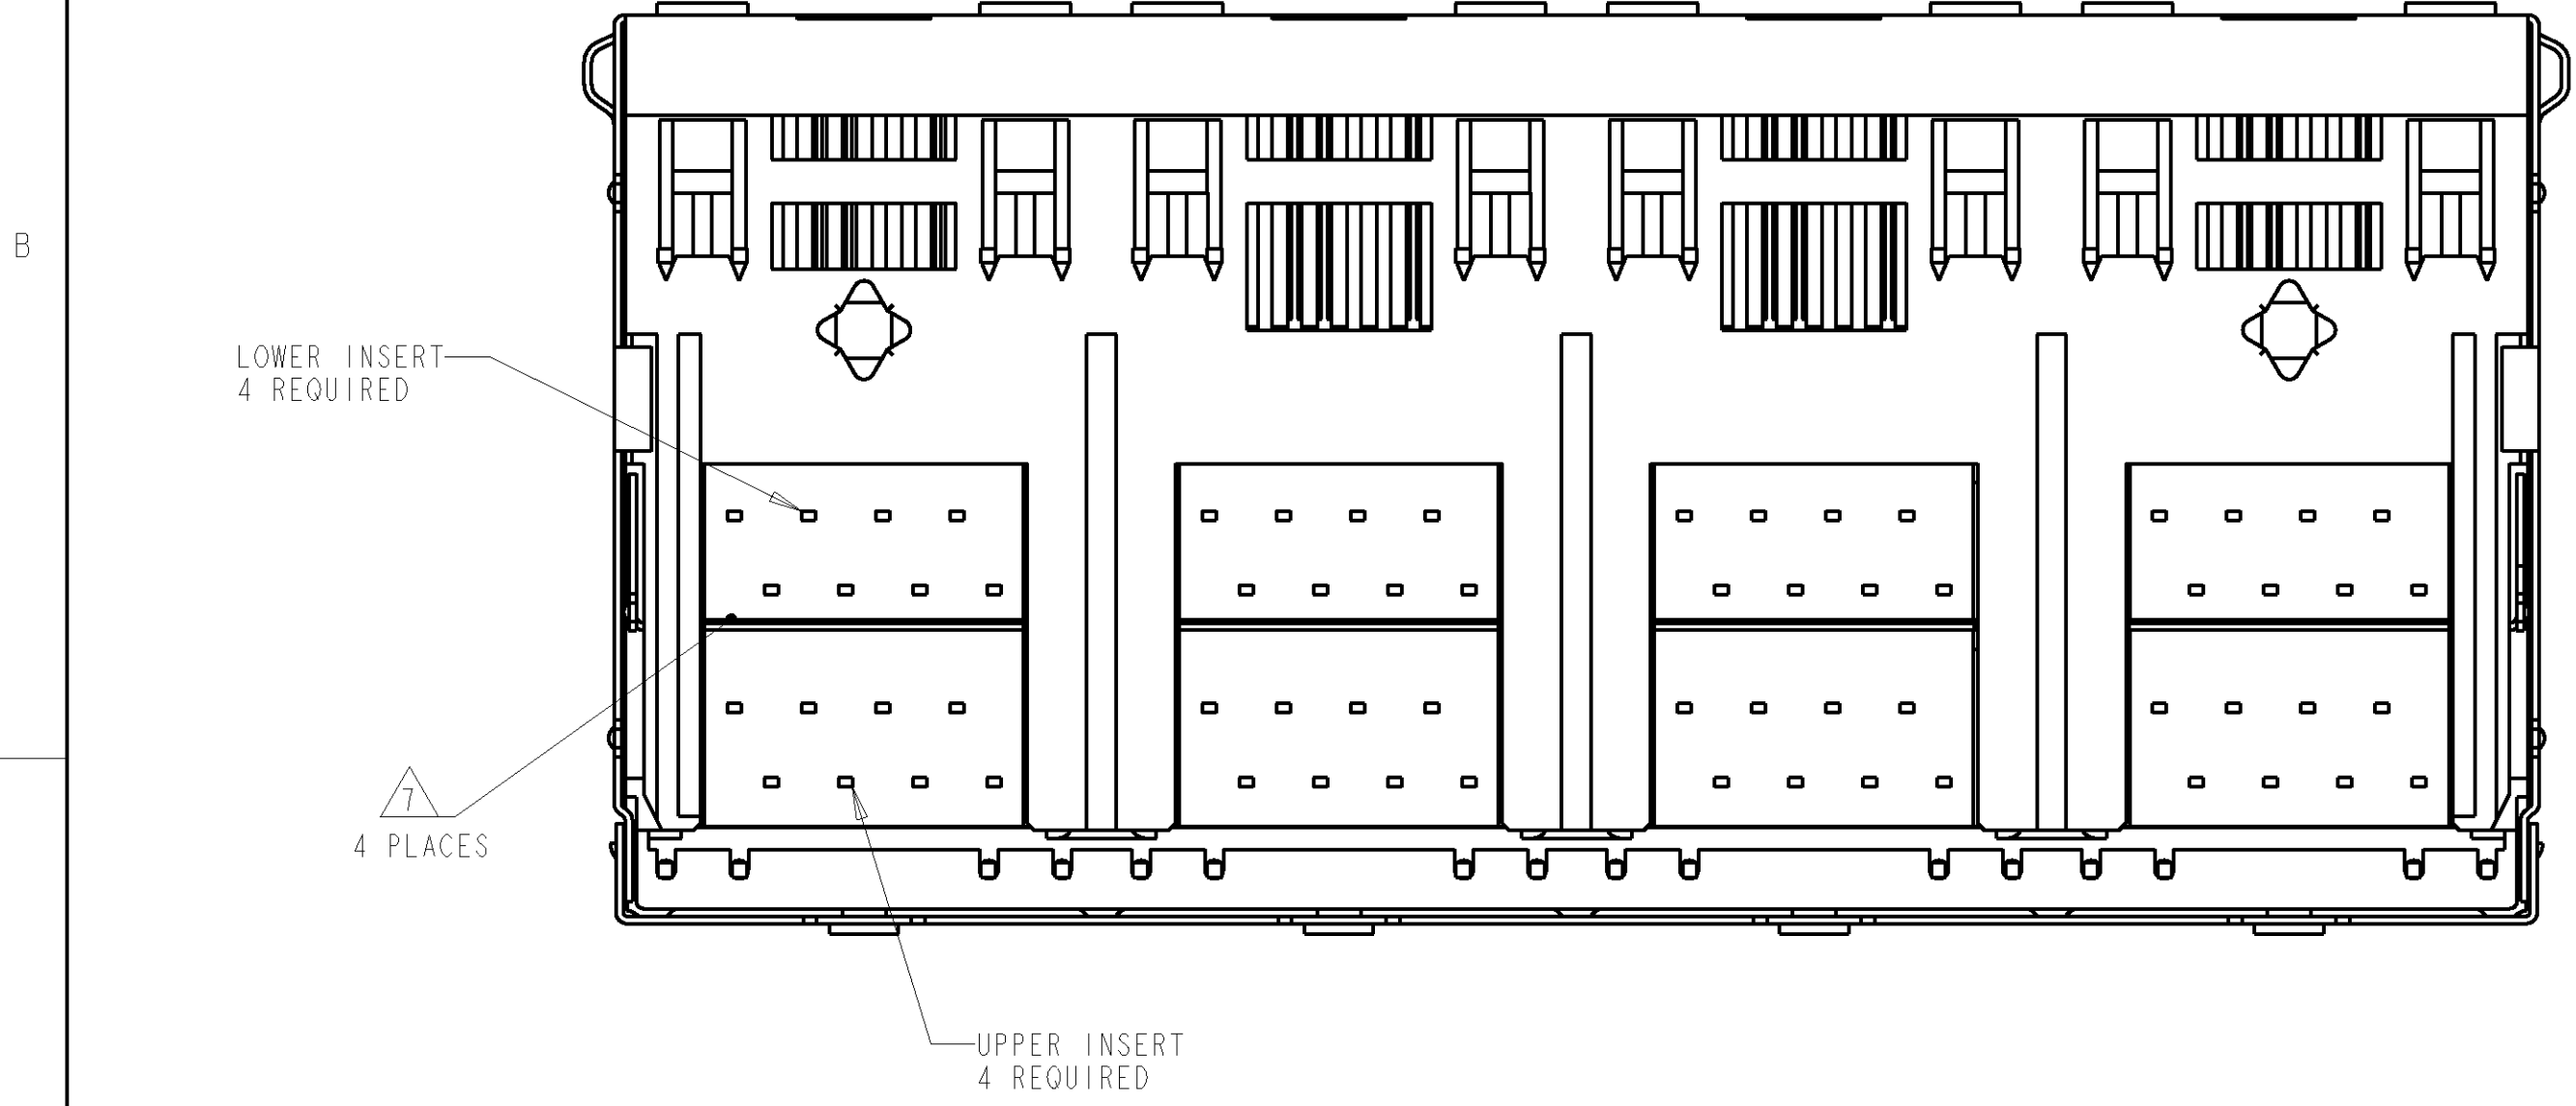
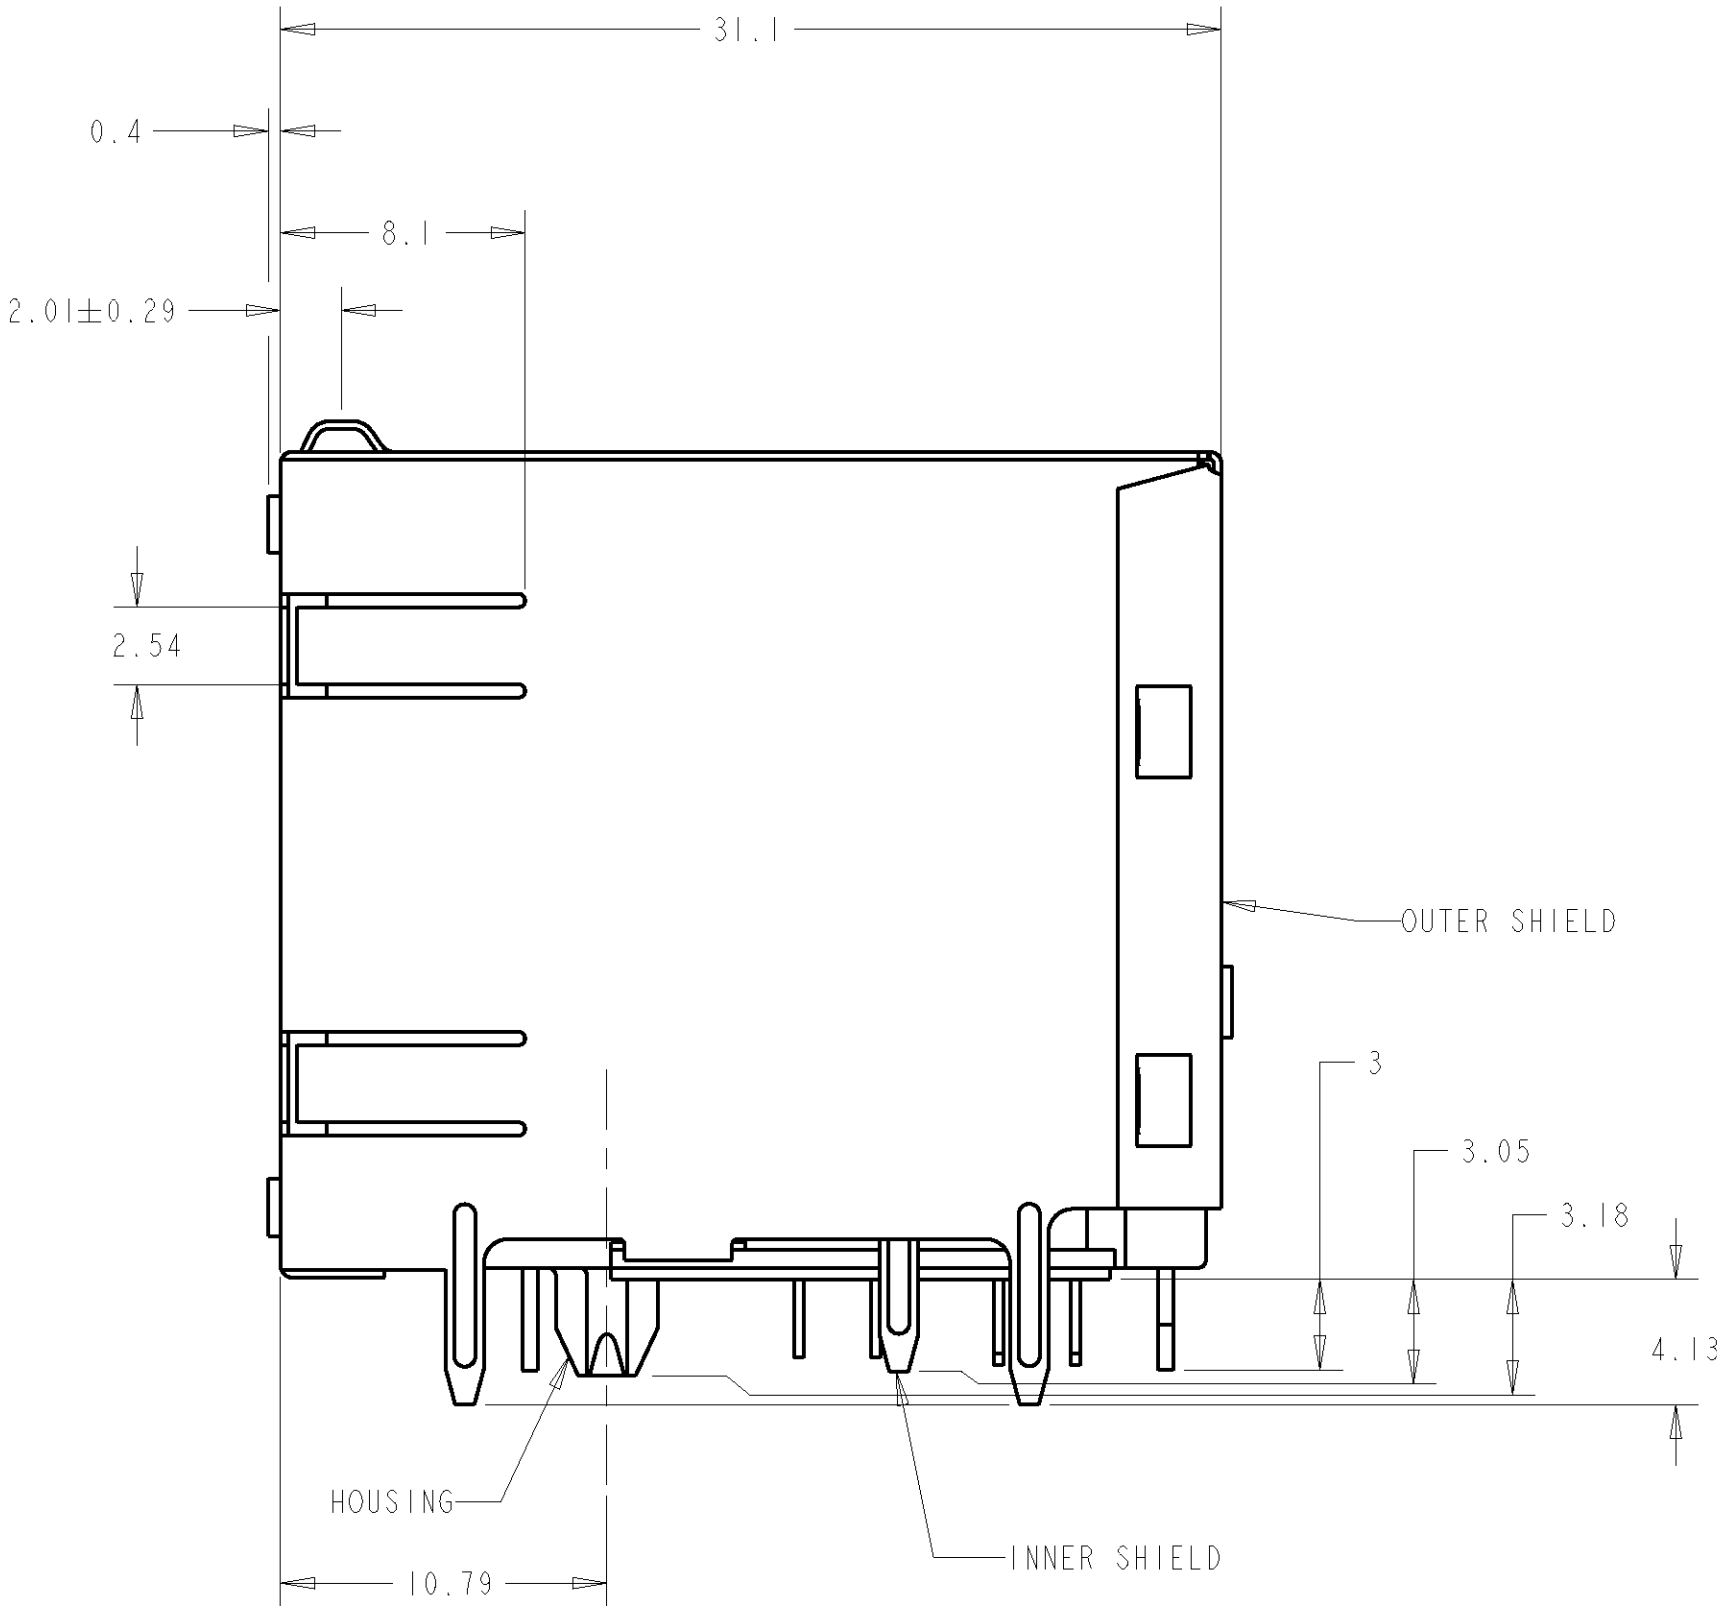


LOC	DIST	REVISIONS					
AA	00	P	LYR	DESCRIPTION	DATE	DWN	APVD
		A		REVISED PER EC 0S11-0201-04	23JUN2005	LV	SF
		B		ECO-07-007817	18APR2007	LAM	JW
		C		ECO-07-025050	26OCT2007	LAM	JW
		D		ECR-08-017313	10JUL2008	A.L	S.Y
		D1		REVISED PER ECO-10-000445	11JAN10	KK	AEG

1. HOUSING: PBT POLYESTER, BLACK, UL 94V-0.
TERMINALS: 0.3175 THICK PHOS BRONZE PLATED WITH 1.27µm MINIMUM THICK HARD GOLD IN LOCALIZED AREA AND 3.81µm MINIMUM THICK MATTE TIN IN SOLDER AREA OVER 1.27µm MINIMUM THICK NICKEL UNDERPLATE.
INNER SHIELD: 0.25 THICK COPPER ALLOY PLATED WITH 2.03µm MINIMUM BRIGHT TIN OVER 1.27µm MINIMUM NICKEL.
OUTER SHIELD: 0.25 THICK COPPER ALLOY PLATED WITH 2.03µm MINIMUM HOT TIN DIPPED PCB GROUND TABS OVER 1.27µm MINIMUM NICKEL.
LIGHT EMITTING DIODE (LED): DIFFUSED EPOXY LENS, 0.50 X 0.50 CARBON STEEL WIREFRAME LEADS PLATED WITH 8.89µm TIN/COPPER OVER 2.03µm SILVER OVER 1.02µm COPPER OVER 3.56µm NICKEL OVER 1.02µm COPPER UNDERPLATE.

- 2 JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- 3 DATE CODE LOCATED ON REAR OF PART APPROX AS SHOWN: FIRST 2 DIGITS ARE LAST 2 DIGITS OF YEAR, SECOND 2 DIGITS ARE MANUFACTURING WORK WEEK, LAST DIGIT IS DAY OF WEEK, WITH SUNDAY=1.
- 4 SUGGESTED OPERATING CURRENT FOR THE LED IS 20mA
5. THIS MODULAR JACK WITH INTEGRATED LED IS NOT IR REFLOW SOLDERING PROCESS COMPATIBLE.
6. PRODUCT MEETS IEEE 802.3 SECTION 14.3.1.1 ISOLATION REQUIREMENT.
A) 1500 V RMS AT 50 HZ TO 60 HZ FOR 60 S, APPLIED AS SPECIFIED IN SECTION 5.3.2 OF IEC 60950:1991.
B) 2250 VDC FOR 60 S, APPLIED AS SPECIFIED IN SECTION 5.3.2 OF IEC 60950:1991.
- INSULATOR TAPE (.425" X .425") APPLIED BETWEEN LOWER INSERT AND INNER SHIELD.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

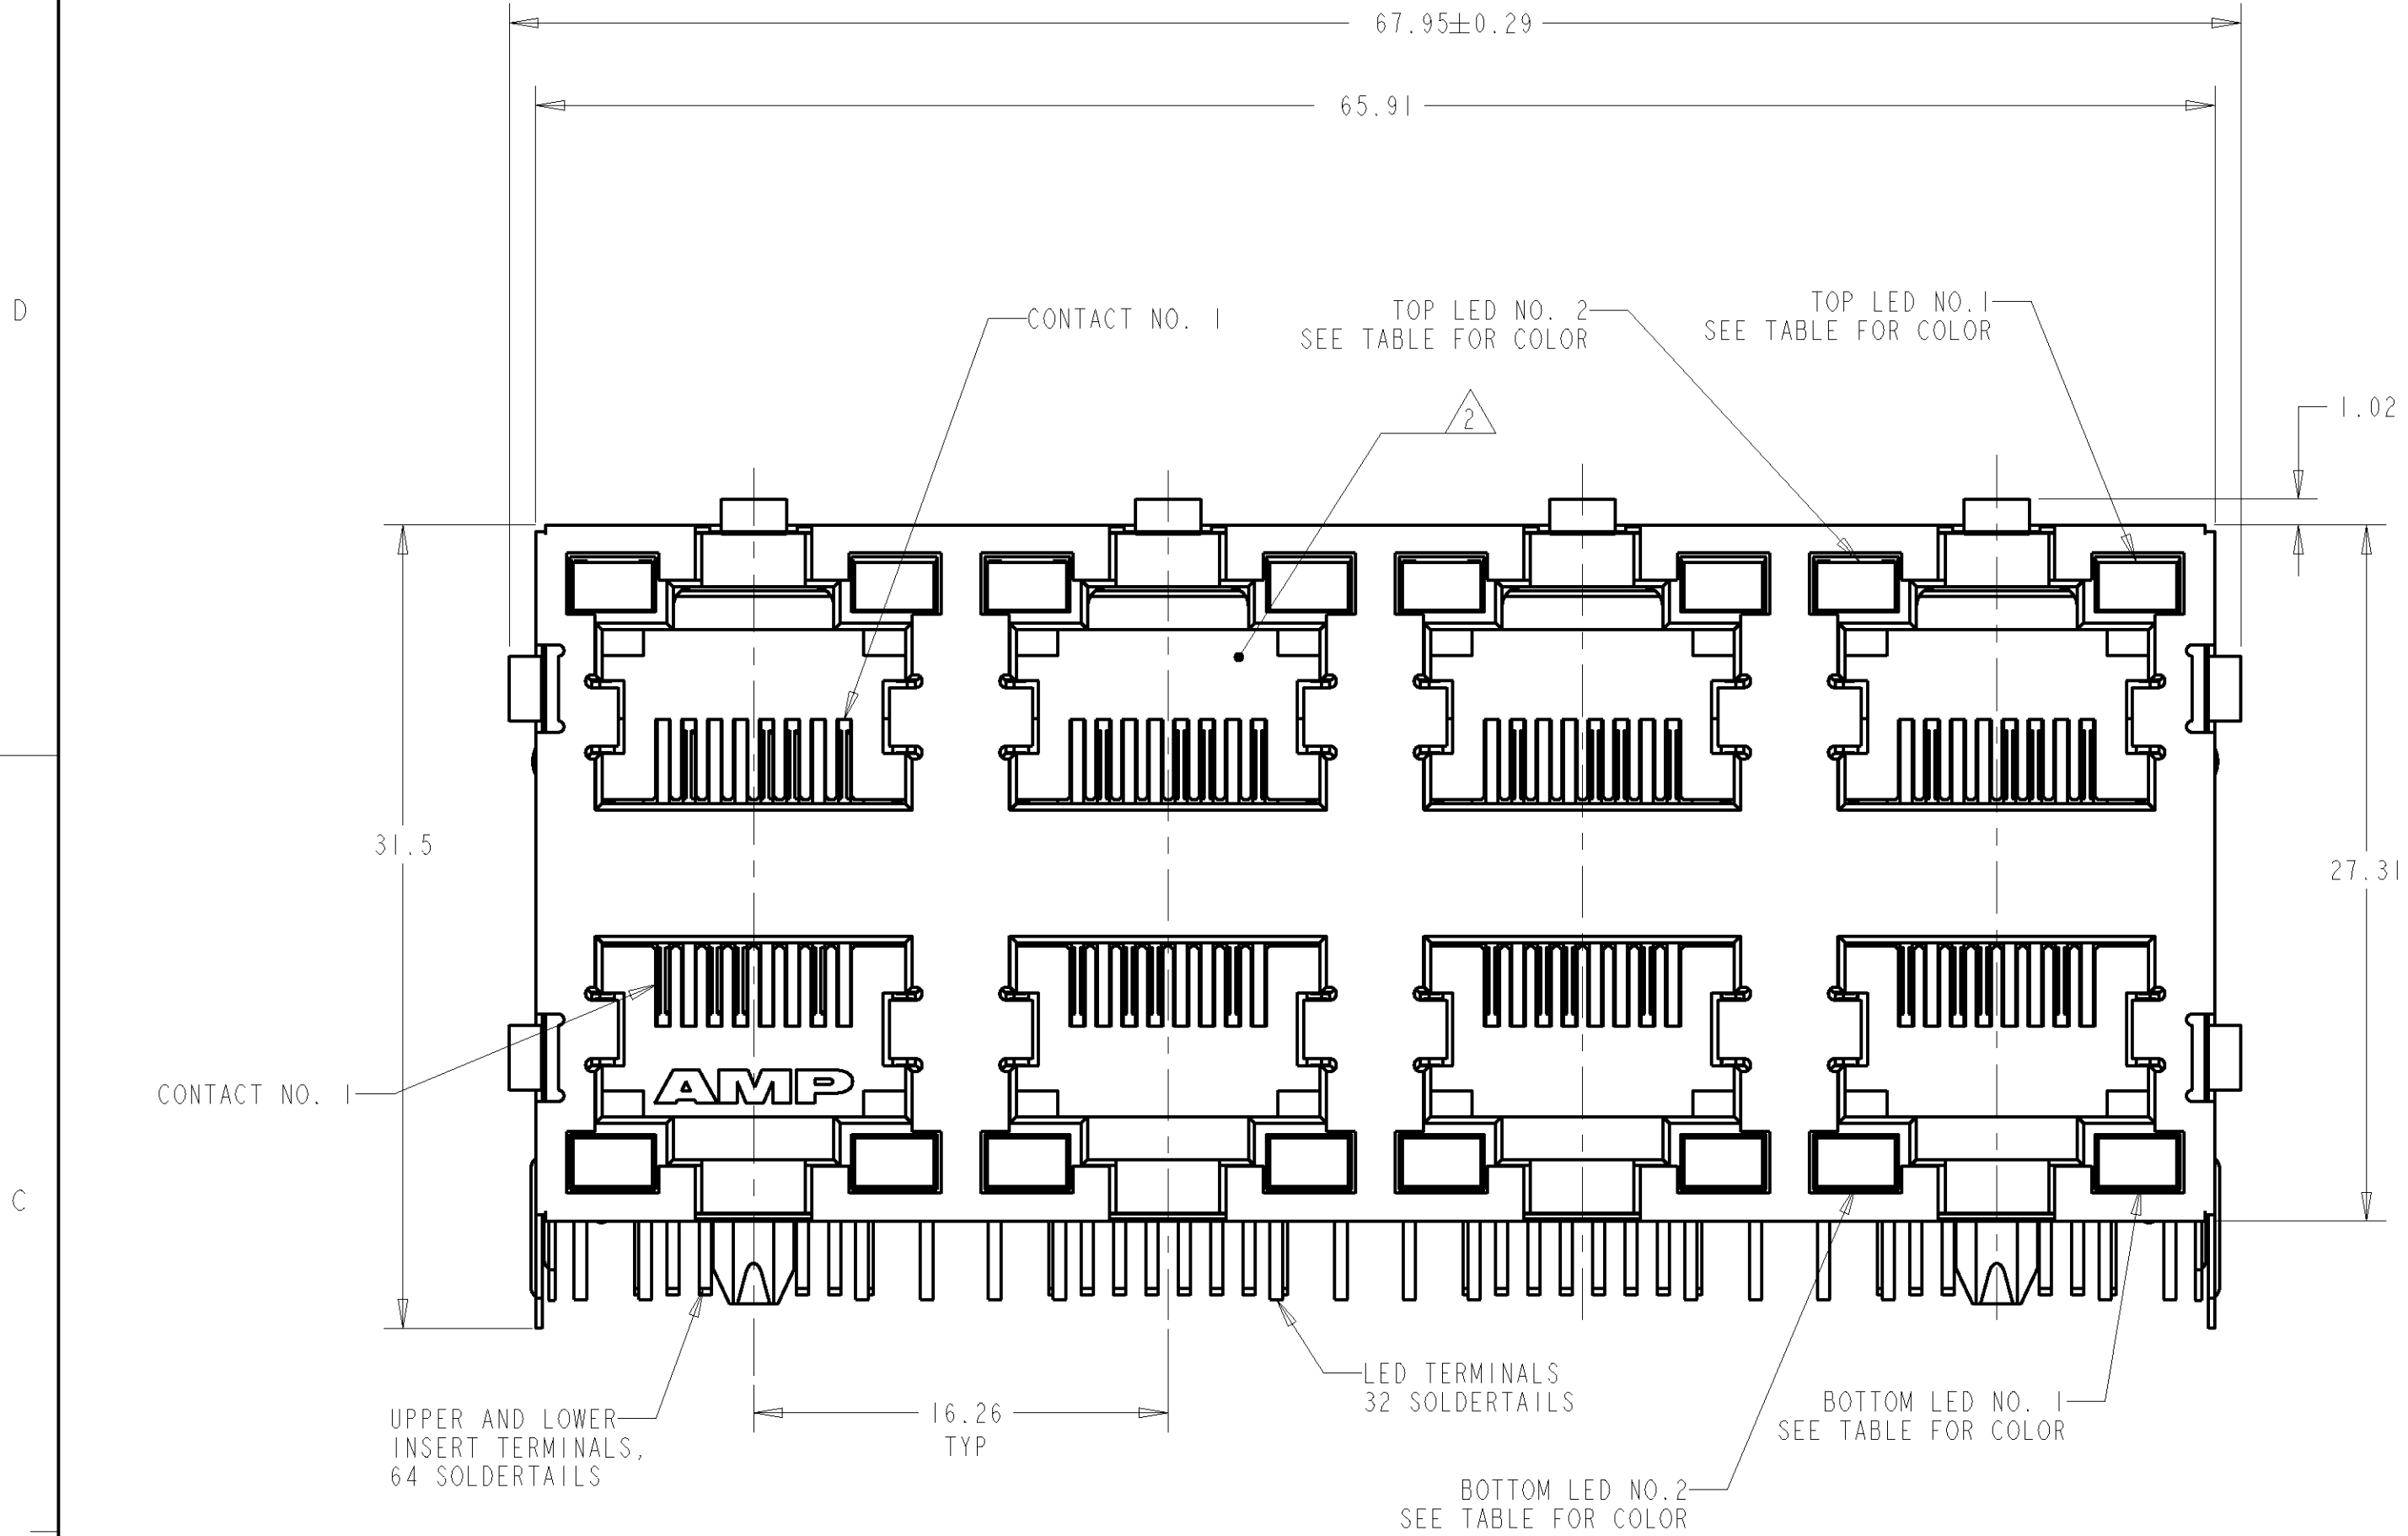


GREEN/YELLOW	GREEN/YELLOW	GREEN/YELLOW	GREEN/YELLOW	6339082-7
GREEN/YELLOW	GREEN	GREEN/YELLOW	GREEN	6339082-6
GREEN/ORANGE	GREEN/ORANGE	GREEN/ORANGE	GREEN/ORANGE	6339082-4
GREEN	YELLOW	GREEN	YELLOW	6339082-3
YELLOW	GREEN	GREEN	YELLOW	6339082-2
GREEN	GREEN	GREEN	GREEN	6339082-1
BOTTOM LED NO. 2	BOTTOM LED NO. 1	TOP LED NO. 2	TOP LED NO. 1	PART NUMBER


8 OBSOLETE

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN L. VARELA - 23JUN2005		Tyco Electronics Corporation	
mm		0 PLC ±0.25		CHK J. WESTMAN - 23JUN2005		Harrisburg, PA 17105-3608	
1 PLC ±0.25		2 PLC ±0.25		APVD S. FLICKINGER - 23JUN2005		NAME	
3 PLC ±0.25		4 PLC ±0.25		PRODUCT SPEC		ASSEMBLY, STACKED JACK, 2 X 4	
4 PLC ±0.25		5 PLC ±0.25		APPLICATION SPEC		8 POSITION, SHIELDED, PANEL GROUND, LED, CATEGORY 5	
MATERIAL SEE NOTE 1		FINISH SEE NOTE 1		114-2154		SIZE CAGE CODE DRAWING NO	
				WEIGHT -		A1 00779 C=6339082	
				CUSTOMER DRAWING		SCALE 1:1 SHEET 1 OF 2	


LOC		DIST		REVISIONS			
AA		00		DATE	OWN	APVD	
				DESCRIPTION	DATE	OWN	APVD
				SEE SHEET 1	-	-	-

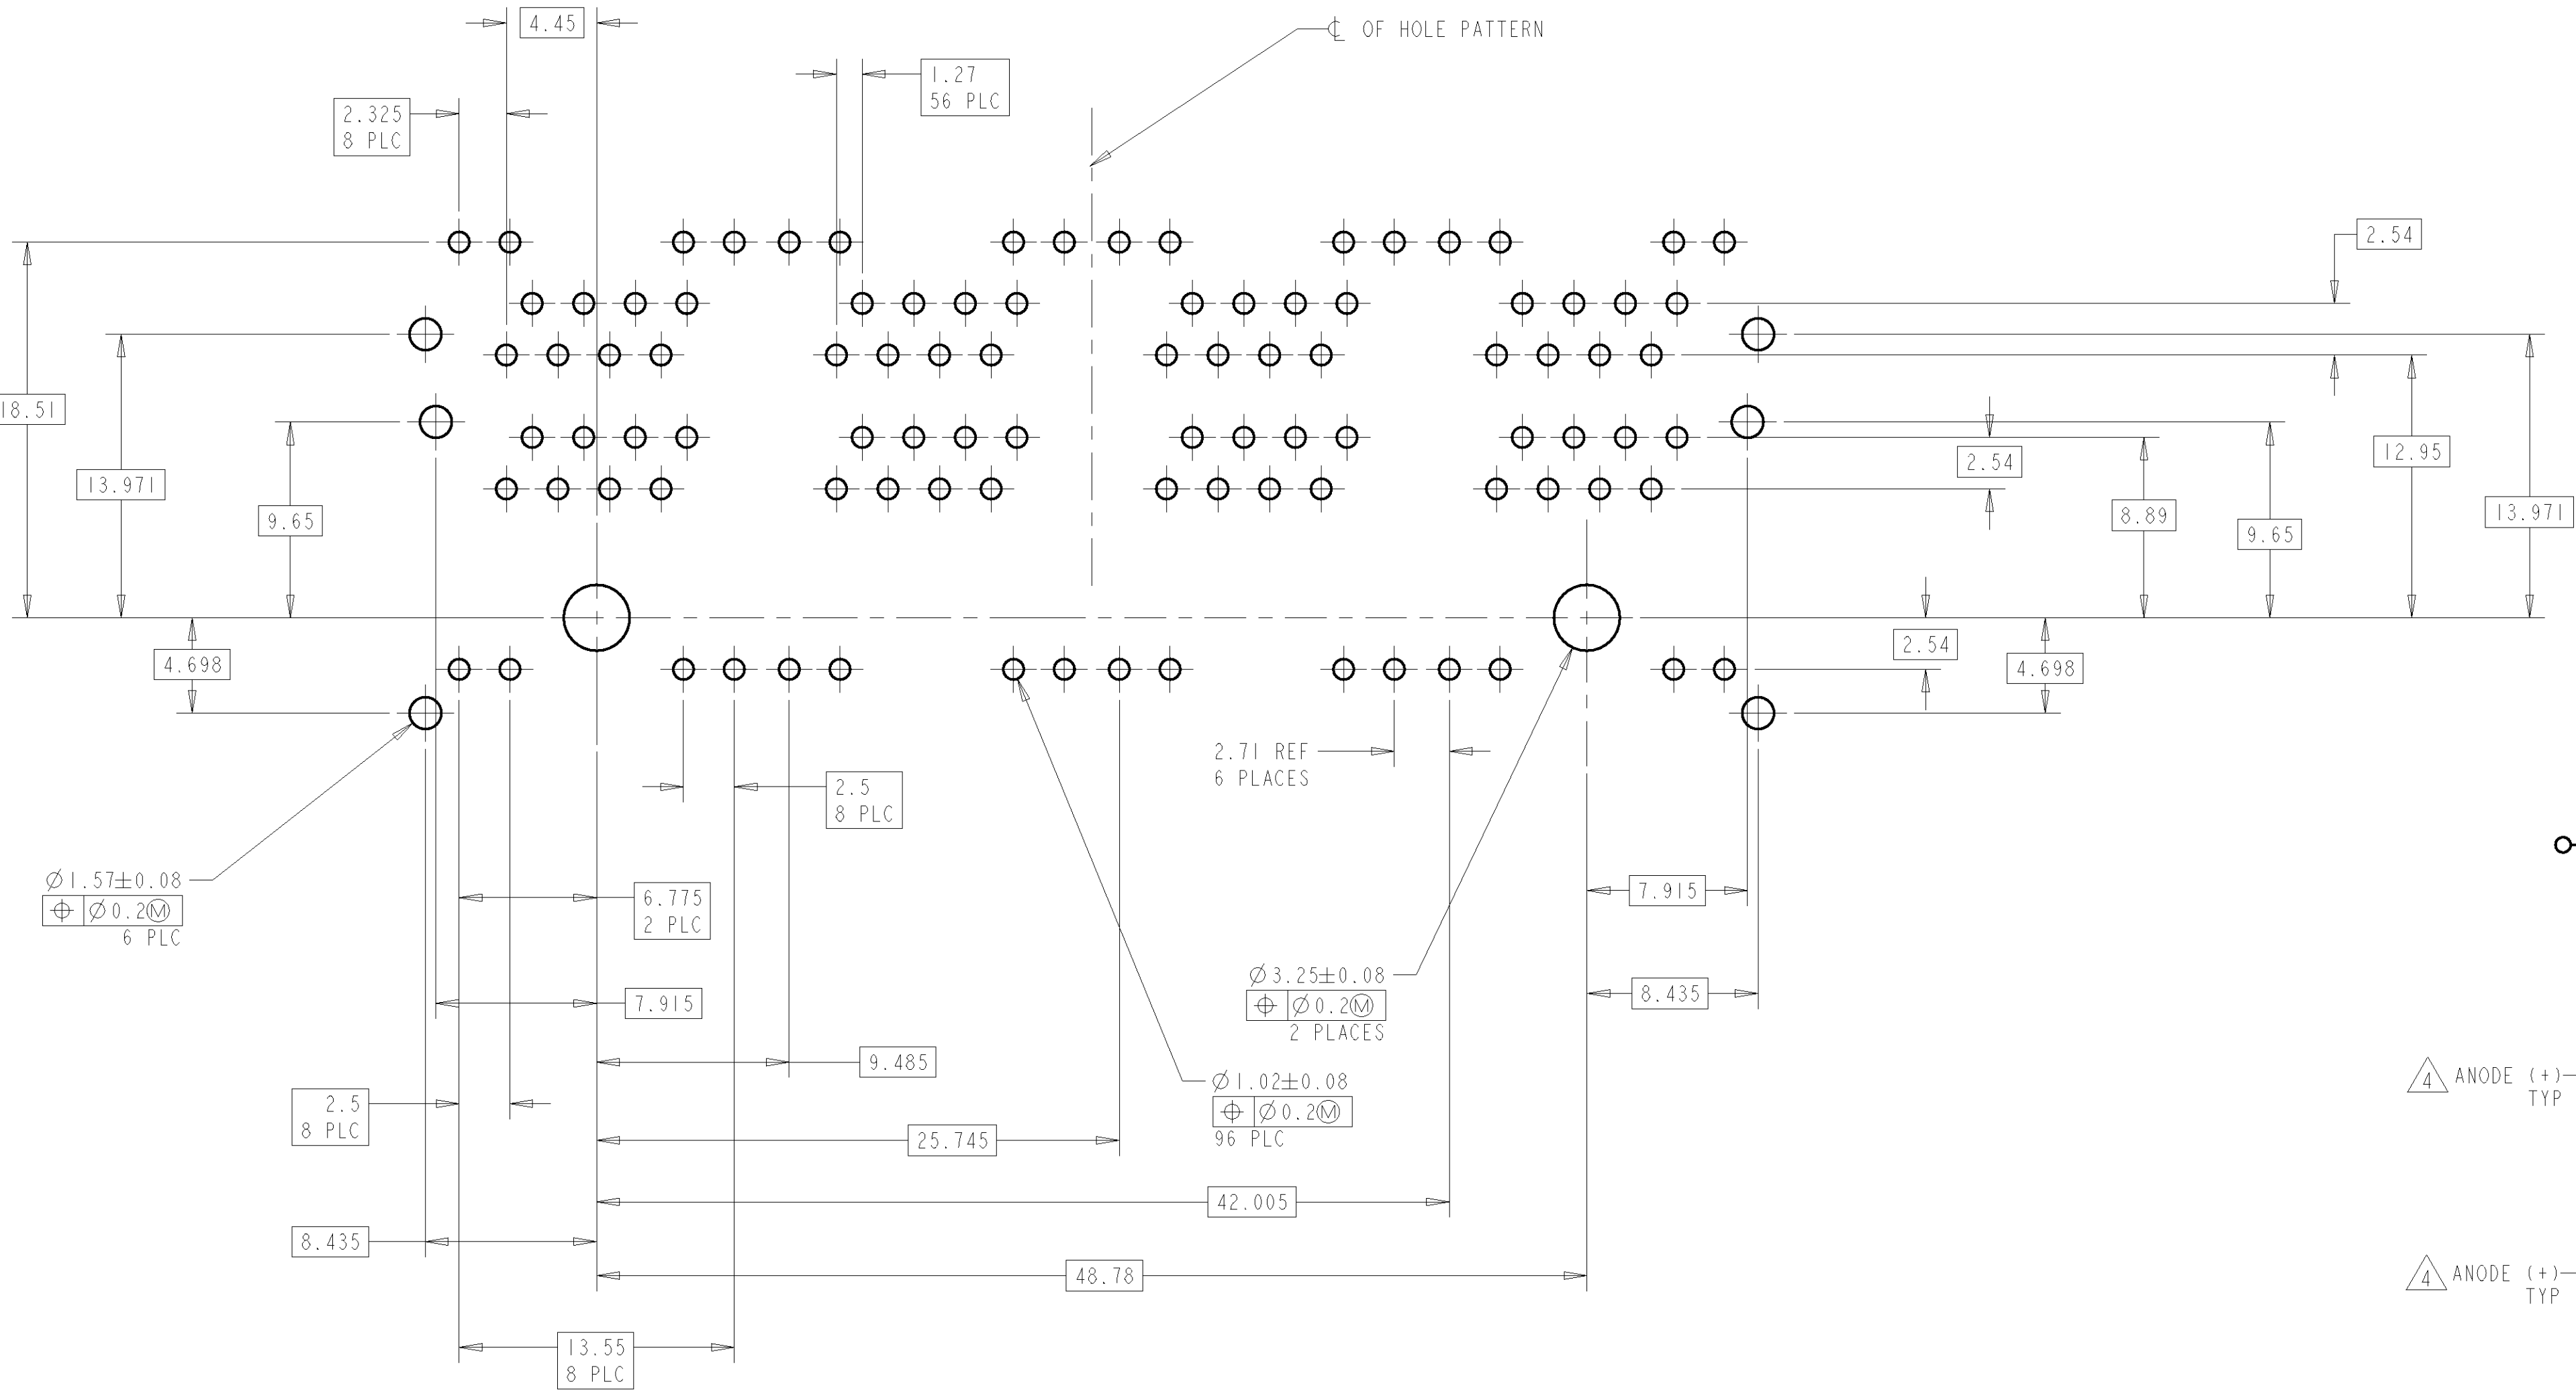


PC BOARD LAYOUT VIEWED FROM COMPONENT SIDE OF BOARD
SCALE 4:1

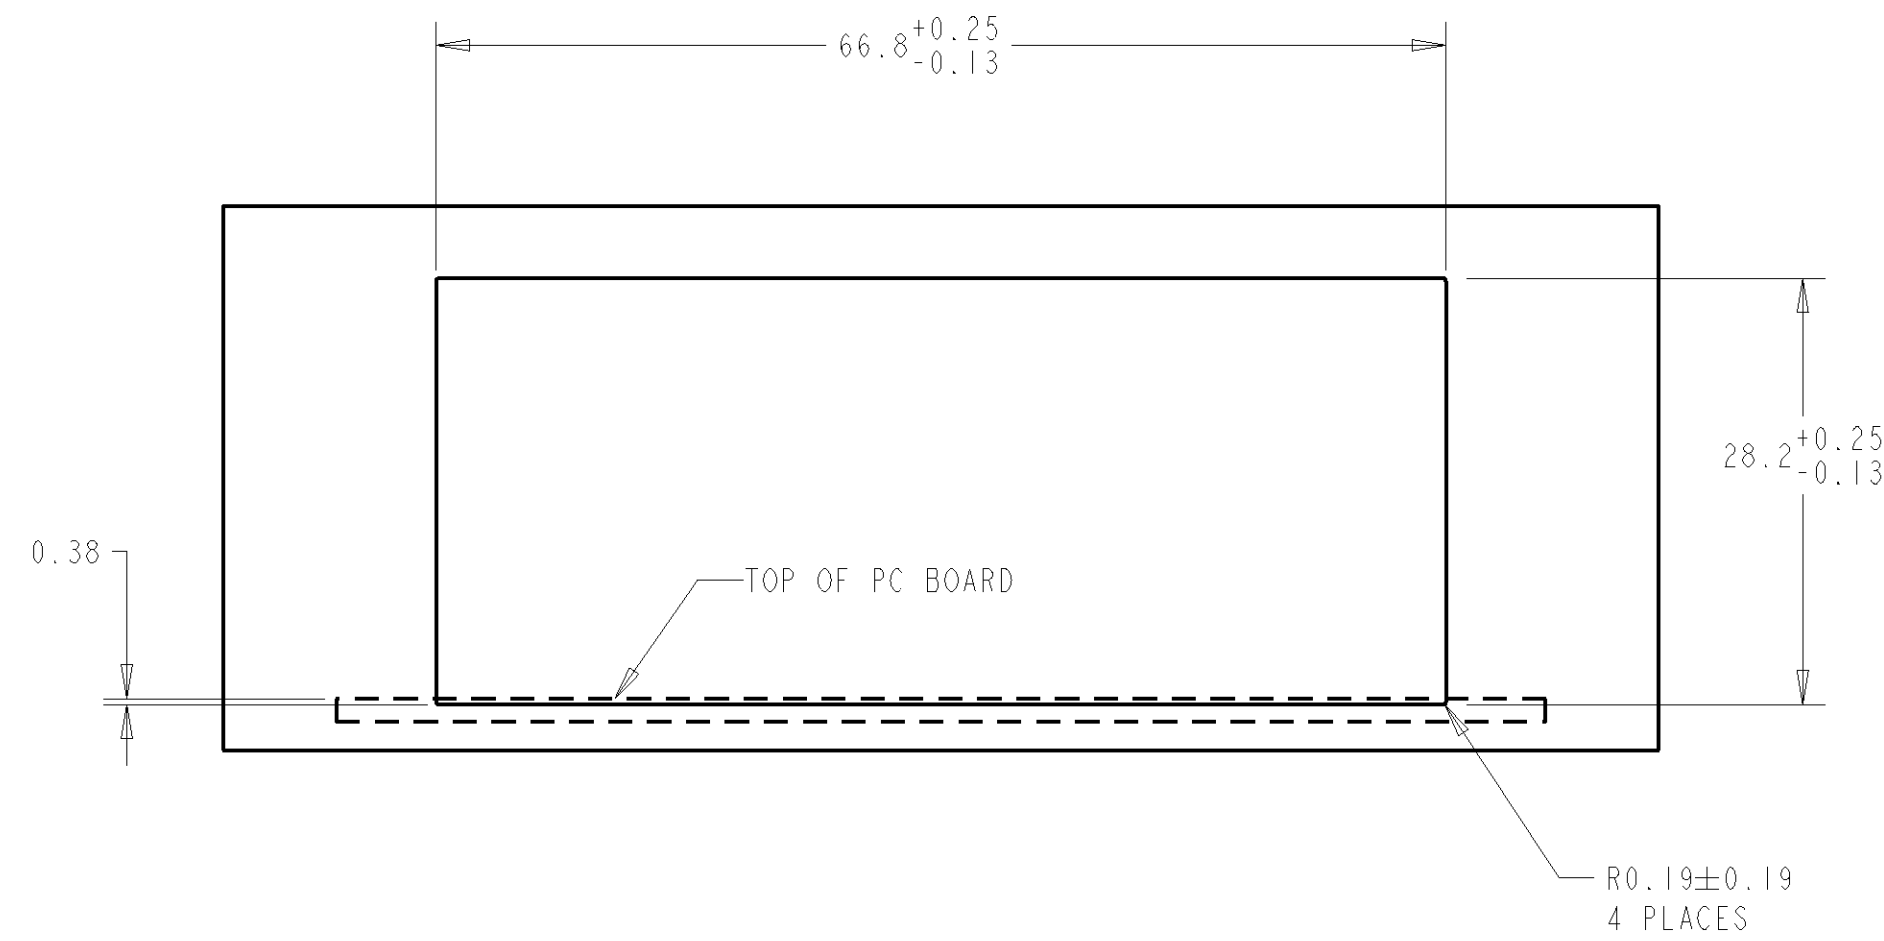


SUGGESTED PANEL CUTOUT DIMENSIONS
SCALE 12:1

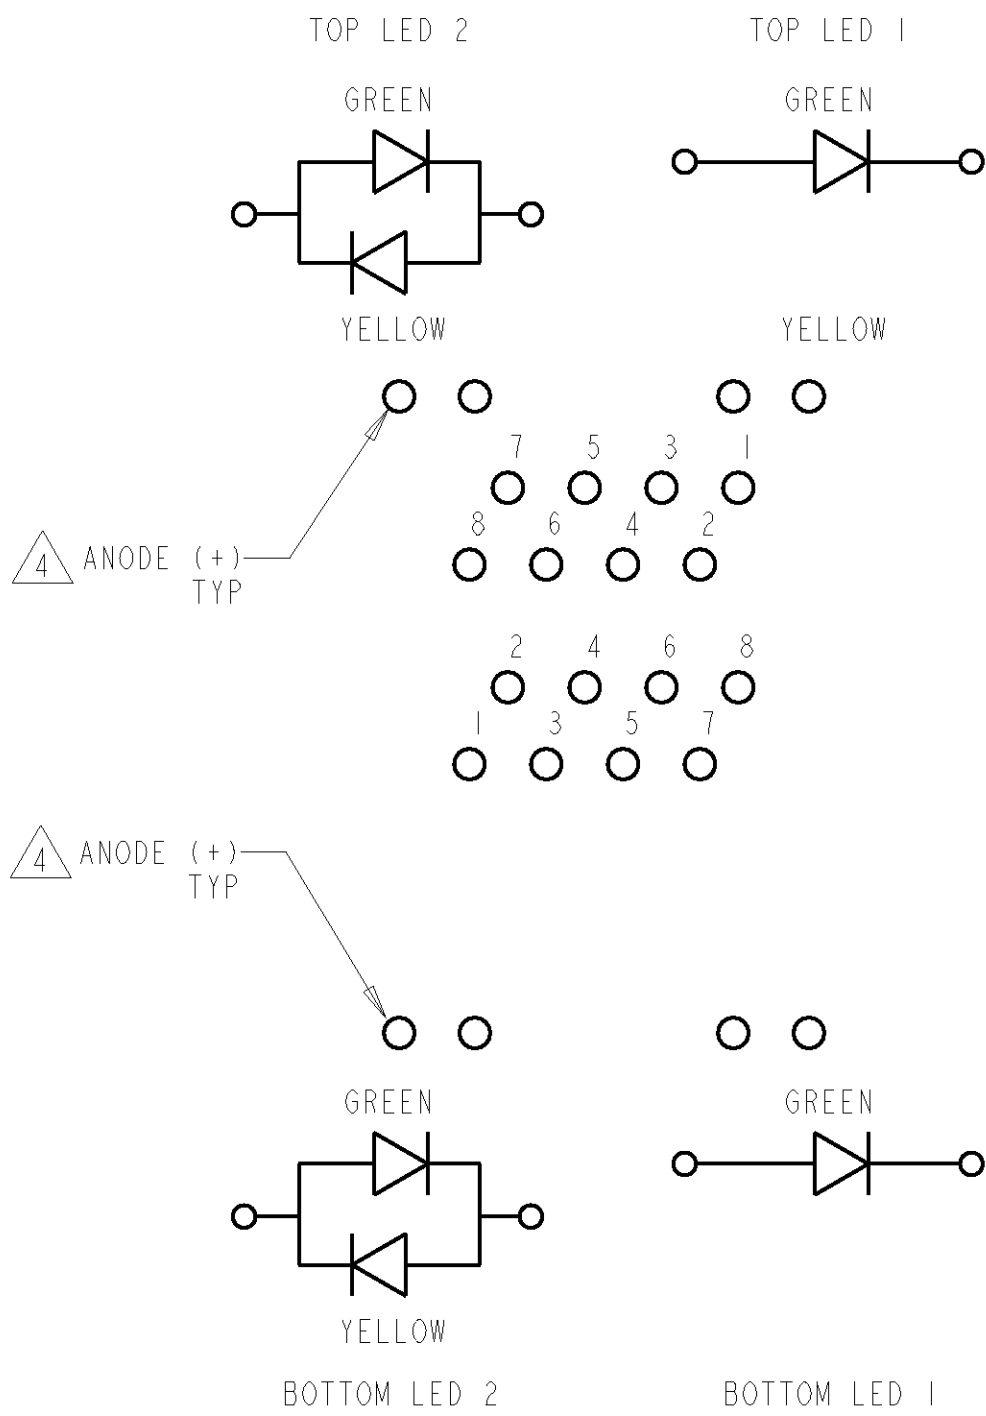


SCHEMATIC FOR 6339082-6
SCALE 4:1

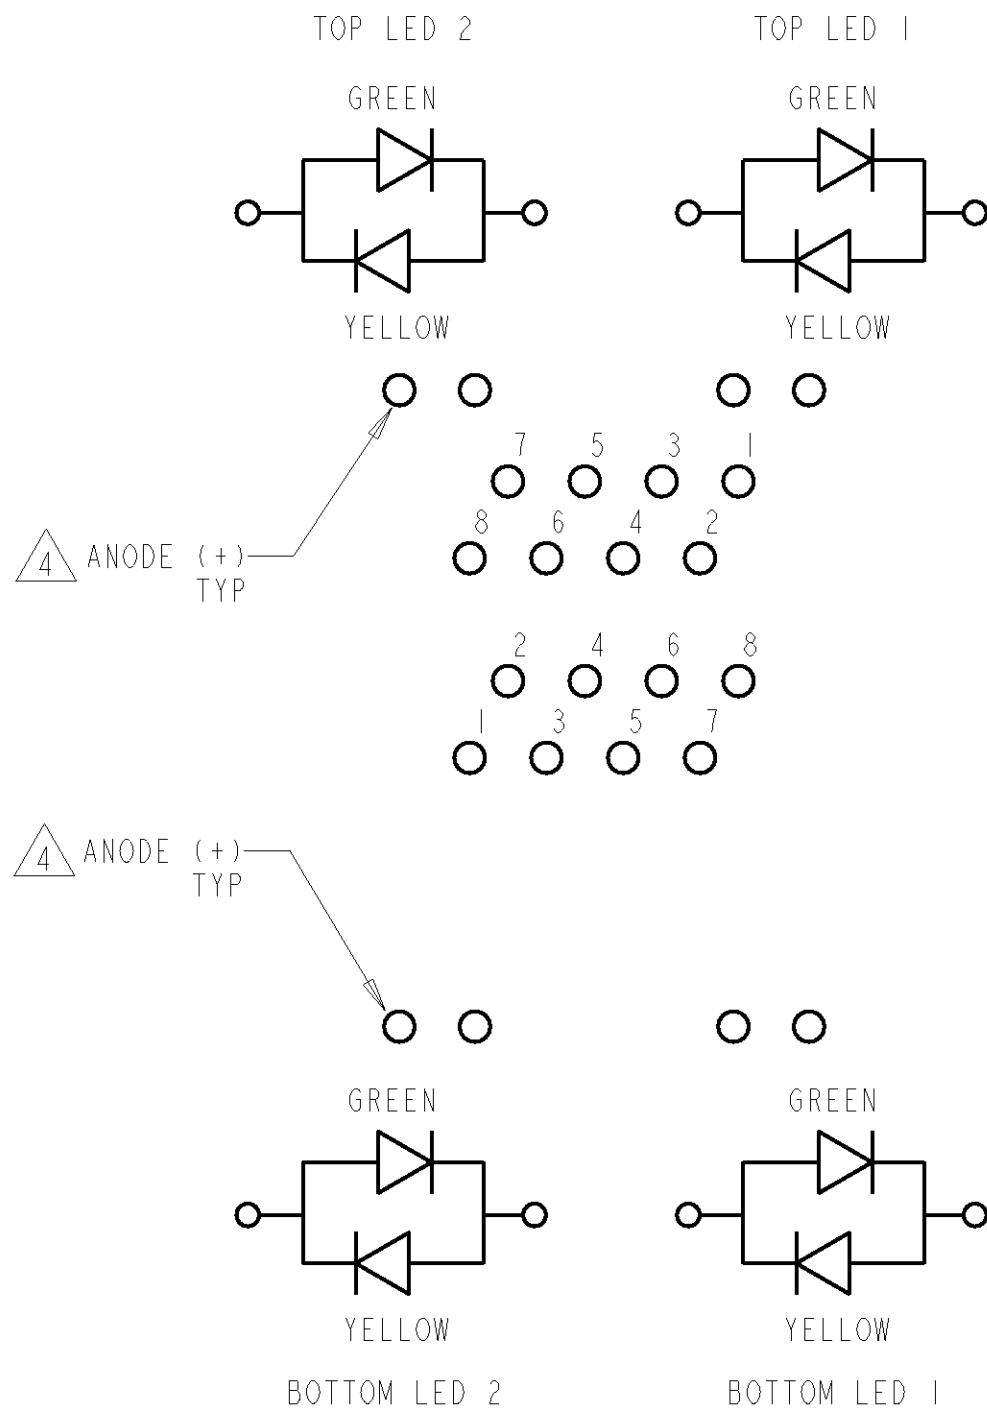

SCHEMATIC FOR 6339082-7
SCALE 4:1

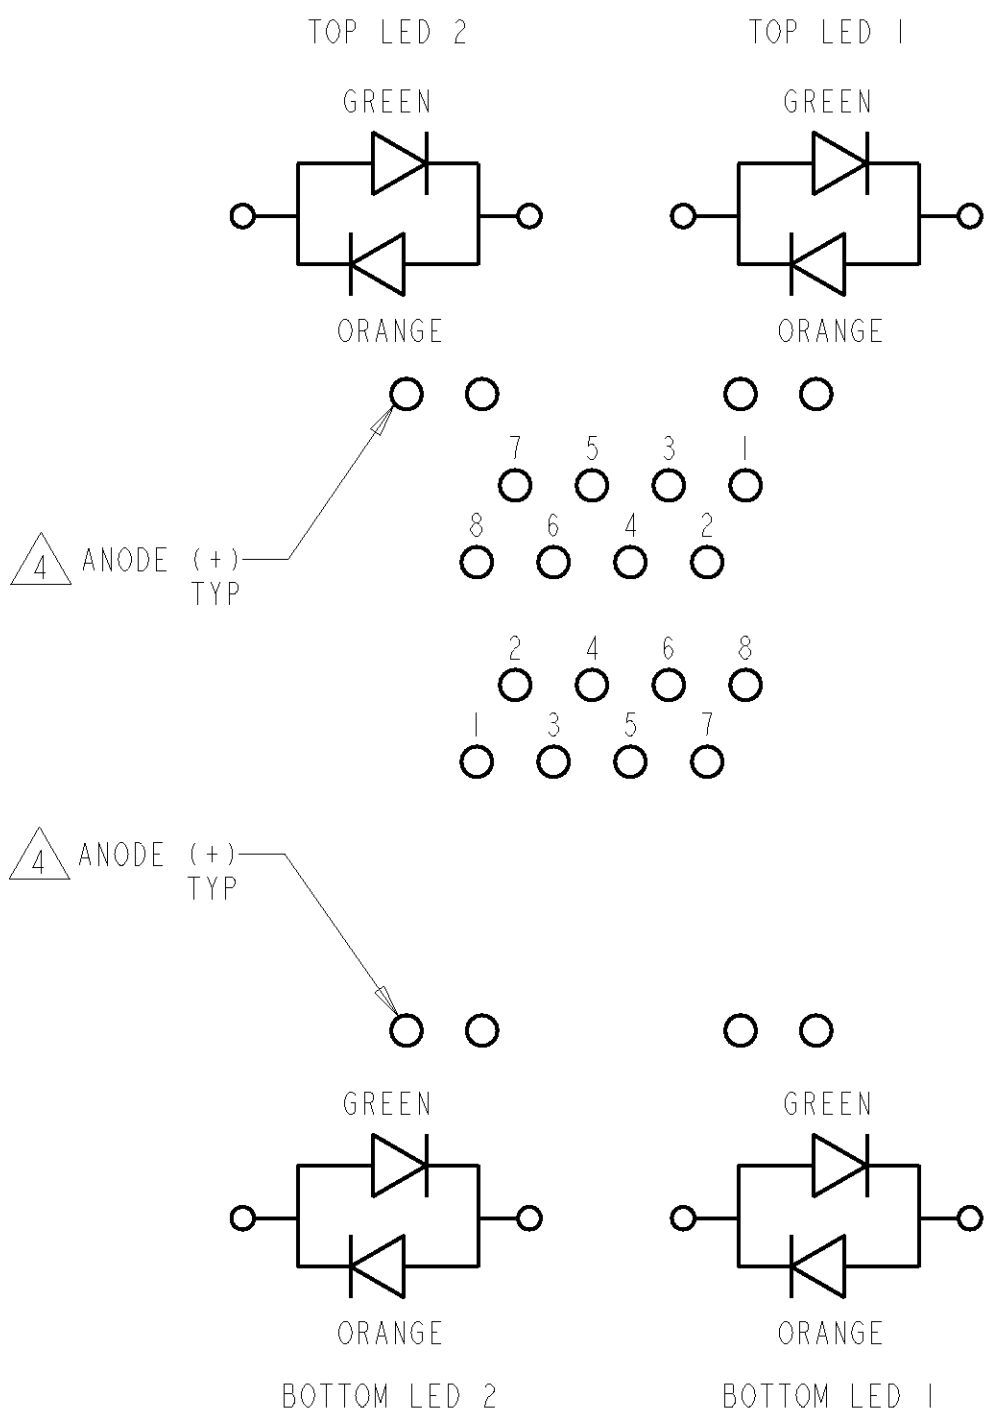

SCHEMATIC FOR 6339082-4
SCALE 4:1

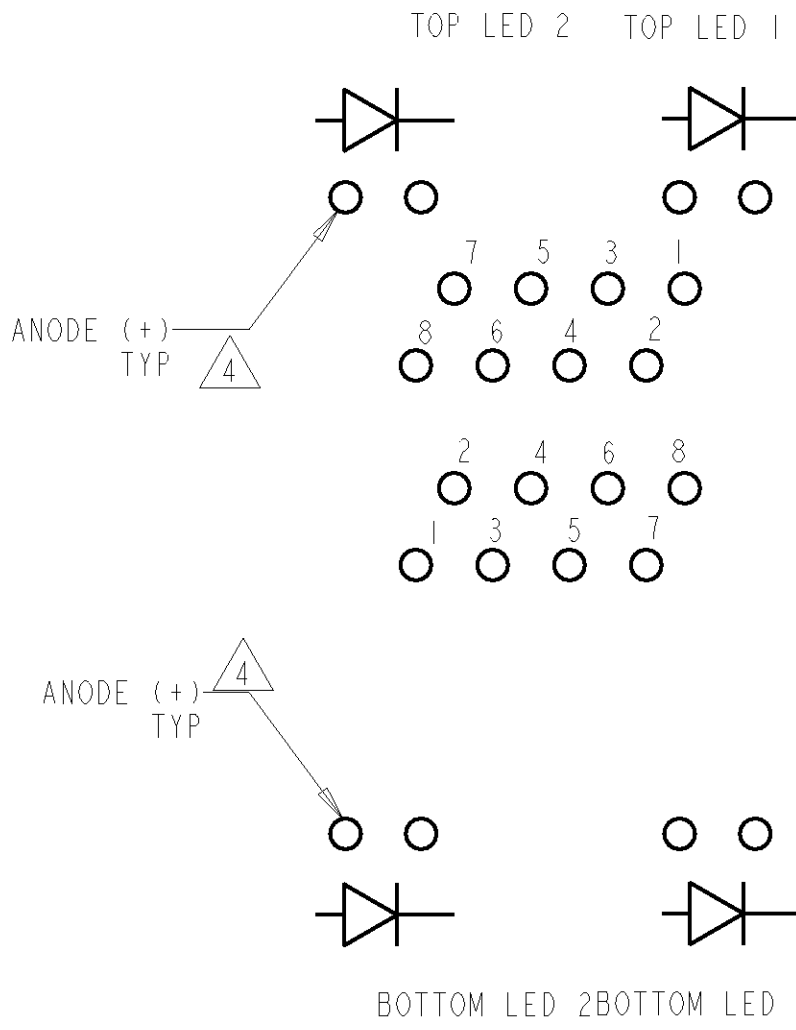

SCHEMATIC FOR 6339082-1,-2,-3
SCALE 4:1

THE INFORMATION CONTAINED HEREIN IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE. IT IS THE POLICY OF TYCO ELECTRONICS CORPORATION TO MAKE THIS INFORMATION AVAILABLE TO THE PUBLIC. IT IS THE POLICY OF TYCO ELECTRONICS CORPORATION TO MAKE THIS INFORMATION AVAILABLE TO THE PUBLIC. IT IS THE POLICY OF TYCO ELECTRONICS CORPORATION TO MAKE THIS INFORMATION AVAILABLE TO THE PUBLIC.		DWN L. VARELA - 23 JUN 2005	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
CHK J. WESTMAN - 23 JUN 2005		NAME S. FLICKINGER - 23 JUN 2005	ASSEMBLY, STACKED JACK, 2 X 4, 8 POSITION, SHIELDED, PANEL GROUND, LED, CATEGORY 5	
APVD S. FLICKINGER		PRODUCT SPEC 108-1163-2	SIZE 114-2154	RESTRICTED TO -
MATERIAL SEE NOTE 1		APPLICATION SPEC 114-2154	WEIGHT -	REV D1
FINISH SEE NOTE 1		CAGE CODE 00779	CUSTOMER DRAWING	SCALE 1:1
		DRAWING NO 6339082	SHEET 2	OF 2

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru