


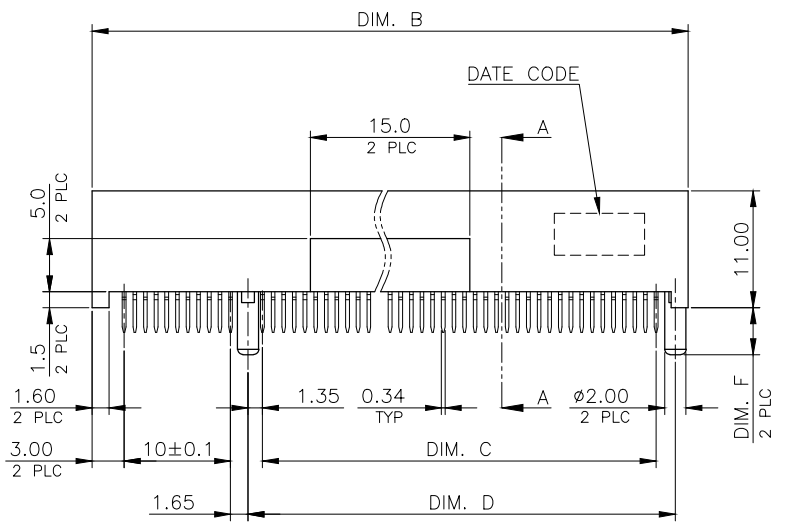



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2011 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


| | | | | | | | |
|-----|------|-----------|-----|--------------------------------------|---------|------|------|
| LOC | DIST | REVISIONS | | | | | |
| DW | | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | B2 | | REVISED (ECR-15-000838) , ADD NEW PN | 20JAN15 | S.C. | H.L. |

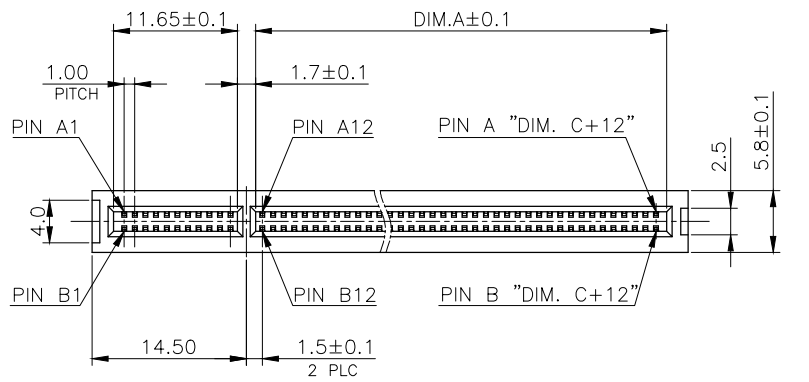

- NOTE:
- MATERIAL:
 HOUSING: LCP WITH 30% GF, UL 94V-0, WHITE COLOR.
 CONTACTS: PHOSPHOR BRONZE.
 - FINISH:
 CONTACTS: GOLD PLATED (SEE TABLE) ON CONTACT AREA
 2.54µm [100µ"] MIN. MATTE-TIN PLATING ON SOLDER AREA
 1.27µm [50µ"] MIN. NICKEL UNDERPLATED OVERALL.
 - WAVE SOLDER CAPABLE TO 265°C PER TEST SPEC 109-202, CONDITION B.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC. TEC-109-201, CONDITION B.
 - SPECIAL PACKAGE PER CUSTOMER REQUEST(SEE PAGE 4).



| | | | | | | | | | |
|----------------|-------|-------|-------|-------|-------|-------|-----|---------------------|-------------|
| 6.8 | 4.40 | 2.3 | 73.15 | 70.00 | 89.00 | 71.65 | 164 | 0.381µm [15µ"] | 1-2041612-5 |
| 6.8 | 2.00 | 1.5 | 73.15 | 70.00 | 89.00 | 71.65 | 164 | 0.381µm [15µ"] | 2041612-7 |
| 6.8 | 4.40 | 2.3 | 73.15 | 70.00 | 89.00 | 71.65 | 164 | 0.762µm [30µ"] | 2041612-6 |
| | | | | | | | | 0.381µm [15µ"] | 2041612-5 |
| 4.2 | 4.40 | 2.3 | 40.15 | 37.00 | 56.00 | 38.65 | 98 | GOLD FLASH | 2041612-4 |
| | | | | | | | | 0.762µm [30µ"] | 2041612-3 |
| | | | | | | | | 0.381µm [15µ"] | 2041612-2 |
| | | | | | | | | GOLD FLASH | 2041612-1 |
| WEIGHT (GRAMS) | DIM F | DIM E | DIM D | DIM C | DIM B | DIM A | POS | MIN. GOLD THICKNESS | PART NUMBER |

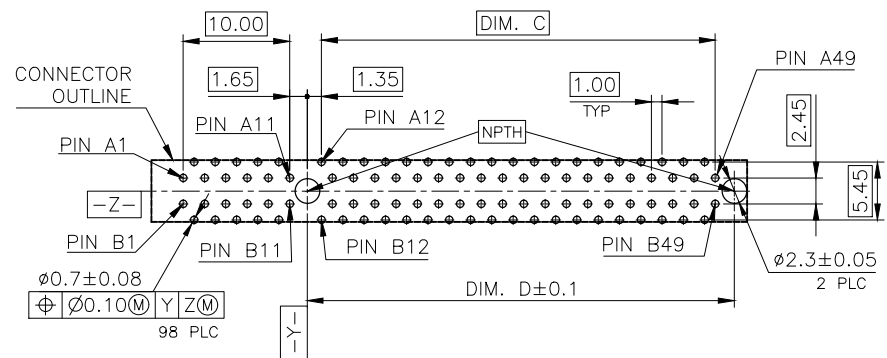


TOLERANCE: ±0.05, THICKNESS: 1.6mm
 RECOMMENDED PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.



| | | | | | | |
|-------------------|---|--------------------------|--|-----------------|----------------------|---------------|
| DIMENSIONS: mm | TOLERANCES UNLESS OTHERWISE SPECIFIED: | DWN E. LIU 11NOV2009 | TE Connectivity PCI EXPRESS CARD EDGE CONNECTOR VERTICAL, SLIM, DIP TYPE | | | |
| | 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3° | CHK S. CHIEN 11NOV2009 | | | | |
| | | APVD W. KODAMA 11NOV2009 | | | | |
| | | NAME | | | | |
| MATERIAL SEE NOTE | FINISH SEE NOTE | PRODUCT SPEC 108-57787 | SIZE A3 | CAGE CODE 00779 | DRAWING NO C=2041612 | RESTRICTED TO |
| | | APPLICATION SPEC | WEIGHT SEE TABLE | | | |
| | | | CUSTOMER DRAWING | SCALE | SHEET 1 of 4 | REV B2 |

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2011 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| | | | | | | | |
|-----|------|-----------|-----|--------------|------|-----|------|
| LOC | DIST | REVISIONS | | | | | |
| DW | | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | | | SEE SHEET 1. | | | |

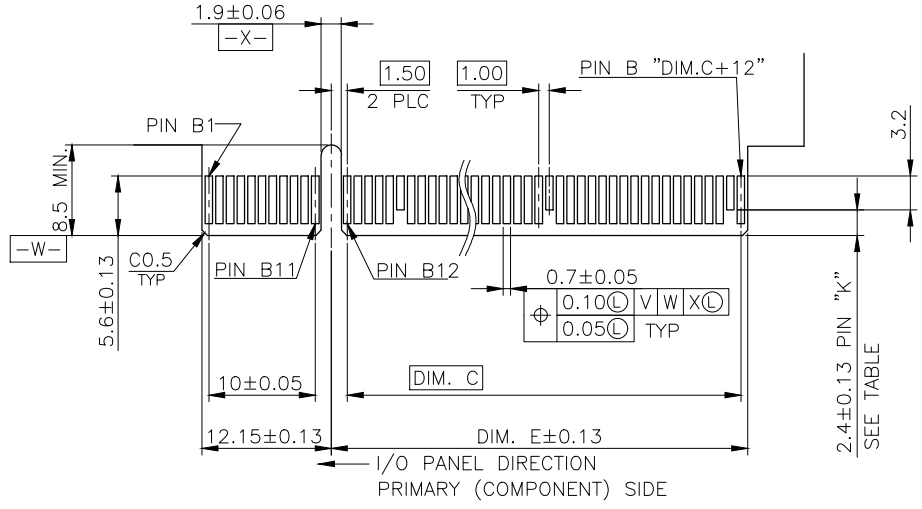

ADD-IN CARD EDGE-FINGER DIMENSIONS

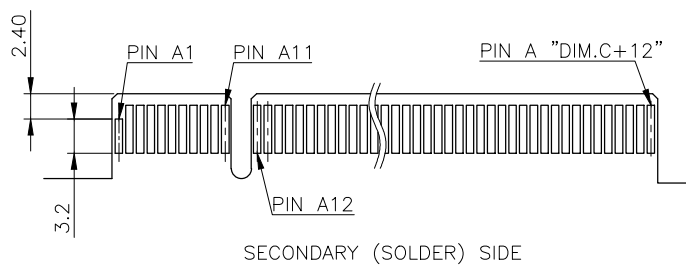

| | | | |
|------|--------|--------|-----------------|
| 164 | 70.0 | 72.15 | B17,B31,B48,B81 |
| 98 | 37.0 | 39.15 | B17,B31,B48 |
| POS. | DIM. C | DIM. E | "K" |






| | | | | | |
|--|--|------------------|--|-----------|------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN | STE TE Connectivity | | |
| DIMENSIONS: mm | | CHK | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD | NAME | | |
| 0 PLC ± - | | PRODUCT SPEC | PCI EXPRESS CARD EDGE CONNECTOR VERTICAL, SLIM, DIP TYPE | | |
| 1 PLC ± 0.3 | | APPLICATION SPEC | SIZE | CAGE CODE | DRAWING NO |
| 2 PLC ± 0.2 | | WEIGHT | A3 | 00779 | C=2041612 |
| 3 PLC ± 0.15 | | CUSTOMER DRAWING | RESTRICTED TO | - | |
| 4 PLC ± - | | | SCALE | SHEET | REV |
| ANGLES ± 3' | | | | 2 of 4 | B2 |

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2011 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| | | | | | | | |
|-----|------|-----------|-----|--------------|------|-----|------|
| LOC | DIST | REVISIONS | | | | | |
| DW | | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | | | SEE SHEET 1. | | | |

- NOTES:
- MATERIAL
 - TRAY: PVC
 - CONVER TRAY: PVC
 - SHIPPING BOX: CORRUGATED FIBER
 - DIMENSION
 - TRAY: 320mm(L) X 295mm(W) X 21mm(H)
 - BOX: 326mm(L) X 300mm(W) X 305mm(H)
 - QUANTITY: SEE TABLE.
 - WEIGHT: SEE TABLE.

| | | | | | |
|---------|-----------------|---------------|----------------|-----------------|-------------------|
| 164 | 60 | 14 | 840 | 5.7 | 9.4 |
| 98 | 100 | 14 | 1400 | 5.9 | 9.6 |
| POS NO. | PIECES PER TRAY | TRAYS PER BOX | PIECES PER BOX | NET WEIGHT (Kg) | GROSS WEIGHT (Kg) |

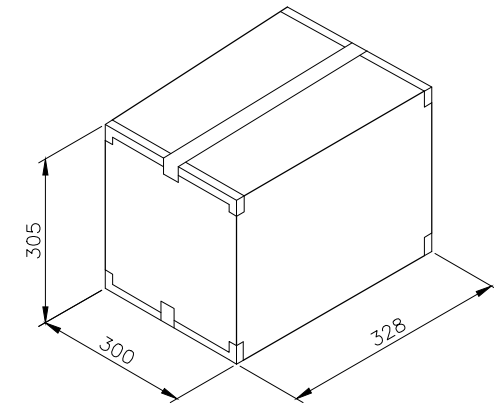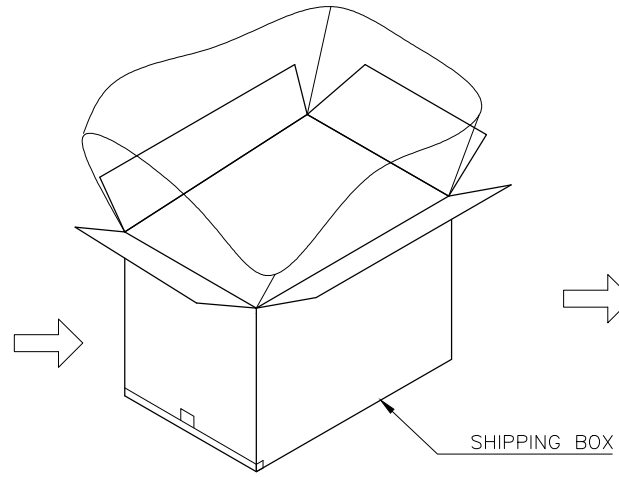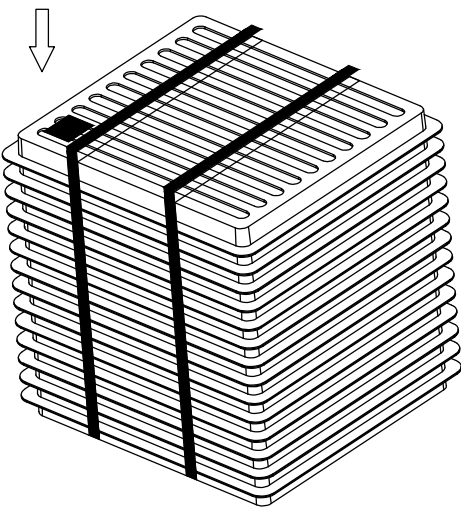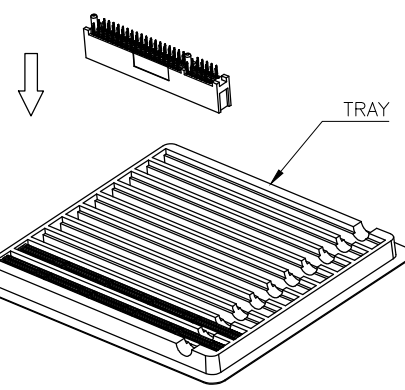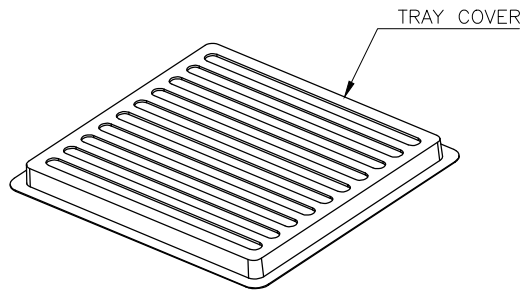

| |
|-------------|
| 2041612-7 |
| 2041612-6 |
| 2041612-5 |
| 2041612-4 |
| 2041612-3 |
| 2041612-2 |
| 2041612-1 |
| PART NUMBER |



| | | | | | |
|--|--|------------------|--|-----------|------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN | TE Connectivity | | |
| DIMENSIONS: mm | | CHK | NAME | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD | PCI EXPRESS CARD EDGE CONNECTOR VERTICAL, SLIM, DIP TYPE | | |
| 0 PLC ± | | PRODUCT SPEC | SIZE | CAGE CODE | DRAWING NO |
| 1 PLC ±0.3 | | APPLICATION SPEC | A3 | 00779 | C=2041612 |
| 2 PLC ±0.2 | | WEIGHT | RESTRICTED TO | | |
| 3 PLC ±0.15 | | CUSTOMER DRAWING | SCALE | | |
| 4 PLC ± | | | SHEET 3 of 4 | | |
| ANGLES ±3' | | | REV B2 | | |
| MATERIAL | | | | | |
| FINISH | | | | | |

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2011 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| | | | | | |
|-----------|------|--------------|------|-----|------|
| LOC DW | DIST | REVISIONS | | | |
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | SEE SHEET 1. | | | |

D

D

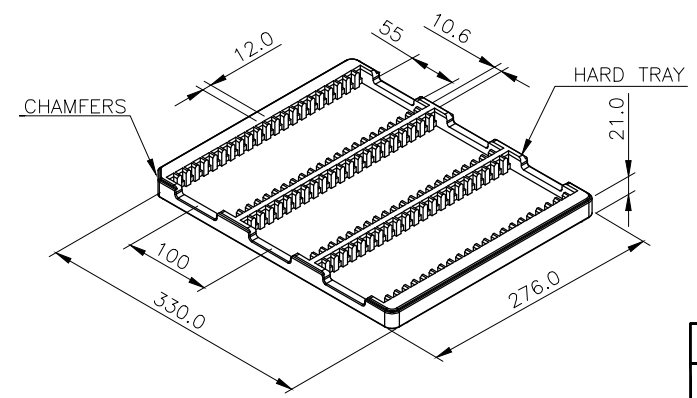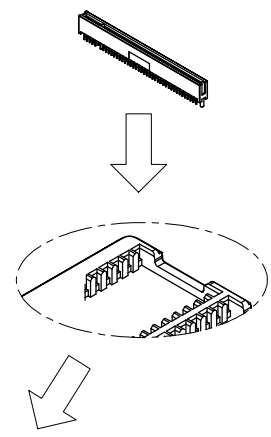




NOTES:

- MATERIAL
 - TRAY; ABS, COLOR: BLACK.
 - CARTON: CORRUGATED FIBER.
 - TRANSPARENT BAG: PE, SIZE: 500mm*380mm*0.06mm.
- EACH BAG SHALL BE INCLUDED:: * DESICCANT
- DIMENSION
 - TRAY: 330mm(L) X 276mm(W) X 21mm(H)
 - BOX: 332mm(L) X 295mm(W) X 345mm(H)
- QUANTITY: SEE TABLE.
- WEIGHT: SEE TABLE.

| | | | | | |
|---------|-----------------|---------------|----------------|-----------------|-------------------|
| 164 | 66 | 14 | 924 | 5.7 | 11 |
| POS NO. | PIECES PER TRAY | TRAYS PER BOX | PIECES PER BOX | NET WEIGHT (Kg) | GROSS WEIGHT (Kg) |

C

C

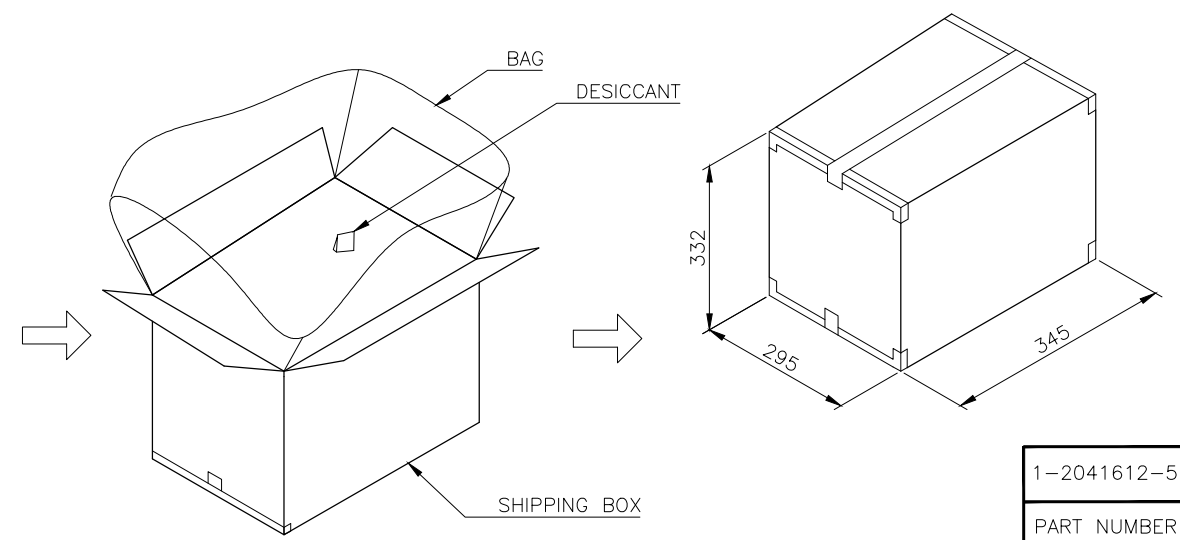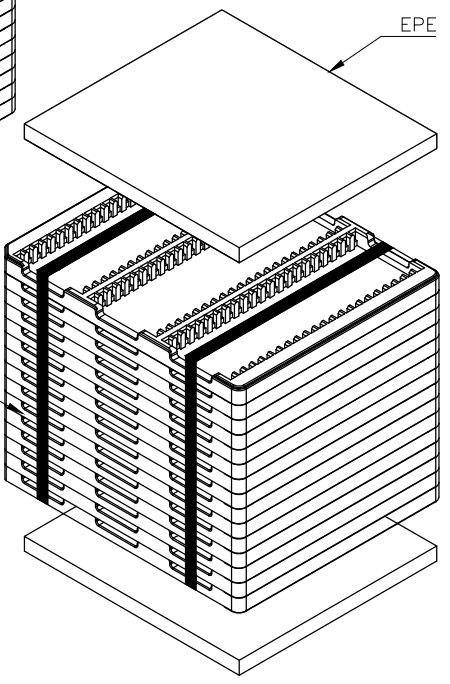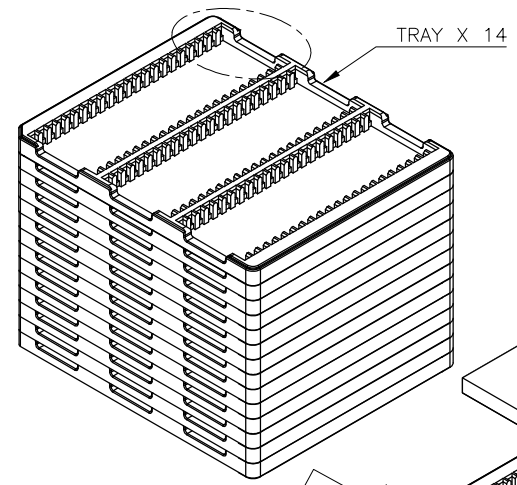

1-2041612-5
 PART NUMBER

B

B

A

A

| | | | | | |
|--|--|------------------|--|-----------|------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN | TE Connectivity | | |
| DIMENSIONS: mm | | CHK | NAME | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD | PCI EXPRESS CARD EDGE CONNECTOR VERTICAL, SLIM, DIP TYPE | | |
| 0 PLC ± - | | PRODUCT SPEC | SIZE | CAGE CODE | DRAWING NO |
| 1 PLC ± - | | APPLICATION SPEC | A3 | 00779 | C=2041612 |
| 2 PLC ± - | | WEIGHT | RESTRICTED TO | | |
| 3 PLC ± - | | CUSTOMER DRAWING | SCALE | | |
| 4 PLC ± - | | | SHEET 4 of 4 | | |
| ANGLES ± - | | | REV B2 | | |
| MATERIAL | | | | | |
| FINISH | | | | | |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru