

General Specifications

B Electrical Capacity (Resistive Load)

Power Level (silver): 6A @ 125V AC & 3A @ 250V AC
4A @ 30V DC for On-None-On; 3A @ 30V DC for all other circuits

Logic Level (gold): 0.4VA maximum @ 28V AC/DC maximum
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)

Logic/Power Level (gold over silver): Combines silver & gold ratings
Note: Find additional explanation of dual rating & operating range in Supplement section.

Other Ratings

Contact Resistance: 10 milliohms maximum for silver; 20 milliohms maximum for gold
Insulation Resistance: 1,000 megohms minimum @ 500V DC
Dielectric Strength: 1,000V AC minimum between contacts for 1 minute minimum;
1,500V AC minimum between contacts and case for 1 minute minimum
Mechanical Life: 50,000 operations minimum
Electrical Life: 25,000 operations minimum for silver; 50,000 operations minimum for gold;
50,000 operations minimum for silver at 3A @ 125V AC
Angle of Throw: 25°

Materials & Finishes

Actuator Clip & Mounting Frame: Stainless Steel
Body Frame: Stainless steel
Case: Diallyl phthalate resin (UL94V-0)
Movable Contactor: Phosphor bronze with silver or gold plating
Movable Contacts: Silver alloy (code W); copper with gold plating (code G); or silver alloy with gold plating (code A)
Stationary Contacts: Silver with silver plating (code W); copper or brass with gold plating (code G);
or silver with gold plating (code A)
Terminals: Copper or brass with silver plating; or copper or brass with gold plating

Environmental Data

Operating Temp Range: -30°C through +85°C (-22°F through +185°F)
Humidity: 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning
in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Processing

Soldering: Wave Soldering (PC version) for Gold: See Profile A in Supplement section.
Manual Soldering for Gold: See Profile A in Supplement section.
Wave Soldering (PC version) for Silver: See Profile B in Supplement section.
Manual Soldering for Silver: See Profile B in Supplement section.
Note: Actuator must be in OFF (center) position while soldering.
Cleaning: These devices are not process sealed. Hand clean locally using alcohol based solution.

Standards & Certifications

Flammability Standards: UL94V-0 for case
UL: **File No. E44145 - Recognized only when ordered with marking on switch.**
Add "/U" before first dash in part number to order UL recognized switch.
All models recognized at 6A @ 125V AC, 3A @ 250V AC or 0.4VA maximum @ 28V DC maximum.
CSA: **File No. 023535_0_000 - Certified only when ordered with marking on switch.**
Add "/C" before first dash in part number to order CSA certified switch.
All models certified at 6A @ 125V AC or 3A @ 250V AC or 0.4VA maximum @ 28V maximum.

Distinctive Characteristics

Three methods of panel mounting: flat frame for flush with face or subpanel, snap-in, and PCB.

High insulating barriers increase isolation of circuits in multipole devices and provide added protection to contact points.


The molded diallyl phthalate case has a UL 94V-0 flammability rating.

Epoxy sealed terminals prevent entry of solder flux and other contaminants.



Prominent external insulating barriers increase insulation resistance and dielectric strength.

Bias guard prevents misalignment of contacts; interlocking of actuator block with rocker and internal guide does not allow transmission of diagonal force on rocker to reach contact mechanism.

Clinching of the frame to the case well above the base and terminals provides 1,500V dielectric strength.

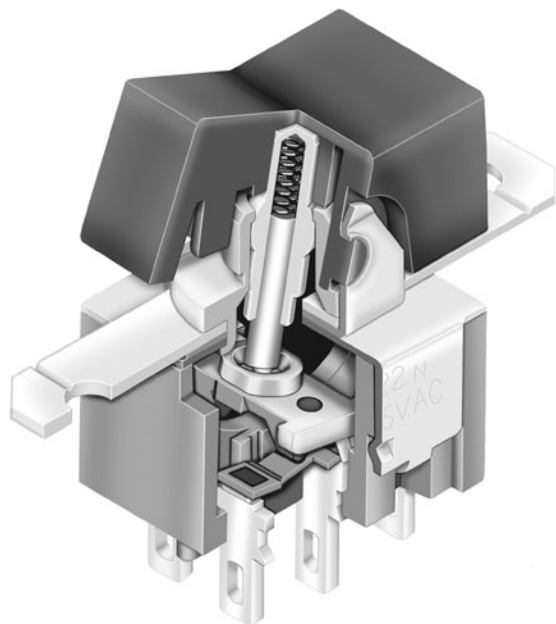


Actual Size

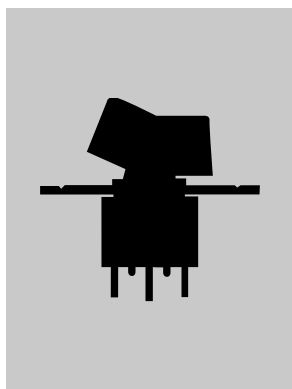


Snap-in Mount

Page B64



Bracket PC Mount

Page B72



Flat Frame Mount

Page B83

TYPICAL SWITCH ORDERING EXAMPLE

M20

1

2

TN

W

01

—

D

C

Poles

1	SPDT
2	DPDT SP3T
3	3PDT
4	4PDT DP3T

Circuits

2	ON	NONE	ON
3	ON	OFF	ON
5	ON	NONE	(ON)
8	(ON)	OFF	(ON)
9	ON	OFF	(ON)
*4	ON	ON	ON
*6	(ON)	ON	(ON)
*7	ON	ON	(ON)

() = Momentary

* 3-ON circuits

Mounting Frames

TN	.272" (6.9mm) Wide Flat Frame
TY	.504" (12.8mm) Wide Flat Frame

Contact Materials
& Ratings

W	Silver; Rated 6A @ 125V AC & 3A @ 250V AC
G	Gold; Rated 0.4VA max @ 28V AC/DC max
A	Gold over Silver; Rated 6A @ 125V AC & 0.4VA max @ 28V AC/DC max

Rockers & Paddles

Small Actuators (TN Frame)

D	.365" (9.27mm) Wide Rocker
E	.365" (9.27mm) Wide Paddle
F	.450" (11.43mm) Wide Rocker
G	.450" (11.43mm) Wide Paddle

Large Actuators (TY Frame)

J	.595" (15.11mm) Wide Rocker
H	.595" (15.11mm) Wide Paddle

Terminals

01	Solder Lug*
03	.250" (6.35mm) Straight PC

Rocker & Paddle
Colors

A	Black
B	White
C	Red
E	Yellow
F	Green
G	Blue
H	Gray

IMPORTANT:

Switches are supplied without UL & CSA marking unless specified.
UL & CSA recognized only when ordered with marking on the switch.
Specific models, ratings, & ordering instructions are noted on General Specifications page.

* Wire harness & cable assemblies offered only in Americas

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

M2012TNW01-DC

NIKK
SWITCHES

www.nkk.com

B83

Toggles
Rockers
Pushbuttons
Illuminated PB
Programmable
Keylocks
Rotaries
Slides
Tactiles
Tilt
Touch
Indicators
Accessories
Supplement

POLES & CIRCUITS

		Rocker Position () = Momentary			Connected Terminals			Throw & Schematics
Pole	Model	Down	Center	Up	Down	Center	Up	Note: Terminal numbers are not actually on the switch.
SP	M2012	ON	NONE	ON	2-3	OPEN	2-1	SPDT
	M2013	ON	OFF	ON				
	M2015	ON	NONE	(ON)				
	M2018	(ON)	OFF	(ON)				
	M2019	ON	OFF	(ON)				
DP	M2022	ON	NONE	ON	2-3 5-6	OPEN	2-1 5-4	DPDT
	M2023	ON	OFF	ON				
	M2025	ON	NONE	(ON)				
	M2028	(ON)	OFF	(ON)				
	M2029	ON	OFF	(ON)				
3P	M2032	ON	NONE	ON	2-3 5-6 8-9	OPEN	2-1 5-4 8-7	3PDT
	M2033	ON	OFF	ON				
	M2035	ON	NONE	(ON)				
	M2038	(ON)	OFF	(ON)				
	M2039	ON	OFF	(ON)				
4P	M2042	ON	NONE	ON	2-3 5-6 8-9 11-12	OPEN	2-1 5-4 8-7 11-10	4PDT
	M2043	ON	OFF	ON				
	M2045	ON	NONE	(ON)				
	M2048	(ON)	OFF	(ON)				
	M2049	ON	OFF	(ON)				


For 3 Throw (3-On)

Connected Terminals & Schematics

Pole	Model	Down	Center	Up	Down	Center	Up
SP	M2024 M2026 M2027	ON (ON) ON	ON ON ON	ON (ON) (ON)			
					2-3 5-6	2-3 5-4	2-1 5-4
DP	M2044 M2046 M2047	ON (ON) ON	ON ON ON	ON (ON) (ON)			
					2-3 5-6 8-9 11-12	2-3 5-4 8-9 11-10	2-1 5-4 8-7 11-10


The SP3T model utilizes a double pole base.

External connection must be made during field installation.



The DP3T model utilizes a four pole base.

External connection must be made during field installation.




Flat Frame Mount Miniature Rockers

MOUNTING FRAMES


TN .272" (6.9mm)
Wide Flat Frame

Mounting hardware kit HK-1, as shown on the following page, must be ordered separately.


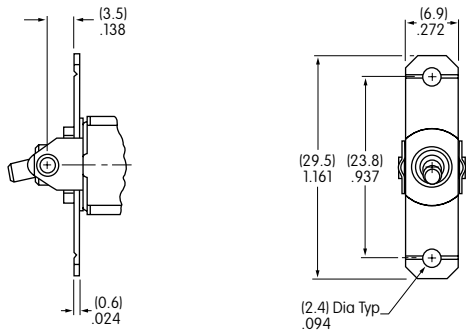


Small Actuators & Panel Cutouts for TN Frame (actuator details on the following pages)


AT4148





AT4149



AT4150



AT4151




TY .504" (12.8mm)
Wide Flat Frame





Large Actuators & Panel Cutout for TY Frame
(actuator details on the following pages)

Mounting hardware kit HK-2, as shown on the following page, must be ordered separately.

AT4156




AT4157

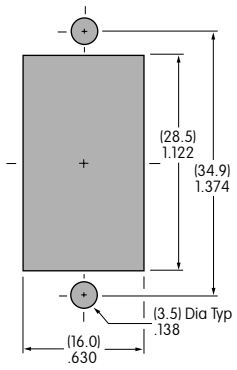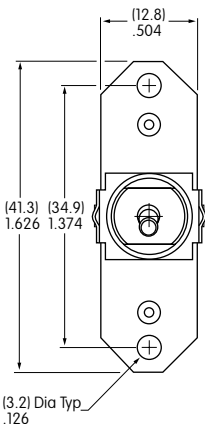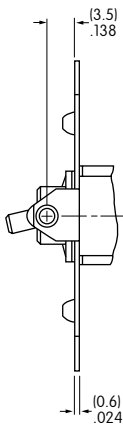


MOUNTING FRAMES (CONTINUED)

Face Panel Mounting



Flat frame devices may also be mounted to the face panel. Standoffs are used to recess the actuator and achieve an attractive front panel appearance.

Subpanel Mounting



These devices are especially designed for subpanel mounting. When installed on a mounting plate behind the panel, hardware is completely concealed and the front panel retains a clean, attractive appearance.

Optional Hardware Kits for Subpanel or Face Panel Mounting

Frame	Panel Thickness	Standoff Length	Hardware Kit Number
TN Frame	.125" (3.175mm)	.233" (5.918mm)	ATHK-1
TY Frame	.125" (3.175mm)	.312" (7.925mm)	ATHK-2

Hardware kits include:
2 stainless steel screws, 2 hex nuts, 2 lockwashers, & 2 standoffs

Optional Snap-in Panel Frames



AT064-1
AT064-2



AT065-1
AT065-2

Further details are shown in the previous bracketed PC mount subsection.

CONTACT MATERIALS & RATINGS



Silver over Silver

Power Level

6A @ 125V AC & 3A @ 250V AC



Gold over Brass or Copper

Logic Level

0.4VA maximum @ 28V AC/DC maximum

Note: See Supplement section to find complete explanation of operating range.



Gold over Silver

**Power Level
or Logic Level**


**6A @ 125V AC
or 0.4VA maximum @ 28V AC/DC maximum**

Note: This dual rated option is suitable when two or more identical switches are used in logic and in power circuits within the same application. See Supplement section to find complete explanation of dual rating and operating range.



TERMINALS




Solder Lug




**.250" (6.35mm)
Straight PC**




Single Pole



Double Pole



Three Pole



Four Pole

Toggles

B Rockers

Pushbuttons

Illuminated PB



Keylocks

otaries



tiles

Item	Unit	Price	Quantity	Total
1. 1000	1000	1000	1000	1000
2. 1000	1000	1000	1000	1000
3. 1000	1000	1000	1000	1000
4. 1000	1000	1000	1000	1000
5. 1000	1000	1000	1000	1000
6. 1000	1000	1000	1000	1000
7. 1000	1000	1000	1000	1000
8. 1000	1000	1000	1000	1000
9. 1000	1000	1000	1000	1000
10. 1000	1000	1000	1000	1000
11. 1000	1000	1000	1000	1000
12. 1000	1000	1000	1000	1000
13. 1000	1000	1000	1000	1000
14. 1000	1000	1000	1000	1000
15. 1000	1000	1000	1000	1000
16. 1000	1000	1000	1000	1000
17. 1000	1000	1000	1000	1000
18. 1000	1000	1000	1000	1000
19. 1000	1000	1000	1000	1000
20. 1000	1000	1000	1000	1000
21. 1000	1000	1000	1000	1000
22. 1000	1000	1000	1000	1000
23. 1000	1000	1000	1000	1000
24. 1000	1000	1000	1000	1000
25. 1000	1000	1000	1000	1000
26. 1000	1000	1000	1000	1000
27. 1000	1000	1000	1000	1000
28. 1000	1000	1000	1000	1000
29. 1000	1000	1000	1000	1000
30. 1000	1000	1000	1000	1000
31. 1000	1000	1000	1000	1000
32. 1000	1000	1000	1000	1000
33. 1000	1000	1000	1000	1000
34. 1000	1000	1000	1000	1000
35. 1000	1000	1000	1000	1000
36. 1000	1000	1000	1000	1000
37. 1000	1000	1000	1000	1000
38. 1000	1000	1000	1000	1000
39. 1000	1000	1000	1000	1000
40. 1000	1000	1000	1000	1000
41. 1000	1000	1000	1000	1000
42. 1000	1000	1000	1000	1000
43. 1000	1000	1000	1000	1000
44. 1000	1000	1000	1000	1000
45. 1000	1000	1000	1000	1000
46. 1000	1000	1000	1000	1000
47. 1000	1000	1000	1000	1000
48. 1000	1000	1000	1000	1000
49. 1000	1000	1000	1000	1000
50. 1000	1000	1000	1000	1000
51. 1000	1000	1000	1000	1000
52. 1000	1000	1000	1000	1000
53. 1000	1000	1000	1000	1000
54. 1000	1000	1000	1000	1000
55. 1000	1000	1000	1000	1000
56. 1000	1000	1000	1000	1000
57. 1000	1000	1000	1000	1000
58. 1000	1000	1000	1000	1000
59. 1000	1000	1000	1000	1000
60. 1000	1000	1000	1000	1000
61. 1000	1000	1000	1000	1000
62. 1000	1000	1000	1000	1000
63. 1000	1000	1000	1000	1000
64. 1000	1000	1000	1000	1000
65. 1000	1000	1000	1000	1000
66. 1000	1000	1000	1000	1000
67. 1000	100			

Techniques



Indica

Accesso

Supplement




TYPICAL SWITCH DIMENSIONS

TN Frame • Solder Lug

Single Pole



M2012TNW01-DC


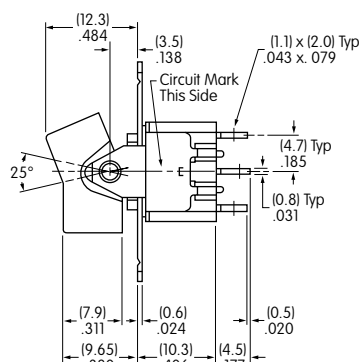
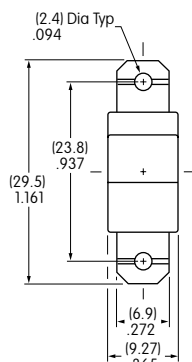


TN Frame • Solder Lug

Double Pole



M2022TNW01-DC

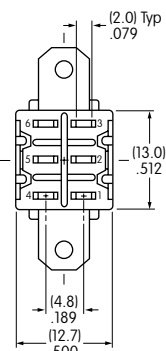
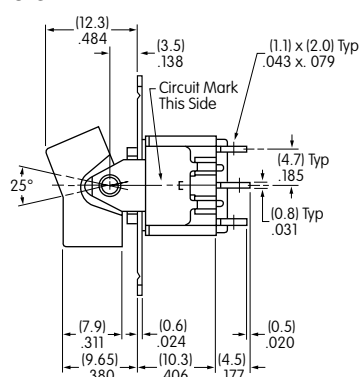
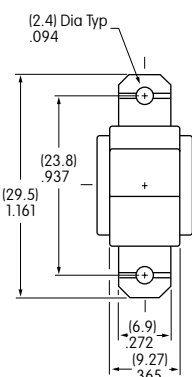


TN Frame • Solder Lug

Three Pole



M2032TNW01-DC


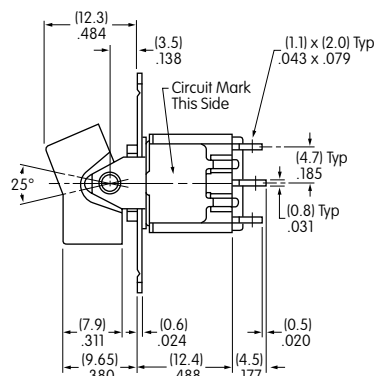
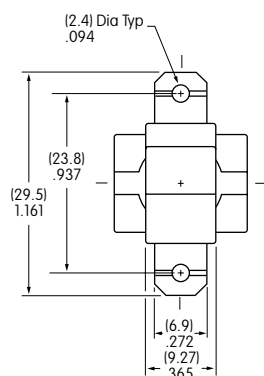


TN Frame • Solder Lug

Four Pole




M2042TNW01-DC

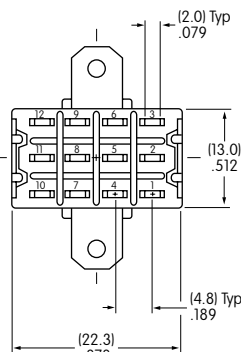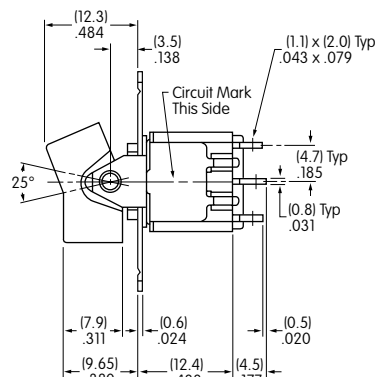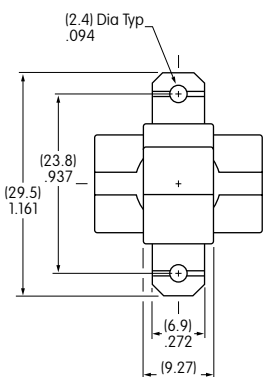


TYPICAL SWITCH DIMENSIONS

TY Frame • Solder Lug

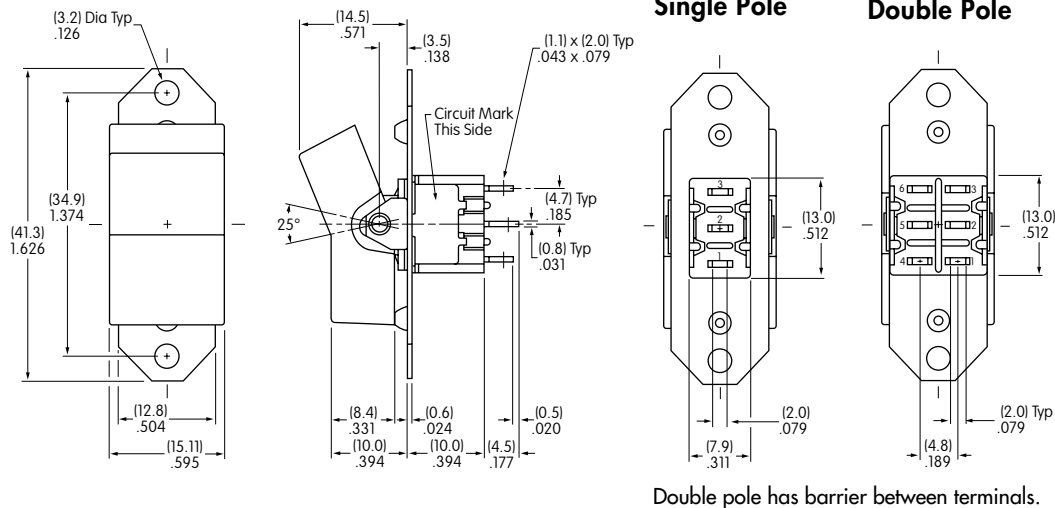

M2012YW01-JC


TY Frame • Solder Lug

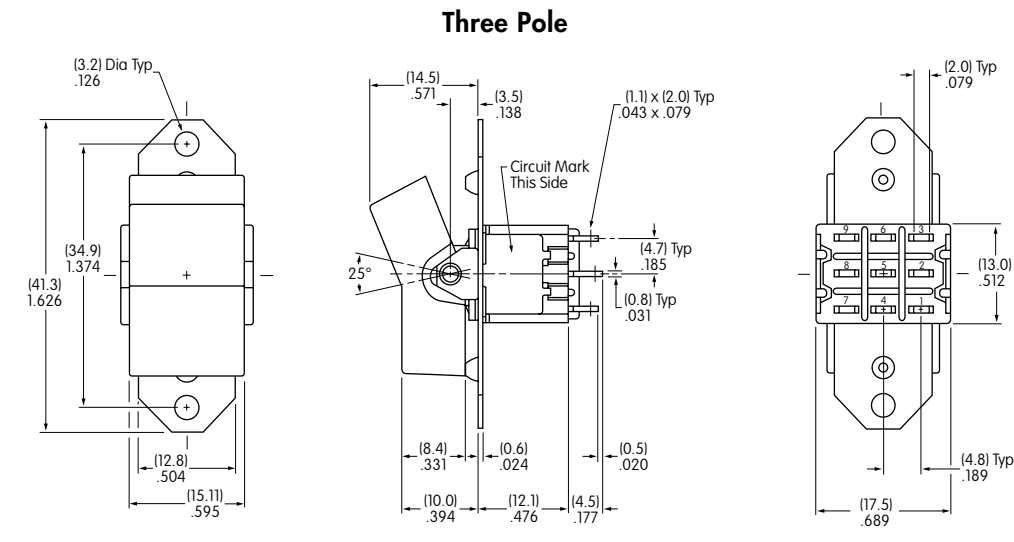

M2032YW01-JC

Four Pole

TY Frame • Solder Lug

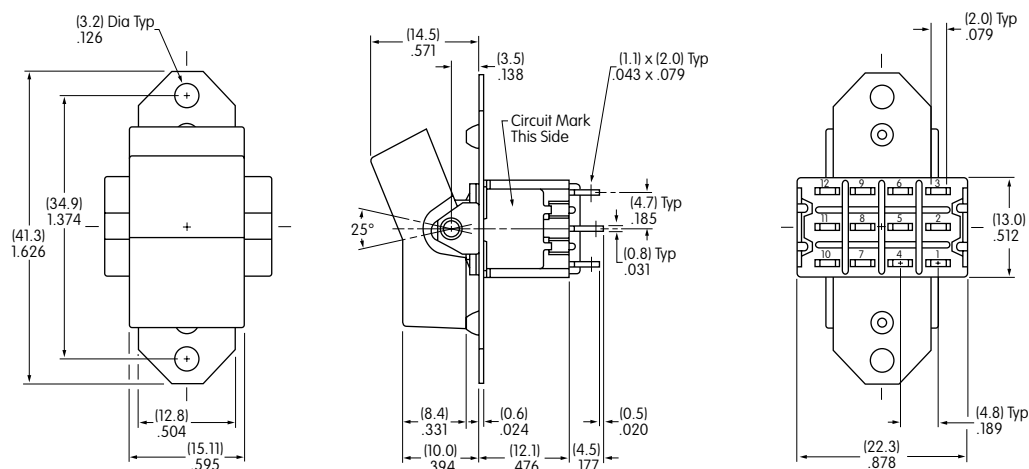



M2042YW01-JC

LEGENDS


NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for Caps



AT4148



AT4150



AT4156



Shaded areas are printable areas.

Recommended Print Method:

Pad Print

Epoxy based ink is recommended.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru