

## VERONICA-SQ-O

~55° + 12° oval beam

### TECHNICAL SPECIFICATIONS:

Dimensions	Ø 22.5 mm
Height	12.2 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ


### MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
VERONICA-SQ-O	Single lens	PMMA	clear	
VERONICA-TAPE	Tape	PU tape	clear	



### ORDERING INFORMATION:


Component	Type	Qty in box	MOQ	MPQ	Box weight (kg)
CA13726_VERONICA-SQ-O » Box size: 480 x 280 x 300 mm	Single lens	1980	360	90	8.2

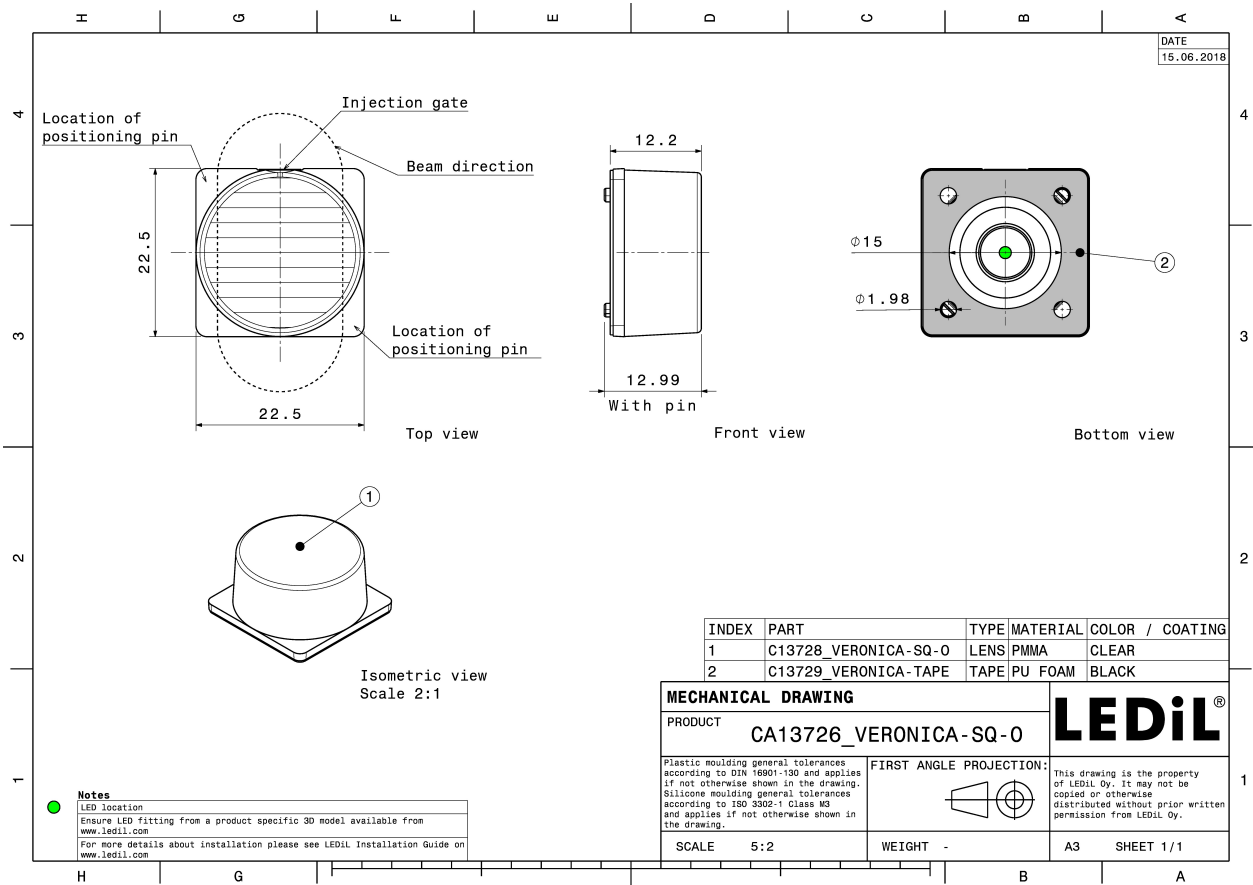

#### PHOTOMETRIC DATA (MEASURED):



#### CREE

LED XB-H  
 FWHM 45.0 + 16.0°  
 Efficiency 77 %  
 Peak intensity 2.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

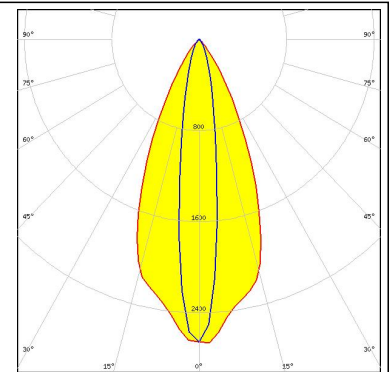


#### CREE

LED XD16  
 FWHM 47.0 + 17.0°  
 Efficiency 87 %  
 Peak intensity 2.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

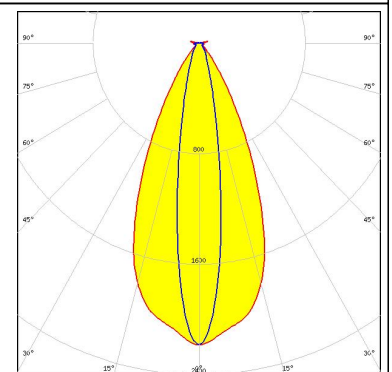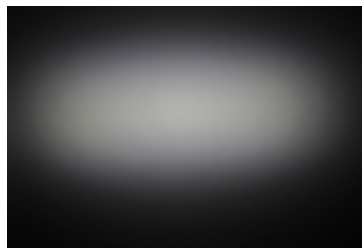

#### CREE

LED XHP35 HD  
 FWHM 45.0 + 20.0°  
 Efficiency 73 %  
 Peak intensity 2.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

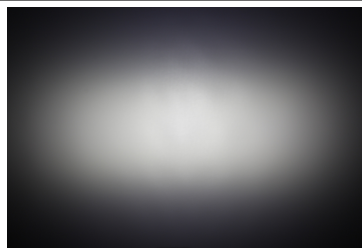

#### CREE


LED XHP35 HI  
 FWHM 46.0 + 16.0°  
 Efficiency 75 %  
 Peak intensity 2.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:





#### PHOTOMETRIC DATA (MEASURED):





LED XM-L  
 FWHM 47.0 + 20.0°  
 Efficiency 80 %  
 Peak intensity 2.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

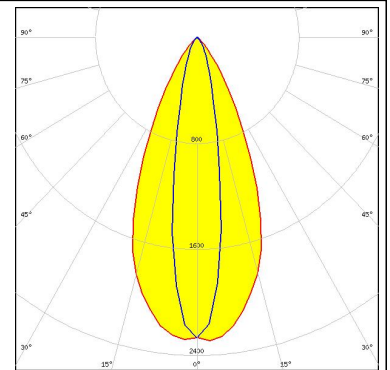



LED XM-L2  
 FWHM 47.0 + 20.0°  
 Efficiency 80 %  
 Peak intensity 2.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

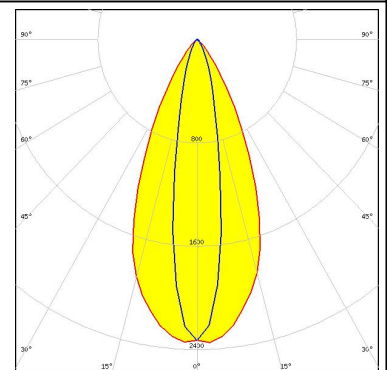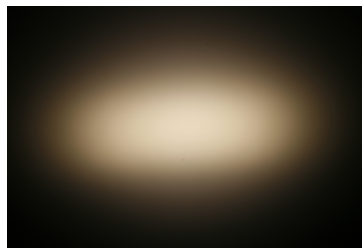

LED XP-E2  
 FWHM 46.0 + 12.0°  
 Efficiency 80 %  
 Peak intensity 3.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

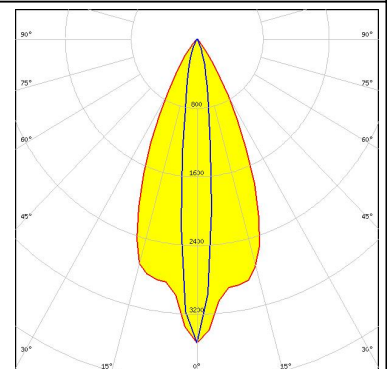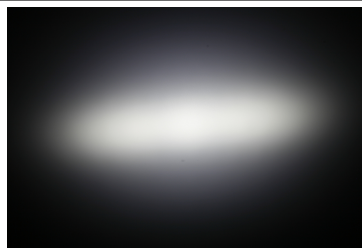



LED XP-G2  
 FWHM 47.0 + 14.0°  
 Efficiency 80 %  
 Peak intensity 2.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

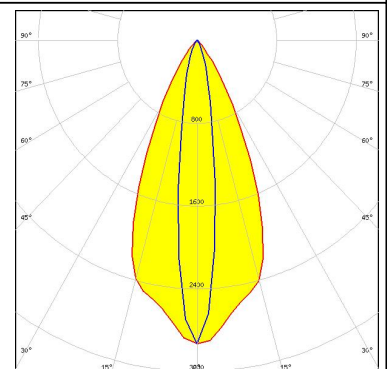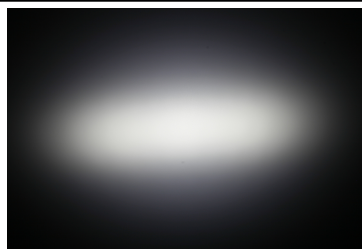


#### PHOTOMETRIC DATA (MEASURED):





LED XP-L2  
 FWHM 45.0 + 20.0°  
 Efficiency 86 %  
 Peak intensity 1.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

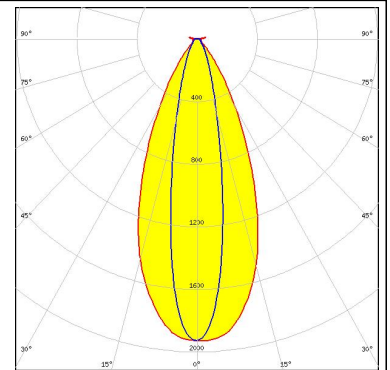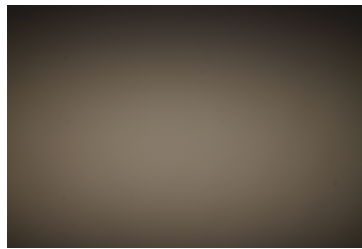



LED XT-E  
 FWHM 47.0 + 16.0°  
 Efficiency 79 %  
 Peak intensity 2.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

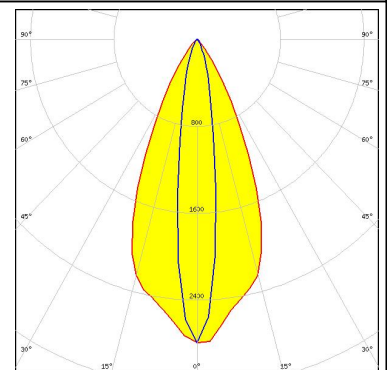

LED LUXEON M/MX  
 FWHM 45.0 + 28.0°  
 Efficiency 76 %  
 Peak intensity 1.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

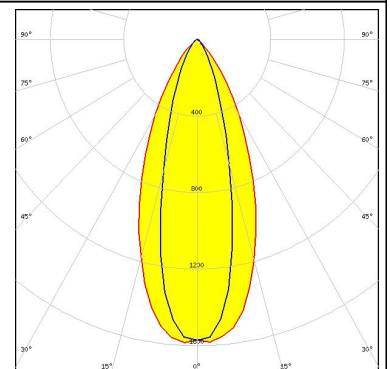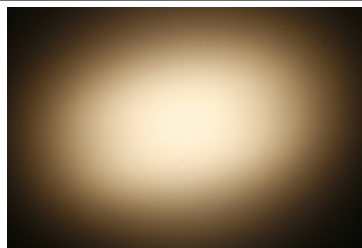


LED LUXEON MZ  
 FWHM 47.0 + 23.0°  
 Efficiency 73 %  
 Peak intensity 2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

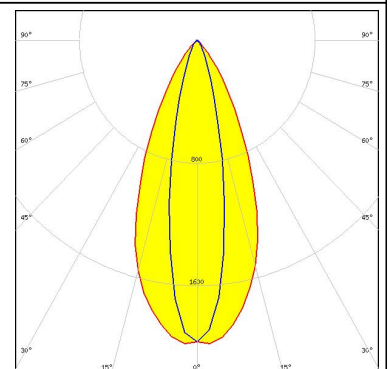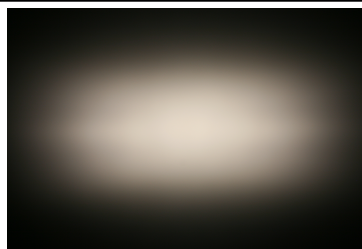

#### PHOTOMETRIC DATA (MEASURED):


##### LUMILEDS

LED LUXEON Rebel  
 FWHM 47.0 + 15.0°  
 Efficiency 80 %  
 Peak intensity 3 cd/Im  
 LEDs/each optic 1  
 Light colour White  
 Required components:

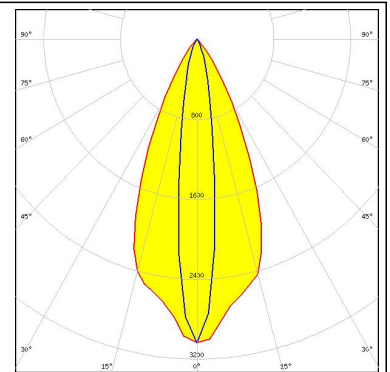



##### LUMILEDS

LED LUXEON Rebel ES  
 FWHM 47.0 + 17.0°  
 Efficiency 80 %  
 Peak intensity 2.7 cd/Im  
 LEDs/each optic 1  
 Light colour White  
 Required components:

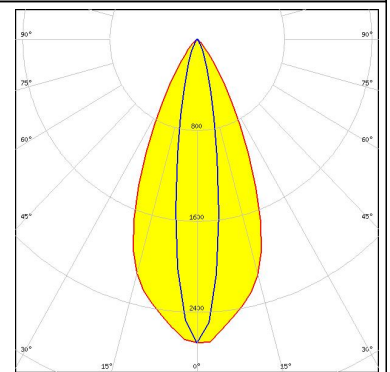



##### LUMILEDS

LED LUXEON T  
 FWHM 47.0 + 17.0°  
 Efficiency 80 %  
 Peak intensity 2.8 cd/Im  
 LEDs/each optic 1  
 Light colour White  
 Required components:

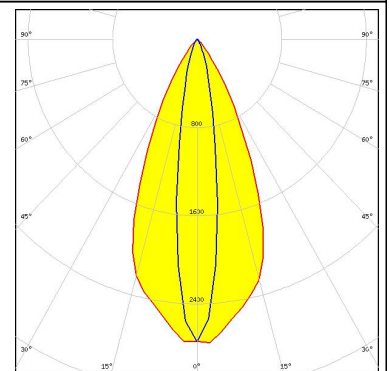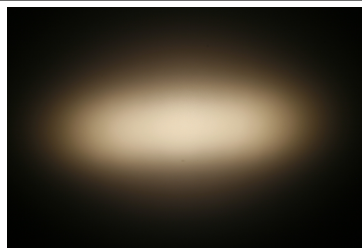

##### LUMILEDS


LED LUXEON TX  
 FWHM 46.0 + 16.0°  
 Efficiency 77 %  
 Peak intensity 2.8 cd/Im  
 LEDs/each optic 1  
 Light colour White  
 Required components:

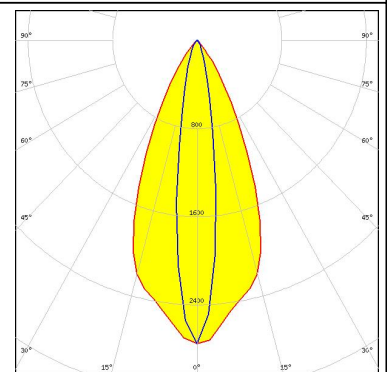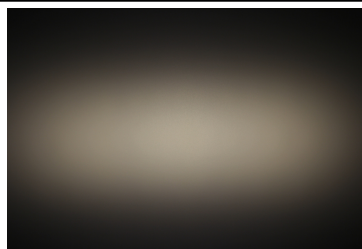

#### PHOTOMETRIC DATA (MEASURED):



##### LUMILEDS

LED LUXEON V  
 FWHM 46.0 + 21.0°  
 Efficiency 88 %  
 Peak intensity 1.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

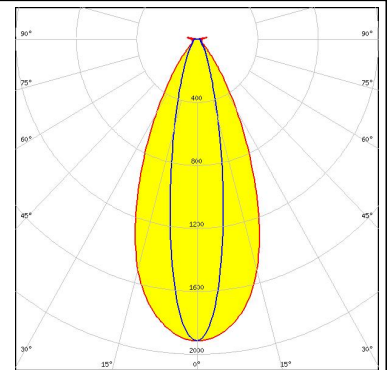


##### LUMILEDS

LED LUXEON V2  
 FWHM 47.0 + 17.0°  
 Efficiency 87 %  
 Peak intensity 2.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

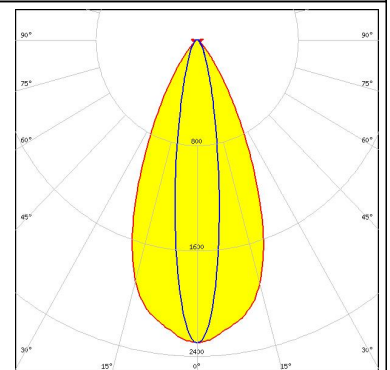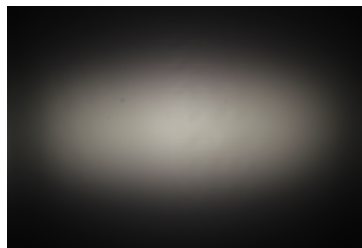


##### NICHIA

LED NVSW219F  
 FWHM 48.0 + 16.0°  
 Efficiency 88 %  
 Peak intensity 2.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

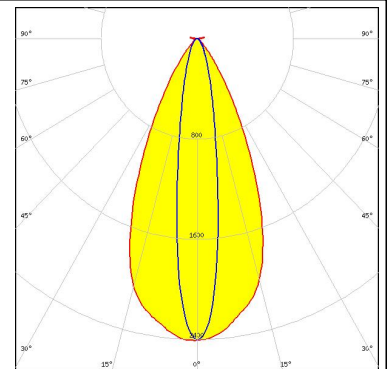
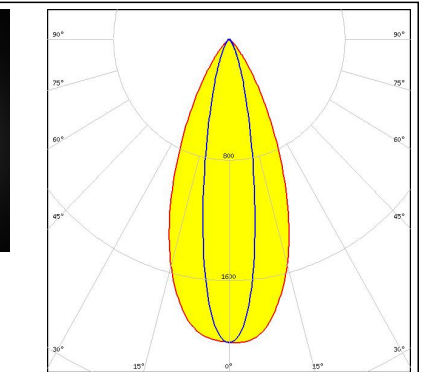

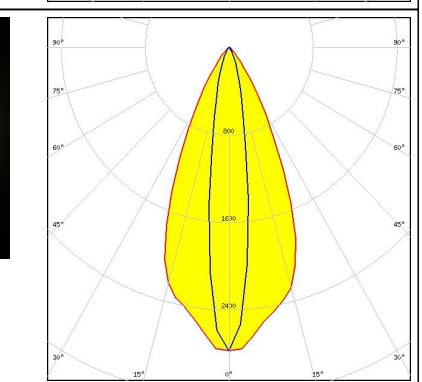
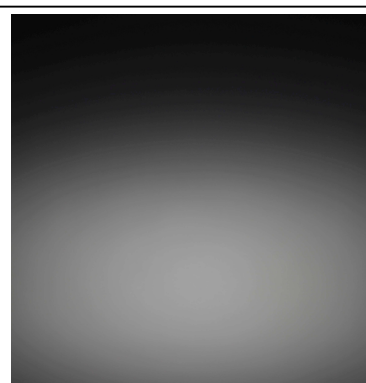
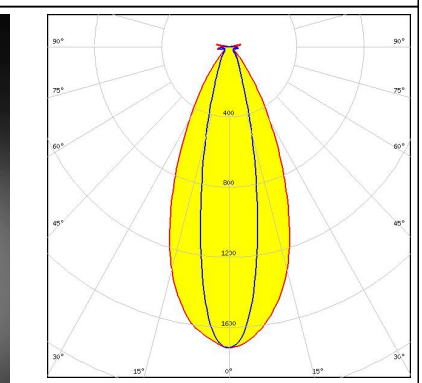
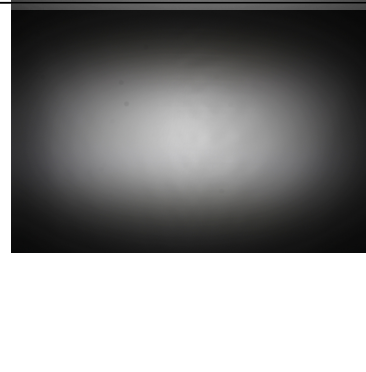
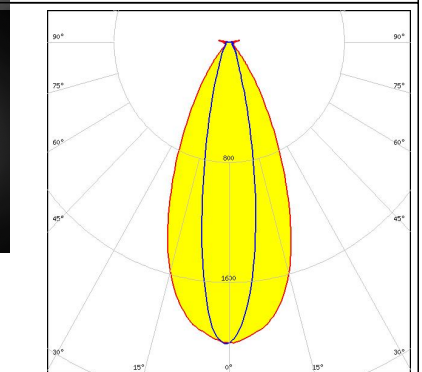


##### NICHIA

LED NVSxx19B/NVSxx19C  
 FWHM 47.0 + 18.0°  
 Efficiency 80 %  
 Peak intensity 2.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

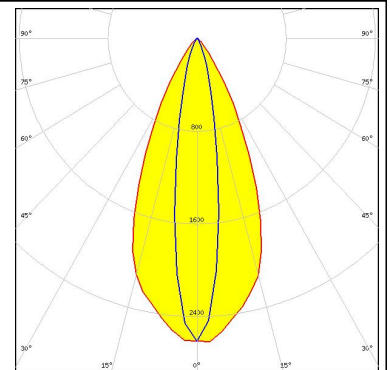

#### PHOTOMETRIC DATA (MEASURED):


<p><b>NICHIA</b></p> <p>LED NWSx229A            FWHM 20.0 + 45.0°            Efficiency 74 %            Peak intensity 2 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>OSRAM</b>  <small>Opto Semiconductors</small></p> <p>LED OSLOM Square EC            FWHM 47.0 + 17.0°            Efficiency 79 %            Peak intensity 2.8 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>SAMSUNG</b></p> <p>LED LH181A            FWHM 46.0 + 22.0°            Efficiency 85 %            Peak intensity 1.7 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>SAMSUNG</b></p> <p>LED LH181B            FWHM 46.0 + 21.0°            Efficiency 88 %            Peak intensity 2 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		





#### PHOTOMETRIC DATA (MEASURED):

### SAMSUNG



LED LH351Z  
 FWHM 47.0 + 15.0°  
 Efficiency 78 %  
 Peak intensity 2.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

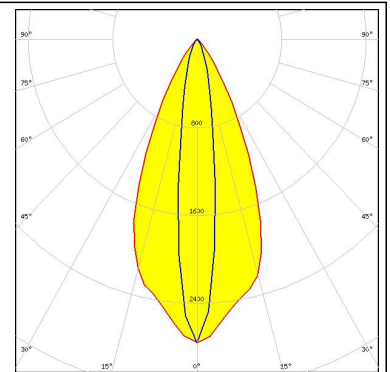



SEOUL SEMICONDUCTOR  
 LED MJT 5050  
 FWHM 45.0 + 28.0°  
 Efficiency 87 %  
 Peak intensity 1.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

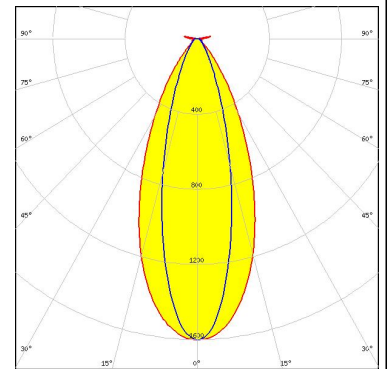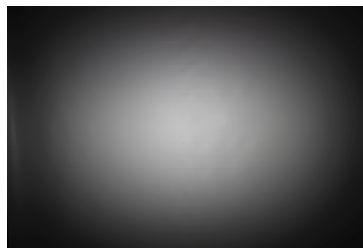

SEOUL SEMICONDUCTOR  
 LED Z5M3  
 FWHM 47.0 + 18.0°  
 Efficiency 89 %  
 Peak intensity 2.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

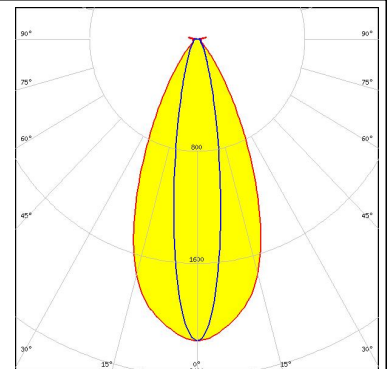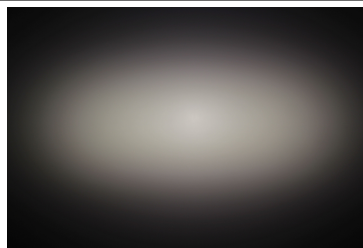

SEOUL SEMICONDUCTOR  
 LED Z8Y22P  
 FWHM 45.0 + 18.0°  
 Efficiency 86 %  
 Peak intensity 2.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

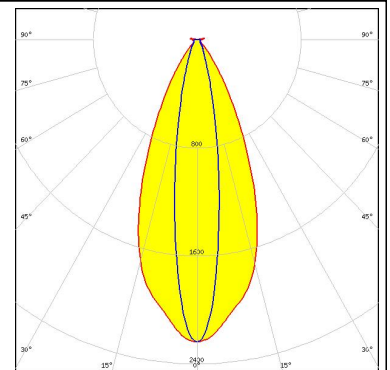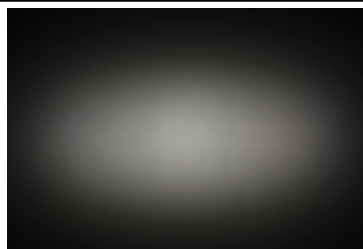


### PHOTOMETRIC DATA (MEASURED):




#### PHOTOMETRIC DATA (SIMULATED):




LED XP-G2 HE  
 FWHM 54.0 + 14.0°  
 Efficiency 92 %  
 Peak intensity 2.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

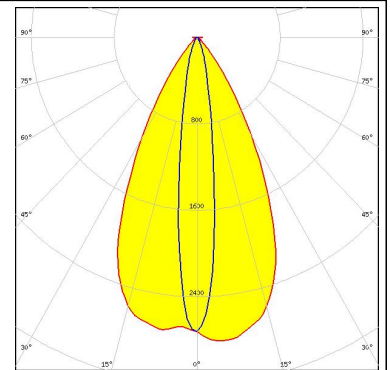


LED XP-L HD  
 FWHM 53.0 + 16.0°  
 Efficiency 86 %  
 Peak intensity 2.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

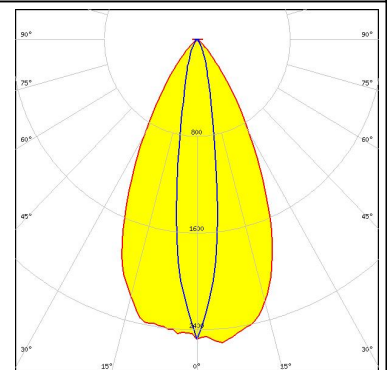

LED NV4WB35AM  
 FWHM 50.0 + 18.0°  
 Efficiency 88 %  
 Peak intensity 2.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

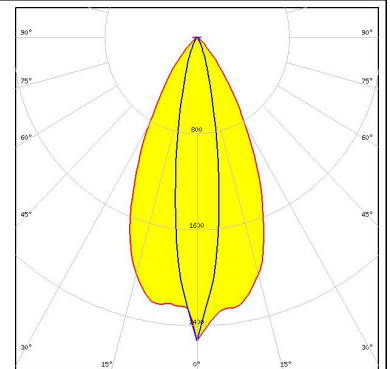


LED OSCONIQ P 3030  
 FWHM 56.0 + 12.0°  
 Efficiency 88 %  
 Peak intensity 3.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

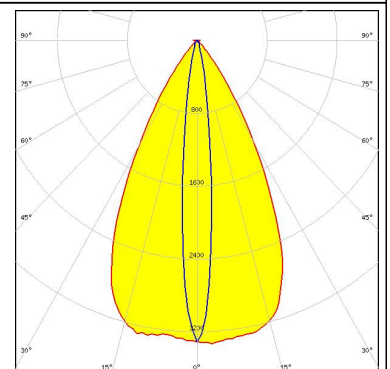

#### PHOTOMETRIC DATA (SIMULATED):


**OSRAM**  
Opto Semiconductors

LED OSCONIQ P 7070  
 FWHM 49.0 + 25.0°  
 Efficiency 84 %  
 Peak intensity 1.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

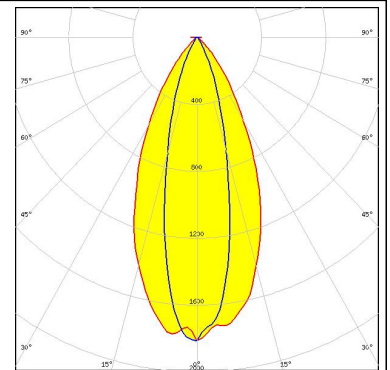

**OSRAM**  
Opto Semiconductors


LED OSLOM Square CSSRM2/CSSRM3  
 FWHM 56.0 + 12.0°  
 Efficiency 88 %  
 Peak intensity 3.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

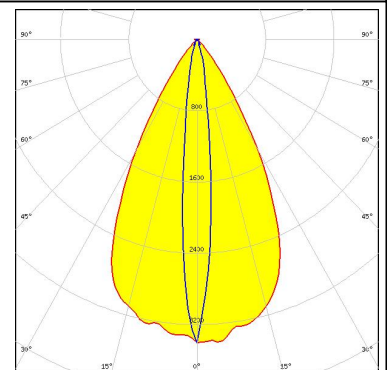

**SEOL**

SEOUL SEMICONDUCTOR

LED Z8Y22T  
 FWHM 54.0 + 16.0°  
 Efficiency 89 %  
 Peak intensity 2.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

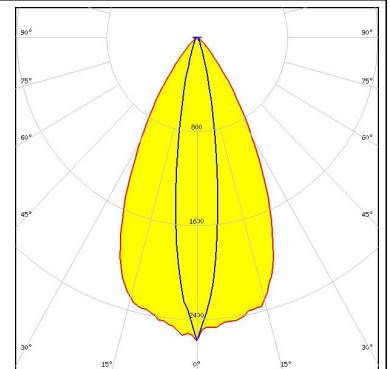

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)