


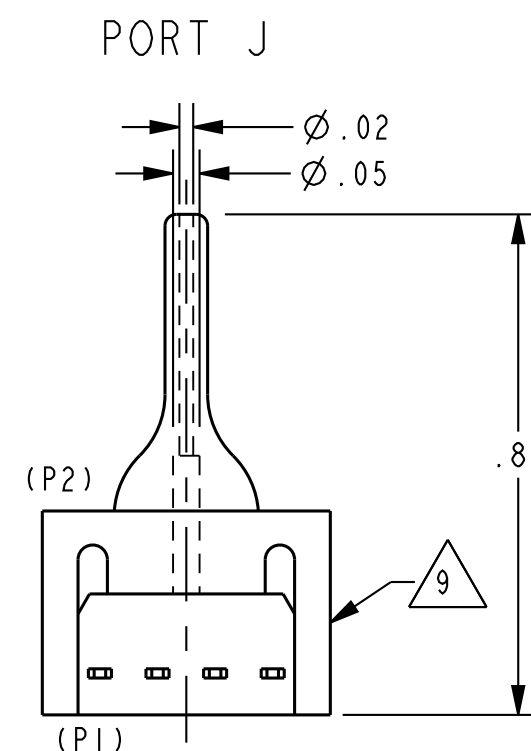
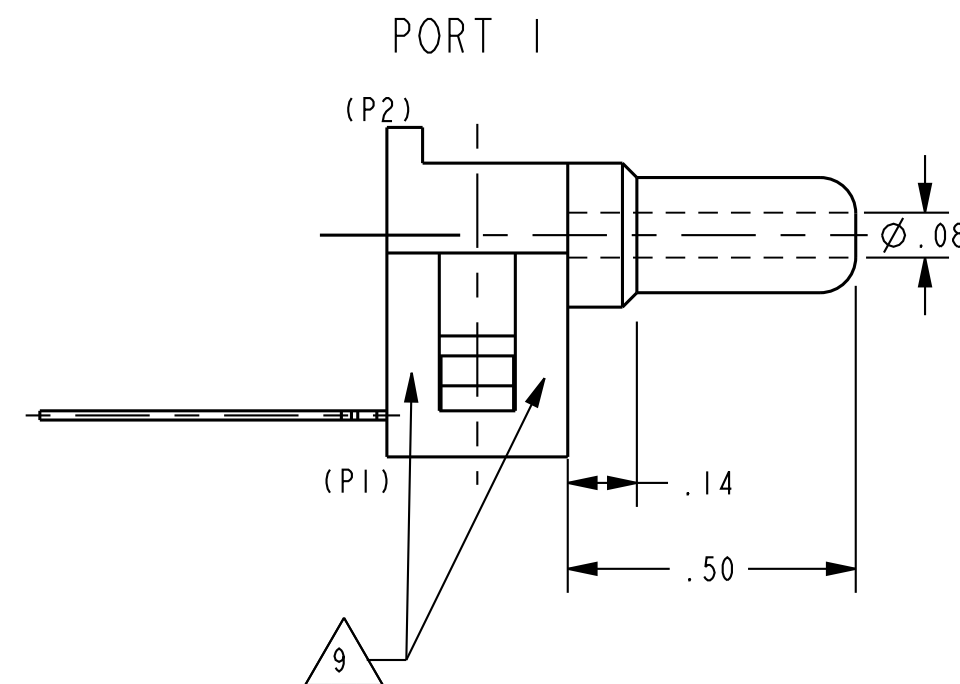
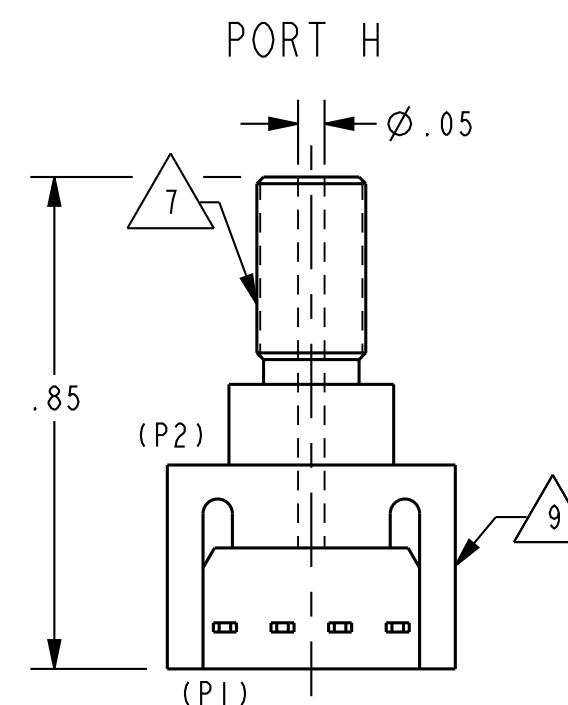
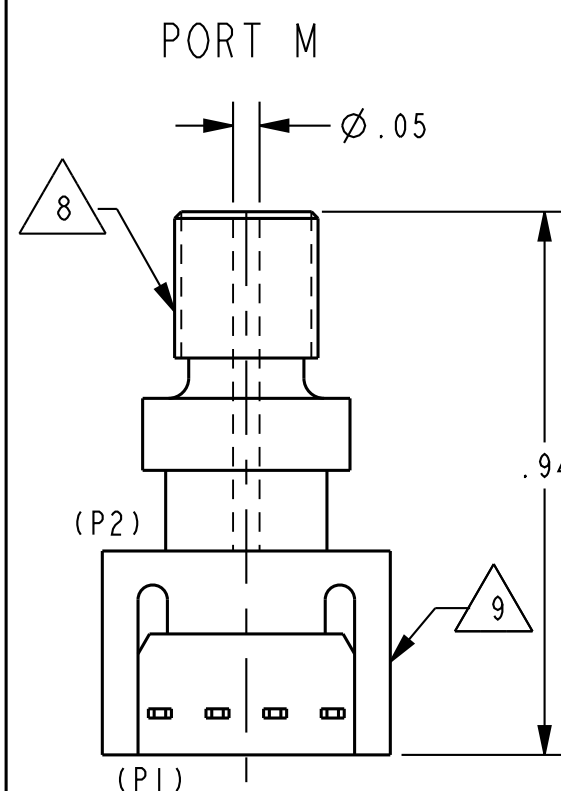
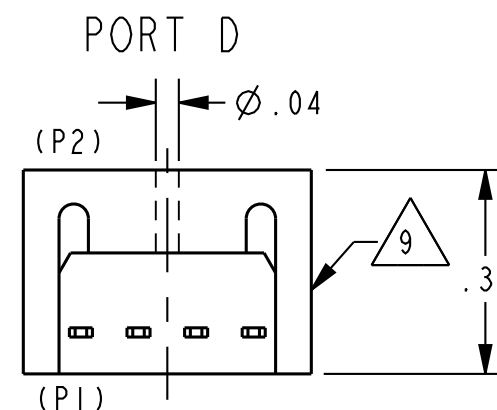
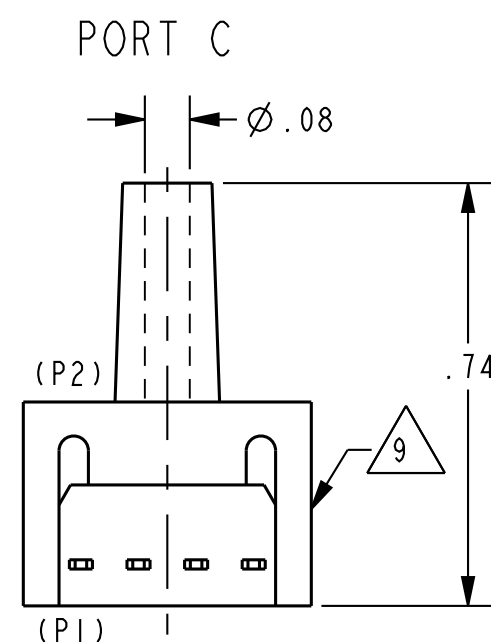
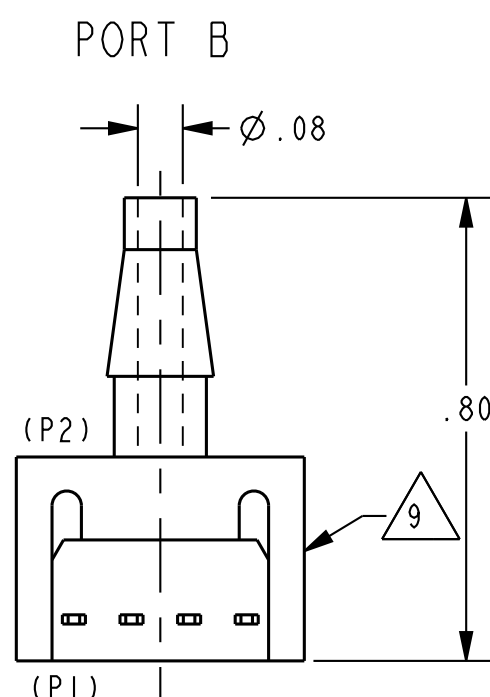


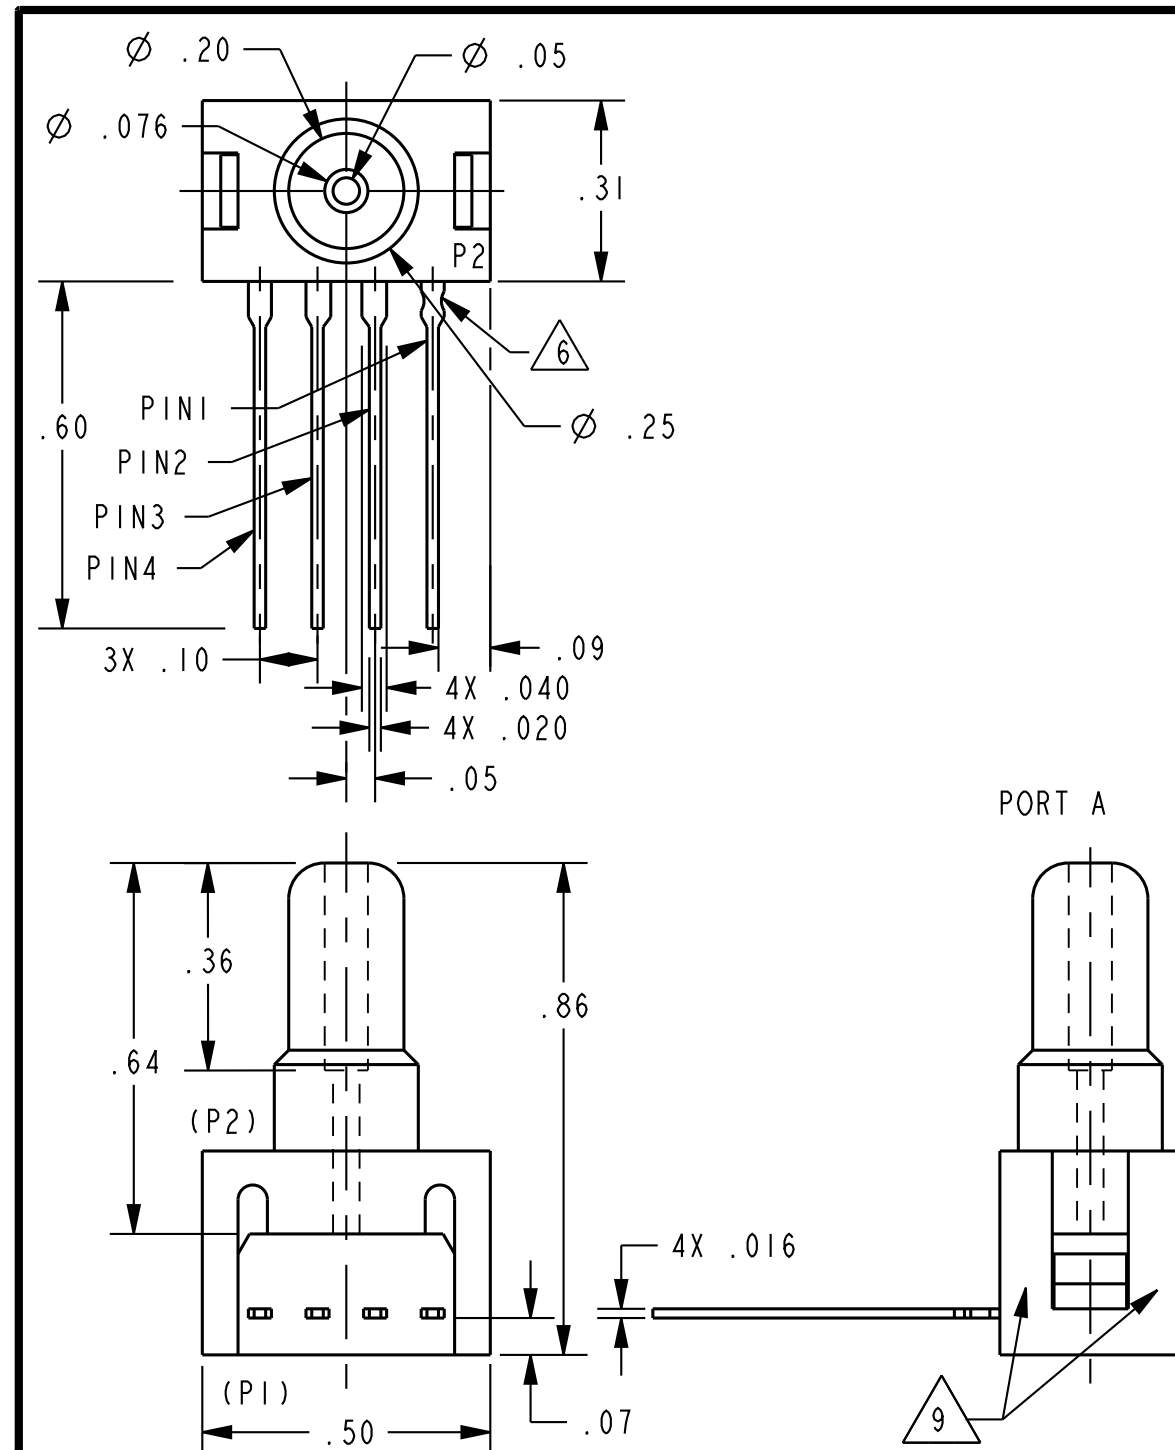


CATALOG LISTING		BRAND DESIGNATION 
24PCFFH6G		4FF6G
24PCEFH6G		4EF6G
24PCCFH6G		4CF6G
24PCEFA6G		4EF6G
24PCAF A6G		4AF6G
24PCBF A6G		4BF6G
24PCBFD6G		4BF6G
24PCBFH6G		4BF6G
24PCCFA6G		4CF6G
24PCDFA6G		4DF6G
24PCFFA6G		4FF6G
24PCEFD6G		4EF6G
24PCAFD6G		4AF6G
24PCAFB6G		4AF6G
24PCBFB6G		4BF6G
24PCCFB6G		4CF6G
24PCCFD6G		4CF6G
24PCDFB6G		4DF6G
24PCDFC6G		4DF6G
24PCDND6G		4DN6G
24PCFFH6G		4FF6G
24PCFFC6G		4FF6G
24PCFFD6G		4FF6G
24PCFFM6G		4FF6G
24PCFND6G		4FN6G
24PCGFA6G		4GF6G
24PCGFA6G		4GF6G
24PCGFH6G		4GF6G
24PCGFM6G		4GF6G
24PCGND6G		4GN6G
24PCGNH6G		4GN6G
24PCEF J6G		4EF6G
24PCAND6G		4AN6G
24PCBND6G		4BN6G
24PCDFD6G		4DF6G
24PCAFH6G		4AF6G
24PCCFM6G		4CF6G
24PCCFM6G		4CF6G
24PCAF J6G		4AF6G
24PCDFH6G		4DF6G

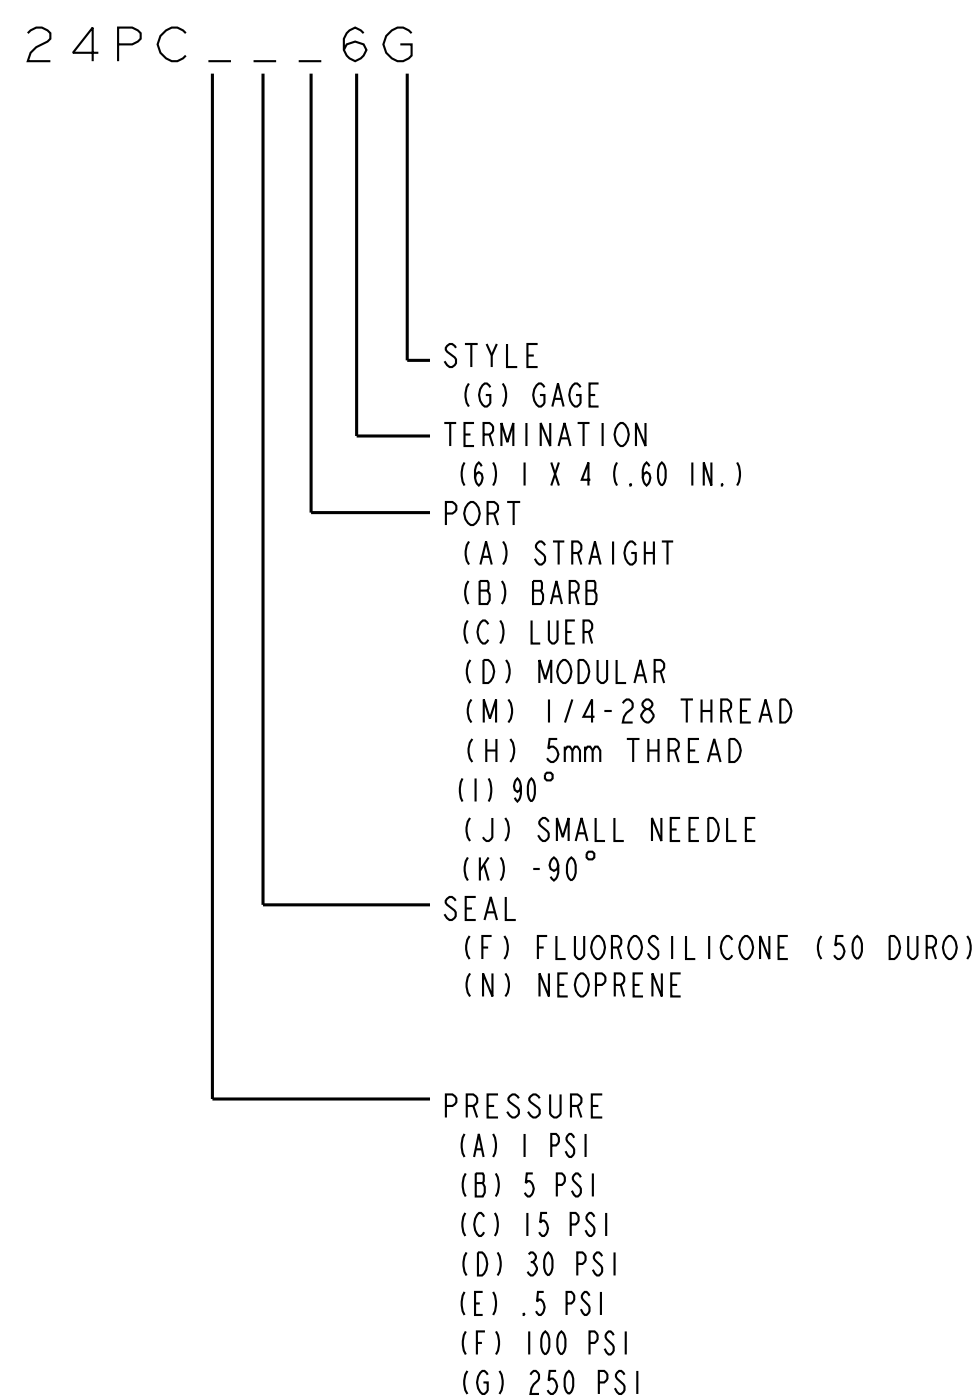

GENERAL OPERATING CHARACTERISTICS (ELECTRICAL PERFORMANCE AT 10.00±0.01 VDC EXCITATION, 25°C)					
PARAMETERS	PRESSURE RANGES (PSI)	MIN	TYP	MAX	UNITS
NULL OFFSET	ALL	-30	0	+30	mV
NULL SHIFT $\triangle 2$ 0° TO 25°C OR 25° TO 50°C			±1.0		
SPAN $\triangle 1$ P2 > P1	0 TO .5 G	25	35	45	
	0 TO 1 G	30	45	60	
	0 TO 5 G	85	115	145	
	0 TO 15 G	165	225	285	
	0 TO 30 G	240	330	420	
	0 TO 100 G	156	225	294	
	0 TO 250 G	144	212	280	
SENSITIVITY SHIFT $\triangle 2$					
0° TO 25°C OR 25° TO 50°C P2 > P1 AT 10 VDC AT 2 mA	ALL				%SPAN
			±5.0		
LINEARITY P2 > P1 (BFSL) P1 > P2	ALL		.2	1.0	
REPEATABILITY & HYSTERESIS	ALL		±.5		
STABILITY OVER 1 YEAR					
EXCITATION VOLTAGE			±1.5		
INPUT RESISTANCE		4.0K	5.0K	6.0K	OHMS
OUTPUT RESISTANCE		4.0K	5.0K	6.0K	OHMS
(P1 > P2) (P2 > P1) OVERPRESSURE AT 25°C	0 TO .5 G			20	PSI
	0 TO 1 G			20	
	0 TO 5 G			20	
	0 TO 15 G			45	
	0 TO 30 G			60	
	0 TO 100 G			200	
	0 TO 250 G			500	
TEMPERATURE STORAGE OPERATE	ALL	-55° TO +100°C (-67°F TO +212°F) -40° TO +85°C (-40°F TO +185°F)			

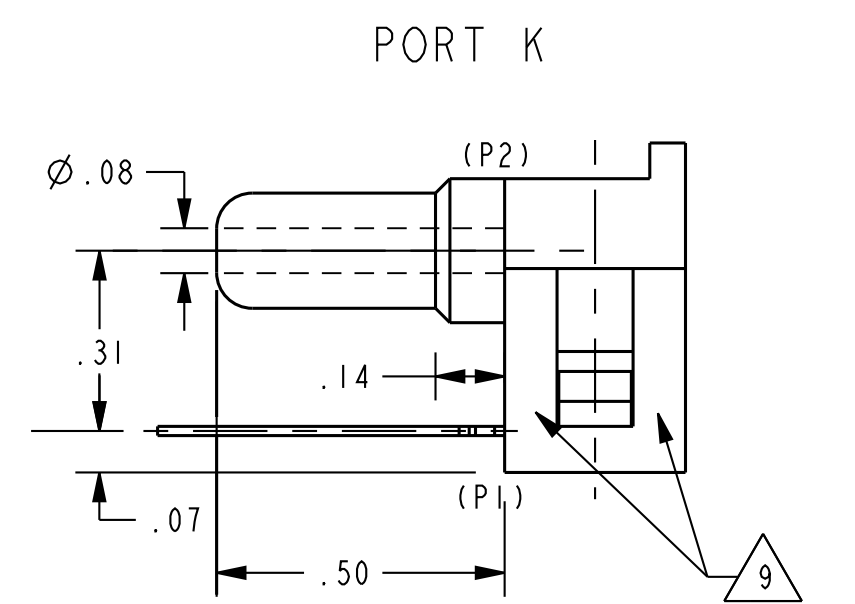

METRIC	INCHES
0,41	.016
0,51	.020
1,02	.040
1,3	.05
1,8	.07
2,0	.08
2,3	.09
2,5	.10
3,6	.14
5,1	.20
6,4	.25
7,9	.31
8,9	.35
12,7	.50
15,3	.60
18,8	.74
20,4	.80
21,6	.85
21,8	.86
22,1	.87
23,9	.94

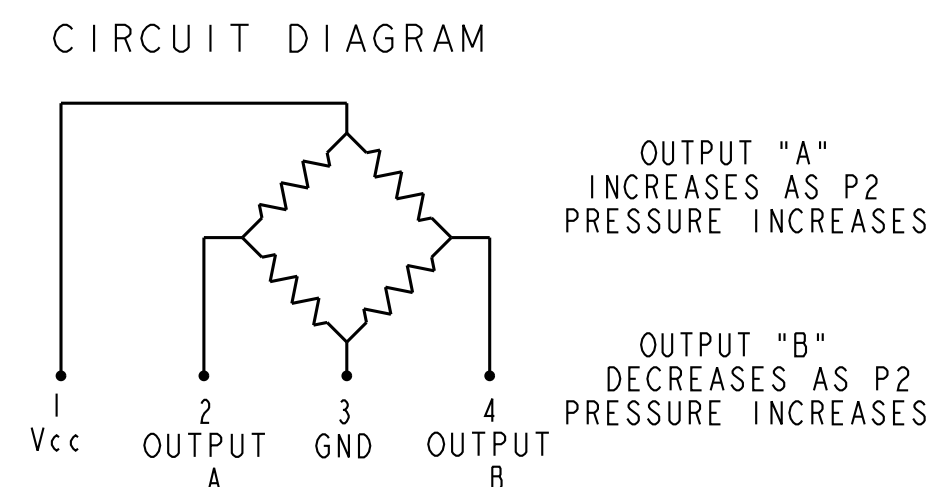

NOTES

- 1 SPAN IS THE ALGEBRAIC DIFFERENCE BETWEEN END POINTS (OUTPUT AT MINIMUM AND MAXIMUM PRESSURE)
- 2 TEMPERATURE ERROR IS CALCULATED WITH RESPECT TO 25°C AND EXPRESSES THE DEVIATION THAT COULD OCCUR AS TEMPERATURE IS RAISED OR LOWERED TO LIMITS INDICATED
- 3 - INPUT MEDIA LIMITED ONLY TO THOSE MATERIALS THAT WILL NOT ATTACK POLYESTER, SILICON, BUNA-N OR FLUROSILICONE
- 4 - TERMINALS ARE PLATED FOR SOLDERING
- 5 - LIMIT SOLDERING TO 315° FOR 10 SECONDS MAX
- 6 PIN 1 IS IDENTIFIED BY NOTCH IN LEAD
- 7 M5 THREADED PRODUCT:
RECOMMENDED TORQUE FOR SEALING: 4 IN-LBS
DO NOT EXCEED 6 IN-LBS OF TORQUE
SIZE .007 O-RING
O-RING COUNTERBORE DIMENSIONS: $\varnothing .300 \pm .003$ X $\varnothing .040$

8 1/4-28 UNF THREADED PRODUCT:
 RECOMMENDED TORQUE FOR SEALING: 8 IN-LBS
 DO NOT EXCEED 12 IN-LBS OF TORQUE
 SIZE 009 O-RING
 O-RING COUNTERBORE DIMENSIONS: $\varnothing .360 \pm .003 \times \nabla .040 \pm .002$
 BRAND 5 DIGIT LISTING AND 6 DIGIT DATE CODE (YYYYWW). ALTERNATE
 9 FORMAT OF CATALOG LISTING BRAND IS THE ENGINE CATALOG LISTING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		ONE PLACE (.0) +.030
FED. MFG. CODE 91929	CATALOG LISTING	TWO PLACE (.00) +.015
 MICRO SWITCH a Honeywell Division	BRIDGE PRESSURE SENSOR 24PC SERIES CHART 5	THREE PLACE (.000) +.005
		ANGLES *
		WEIGHT 2 OZ.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru