

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0751951013

Status:

Active

Overview:

vhdm__hsd

Description:

2.00mm (.079") Pitch 6-Row VHDM® Lite Backplane Header, Left Shield End Version, 6 Row, 60 Circuits, Pin Length 4.25mm (.167")

Documents:

Drawing (PDF)

Product Specification PS-74031-999 (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family

Series

Application

Application Tooling Documents

Comments

Component Type

Overview

Product Name

Style

Backplane Connectors

75195

Backplane

Tooling Manual

Keying Position A

PCB Header

vhdm__hsd

VHDM Lite®

N/A

Physical

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Guide to Mating Part

Keying to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Number of Columns

Number of Pairs

Number of Rows

Orientation

PC Tail Length (in)

PC Tail Length (mm)

PCB Locator

PCB Retention

PCB Thickness Recommended (in)

PCB Thickness Recommended (mm)

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Pitch - Term. Interface (in)

Pitch - Term. Interface (mm)

Plating min: Mating (µin)

Plating min: Mating (µm)

Plating min: Termination (µin)

Plating min: Termination (µm)

Polarized to PCB

Stackable

Surface Mount Compatible (SMC)

60

60

Black

200

No

Yes

Yes

High Performance Alloy (HPA), Stainless Steel

Gold

Tin-Lead

High Temperature Thermoplastic

10

Open Pin Field

6

Vertical

0.098 In

2.50 mm

No

Yes

0.071 In

1.80 mm

Tube

0.079 In

2.00 mm

0.079 In

2.00 mm

30

0.75


30

0.75

No

No

Yes



Series

image - Reference only

EU RoHS

RoHS Compliant by Exemption

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS



Pb

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

75195Series

Mates With

75189 VHDM® Lite Board-to-Board Daughtercard

Use With

Daughtercard Modules

Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
VHDM® Signal Pin	0622015700
Insertor Repair Tool	
VHDM® Insertion	0622020207
Module for Advanced Mate Signal Header,	

Temperature Range - Operating	105°C	6 Row by 10 Wide,
Termination Interface: Style	Through Hole - Compliant Pin	20.00mm (.787")

Electrical

Current - Maximum per Contact	2A
Data Rate	622.0 Mbps
Real Signals (per 25mm)	76
Shielded	No
Voltage - Maximum	120V AC (RMS)/DC

Material Info


Reference - Drawing Numbers

Product Specification	PS-74031-999
Sales Drawing	SD-75195-001

VHDM and Very High Density Metric are trademarks of Amphenol Corporation

This document was generated on 05/28/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

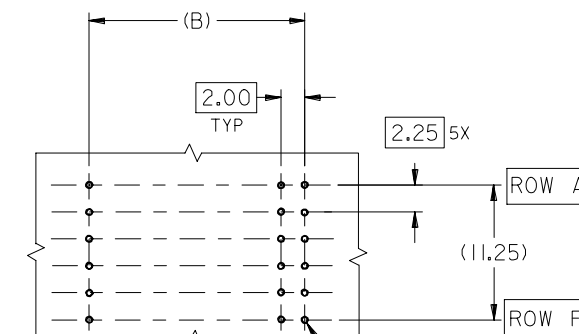


BACKPLANE HOLE PATTERN
RECOMMENDED DIMENSIONS

Ø0.56 ±0.05 PTH
Ø0.66 DRILL
Ø1.00 PAD
⌀ Ø0.10

NOTES:

1. MATERIALS:
HOUSING - LIQUID CRYSTAL POLYMER (LCP),
GLASS-FILLED, UL 94V-0, COLOR: BLACK
SIGNAL PIN - COPPER ALLOY
2. FINISHES:
CONTACT AREA: SELECTIVE GOLD (Au)
PCB TAILS: SELECTIVE TIN/LEAD (Sn/Pb)
OR SELECTIVE MATTE TIN (Sn)
NICKEL (Ni) OVERALL.
3. THIS PART CONFORMS TO MOLEX PRODUCT
SPECIFICATION PS-74031-999
4. FOR MIXED CONTACT LENGTHS CONSULT
MOLEX FOR AVAILABILITY
5. FOR SPECIFIC MATERIAL NUMBERS & MATING
INFORMATION REFER TO SHEET 2
6. PACKAGE PER PK-74058-003
7. EITHER MARK PART WITH PART NUMBER & DATE
CODE APPROXIMATELY WHERE SHOWN OR PLACE
LABEL ON THE TUBE.



ADD LEADFREE PINS EC NO: UCP2006-0059 2005/07/13 DRAWN: KMULVEY 2005/07/13 CHKD: 2005/07/15 APPR: SREED	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2.5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY MBANDURA	DATE 2003/01/06	TITLE VHDM LITE 6 ROW SIGNAL END BACKPLANE SALES ASSEMBLY			
			4 PLACES ± --- ± ---	CHECKED BY NMARTIN	DATE 2003/01/06					
			3 PLACES ± --- ± ---	APPROVED BY CBIXLER	DATE 2003/01/06	MOLEX INCORPORATED				
			2 PLACES ± --- ± ---	MATERIAL NO.						DOCUMENT NO.
			1 PLACE ± --- ± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 2		SD-75195-001		1 OF 2
			ANGULAR ±1/2°		SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			



M/N
75195-()

KEYING PIN
ORIENTATION

***0*	***1*	***2*	***3*	***4*	***5*	***6*	***7*	***8*
O	A	B	C	D	E	F	G	H

75195 * * * *

COLUMN/PLATING
10 = 10 COLUMN TIN/LEAD
25 = 25 COLUMN TIN/LEAD
90 = 10 COLUMN MATTE TIN
85 = 25 COLUMN MATTE TIN

CONTACT LOAD
(PIN HEIGHT)
1 = 4.75
2 = 6.25
3 = 4.25
4 = 5.15

PART NUMBER	COLUMN	NUMBER OF SIGNAL PIN	NUMBER OF SHIELD	A	B	M	Au (um) THICKNESS	Sn (um) THICKNESS
75195-*0*1	10	60	0	27.00	18.00	4.75	0.76	0.76-1.52

75195-*5*1	25	150	0	57.00	48.00	4.75	0.76	

75195-*0*2	10	60	0	27.00	18.00	6.25	0.76	

75195-*5*2	25	150	0	57.00	48.00	6.25	0.76	

75195-*0*3	10	60	0	27.00	18.00	4.25	0.76	

75195-*5*3	25	150	0	57.00	48.00	4.25	0.76	

75195-*0*4	10	60	0	27.00	18.00	5.15	0.76	

75195-*5*4	25	150	0	57.00	48.00	5.15	0.76	

SEE SHEET 1 EC NO: UCP2006-0059 IDRWK/MULVEY 2005/07/13 CHKD: 2005/07/13 APPR: SREED 2005/07/15	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2.5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
		 =0  =0		mm	INCH	DRAWN BY	DATE	TITLE VHDM LITE 6 ROW SIGNAL END BACKPLANE SALES ASSEMBLY				
			4 PLACES	± ---	± ---	MBANDURA	2003/01/06					
			3 PLACES	± ---	± ---	CHECKED BY	DATE	MOLEX INCORPORATED				
			2 PLACES	± ---	± ---	NMARTIN	2003/01/06					
			1 PLACE	± ---	± ---	APPROVED BY	DATE					
ANGULAR ±1/2°		CBIHLER	2003/01/06	SHEET NO. 2 OF 2								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.							SEE CHART			
REV					SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru