

C×R type SSOP package
60 V, 80 V and 100 V
load voltage

PhotoMOS[®]
RF SSOP 1 Form A C×R
(AQY22○○○V)



RoHS compliant

FEATURES

- 1. Miniature SSOP package**
 (Compared to SOP 4-pin models, volume ratio can be reduced by approximately 53%.)
- 2. Load voltage: 60 V, 80 V and 100 V**
- 3. Low C×R**
 Low on resistance and low output capacitance available
 - 60 V load voltage
 Output capacitance: Typ. 27 pF, On resistance: Typ. 0.8Ω
 - 80 V load voltage
 Output capacitance: Typ. 4.5 pF, On resistance: Typ. 10.5Ω
 - 100 V load voltage
 Output capacitance: Typ. 5.8 pF, On resistance: Typ. 8.8Ω
- 4. Turn on time**
 80 V and 100 V load voltage type: Typ. 0.05 ms

TYPICAL APPLICATIONS

- 1. Measuring and testing equipment**
 Semiconductor testing equipment, Probe cards, Datalogger, Board tester and other testing equipment
- 2. Telecommunication and broadcasting equipment**
- 3. Medical equipment**
 Ultrasonic wave diagnostic machine
- 4. Multi-point recorder**
 Data logger, Warping and Thermocouple, etc.

*Does not support automotive applications.

TYPES

Type	Output rating*1		Part No. (Tape and reel packing style)*2		Packing quantity in the tape and reel
	Load voltage	Load current	Picked from the 1 and 4-pin side	Picked from the 2 and 3-pin side	
AC/DC dual use	60 V	400 mA	AQY222R2VY	AQY222R2VW	3,500 pcs.
	80 V	120 mA	AQY225R2VY	AQY225R2VW	
	100 V	120 mA	AQY225R3VY	AQY225R3VW	

Notes: *1. Indicate the peak AC and DC values.

*2. Only tape and reel package is available. Packing quantity of 1,000 pieces is possible. Please consult us.

For space reasons, the three initial letters of the part number "AQY", the package (SSOP) indication "V", and the packaging style "Y" or "W" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQY222R2V	AQY225R2V	AQY225R3V	Remarks
Input side	LED forward current	I_F	50 mA			
	LED reverse voltage	V_R	5 V			
	Peak forward current	I_{FP}	1 A			$f = 100 \text{ Hz}$, Duty factor = 0.1%
	Power dissipation	P_{in}	75 mW			
Output side	Load voltage (peak AC)	V_L	60 V	80 V	100 V	
	Continuous load current	I_L	0.4 A	0.12 A		Peak AC, DC
	Peak load current	I_{peak}	1.2 A	0.3 A		100 ms (1shot), $V_L = \text{DC}$
	Power dissipation	P_{out}	250 mW			
Total power dissipation		P_T	300 mW			
I/O isolation voltage		V_{iso}	1,500 Vrms			
Ambient temperature	Operating	T_{opr}	-40 to +85°C -40 to +185°F			(Non-icing at low temperatures)
	Storage	T_{stg}	-40 to +100°C -40 to +212°F			


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQY222R2V	AQY225R2V	AQY225R3V	Condition	
Input	LED operate current	Typical	0.5 mA			AQY222R2V: $I_L = 400 \text{ mA}$ AQY225R2V: $I_L = 80 \text{ mA}$ AQY225R3V: $I_L = 80 \text{ mA}$	
		Maximum	3.0 mA				
	LED turn off current	Minimum	0.1 mA				
		Typical	0.45 mA				
LED dropout voltage	Typical	1.32 V (1.14 V at $I_F = 5 \text{ mA}$)			$I_F = 50 \text{ mA}$		
	Maximum	1.5 V					
Output	On resistance	Typical	0.8Ω	10.5Ω	8.8Ω	AQY222R2V: $I_F = 5 \text{ mA}$, $I_L = 400 \text{ mA}$ AQY225R2V: $I_F = 5 \text{ mA}$, $I_L = 80 \text{ mA}$ AQY225R3V: $I_F = 5 \text{ mA}$, $I_L = 80 \text{ mA}$ Within 1 s	
		Maximum	1.25Ω	15Ω	14Ω		
	Output capacitance	Typical	27 pF	4.5 pF	5.8 pF		$I_F = 0 \text{ mA}$, $V_B = 0 \text{ V}$, $f = 1 \text{ MHz}$
		Maximum	40 pF	6 pF	8 pF		
Off state leakage current	Typical	—			$I_F = 0 \text{ mA}$, $V_L = \text{Max.}$		
	Maximum	*10 nA					
Transfer characteristics	Turn on time**	Typical	0.15 ms	0.05 ms		AQY222R2V: $I_F = 5 \text{ mA}$, $V_L = 10 \text{ V}$, $R_L = 100\Omega$ AQY225R2V: $I_F = 5 \text{ mA}$, $V_L = 10 \text{ V}$, $R_L = 125\Omega$ AQY225R3V: $I_F = 5 \text{ mA}$, $V_L = 10 \text{ V}$, $R_L = 125\Omega$	
		Maximum	0.5 ms				
	Turn off time**	Typical	0.08 ms	0.05 ms			
		Maximum	0.2 ms				
	I/O capacitance	Typical	0.8 pF				$f = 1 \text{ MHz}$, $V_B = 0 \text{ V}$
		Maximum	1.5 pF				
Initial I/O isolation resistance	Minimum	R_{iso}	1,000 MΩ		500 V DC		

Note: Variation possible through combinations of output capacitance and on resistance. For more information, please contact our sales office in your area.

*Available as custom orders (1 nA or less)

**Turn on/Turn off time

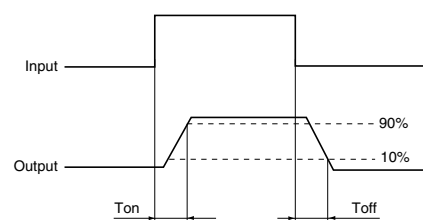

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item		Symbol	Min.	Max.	Unit
LED current		I_F	5	30	mA
AQY222R2V	Load voltage (Peak AC)	V_L	—	30	V
	Continuous load current	I_L	—	0.4	A
AQY225R2V	Load voltage (Peak AC)	V_L	—	40	V
	Continuous load current	I_L	—	0.12	A
AQY225R3V	Load voltage (Peak AC)	V_L	—	50	V
	Continuous load current	I_L	—	0.12	A

■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1.-(1) Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F




1.-(2) Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

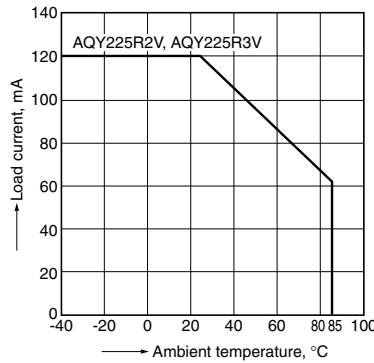

2.-(1) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4
LED current: 5 mA; Load voltage: 10V (DC)
Continuous load current: Max. (DC)

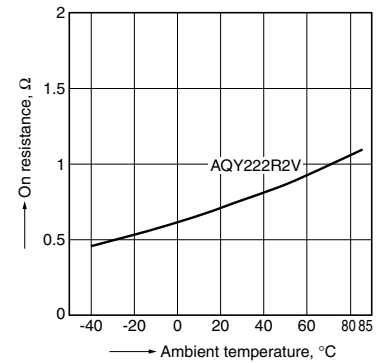


2.-(2) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4;
LED current: 5 mA; Load voltage: 10V (DC);
Continuous load current: 80mA (DC)




3.-(1) Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10V (DC);
Continuous load current: 100mA (DC)

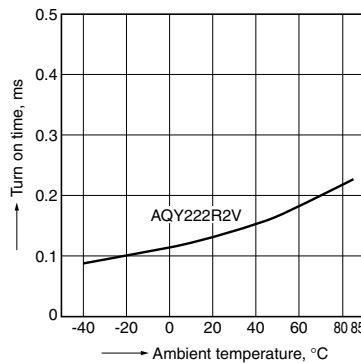

3.-(2) Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10V (DC);
Continuous load current: 80mA (DC)

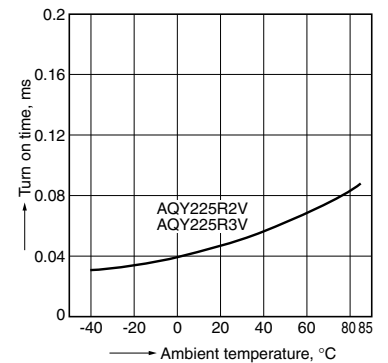


4.-(1) Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10V (DC);
Continuous load current: 100mA (DC)




4.-(2) Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10V (DC);
Continuous load current: 80mA (DC)

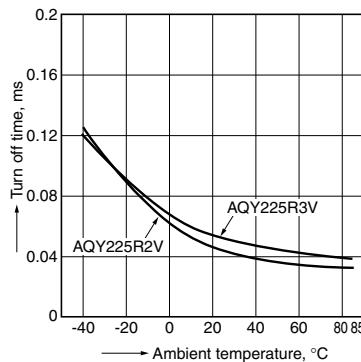

5.-(1) LED operate current vs. ambient temperature characteristics


Load voltage: 10V (DC);
Continuous load current: 400mA (DC)

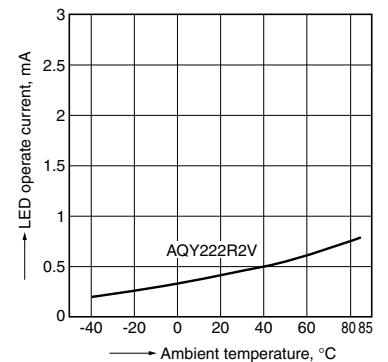

RF SSOP 1 Form A CxR (AQY22000V)

5.-(2) LED operate current vs. ambient temperature characteristics

Load voltage: 10V (DC);
Continuous load current: 80mA (DC)

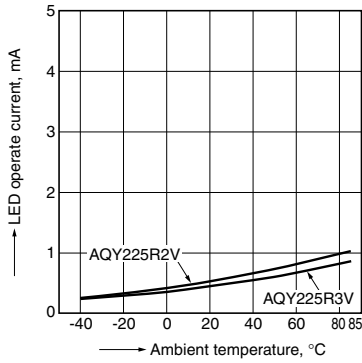

6.-(1) LED turn off current vs. ambient temperature characteristics

Load voltage: 10V (DC);
Continuous load current: 400mA (DC)




6.-(2) LED turn off current vs. ambient temperature characteristics

Load voltage: 10V (DC);
Continuous load current: 80mA (DC)




7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

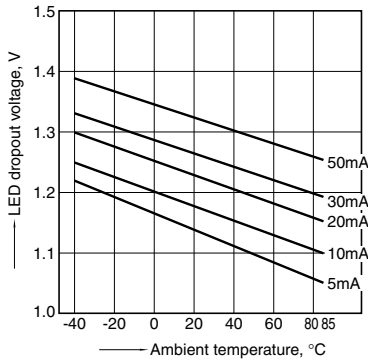


8.-(1) Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 3 and 4;
Ambient temperature: 25°C 77°F




8.-(2) Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 3 and 4;
Ambient temperature: 25°C 77°F



9.-(1) Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4;
Ambient temperature: 25°C 77°F

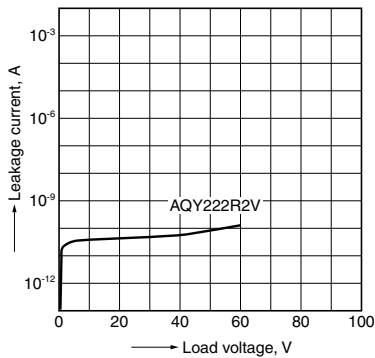


9.-(2) Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4;
Ambient temperature: 25°C 77°F




10.-(1) Turn on time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4;
Load voltage: 10V (DC); Continuous load current: 100mA (DC); Ambient temperature: 25°C 77°F

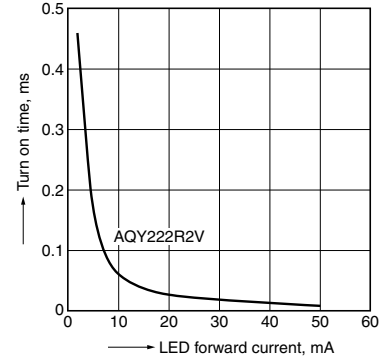


10.-(2) Turn on time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4;
Load voltage: 10V (DC); Continuous load current: 80mA (DC); Ambient temperature: 25°C 77°F

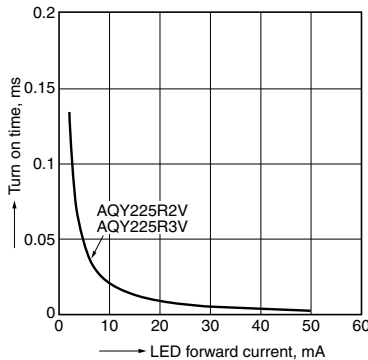


11.-(1) Turn off time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4;
Load voltage: 10V (DC); Continuous load current: 100mA (DC); Ambient temperature: 25°C 77°F

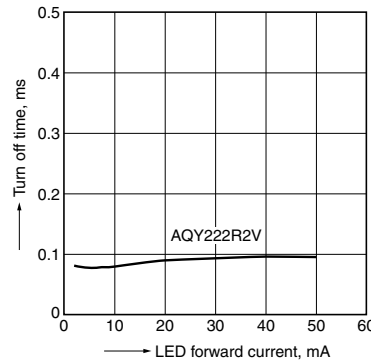


11.-(2) Turn off time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4;
Load voltage: 10V (DC); Continuous load current: 80mA (DC); Ambient temperature: 25°C 77°F

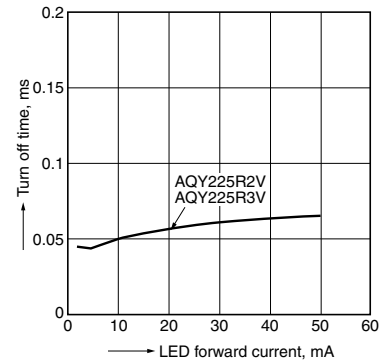


12.-(1) Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4;
 Measurement signal: 1 MHz;
 Ambient temperature: 25°C 77°F

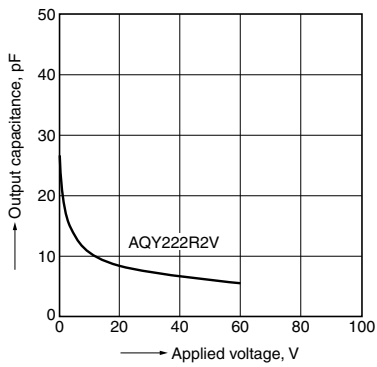

12.-(2) Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4;
 Measurement signal: 1 MHz;
 Ambient temperature: 25°C 77°F

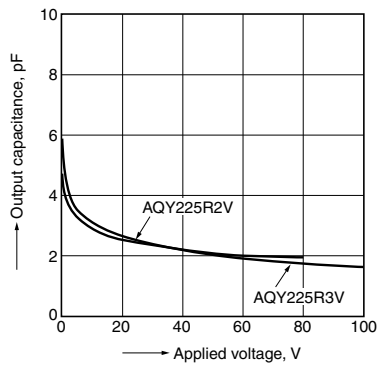

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[AQY225R2V](#) [AQY225R2VW](#) [AQY225R2VY](#) [AQY222R2V](#) [AQY225R3V](#) [AQY222R2VW](#) [AQY222R2VY](#)
[AQY225R3VY](#) [AQY225R3VW](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru