

# 10A-25A SERIES

## 10kV to 25kV High Voltage Biasing Supplies

The 10A-25A Series of regulated, high-voltage DC-DC converters are an extension of the A Series, directly addressing the needs of the miniature PCB or chassis-mount  $\geq 10\text{kV}$  application. Designed and built utilizing state-of-the-art power conversion topology, these units feature surface-mount technology and encapsulation techniques providing high reliability and low cost. Typical applications for the 10A-25A Series include the following: electrophoresis, mass spectroscopy, electron microscopes, plasma and cathode ray tubes (CRT).

- 0 to 10kV, 15kV, 20kV, or 25kV output
- 4, 15 or 30 watts of output power
- Maximum Iout capability down to 0 Volts
- Wide input voltage range
- Indefinite output short-circuit protection



- Output current & voltage monitors
- Fixed-frequency, low-stored-energy design
- >450,000 hour MTBF @65°C
- UL/cUL Recognized Component; CE Mark (LVD & RoHS)

| PARAMETER                  | CONDITIONS                              | MODELS                                                                                 |       |       |             |                                                |       |             |       |       |             |       |       | UNITS      |
|----------------------------|-----------------------------------------|----------------------------------------------------------------------------------------|-------|-------|-------------|------------------------------------------------|-------|-------------|-------|-------|-------------|-------|-------|------------|
| INPUT                      |                                         | 12V                                                                                    |       |       |             | 24V                                            |       |             |       |       |             |       |       |            |
| Voltage Range              | Full Power                              | + 11 to 16                                                                             |       |       |             | + 23 to 30                                     |       |             |       |       |             |       |       | VDC        |
| Voltage Range              | Derated Power Range                     | + 9 to 32                                                                              |       |       |             | + 9 to 32                                      |       |             |       |       |             |       |       | VDC        |
| Current                    | Standby / Disable                       | < 30                                                                                   |       |       |             | < 30                                           |       |             |       |       |             |       |       | mA         |
| Current                    | No Load, Max Eout                       | 10A < 0.20, 15A/20A/25A < 0.25                                                         |       |       |             | 10A < 0.17, 15A < 0.20, 20A < 0.21, 25A < 0.25 |       |             |       |       |             |       |       | A          |
| Current                    | Max Load, Max Eout                      | ~ 500                                                                                  |       |       |             | ~ 1600                                         |       |             |       |       |             |       |       | mA         |
| AC Ripple Current          | Nominal Input, Full Load                | < 80                                                                                   |       |       |             | < 80                                           |       |             |       |       |             |       |       | mA p-p     |
| OUTPUT                     |                                         | 10A                                                                                    |       |       | 15A         |                                                |       | 20A         |       |       | 25A         |       |       |            |
| Voltage Range              | Nominal Input                           | 0 to 10,000                                                                            |       |       | 0 to 15,000 |                                                |       | 0 to 20,000 |       |       | 0 to 25,000 |       |       | VDC        |
| Nominal Input Voltage      |                                         | 12                                                                                     | 24    | 24    | 12          | 24                                             | 24    | 12          | 24    | 24    | 12          | 24    | 24    | VDC        |
| Power                      | Nominal Input, Max Eout                 | 4                                                                                      | 15    | 30    | 4           | 15                                             | 30    | 4           | 15    | 30    | 4           | 15    | 30    | Watts      |
| Current                    | Iout Entire Output Voltage Range        | 0.40                                                                                   | 1.5   | 3.0   | 0.26        | 1.0                                            | 2.0   | 0.20        | 0.75  | 1.5   | 0.16        | 0.60  | 1.2   | mA         |
| Current Scale Factor       | Full Load                               | 0.167                                                                                  | 0.184 | 0.381 | 0.158       | 0.181                                          | 0.378 | 0.152       | 0.178 | 0.184 | 0.145       | 0.175 | 0.183 | mA/V       |
| Voltage Monitor Scaling    |                                         | 1000:1 $\pm 2\%$ into 10M $\Omega$                                                     |       |       |             |                                                |       |             |       |       |             |       |       | -          |
| Ripple                     | Full Load, Max Eout, 300pF bypass Cap.  | 0.012                                                                                  | 0.039 | 0.076 | 0.024       | 0.043                                          | 0.080 | 0.020       | 0.031 | 0.080 | 0.020       | 0.080 | 0.051 | %V p-p     |
| Ripple with -F-M Option    | Full Load, Max Eout, 300pF bypass Cap.  | 0.008                                                                                  | 0.034 | 0.072 | 0.021       | 0.028                                          | 0.073 | 0.010       | 0.018 | 0.039 | 0.010       | 0.040 | 0.040 | %V p-p     |
| Dynamic Load Regulation    | ½ to Full Load, Max Eout per 0.1mA      | <5.0                                                                                   | <5.0  | <5.0  | <7.5        | <7.5                                           | <7.5  | <10.0       | <10.0 | <10.0 | <10.0       | <10.0 | <10.0 | V pk       |
| Line Regulation            | Nom. Input, Max Eout, Full Power        | < 0.01 %                                                                               |       |       |             |                                                |       |             |       |       |             |       |       | VDC        |
| Static Load Regulation     | No Load to Full Load, Max Eout          | < 0.01%                                                                                |       |       |             |                                                |       |             |       |       |             |       |       | VDC        |
| Stability                  | 30 Min. warmup, per 8 hr/ per day       | < 0.01% / < 0.02%                                                                      |       |       |             |                                                |       |             |       |       |             |       |       | VDC        |
| PROGRAMMING & CONTROLS     |                                         | ALL TYPES                                                                              |       |       |             |                                                |       |             |       |       |             |       |       |            |
| Input Impedance            | Nominal Input                           | + Output Models 1.1M $\Omega$ to GND, - Output Models 1.1M $\Omega$ to +5 Vref         |       |       |             |                                                |       |             |       |       |             |       |       | M $\Omega$ |
| Adjust Resistance          | Typical Potentiometer Values            | 10K to 100K (Pot across Vref. & Signal GND, Wiper to Adjust)                           |       |       |             |                                                |       |             |       |       |             |       |       | $\Omega$   |
| Adjust Logic               | 0 to +5 for +Out, +5 to 0 for - Out     | +4.64 VDC for +Output or +0.36 for -Output = Nominal Eout                              |       |       |             |                                                |       |             |       |       |             |       |       | -          |
| Output Voltage & Impedance | T=+25°C                                 | + 5.00VDC $\pm 2\%$ , Zout = 464 $\Omega \pm 1\%$                                      |       |       |             |                                                |       |             |       |       |             |       |       | -          |
| Enable/Disable             |                                         | 0 to +0.5 Disable, +2.4 to 32 Enable (Default = Enable)                                |       |       |             |                                                |       |             |       |       |             |       |       | VDC        |
| ENVIRONMENTAL              |                                         | STANDARD                                                                               |       |       |             |                                                |       | -25PPM      |       |       |             |       |       |            |
| Operating                  | Full Load, Max Eout, Case Temp.         | -40 to +65                                                                             |       |       |             |                                                |       | +10 to +45  |       |       |             |       |       | °C         |
| Coefficient                | Over the Specified Temperature          | $\pm 50$                                                                               |       |       |             |                                                |       | $\pm 25$    |       |       |             |       |       | PPM/°C     |
| Thermal Shock              | Mil-Std 810, Method 503-4, Proc. II     | -40 to +65                                                                             |       |       |             |                                                |       |             |       |       |             |       |       | °C         |
| Storage                    | Non-Operating, Case Temp.               | -55 to +105                                                                            |       |       |             |                                                |       |             |       |       |             |       |       | °C         |
| Humidity                   | All Conditions, Standard Package        | 0 to 95% non-condensing                                                                |       |       |             |                                                |       |             |       |       |             |       |       | -          |
| Altitude                   | Standard Package, All Conditions        | Sea Level through Vacuum (Vacuum may require -P2 option, contact factory for details.) |       |       |             |                                                |       |             |       |       |             |       |       | -          |
| Shock                      | Mil-Std-810, Method 516.5, Proc. IV     | 20 (Standard), 40 (-C Option)                                                          |       |       |             |                                                |       |             |       |       |             |       |       | G's        |
| Vibration                  | Mil-Std-810, Method 514.5, Fig.514.5C-3 | 10 (Standard), 20 (-C Option)                                                          |       |       |             |                                                |       |             |       |       |             |       |       | G's        |

Specifications subject to change without notice.



*Making High Voltage Easier!®*


**Higher Service, Higher Performance, Higher Reliability**

©2011, UltraVolt Inc. All rights reserved.


# 10A-25A SERIES

## 10kV to 25kV High Voltage Biasing Supplies


10A SERIES STANDARD CASE

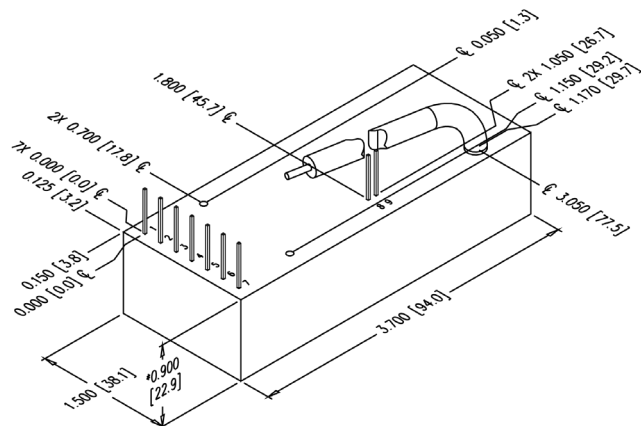


15A SERIES STANDARD CASE

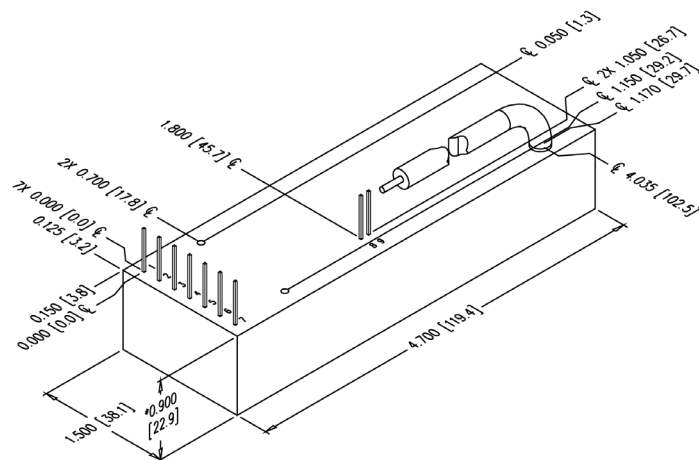

20A SERIES STANDARD CASE

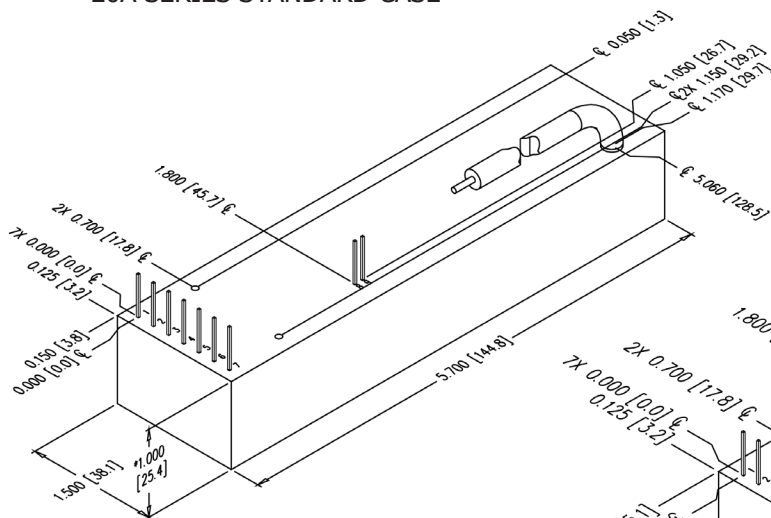

25A SERIES STANDARD CASE

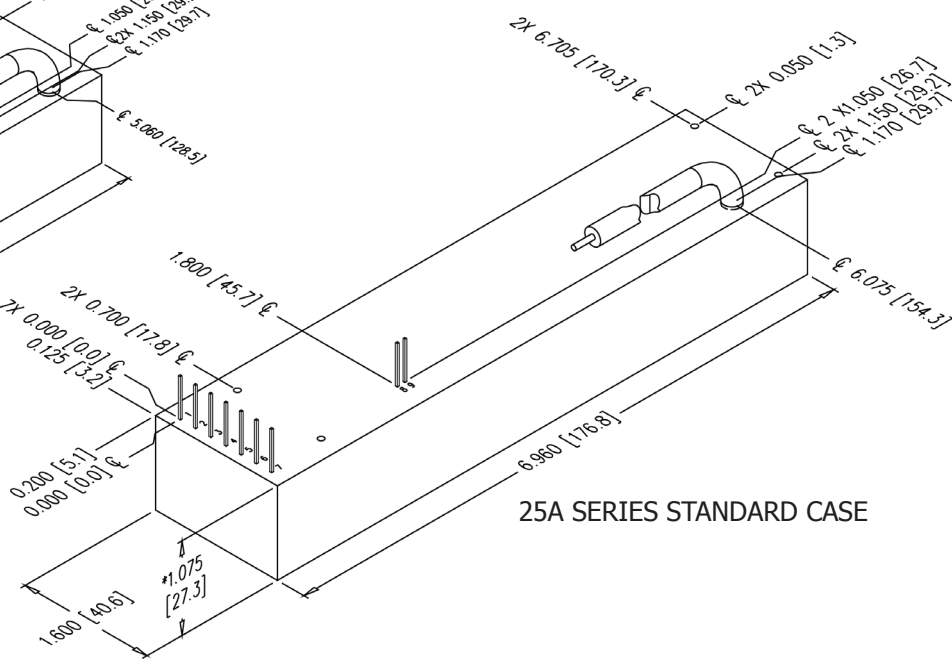

### CONSTRUCTION

Epoxy-filled DAP box certified to ASTM-D-5948 with -C Option:  
Aluminum Alloy 5052-H32, Finish: MIL-A-8625 Type II (Anodizing)

### SIZE

Volume:

10A: 4.90 in<sup>3</sup> (80.31cc), w/-C Option 8.80 in<sup>3</sup> (144.23cc)  
15A: 6.35 in<sup>3</sup> (104.08cc), w/-C Option 11.00 in<sup>3</sup> (180.29cc)  
20A: 8.55 in<sup>3</sup> (140.13cc), w/-C Option 14.40 in<sup>3</sup> (236.02cc)  
25A: 11.70 in<sup>3</sup> (191.76cc), w/-C Option 20.00 in<sup>3</sup> (327.80cc)

Weight:

10A: 6.00 oz (170.10g), w/-C Option 11.50 oz (326.02g)  
15A: 8.00 oz (226.80g), w/-C Option 14.00 oz (396.89g)  
20A: 11.00 oz (311.84g), w/-C Option 19.00 oz (538.64g)  
25A: 15.00 oz (425.24g), w/-C Option 22.00 oz (623.69g)

### TOLERANCE

Overall  $\pm 0.050$ " (1.27)  
Pin to Pin  $\pm 0.015$ " (0.38)  
Mounting hole locations  $\pm 0.025$ " (0.64)

### NOTES

Standard case length, width, and height specs are  $\pm 0.050$ " (1.27)  
-C Option case length, width and height specs are  $\pm 0.025$ " (0.635)  
15W and 30W versions are an additional 0.070" (1.78) in height.  
-M equipped units are an additional 0.030" (0.76) for each dimension.  
Contact [UV Customer Service](#) for drawings of models equipped with -E, -C, or -H options.

[Downloadable drawings \(complete with mounting & pin information\) and 3D models are available online.](#)



**Making High Voltage Easier!®**

1800 Ocean Avenue, Ronkonkoma, NY 11779  
Phone: 1-631-471-4444 Fax: 1-631-471-4696 [www.ultravolt.com](http://www.ultravolt.com)

# 10A-25A SERIES

## 10kV to 25kV High Voltage Biasing Supplies

| CONNECTIONS |                           |
|-------------|---------------------------|
| PIN         | FUNCTION                  |
| 1           | Input-Power Ground Return |
| 2           | Positive Power Input      |
| 3           | Iout Monitor              |
| 4           | Enable/Disable            |
| 5           | Signal Ground Return      |
| 6           | Remote Adjust Input       |
| 7           | +5VDC Reference Output    |
| 8           | HV Ground Return          |
| 9           | Eout Monitor              |

All grounds joined internally. Power-supply mounting points isolated from internal grounds by  $>100k\Omega$ ,  $.01\mu F$  / 50V (Max) on all models except -M (15W and above), -M-E, -M-C, and -M-H configurations which are  $0\Omega$ .



Non-RoHS compliant units are available. Please contact the factory for more information.

Manufactured in USA

| ORDERING INFORMATION                 |                                                               |            |
|--------------------------------------|---------------------------------------------------------------|------------|
| Type                                 | 0 to 10,000 VDC Output                                        | 10A        |
|                                      | 0 to 15,000 VDC Output                                        | 15A        |
|                                      | 0 to 20,000 VDC Output                                        | 20A        |
|                                      | 0 to 25,000 VDC Output                                        | 25A        |
| Input                                | 12VDC Nominal (4W only)                                       | 12         |
|                                      | 24VDC Nominal (15W and 30W only)                              | 24         |
| Polarity                             | Positive Output                                               | -P         |
|                                      | Negative Output                                               | -N         |
| Power                                | Watts Output (12Vin Only)                                     | 4          |
|                                      | Watts Output (24Vin Only)                                     | 15         |
|                                      | Watts Output (24Vin Only)                                     | 30         |
| Case                                 | Plastic Case - Diallyl Phthalate                              | (Standard) |
|                                      | 'Eared' Chassis Mounting Plate (Plastic Case)                 | -E         |
|                                      | RF-Tight Aluminum Enclosure                                   | -C         |
| Heat Sink                            | .400" High (sized to fit case)                                | -H         |
| Shield                               | Six-sided Mu-Metal Shield                                     | -M         |
| Ripple Stripper®                     | Integral Output Filter (See -F Option Datasheet) and Mu-Metal | -F-M       |
| Options                              | Shielded Flying Lead for HV Output                            | -WS        |
| Lead Options                         | Protected Flying Lead                                         | -AP        |
|                                      | Terminated Flying Lead (Contact Customer Service)             | -ATxx      |
| Temp. Coefficient                    | 25PPM Temperature Coefficient                                 | -25PPM     |
| Enhanced Interface (10A models only) | 5V Control and Monitors                                       | -I5        |
|                                      | 10V Control and Monitors                                      | -I10       |

Example: **10A12-P4-C**

Type — Voltage — Model — Input — Option (Metal Case) — Power — Polarity

Popular accessories ordered with this product include CONN-KIT, BR-2, BR-3, and BR-5 mounting bracket kits, and our full range of high voltage output connectors (see Accessories & Connectors datasheet).



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)