

0RQB-30Y05L Series

Isolated DC-DC Converter

The 0RQB-30Y05L is an isolated DC/DC converter providing 30 W of output power from a wide input range (24 V, 48 V, 72 V, 96 V, 110 V typical). Standard features include remote on/off, input under-voltage protection, output over-voltage protection, over current and short circuit protection. This converter can also provide a 5 V/5 mA auxiliary supply. When a large hold-up capacitor is added, the converter can still work up to 12 ms when the input supply is interrupted. Conformal coated PCB is used for environmental ruggedness.



Key Features & Benefits

- 24/48/72/96/110 VDC Input
- 5 VDC / 6 A Output
- Isolated
- Input under-voltage protection
- High Efficiency
- Output over-voltage protection
- Hold-up function
- Over current and short circuit protection
- Remote ON/OFF
- Over temperature protection
- Conformal coated
- 5V auxiliary supply at primary side
- Wide input range (24 V, 48 V, 72 V, 96 V, 110 V typical)
- Class II, Category 2, Isolated DC/DC Converter (refer to IPC-9592B)
- Approved to EN60950-1, 2nd +A2 version



Applications

- Industrial
- Railway

1. MODEL SELECTION

OUTPUT VOLTAGE	INPUT VOLTAGE	MAX. OUTPUT CURRENT	MAX. OUTPUT POWER	TYPICAL EFFICIENCY	MODEL NUMBER ACTIVE LOW
5 VDC	24/48/72/96/110 VDC	6 A	30 W	82%	0RQB-30Y05L

NOTE: Add "G" suffix at the end of the model number to indicate Tray Packaging.

PART NUMBER EXPLANATION

0	R	QB	-	30	Y	05	L	y
Mounting Type	RoHS Status	Series Name		Output Power	Input Range	Output Voltage	Active Logic & HSK Feature	Package Type
Through hole mount	RoHS	DOSA Quarter Brick		30 W	24/48/72/96/110V	5 V	Active low, baseplate	G – Tray package

2. ABSOLUTE MAXIMUM RATINGS

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNITS
Continuous non-operating Input Voltage		-0.5	-	160	V
Remote On/Off		-0.3	-	15	V
Thermal Resistance	Baseplate to heatsink, flat greased surface Baseplate to ambient	-	0.24 4		°C/W
Operating Temperature	Temperature measured at the center of the baseplate, full load	-40	-	105	°C
Storage Temperature		-55	-	125	°C
Altitude		-	-	2000	m

NOTE: Ratings used beyond the maximum ratings may cause a reliability degradation of the converter or may permanently damage the device.

3. INPUT SPECIFICATIONS

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
Operating Input Voltage Range 1	Fully functioning for long term operation.	16.8	24 48 72 96 110	137.5	V
Operating Input Voltage Range 2	Fully functioning for 0.1s operation. Full function is not guaranteed but undamaged for 1s operation.	14.4 137.5	- -	16.8 154	V
Input Current		-	-	3.0	A
Input Voltage Rising Slope		-	-	2	V/ms
Input Current (no load)		-	100	150	mA
Remote Off Input Current		-	-	40	mA
Input Reflected Ripple Current (pk-pk)	With simulated source impedance of 10µH, 5Hz to 20 MHz. Use two 100 µF/250 V electrolytic capacitors with ESR=0.5R max, at 200 kHz @ 25°C.	-	-	300	mA
Input Reflected Ripple Current (rms)		-	-	100	mA
Under-voltage Turn on Threshold	Lockout turn on	14.5	15.2	16	V
Under-voltage Turn off Threshold	Lockout turn off, non-latching	12.5	13.2	14	V
Recommended input fast-acting fuse on system board	CAUTION: This converter is not internally fused. An input line fuse must be used in application.	-	6	-	V

4. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
Output Voltage Set Point		4.9	5	5.1	V
Line Regulation		-	-	10	mV
Load Regulation		-	-	20	mV
Regulation Over Temperature		-	-	± 100	mV
Output Current Range		0	-	6	A
Output Ripple and Noise (pk-pk)	With a 100 μF ceramic and a 100 μF electrolytic capacitors at output.	-	50	80	mV
Output Ripple and Noise (rms)		-	10	15	mV
Output DC Current Limit	Enter a hiccup mode, non-latching.	7	-	10	A
Turn on Time	Enable from Vin Enable from ON/OFF	-	-	1500 200	ms
Rise Time		-	25	50	
Overshoot at Turn on		-	0	3	%
Undershoot at Turn off		-	0	3	%
Output Capacitance	Typically 50% ceramic and 50% electrolytic capacitors.	200	-	1000	μF
5V Auxiliary Supply Source Current		-	-	5	mA
TRANSIENT RESPONSE					
ΔV 50% ~ 75% of Max Load		-	200	-	mV
Settling Time	di/dt = 0.1 A/ μs , with a 100 μF ceramic and a 100 μF electrolytic capacitors near the brick output.	-	0.5	-	ms
ΔV 75% ~ 50% of Max Load		-	200	-	mV
Settling Time		-	0.5	-	ms


NOTE: All specifications are typical at nominal input, full load at 25°C unless noted.

5. GENERAL SPECIFICATIONS

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
Efficiency	Vin = 24 V, Iout = 6 A	81	82	-	
	Vin = 48 V, Iout = 6 A	82	83	-	
	Vin = 72 V, Iout = 6 A	82	83	-	%
	Vin = 96 V, Iout = 6 A	82	83	-	
	Vin = 110 V, Iout = 6 A	83	84	-	
Switching Frequency	1st stage	-	150	-	
	2nd stage	-	250	-	kHz
FIT*	Calculated Per IEC 62380 TR 1 (UTECH 80-810)	-	176.66	-	-
MTBF*	(Vin=24 V, Vo=5V, Io=6A, Tac = 50°C, Tae=35°C)	-	5.66	-	Mil. hours
Over Temperature Protection		-	125	-	°C
Over Voltage Protection (Static)		-	6	-	
ISOLATION CHARACTERISTICS					
Isolation Capacitance		-	-	2200	pF
Isolation Resistance		10M	-	-	ohm
Input to Output		-	-	2250	V
Input to Heatsink		-	-	2250	
Output to Heatsink		-	-	2250	
Dimensions (L x W xH)		2.30 x1.45 x 0.59		inch 62.24 x36.84 x15	
Weight		-	62	-	g

NOTE: All specifications are typical at 25 °C unless otherwise stated.

6. EFFICIENCY DATA

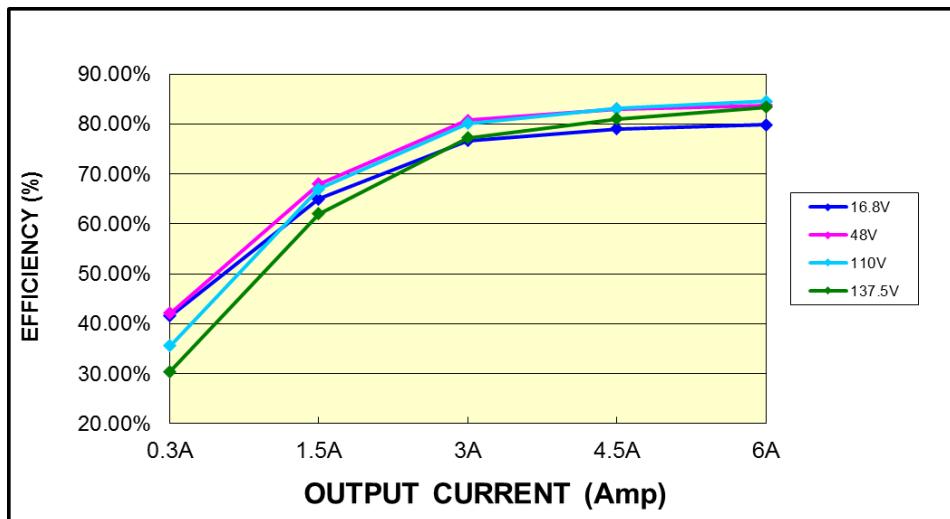

7. THERMAL DERATING CURVES


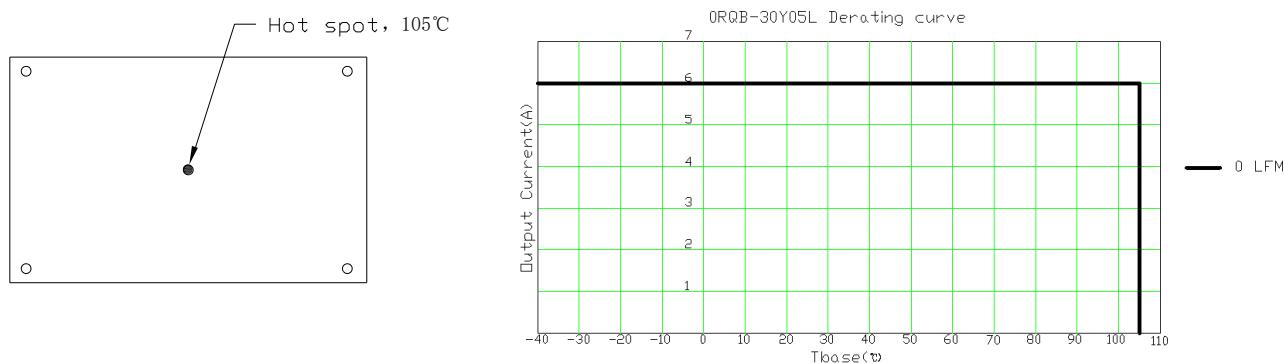


Figure 1. Module top view


8. REMOVE ON/OFF

PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT
REMOTE ON/OFF					
Signal Low (Unit On)	Active Low	-0.3	-	0.8	V
Signal High (Unit Off)		2.4	-	15	
Current Sink		0	-	1	mA


Recommended Remote On/Off Circuit for Active Low

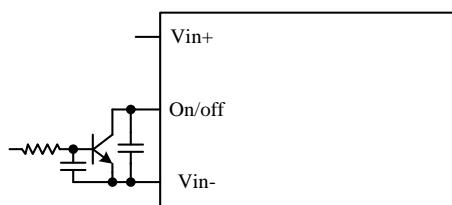


Control with open collector/drain circuit

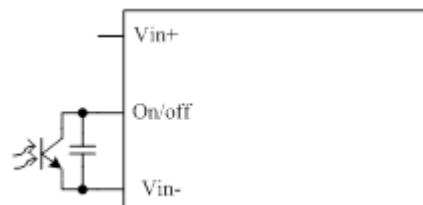

Control with coupler circuit

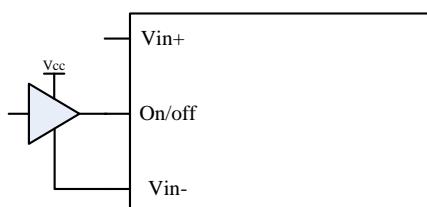


Control with logic circuit

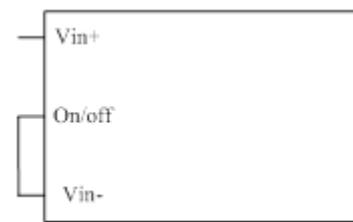

Permanently on


9. INPUT UNDER-VOLTAGE LOCKOUT

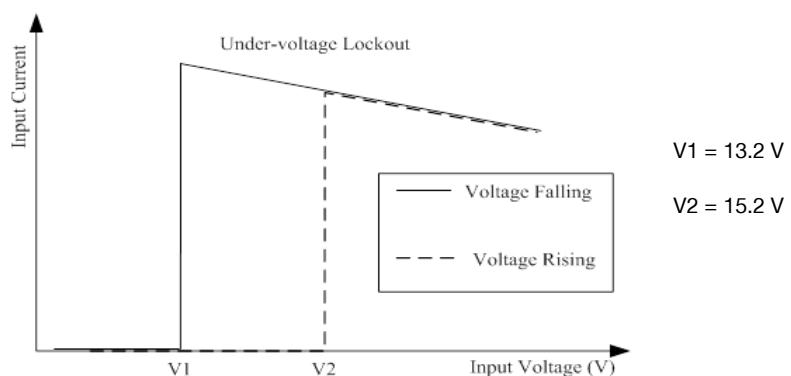

10. INPUT NOISE

Input Reflected Ripple Current

Testing set up

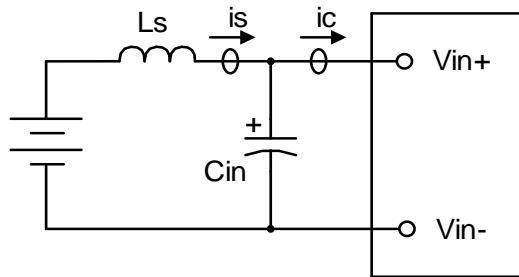

Notes and values in testing.

is: Input Reflected Ripple Current

ic: Input Terminal Ripple Current

Ls: Simulated Source Impedance ($10\mu H$)

Cin: Electrolytic capacitor, should be as closed as possible to the power module to swallow *ic* ripple current and help with stability. Recommendation: $2 \times 100\mu F$, ESR < $0.5R$ @ 100 kHz, $20C$

Below measured waveforms are based on above simulated and recommended inductance and capacitance

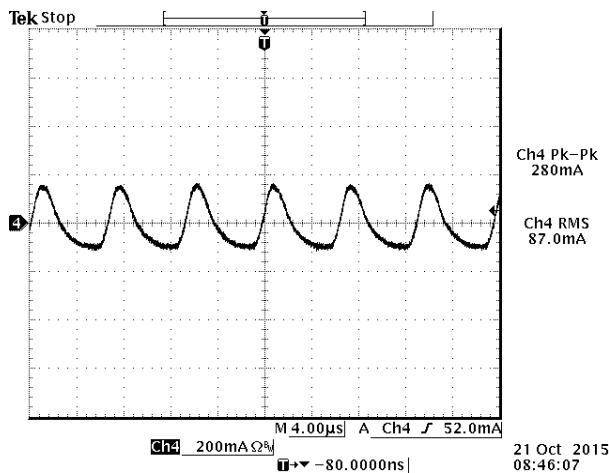


Figure 2. *is* (input reflected ripple current), AC component


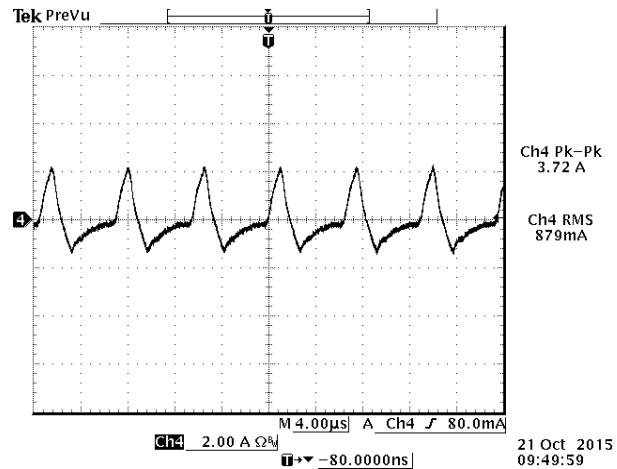



Figure 3. *ic* (input reflected ripple current), AC component

NOTE: 48 VDC input, 5 VDC/6A output and $T_a=25$ °C, with $100\mu F$ ceramic capacitor and $100\mu F$ AL. cap at output.

11. RIPPLE AND NOISE WAVEFORM

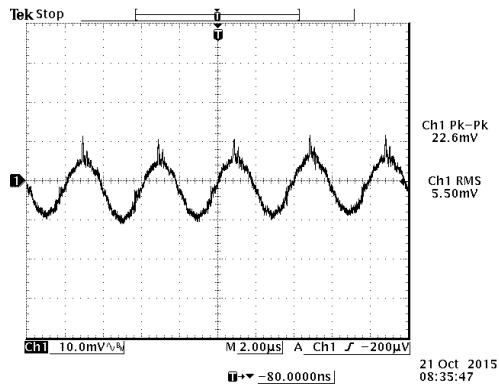

NOTE: Ripple & noise at full load, 48 V input, with a 1 °F ceramic capacitor and a 10 μ F tantalum capacitor at the output, and Ta=25°C.

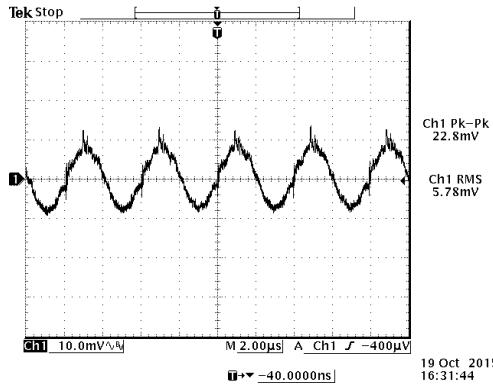

NOTE: Ripple and noise, 110VDC input, 5VDC/6A output and Ta=25 °C, with 100 μ F ceramic capacitor and 100 μ F AL. cap at output.

12. TRANSIENT RESPONSE

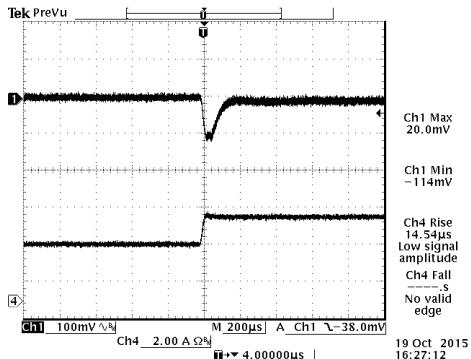


Figure 4. 50%-75% Load Transients at Vin=48V@Ta=25°C

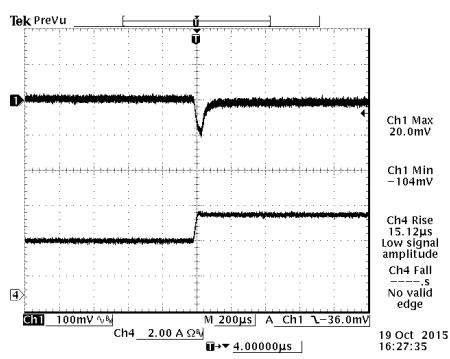


Figure 5. 50%-75% Load Transients at Vin=110V@Ta=25°C

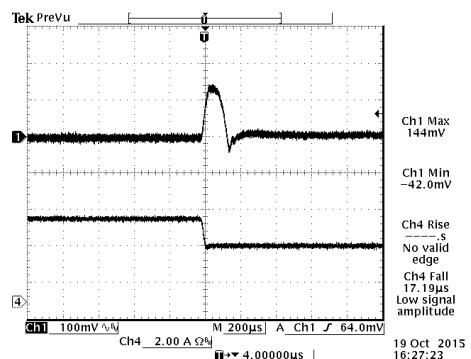


Figure 6. 75%-50% Load Transients at Vin=48V@Ta=25°C

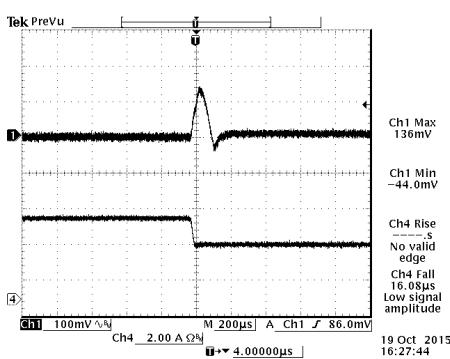


Figure 7. 75%-50% Load Transients at Vin=110V@Ta=25°C

13. STARTUP & SHUTDOWN

TURN ON RISE TIME

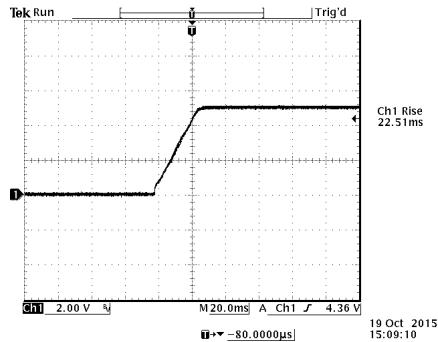


Figure 8. $V_{in}=48V$, $I_o=6A$, $V_o=5V$

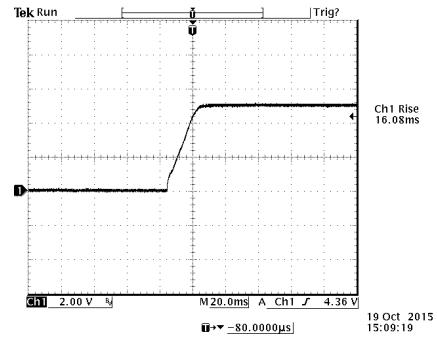


Figure 9. $V_{in}=110V$, $I_o=6A$, $V_o=5V$

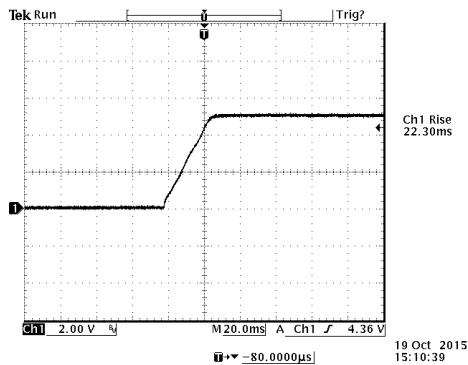


Figure 10. $V_{in}=48V$, $I_o=6A$, $V_o=5$, with $C_{ext}=1000\mu F$

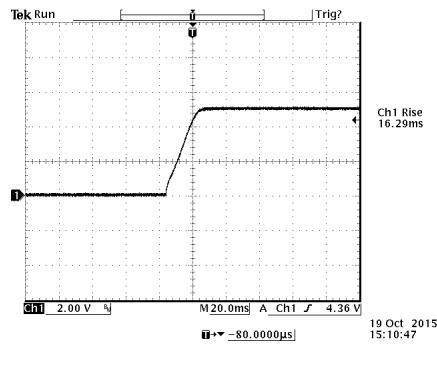


Figure 11. $V_{in}=48V$, $I_o=6A$, $V_o=5$, with $C_{ext}=1000\mu F$

TURN ON DELAY TIME

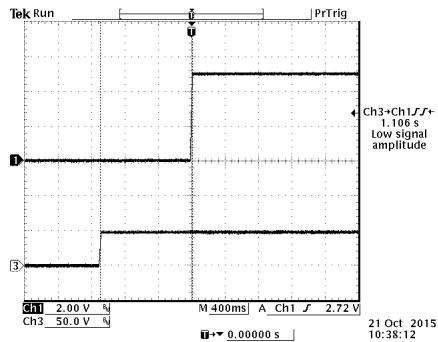


Figure 12. Startup from V_{in}
Ch1: V_o
Ch3: V_{in}
 $V_{in}=48V$, $I_o=6A$, $V_o=5V$

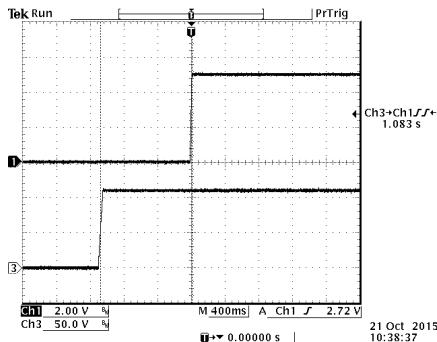


Figure 13. Startup from V_{in}
Ch1: V_o
Ch3: V_{in}
 $V_{in}=110V$, $I_o=6A$, $V_o=5V$

0RQB-30Y05L Series

9

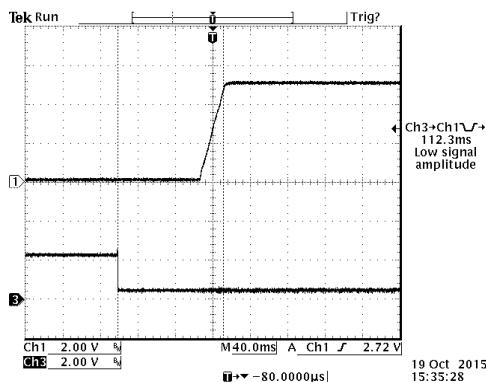


Figure 14. Startup from on/off
Ch1: Vo
Ch3: on/off
Vin=48V, Io=6A, Vo=5V

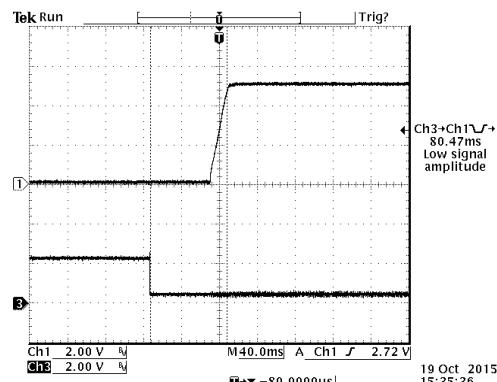


Figure 15. Startup from on/off
Ch1: Vo
Ch3: on/off
Vin=110V, Io=6A, Vo=5V

SHUTDOWN

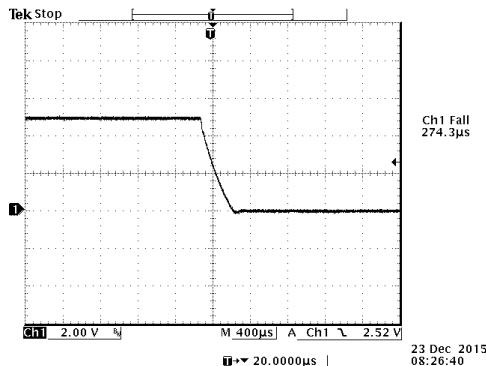


Figure 16. Vin=48V, Io=6A, Vo=5

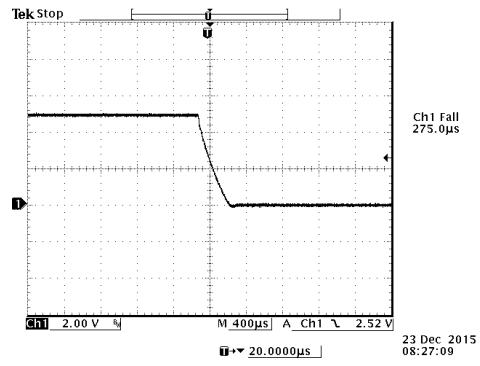


Figure 17. Vin=48V, Io=6A, Vo=5

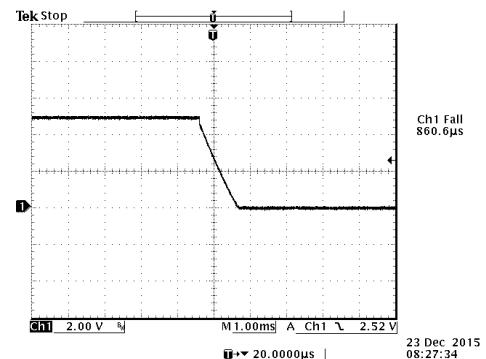


Figure 18. Vin=48V, Io=6A, Vo=5, with $C_{ext}=1000\mu F$


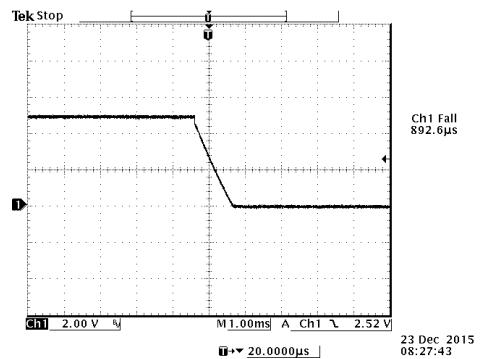


Figure 19. Vin=48V, Io=6A, Vo=5, with $C_{ext}=1000\mu F$

14. HOLD UP CIRCUIT

PARAMETER	DESCRIPTION	SYMBOL	MIN	TYP	MAX	UNITS
Hold up Capacitor	Working voltage rating should be 200V. Caution: This capacitor is necessary for both normal and hold up operation.	C_HOLD	220	-	330	µF
Hold up Voltage	Normal operation.	V_HOLD	45	85	154	V
Hold up Time	16.8-137.5V input and all lout range.	T_HOLD	12	-	-	ms

Recommended External Hold up Circuit

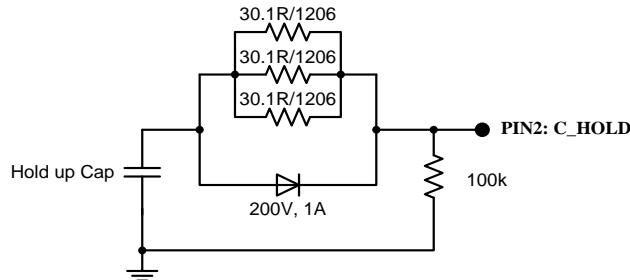

15. SAFETY & EMC

SAFETY:


TUV certificated to EN60950-1, 2nd edition+ A2 version
CE certificated to Low Voltage Directive 2014/35/EU

EMC:

Conductive EMI: EN55022 class A


Compliance to EN55022 class A (both peak and average) with the following inductive and capacitive filter

SETUP:

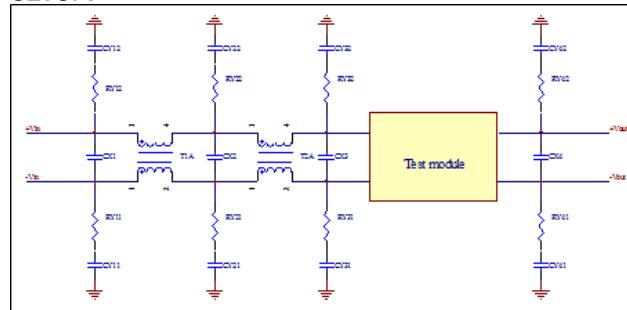


ITEM	DESIGNATOR	PARAMETER	VENDOR	VENDOR P/N
1	CX1	100µF/200V, AL cap		
2	CX2	220µF/200V, AL cap		
2	CX3	220µF/200V, AL cap		
3	CX4	220µF/200V, AL cap		
3	CY21	0.22µF/1000V, ceramic		
4	CY22	0.22µF/1000V, ceramic		
7	RY21	1206,0 R, Resistor		
8	RY22	1206,0 R ,Resistor		
11	T2A	0.45mH, common mode		
12	T1A	0.9mH, common mode		
12	RY11,RY12,CY11,CY21, RY31,RY32,CY31,CY32 RY41,RY42,CY41,CY42	NIL		


POSITIVE:

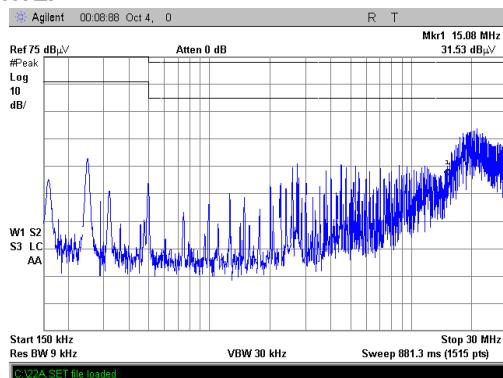

NEGATIVE:

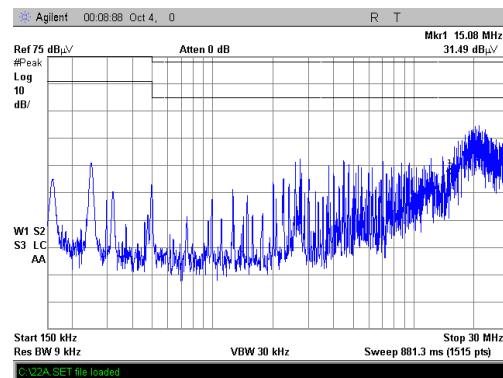

16. MECHANICAL OUTLINE

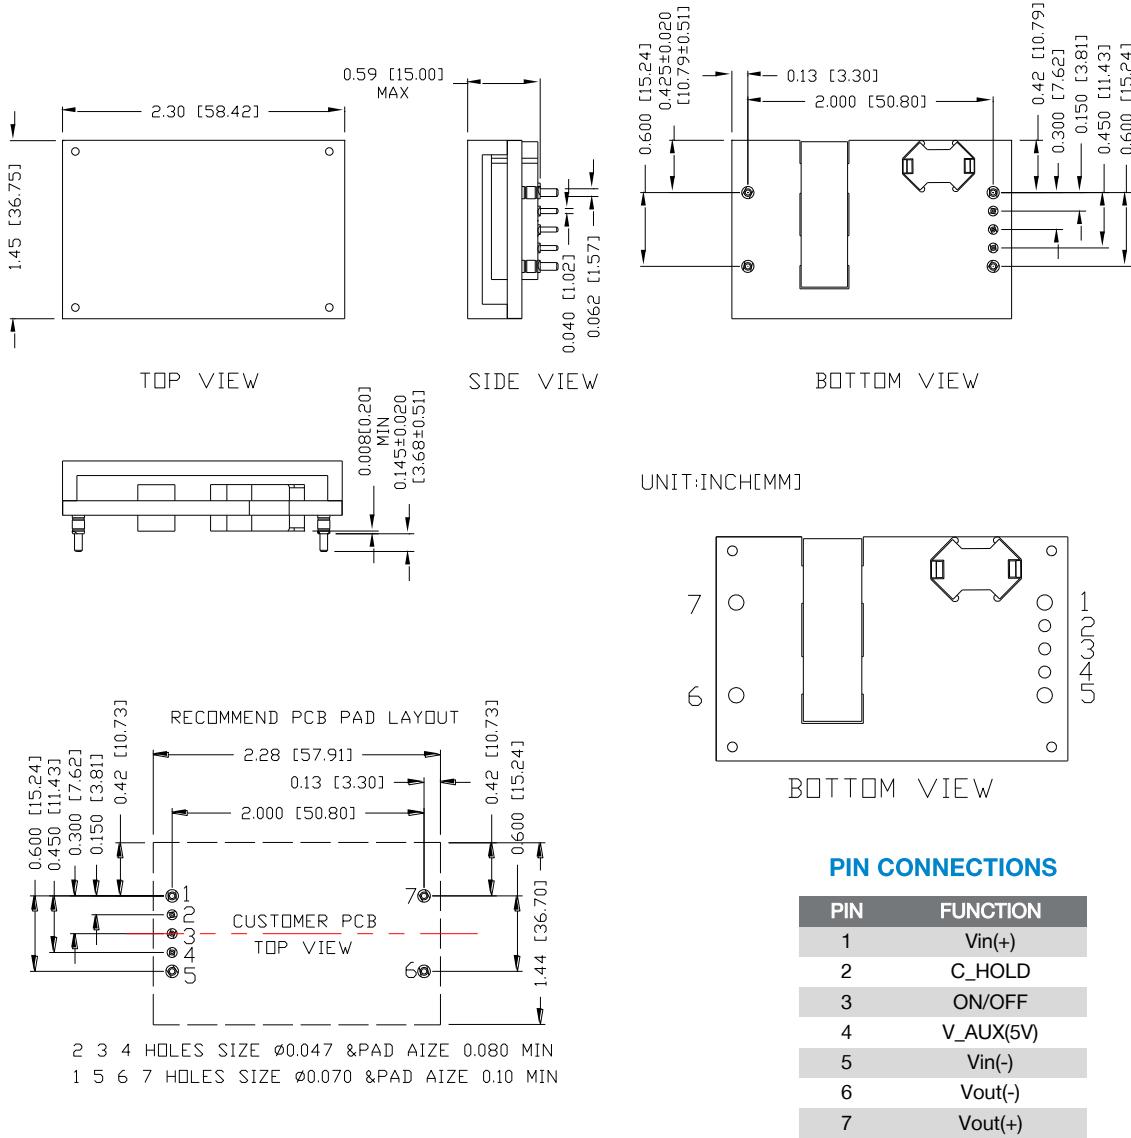

NOTE: This module is recommended and compatible with Pb-Free Wave Soldering and must be soldered using a peak solder temperature of no more than 260 °C for less than 5 seconds.

NOTE: 1) All Pins: Material - Copper Alloy;

Finish – Tin plated

2) Undimensioned components are shown for visual reference only.

3) All dimensions in inches (mm); Tolerances: x.xx +/-0.02 in. (x.x +/-0.5mm) x.xxxx +/-0.010 in. (x.xx +/-0.25mm).



tech.support@psbel.com
belfuse.com/power-solutions

17. REVISION HISTORY

DATE	REVISION	CHANGES DETAIL	APPROVAL
2014-11-12	A	First release	Summer Wang
2015-12-23	B	1. Update rise time and turn on time 2. Update Efficiency value 3. Update waveform of electrical performance	Summer Wang
2016-02-26	C	1. Change the operation temperature in Absolute Maximum Ratings 2. Add thermal resistance in Absolute Maximum Ratings	Summer Wang
2016-04-21	D	Update Safety Certification, MTBF, Thermal Derating Curve, MD.	Summer Wang

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru