

## Description

The AP3171 is a constant voltage (CV), constant current (CC) and synchronous rectification buck converter compatible with Qualcomm Quick Charge 2.0.

AP3171 combines PWM controller, high/low side power MOSFETs, CC/CV control and Qualcomm QC 2.0 decoder in one package so as to achieve high performance with compact profile. According to different D+/D- signal combinations, the AP3171 will set the output voltage and full current capabilities to 5V/2A, 9V/2A or 12V/1.5A respectively. The AP3171 automatically provides 5V/2A output configuration to backwards compatible to the existing devices that are not compatible to Qualcomm QC 2.0.

AP3171 has a fixed switching frequency of 120kHz at heavy load, while at light load and no load, its zero current detection (ZCD) function takes effect to have the system enter into discontinuous current mode (DCM) to improve power conversion efficiency.

The AP3171 has versatile protection functions to guarantee a safe operation, including input voltage under voltage lock-out (UVLO), output voltage over voltage protection (OVP) and under voltage protection (UVP), inductor peak current limit and Internal over temperature protection (OTP).


Furthermore, AP3171 has cable compensation and it is adjustable by the external resistor.

The AP3171 is available in SO-8EP package.

## Features

- 8.7V to 40V Input Voltage Range
- Fixed 120k Operating Frequency
- Integrated Two MOSFETs for Synchronization Rectification
- Quick Charge Function Compatible with Qualcomm QC 2.0 Protocol
- Input Protection – UVLO
- Output Protection – UVP/OVP
- OCP Function
- Adjustable Cable Compensation
- Output CC/CV Mode Function
- Reference Accuracy :
  - CV  $\pm 1.5\%$  CC  $\pm 4\%$  (5V)
  - CV  $\pm 2.5\%$  CC  $\pm 5\%$  (9V/12V)
- Output power: 5V/10W, 9V/18W, 12V/18W
- Internal OTP Function
- **Totally Lead-free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**

## Pin Assignments

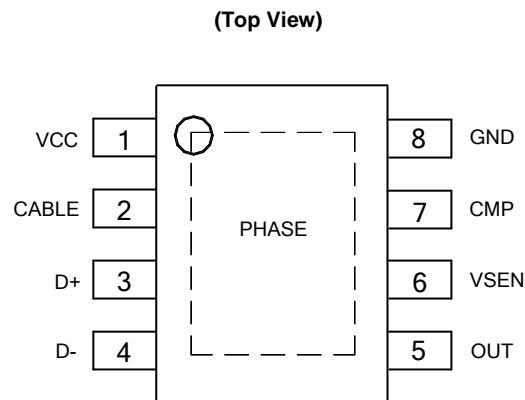

Note: The PHASE pin of BUCK converter is exposed PAD, which is at bottom of the IC (the dashed box).


SO-8EP

## Applications

- Car Charger
- Automotive Power application
- General DC/DC Application Need CC/CV Mode

- Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
  2. See [http://www.diodes.com/quality/lead\\_free.html](http://www.diodes.com/quality/lead_free.html) for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
  3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.


## Typical Applications Circuit

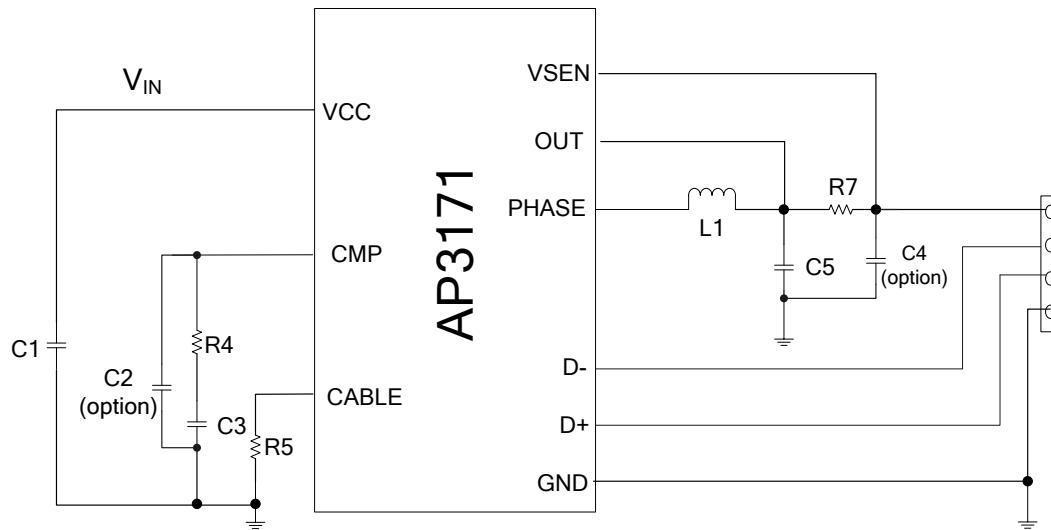

## Pin Descriptions

Pin Number	Pin Name	Function
1	VCC	IC voltage supplier and input voltage for power conversion; Decoupling cap is required to be placed to this pin and GND pin as close as possible
2	CABLE	Connected to the external resistor to set the cable compensation value
3	D+	Connected to USB D+
4	D-	Connected to USB D-
5	OUT	Sense the output voltage; connected to the input of current sense resistor
6	VSEN	Sense the output current; connected to the output of current sense resistor
7	CMP	The EA output pin to compensate the loop
8	GND	Ground return for the power stage and controller
Exposed PAD	PHASE	Connected to the input of external output inductor

## Functional Block Diagram

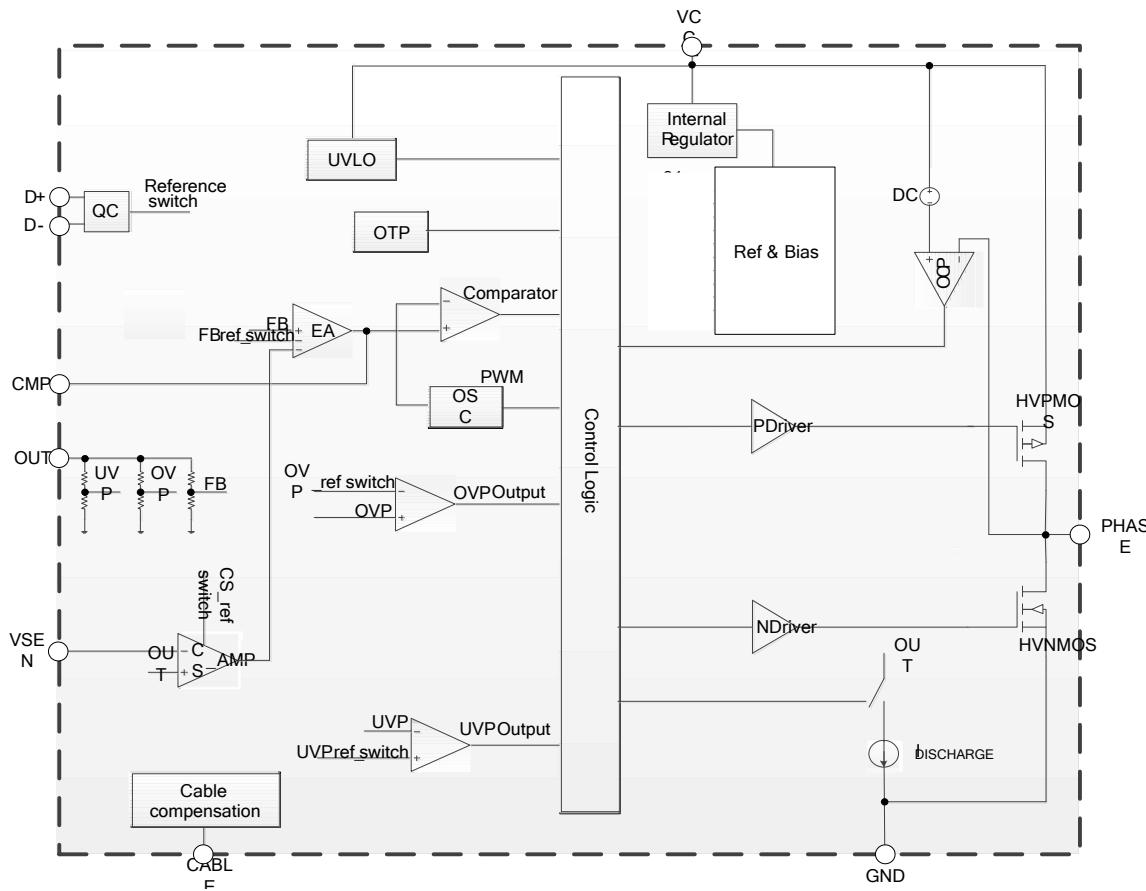

## Absolute Maximum Ratings (Note 4)

Parameter	Symbol	Rating	Unit
Supply Voltage	V <sub>CC</sub>	-0.3 to 42	V
Voltage From PHASE to GND	V <sub>PHASE</sub>	-0.3 to 42	V
Voltage From OUT to GND	V <sub>OUT</sub>	-0.3 to 20	V
Voltage on Other Separate Pins	—	-0.3 to 6	V
Thermal Resistance (Note 5)	θ <sub>JA</sub>	63	°C/W
Operating Junction Temperature	T <sub>J</sub>	-40 to +125	°C
Storage Temperature	T <sub>STG</sub>	-65 to +150	°C
ESD (Human Body Model)	—	2000	V
ESD (Machine Model)	—	200	V

Note: 4. Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.  
 5. Device mounted on FR-4 substrate PC board, 2oz copper, with 1 square inch pad layout.

## Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V <sub>CC</sub>	Supply Voltage	10	40	V
T <sub>A</sub>	Ambient Temperature	-40	+85	°C

## Electrical Characteristics (@T<sub>A</sub> = +25°C, V<sub>CC</sub> = 16V, unless otherwise specified.)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
<b>Supply Voltage</b>						
V <sub>ST</sub>	Startup Voltage	—	8.4	8.7	9.0	V
—	UVLO	—	6.75	7.00	7.25	V
I <sub>NO-LOAD</sub>	I <sub>CC</sub> @ No-load Condition	—	—	2	—	mA
<b>CV/CC Control</b>						
V <sub>REF_12V</sub>	Voltage Control Loop Reference	—	11.7	12.0	12.3	V
V <sub>REF_9V</sub>		—	8.77	9.00	9.23	V
V <sub>REF_5V</sub>		—	4.92	5.00	5.08	V
V <sub>CABLE</sub>	Cable Compensation	R <sub>CABLE</sub> = 17.6k, R <sub>SENSE</sub> = 27.27mΩ	—	400	—	mV
V <sub>CS_12V</sub>	Current Control Loop Reference	—	41.0	45.0	49.0	mV
V <sub>CS_9V</sub>		—	57.0	60.0	63.0	mV
V <sub>CS_5V</sub>		—	57.6	60.0	62.4	mV
<b>Internal MOSFET</b>						
R <sub>DSON_UP</sub>	High Side MOSFET R <sub>DSON</sub>	—	—	100	—	mΩ
R <sub>DSON_LOW</sub>	Low Side MOSFET R <sub>DSON</sub>	—	—	45	—	mΩ
<b>PWM And Oscillation</b>						
f <sub>S</sub>	Switching Frequency	—	—	120	—	kHz
D <sub>MAX</sub>	Maximum Duty	—	—	95	—	%
I <sub>DIS</sub>	Discharge Current@ OUT Pin	—	—	100	—	mA
<b>Protection</b>						
V <sub>OVP_5V</sub>	Output OVP Threshold @5V	Note 6	5.63	5.80	5.97	V
V <sub>OVP_9V</sub>	Output OVP Threshold @9V		10.13	10.44	10.75	V
V <sub>OVP_12V</sub>	Output OVP Threshold @12V		13.51	13.92	14.33	V
V <sub>UVP_5V</sub>	Output UVP Threshold @5V	—	3.13	3.30	3.47	V
V <sub>UVP_9V</sub>	Output UVP Threshold @9V	—	5.63	5.94	6.24	V
V <sub>UVP_12V</sub>	Output UVP Threshold @12V	—	7.51	7.92	8.33	V
I <sub>PK_MAX</sub>	MOSFET Maximum I <sub>PEAK</sub> Limitation	—	—	4.0	—	A
<b>Internal OTP</b>						
—	Internal OTP Trigger Temperature	—	—	+160	—	°C
—	Internal OTP Recovery Temperature	—	—	+140	—	°C
<b>QC 2.0 protocol definition</b>						
V <sub>DAT_REF</sub>	Data Detect Voltage	—	0.25	0.325	0.40	V
V <sub>SEL_REF</sub>	VSEL_REF (Reference for Selecting HVDCP Voltage)	—	1.8	2	2.2	V
t <sub>GLITCH_BC_DONE</sub>	D+ High Glitch Filter Time	—	1	1.25	1.5	s
t <sub>GLITCH_DM_LOW</sub>	D- Low Glitch Filter Time	Note 7	1	2.5	—	ms

Notes: 6. The value in table is only for I<sub>O</sub>=0A. If I<sub>O</sub> is not zero, the over voltage protection value needs to add cable compensation voltage.  
7. Guaranteed by design.

## Operation Description

### Qualcomm QC 2.0 Protocol Operation

Decoder	V <sub>D+</sub> (V)	V <sub>D-</sub> (V)	Charger Output Voltage/Full Current Capability
Qualcomm Quick Charge 2.0 Protocol  Class A: 5V, 9V, 12V	0.6	0.6	12V/1.5A
	3.3	0.6	9V/2A
	0.6	3.3	Keep Present V1/V2 Status Unchanged
	3.3	3.3	Keep Present V1/V2 Status Unchanged
	0.6 or 3.3	GND	5V/2A
	GND	0.6 or 3.3 or GND	5V/2A (Protocol Handshake Reset)

### Constant Current Operation


The AP3171 can work in constant-current (CC) mode. The output current is sensed by a current sense resistor R<sub>SENSE</sub>. As output current increases, the voltage drop across R<sub>SENSE</sub> will be limited to a reference voltage (V<sub>cs</sub>) to accomplish CC function. The default R<sub>SENSE</sub> is 27.27mΩ to get the typical CC point of 110% full output current.

### Cable Compensation

The cable compensation can be calculated as below:

$$V_{CABLE} = I_O \cdot R_{SENSE} \cdot 129.5k / R_{CABLE}$$


## Ordering Information

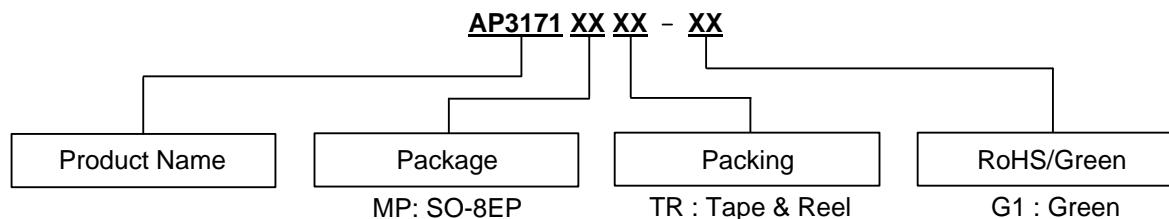

Package	Part Number	Marking ID	Packing
SO-8EP	AP3171MPTR-G1	3171MP-G1	4,000/Tape & Reel

## Marking Information


(Top View)



First and Second Lines: Logo and Marking ID  
 Third Line: Date Code  
 Y: Year  
 WW: Work Week of Molding  
 A: Assembly House Code  
 XX: 7<sup>th</sup> and 8<sup>th</sup> Digits of Batch No.

## Package Outline Dimensions (All dimensions in mm(inch).)


(1) Package Type: SO-8EP

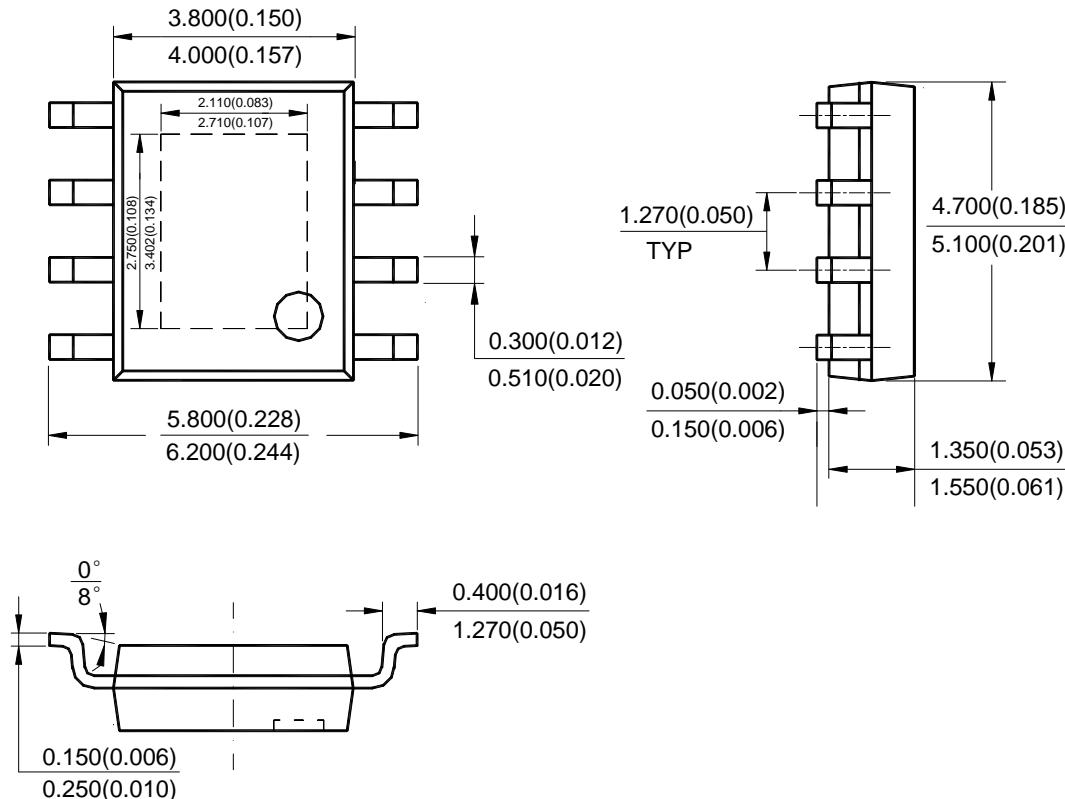

Note: Eject hole, oriented hole and mold mark is optional.

**Suggested Pad Layout**

(1) Package Type: SO-8EP

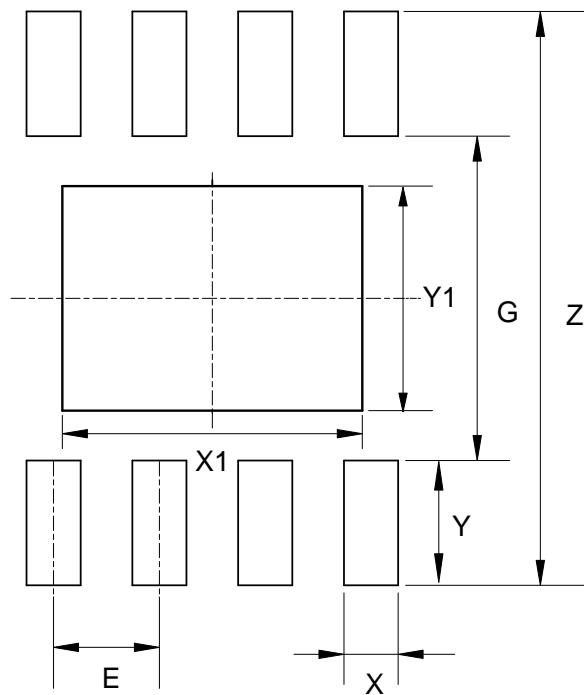

Dimensions	Z (mm)/(inch)	G (mm)/(inch)	X (mm)/(inch)	Y (mm)/(inch)	X1 (mm)/(inch)	Y1 (mm)/(inch)	E (mm)/(inch)
Value	6.900/0.272	3.900/0.154	0.650/0.026	1.500/0.059	3.600/0.142	2.700/0.106	1.270/0.050

**IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

**LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  1. are intended to implant into the body, or
  2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2016, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru