

## FEATURES

- Qualified for automotive applications
- Fully programmable audio DSP for enhanced sound processing
- Features **SigmaStudio**, a proprietary graphical programming tool for the development of custom signal flows
- Up to 294.912 MHz, 32-bit SigmaDSP core at 1.2 V
  - Up to 24 kWords of program memory
  - Up to 80 kWords of parameter/data RAM
  - Up to 6144 SIMD instructions per sample at 48 kHz
  - Up to 1600 ms digital audio delay pool at 48 kHz
- Audio I/O and routing
  - 4 serial input ports, 4 serial output ports
  - 48-channel, 32-bit digital I/O up to a sample rate of 192 kHz
  - Flexible configuration for TDM, I<sup>2</sup>S, left and right justified formats, and PCM
  - Up to 8 stereo ASRCs from 1:8 up to 7.75:1 ratio and 139 dB dynamic range
  - Stereo S/PDIF input and output at 192 kHz
  - Four PDM microphone input channels
  - Multichannel, byte addressable TDM serial ports

- Clock oscillator for generating master clock from crystal
- Integer PLL and flexible clock generators
- Integrated die temperature sensor
- I<sup>2</sup>C and SPI control interfaces (both slave and master)
- Standalone operation
  - Self-boot from serial EEPROM
  - 6-channel, 10-bit SAR auxiliary control ADC
  - 14 multipurpose pins for digital controls and outputs
- On-chip regulator for generating 1.2 V from 3.3 V supply
- 72-lead, 10 mm × 10 mm LFCSP package with 5.3 mm exposed pad
- Temperature range: -40°C to +105°C

## APPLICATIONS

- Automotive audio processing
  - Head units
  - Distributed amplifiers
  - Rear seat entertainment systems
  - Trunk amplifiers
- Commercial and professional audio processing

## FUNCTIONAL BLOCK DIAGRAM



\*SPI/I<sup>2</sup>C INCLUDES THE FOLLOWING PIN FUNCTIONS: SS\_M, MOSI\_M, SCL\_M, SCLK\_M, SDA\_M, MISO\_M, MISO, SDA, SCLK, SCL, MOSI, ADDR1, SS, AND ADDR0 PINS.

Figure 1.

14810-001

Rev. C

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.  
 Tel: 781.329.4700 ©2017–2018 Analog Devices, Inc. All rights reserved.  
[Technical Support](#) [www.analog.com](http://www.analog.com)

**TABLE OF CONTENTS**

|  |    |  |     |
|--|----|--|-----|
| Features .....   | 1  | Software Features .....                                    | 86  |
| Applications.....  | 1  | Pin Drive Strength, Slew Rate, and Pull Configuration..... | 87  |
| Functional Block Diagram .....                             | 1  | Global RAM and Control Register Map.....                   | 89  |
| Revision History .....                                     | 3  | Random Access Memory .....                                 | 89  |
| General Description .....                                  | 4  | Control Registers.....                                     | 92  |
| Differences Between the ADAU1466 and ADAU1462 .....        | 4  | Control Register Details .....                             | 98  |
| Specifications.....  | 5  | PLL Configuration Registers .....                          | 98  |
| Electrical Characteristics .....                           | 7  | Clock Generator Registers .....                            | 103 |
| Timing Specifications .....                                | 9  | Power Reduction Registers .....                            | 108 |
| Absolute Maximum Ratings.....                              | 17 | Audio Signal Routing Registers.....                        | 111 |
| Thermal Considerations.....                                | 17 | Serial Port Configuration Registers .....                  | 117 |
| ESD Caution.....   | 17 | Flexible TDM Interface Registers.....                      | 121 |
| Pin Configuration and Function Descriptions.....           | 18 | DSP Core Control Registers.....                            | 124 |
| Theory of Operation .....                                  | 22 | Debug and Reliability Registers.....                       | 129 |
| System Block Diagram.....                                  | 22 | Software Panic Value 0 Register .....                      | 136 |
| Overview.....  | 22 | Software Panic Value 1 Register .....                      | 136 |
| Initialization .....                                       | 24 | DSP Program Execution Registers.....                       | 139 |
| Master Clock, PLL, and Clock Generators.....               | 28 | Panic Mask Registers .....                                 | 142 |
| Power Supplies, Voltage Regulator, and Hardware Reset..... | 33 | Multipurpose Pin Configuration Registers.....              | 155 |
| Temperature Sensor Diode.....                              | 34 | ASRC Status and Control Registers .....                    | 160 |
| Slave Control Ports.....                                   | 35 | Auxiliary ADC Registers .....                              | 164 |
| Slave Control Port Addressing.....                         | 35 | S/PDIF Interface Registers .....                           | 165 |
| Slave Port to DSP Core Address Mapping .....               | 36 | Hardware Interfacing Registers .....                       | 178 |
| Master Control Ports.....                                  | 44 | Soft Reset Register.....                                   | 196 |
| Self Boot.....   | 45 | Applications Information .....                             | 197 |
| Audio Signal Routing.....                                  | 48 | PCB Design Considerations .....                            | 197 |
| Serial Data Input/Output.....                              | 57 | Typical Applications Block Diagram .....                   | 199 |
| Flexible TDM Interface.....                                | 68 | Example PCB Layout .....                                   | 200 |
| Asynchronous Sample Rate Converters .....                  | 74 | PCB Manufacturing Guidelines .....                         | 201 |
| S/PDIF Interface .....                                     | 74 | Outline Dimensions .....                                   | 202 |
| Digital PDM Microphone Interface.....                      | 76 | Ordering Guide .....                                       | 202 |
| Multipurpose Pins .....                                    | 77 | Automotive Products.....                                   | 202 |
| Auxiliary ADC.....   | 80 |  |     |
| SigmaDSP Core .....  | 80 |  |     |

**REVISION HISTORY****3/2018—Rev. B to Rev. C**

|  |     |
|--|-----|
| Changes to Table 1 .....   | 4   |
| Changes to Table 2 .....   | 5   |
| Changes to Table 3 .....   | 6   |
| Added Endnote 1, Table 6 .....   | 9   |
| Deleted Endnote 1, Table 9 .....   | 11  |
| Changes to S/PDIF Transmitter and Receiver Section and<br>Table 10 .....       | 11  |
| Deleted S/PDIF Receiver Section and Table 11; Renumbered<br>Sequentially ..... | 11  |
| Added Table 11; Renumbered Sequentially .....                                  | 12  |
| Added I <sup>2</sup> C Interface—Master Section .....                          | 13  |
| Changes to Table 20 .....  | 29  |
| Changes to Table 21 .....  | 30  |
| Changes to SigmaDSP Core Section .....   | 80  |
| Changes to Ordering Guide .....  | 202 |

**10/2017—Rev. A to Rev. B**

|                          |   |
|--------------------------|---|
| Changes to Table 1 ..... | 4 |
| Changes to Table 2 ..... | 5 |
| Changes to Table 3 ..... | 6 |

|   |     |
|---|-----|
| Changes to Table 6 .....                                | 9   |
| Changes to Table 21 .....                               | 29  |
| Changes to PLL Filter Section and Table 22 .....        | 30  |
| Changes to Clock Generators Section and Figure 18 ..... | 31  |
| Changes to Figure 19 .....                              | 32  |
| Changes to Figure 26 .....                              | 37  |
| Changes to Figure 27 .....                              | 38  |
| Changes to SigmaDSP Core Section .....                  | 80  |
| Changes to Table 58 .....                               | 89  |
| Changes to Figure 82 .....                              | 90  |
| Changes to Figure 83 .....                              | 91  |
| Changes to Ordering Guide .....                         | 202 |

**9/2017—Rev. 0 to Rev. A**

|  |     |
|--|-----|
| Change to Supply Current Analog Current (AVDD) Parameter,<br>Table 2 .....   | 4   |
| Change to Supply Current PLL Current (PVDD) Parameter and<br>Supply Current Analog Current (AVDD) Parameter, Table 3 ..... | 5   |
| Added Endnote 2 to Ordering Guide .....  | 201 |

**8/2017—Revision 0: Initial Version**

## GENERAL DESCRIPTION

The ADAU1462/ADAU1466 are automotive qualified audio processors that far exceed the digital signal processing capabilities of earlier SigmaDSP® devices. They are pin and register compatible with each other, as well as with the ADAU1450/ADAU1451/ADAU1452 SigmaDSP processors. The restructured hardware architecture is optimized for efficient audio processing. The audio processing algorithms support a seamless combination of stream processing (sample by sample), multirate processing, and block processing paradigms. The SigmaStudio™ graphical programming tool enables the creation of signal processing flows that are interactive, intuitive, and powerful. The enhanced digital signal processor (DSP) core architecture enables some types of audio processing algorithms to be executed using significantly fewer instructions than were required on previous SigmaDSP generations, leading to vastly improved code efficiency.

The 1.2 V, 32-bit DSP core can run at frequencies of up to 294.912 MHz and execute up to 6144 SIMD instructions per sample at the standard sample rate of 48 kHz. Powerful clock generator hardware, including a flexible phase-locked loop (PLL) with multiple fractional integer outputs, supports all industry standard audio sample rates. Nonstandard rates over a wide range can generate up to 15 sample rates simultaneously. These clock generators, along with the on board asynchronous sample rate converters (ASRCs) and a flexible hardware audio routing matrix, make the ADAU1462/ADAU1466 ideal audio hubs that greatly simplify the design of complex multirate audio systems.

The ADAU1462/ADAU1466 interface with a wide range of analog-to-digital converters (ADCs), digital-to-analog converters (DACs), digital audio devices, amplifiers, and control circuitry with highly configurable serial ports, I<sup>2</sup>C, serial peripheral interface (SPI), Sony/Philips Digital Interconnect Format (S/PDIF) interfaces, and multipurpose input/output (I/O) pins.

Dedicated decimation filters can decode the pulse code modulation (PDM) output of up to four MEMS microphones.

Independent slave and master I<sup>2</sup>C/SPI control ports allow the ADAU1462/ADAU1466 to be programmed and controlled by an external master device such as a microcontroller, and to program and control slave peripherals directly. Self boot functionality and the master control port enable complex standalone systems.

The power efficient DSP core can execute at high computational loads while consuming only a few hundred milliwatts (mW) in typical conditions. This relatively low power consumption and small footprint make the ADAU1462/ADAU1466 ideal replacements for large, general-purpose DSPs that consume more power at the same processing load.

Note that throughout this data sheet, multifunction pins, such as SS\_M/MP0, are referred to either by the entire pin name or by a single function of the pin, for example, MP0, when only that function is relevant.

### DIFFERENCES BETWEEN THE ADAU1466 AND ADAU1462

The three variants of this device are differentiated by memory and DSP core frequency. A detailed summary of the differences is listed in Table 1.

**Table 1. Product Selection Table**

| Device            | Data Memory (kWords) | Program Memory (kWords) | DSP Core Frequency (MHz) |
|-------------------|----------------------|-------------------------|--------------------------|
| ADAU1462WBCPZ300  | 48                   | 16                      | 294.912                  |
| ADAU1462WBCPZ150  | 48                   | 16                      | 147.456                  |
| ADAU1466 WBCPZ300 | 80                   | 24                      | 294.912                  |



## SPECIFICATIONS

AVDD = 3.3 V ± 10%, DVDD = 1.2 V ± 5%, PVDD = 3.3 V ± 10%, IOVDD = 1.8 V – 5% to 3.3 V + 10%, T<sub>A</sub> = 25°C, master clock input = 12.288 MHz, core clock (f<sub>CORE</sub>) = 294.912 MHz, I/O pins set to low drive setting, unless otherwise noted.

Table 2.

| Parameter                                   | Min  | Typ  | Max    | Unit | Test Conditions/Comments  |
|---|------|------|--------|------|---|
| <b>POWER</b>                                |      |      |        |      |   |
| Supply Voltage                              |      |      |        |      |   |
| Analog Voltage (AVDD)                       | 2.97 | 3.3  | 3.63   | V    | Supply for analog circuitry, including auxiliary ADC  |
| Digital Voltage (DVDD)                      | 1.14 | 1.2  | 1.26   | V    | Supply for digital circuitry, including the DSP core, ASRCs, and signal routing                           |
| PLL Voltage (PVDD)                          | 2.97 | 3.3  | 3.63   | V    | Supply for PLL circuitry  |
| I/O Supply Voltage (IOVDD)                  | 1.71 | 3.3  | 3.63   | V    | Supply for input/output circuitry, including pads and level shifters                                      |
| Supply Current                              |      |      |        |      |   |
| Analog Current (AVDD)                       |      |      |        |      |   |
| Idle State                                  | 1.36 | 1.66 | 2      | mA   |   |
| Reset State                                 | 1.00 | 1.10 | 40     | μA   | Power applied, $\overline{\text{RESET}}$ held low   |
| PLL Current (PVDD)                          |      |      |        |      |   |
| Idle State                                  | 8.3  | 10.1 | 12.9   | mA   | 12.288 MHz MCLK with default PLL settings   |
| Reset State                                 | 18.3 | 18.7 | 40     | μA   | Power applied, $\overline{\text{PLL}}$ not configured   |
| I/O Current (IOVDD)                         |      |      |        |      |   |
| Operation State                             |      | 53   |        | mA   | IOVDD = 3.3 V; all serial ports are clock masters   |
|   |      | 22   |        | mA   | IOVDD = 1.8 V; all serial ports are clock masters   |
| Power-Down State                            |      | 4.1  | 4.2    | mA   | IOVDD = 1.8 V – 5% to 3.3 V + 10%   |
| Digital Current (DVDD)                      |      |      |        |      |   |
| ADAU1466 Operation State                    |      |      |        |      |   |
| Maximum Program                             |      | 233  | 495    | mA   |   |
| Typical Program                             |      | 220  |        | mA   | Test program includes 16-channel I/O, 10-band equalizer (EQ) per channel, all ASRCs active                |
| Minimal Program                             |      | 213  |        | mA   | Test program includes 2-channel I/O, 10-band EQ per channel   |
| ADAU1462 Operation State                    |      |      |        |      |   |
| f <sub>CORE</sub> = 294.912 MHz             |      |      |        |      |   |
| Maximum Program                             |      | 233  | 495    | mA   |   |
| Typical Program                             |      | 220  |        | mA   | Test program includes 16-channel I/O, 10-band EQ per channel, all ASRCs active                            |
| Minimal Program                             |      | 213  |        | mA   | Test program includes 2-channel I/O, 10-band EQ per channel   |
| f <sub>CORE</sub> = 147.456 MHz             |      |      |        |      |   |
| Maximum Program                             |      | 170  | 455    | mA   |   |
| Typical Program                             |      | 135  |        | mA   | Test program includes 16-channel I/O, 10-band EQ per channel  |
| Minimal Program                             |      | 110  |        | mA   | Test program includes 2-channel I/O, 10-band EQ per channel   |
| Idle State                                  | 18.3 | 18.7 | 19.9   | mA   | Power applied, $\overline{\text{DSP}}$ not enabled  |
| Reset State                                 | 18.3 | 18.7 | 19.9   | mA   | Power applied, $\overline{\text{RESET}}$ held low   |
| <b>ASYNCHRONOUS SAMPLE RATE CONVERTERS</b>  |      |      |        |      |   |
| Dynamic Range                               |      | 139  |        | dB   | A-weighted, 20 Hz to 20 kHz   |
| I/O Sample Rate                             | 6    |      | 192    | kHz  |   |
| I/O Sample Rate Ratio                       | 1:8  |      | 7.75:1 |      |   |
| Total Harmonic Distortion + Noise (THD + N) |      |      | –120   | dB   |   |
| <b>CRYSTAL OSCILLATOR</b>                   |      |      |        |      |   |
| Transconductance                            | 8.3  | 10.6 | 13.4   | mS   |   |
| <b>REGULATOR</b>                            |      |      |        |      |   |
| DVDD Voltage                                | 1.14 | 1.2  |        | V    | Regulator maintains typical output voltage up to a maximum 800 mA load; IOVDD = 1.8 V – 5% to 3.3 V + 10% |

AVDD = 3.3 V ± 10%, DVDD = 1.2 V ± 5%, PVDD = 3.3 V ± 10%, IOVDD = 1.8 V – 5% to 3.3 V + 10%, T<sub>A</sub> = –40°C to +105°C, master clock input = 12.288 MHz, f<sub>CORE</sub> = 294.912 MHz, I/O pins set to low drive setting, unless otherwise noted.

Table 3.

| Parameter                                  | Min  | Typ  | Max    | Unit | Test Conditions/Comments  |
|--|------|------|--------|------|---|
| <b>POWER</b>                               |      |      |        |      |   |
| Supply Voltage                             |      |      |        |      |   |
| Analog Voltage (AVDD)                      | 2.97 | 3.3  | 3.63   | V    | Supply for analog circuitry, including auxiliary ADC  |
| Digital Voltage (DVDD)                     | 1.14 | 1.2  | 1.26   | V    | Supply for digital circuitry, including the DSP core, ASRCs, and signal routing                           |
| PLL Voltage (PVDD)                         | 2.97 | 3.3  | 3.63   | V    | Supply for PLL circuitry  |
| IOVDD Voltage (IOVDD)                      | 1.71 | 3.3  | 3.63   | V    | Supply for input/output circuitry, including pads and level shifters                                      |
| Supply Current                             |      |      |        |      |   |
| Analog Current (AVDD)                      |      |      |        |      |   |
| Idle State                                 | 1.0  | 1.1  | 40     | µA   |   |
| Reset State                                | 1.0  | 1.1  | 40     | µA   |   |
| PLL Current (PVDD)                         |      |      |        |      |   |
| Idle State                                 | 8.3  | 10.2 | 15     | mA   | 12.288 MHz master clock; default PLL settings   |
| Reset State                                | 18.4 | 18.7 | 40     | µA   | Power applied, PLL not configured   |
| I/O Current (IOVDD)                        |      |      |        |      |   |
| Operation State                            |      | 53   |        | mA   | IOVDD = 3.3 V; all serial ports are clock masters   |
|  |      | 22   |        | mA   | IOVDD = 1.8 V; all serial ports are clock masters   |
| Power-Down State                           |      | 4.1  | 4.3    | mA   | IOVDD = 1.8 V – 5% to 3.3 V + 10%   |
| Digital Current (DVDD)                     |      |      |        |      |   |
| ADAU1466 Operation State                   |      |      |        |      |   |
| Maximum Program                            |      | 485  | 920    | mA   |   |
| Typical Program                            |      | 330  |        | mA   | Test program includes 16-channel I/O, 10-band EQ per channel, all ASRCs active                            |
| Minimal Program                            |      | 213  |        | mA   | Test program includes 2-channel I/O, 10-band EQ per channel   |
| ADAU1462 Operation State                   |      |      |        |      |   |
| f <sub>CORE</sub> = 294.912 MHz            |      |      |        |      |   |
| Maximum Program                            |      | 485  | 920    | mA   |   |
| Typical Program                            |      | 330  |        | mA   | Test program includes 16-channel I/O, 10-band EQ per channel, all ASRCs active                            |
| Minimal Program                            |      | 213  |        | mA   | Test program includes 2-channel I/O, 10-band EQ per channel   |
| f <sub>CORE</sub> = 147.456 MHz            |      |      |        |      |   |
| Maximum Program                            |      | 270  | 490    | mA   |   |
| Typical Program                            |      | 220  |        | mA   | Test program includes 16-channel I/O, 10-band EQ per channel, all ASRCs active                            |
| Minimal Program                            |      | 210  |        | mA   | Test program includes 2-channel I/O, 10-band EQ per channel   |
| Idle State                                 | 5.9  | 15.7 | 559    | mA   | Power applied, DSP not enabled  |
| Reset State                                | 5.9  | 15.7 | 559    | mA   | Power applied, $\overline{\text{RESET}}$ held low   |
| <b>ASYNCHRONOUS SAMPLE RATE CONVERTERS</b> |      |      |        |      |   |
| Dynamic Range                              |      | 139  |        | dB   | A-weighted, 20 Hz to 20 kHz   |
| I/O Sample Rate                            | 6    |      | 192    | kHz  |   |
| I/O Sample Rate Ratio                      | 1:8  |      | 7.75:1 |      |   |
| THD + N                                    |      |      | –120   | dB   |   |
| <b>CRYSTAL OSCILLATOR</b>                  |      |      |        |      |   |
| Transconductance                           | 8.1  | 10.6 | 14.6   | mS   |   |
| <b>REGULATOR</b>                           |      |      |        |      |   |
| DVDD Voltage                               | 1.14 | 1.2  |        | V    | Regulator maintains typical output voltage up to a maximum 800 mA load; IOVDD = 1.8 V – 5% to 3.3 V + 10% |

**ELECTRICAL CHARACTERISTICS****Digital Input/Output**

Table 4.

| Parameter                         | Min  | Typ | Max  | Unit    | Test Conditions/Comments   |
|-----------------------------------|------|-----|------|---------|--|
| <b>DIGITAL INPUT</b>              |      |     |      |         |  |
| Input Voltage                     |      |     |      |         | Excluding SPDIFIN, which is not a standard digital input   |
| IOVDD = 3.3 V                     |      |     |      |         |  |
| High Level ( $V_{IH}$ )           | 1.71 |     | 3.3  | V       |  |
| Low Level ( $V_{IL}$ )            | 0    |     | 1.71 | V       |  |
| IOVDD = 1.8 V                     |      |     |      |         |  |
| High Level ( $V_{IH}$ )           | 0.92 |     | 1.8  | V       |  |
| Low Level ( $V_{IL}$ )            | 0    |     | 0.89 | V       |  |
| Input Leakage                     |      |     |      |         |  |
| High Level ( $I_{IH}$ )           |      |     | 2    | $\mu$ A | Digital input pins with pull-up resistor   |
|                                   |      |     | 14   | $\mu$ A | Digital input pins with pull-down resistor   |
|                                   |      |     | 2    | $\mu$ A | Digital input pins with no pull resistor   |
|                                   |      |     | 8    | $\mu$ A | MCLK   |
|                                   |      |     | 120  | $\mu$ A | SPDIFIN  |
| Low Level ( $I_{IL}$ ) at 0 V     | -14  |     |      | $\mu$ A | Digital input pins with pull-up resistor   |
|                                   | -2   |     |      | $\mu$ A | Digital input pins with pull-down resistor   |
|                                   | -2   |     |      | $\mu$ A | Digital input pins with no pull resistor   |
|                                   | -8   |     |      | $\mu$ A | MCLK   |
|                                   | -120 |     |      | $\mu$ A | SPDIFIN  |
| Input Capacitance ( $C_I$ )       |      | 2   |      | pF      | Guaranteed by design   |
| <b>DIGITAL OUTPUT</b>             |      |     |      |         |  |
| Output Voltage                    |      |     |      |         |  |
| IOVDD = 3.3 V                     |      |     |      |         |  |
| High Level ( $V_{OH}$ )           | 3.09 |     | 3.3  | V       | $I_{OH} = 1$ mA  |
| Low Level ( $V_{OL}$ )            | 0    |     | 0.26 | V       | $I_{OL} = 1$ mA  |
| IOVDD = 1.8 V                     |      |     |      |         |  |
| High Level ( $V_{OH}$ )           | 1.45 |     | 1.8  | V       |  |
| Low Level ( $V_{OL}$ )            | 0    |     | 0.33 | V       |  |
| Digital Output Pins, Output Drive |      |     |      |         | The digital output pins are driving low impedance PCB traces to a high impedance digital input buffer          |
| IOVDD = 1.8 V                     |      |     |      |         |  |
| Drive Strength Setting            |      |     |      |         |  |
| Lowest                            |      |     | 1    | mA      | The digital output pins are not designed for static current draw; do not use these pins to drive LEDs directly |
| Low                               |      |     | 2    | mA      | The digital output pins are not designed for static current draw; do not use these pins to drive LEDs directly |
| High                              |      |     | 3    | mA      | The digital output pins are not designed for static current draw; do not use these pins to drive LEDs directly |
| Highest                           |      |     | 5    | mA      | The digital output pins are not designed for static current draw; do not use these pins to drive LEDs directly |
| IOVDD = 3.3 V                     |      |     |      |         |  |
| Drive Strength Setting            |      |     |      |         |  |
| Lowest                            |      |     | 2    | mA      | The digital output pins are not designed for static current draw; do not use these pins to drive LEDs directly |
| Low                               |      |     | 5    | mA      | The digital output pins are not designed for static current draw; do not use these pins to drive LEDs directly |
| High                              |      |     | 10   | mA      | The digital output pins are not designed for static current draw; do not use these pins to drive LEDs directly |
| Highest                           |      |     | 15   | mA      | The digital output pins are not designed for static current draw; do not use these pins to drive LEDs directly |

**Auxiliary ADC**

T<sub>A</sub> = -40°C to +105°C, DVDD = 1.2 V ± 5%, AVDD = 3.3 V ± 10%, IOVDD = 1.8 V - 5% to 3.3 V + 10%, unless otherwise noted.

**Table 5.**

| <b>Parameter</b>                | <b>Min</b> | <b>Typ</b>              | <b>Max</b> | <b>Unit</b> |
|---------------------------------|------------|-------------------------|------------|-------------|
| RESOLUTION                      |            | 10                      |            | Bits        |
| FULL-SCALE ANALOG INPUT         |            | AVDD                    |            | V           |
| NONLINEARITY                    |            |                         |            |             |
| Integrated Nonlinearity (INL)   | -2.5       |                         | +2.5       | LSB         |
| Differential Nonlinearity (DNL) | -2.5       |                         | +2.5       | LSB         |
| GAIN ERROR                      | -2.5       |                         | +2.5       | LSB         |
| INPUT IMPEDANCE                 |            | 200                     |            | kΩ          |
| SAMPLE RATE                     |            | f <sub>CORE</sub> /6144 |            | Hz          |

**TIMING SPECIFICATIONS**

**Master Clock Input**

T<sub>A</sub> = -40°C to +105°C, DVDD = 1.2 V ± 5%, IOVDD = 1.8 V - 5% to 3.3 V + 10%, unless otherwise noted.

**Table 6.**

| Parameter                        | Min                      | Max                      | Unit | Description   |
|----------------------------------|--------------------------|--------------------------|------|---|
| <b>MASTER CLOCK INPUT (MCLK)</b> |                          |                          |      |   |
| f <sub>MCLK</sub>                | 2.375                    | 36                       | MHz  | MCLK frequency  |
| t <sub>MCLK</sub>                | 27.8                     | 421                      | ns   | MCLK period   |
| t <sub>MCLKD</sub>               | 25                       | 75                       | %    | MCLK duty cycle   |
| t <sub>MCLKH</sub>               | 0.25 × t <sub>MCLK</sub> | 0.75 × t <sub>MCLK</sub> | ns   | MCLK width high   |
| t <sub>MCLKL</sub>               | 0.25 × t <sub>MCLK</sub> | 0.75 × t <sub>MCLK</sub> | ns   | MCLK width low  |
| CLKOUT Jitter                    | 12                       | 106                      | ps   | Cycle to cycle rms average  |
| <b>CORE CLOCK</b>                |                          |                          |      |   |
| f <sub>CORE</sub>                |                          |                          |      |   |
| ADAU1462 and ADAU1466            | 152                      | 294.912                  | MHz  | System (DSP core) clock frequency; PLL feedback divider ranges from 64 to 108 |
| t <sub>CORE</sub> <sup>1</sup>   |                          |                          |      |   |
| ADAU1462 and ADAU1466            | 3.39                     |                          | ns   | System (DSP core) clock period  |

<sup>1</sup> Not shown in Figure 2.

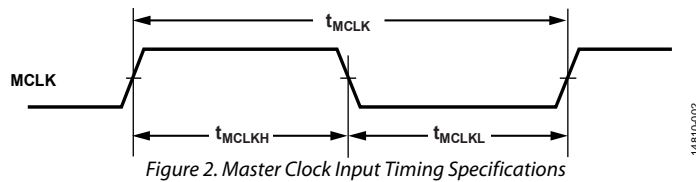


Figure 2. Master Clock Input Timing Specifications

**RESET**

T<sub>A</sub> = -40°C to +105°C, DVDD = 1.2 V ± 5%, IOVDD = 1.8 V - 5% to 3.3 V + 10%.

**Table 7.**

| Parameter         | Min | Max | Unit | Description           |
|-------------------|-----|-----|------|-----------------------|
| t <sub>WRST</sub> | 10  |     | ns   | Reset pulse width low |

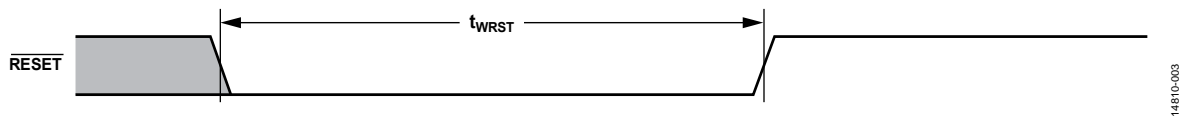


Figure 3. Reset Timing Specification

**Serial Ports**

T<sub>A</sub> = -40°C to +105°C, DVDD = 1.2 V ± 5%, IOVDD = 1.8 V - 5% to 3.3 V + 10%, unless otherwise noted. BCLK in Table 8 refers to BCLK\_OUT3 to BCLK\_OUT0 and BCLK\_IN3 to BCLK\_IN0. LRCLK refers to LRCLK\_OUT3 to LRCLK\_OUT0 and LRCLK\_IN3 to LRCLK\_IN0.

**Table 8.**

| Parameter          | Min  | Max    | Unit | Description   |
|--------------------|------|--------|------|---|
| f <sub>LRCLK</sub> |      | 192    | kHz  | LRCLK frequency   |
| t <sub>LRCLK</sub> | 5.21 |        | µs   | LRCLK period  |
| f <sub>BCLK</sub>  |      | 24.576 | MHz  | BCLK frequency, sample rate ranging from 6 kHz to 192 kHz   |
| t <sub>BCLK</sub>  | 40.7 |        | ns   | BCLK period   |
| t <sub>BIL</sub>   | 10   |        | ns   | BCLK low pulse width, slave mode; BCLK frequency = 24.576 MHz; BCLK period = 40.6 ns  |
| t <sub>BIH</sub>   | 14.5 |        | ns   | BCLK high pulse width, slave mode; BCLK frequency = 24.576 MHz; BCLK period = 40.6 ns   |
| t <sub>LIS</sub>   | 20   |        | ns   | LRCLK setup to BCLK_INx input rising edge, slave mode; LRCLK frequency = 192 kHz  |
| t <sub>LIH</sub>   | 5    |        | ns   | LRCLK hold from BCLK_INx input rising edge, slave mode; LRCLK frequency = 192 kHz   |
| t <sub>SIS</sub>   | 5    |        | ns   | SDATA_INx setup to BCLK_INx input rising edge   |
| t <sub>SIH</sub>   | 5    |        | ns   | SDATA_INx hold from BCLK_INx input rising edge  |
| t <sub>TS</sub>    |      | 10     | ns   | BCLK_OUTx output falling edge to LRCLK_OUTx output timing skew, slave   |
| t <sub>SODS</sub>  |      | 35     | ns   | SDATA_OUTx delay in slave mode from BCLK_OUTx output falling edge; serial outputs function in slave mode at all valid sample rates, provided that the external circuit design provides sufficient electrical signal integrity |
| t <sub>SODM</sub>  |      | 10     | ns   | SDATA_OUTx delay in master mode from BCLK_OUTx output falling edge  |
| t <sub>TM</sub>    |      | 5      | ns   | BCLK falling edge to LRCLK timing skew, master  |

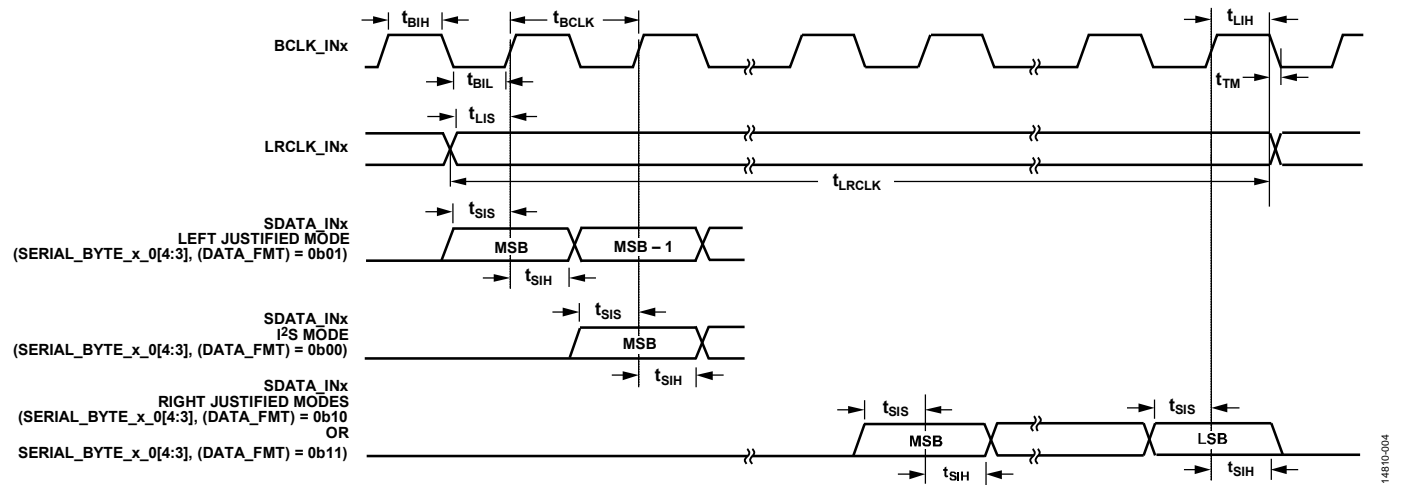


Figure 4. Serial Input Port Timing Specifications

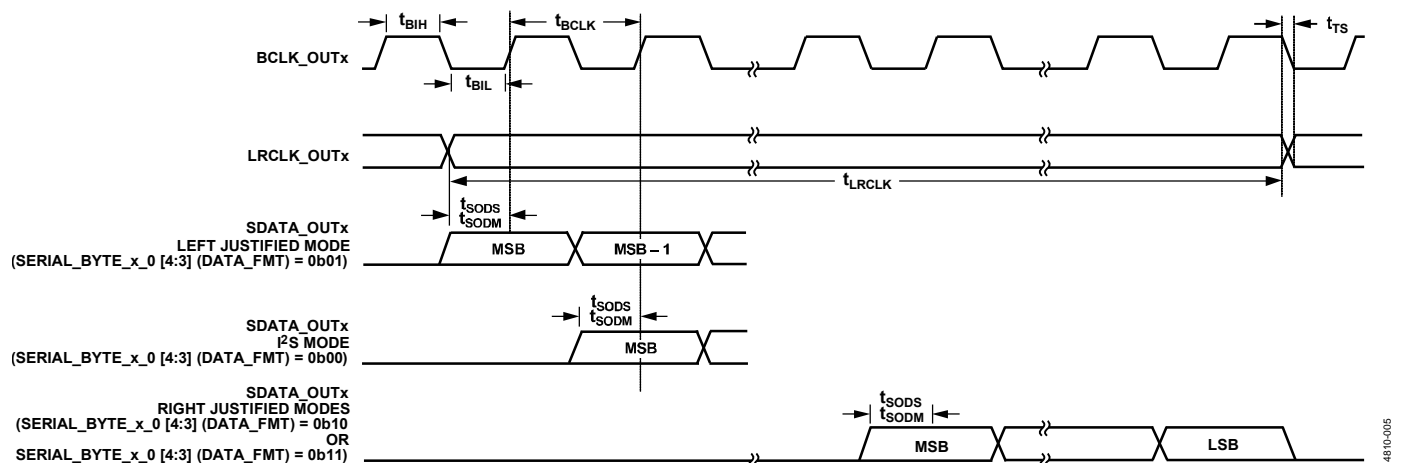


Figure 5. Serial Output Port Timing Specifications

**Multipurpose Pins (MPx)**

$T_A = -40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ ,  $DVDD = 1.2\text{ V} \pm 5\%$ ,  $IOVDD = 1.8\text{ V} - 5\%$  to  $3.3\text{ V} + 10\%$ .

**Table 9.**

| Parameter  | Min                  | Max                    | Unit | Description   |
|------------|----------------------|------------------------|------|---|
| $f_{MP}$   |                      | 24.576                 | MHz  | MPx maximum switching rate when pin is configured as a general-purpose input or general-purpose output  |
| $t_{MPIL}$ | $10 \times t_{CORE}$ | $6144 \times t_{CORE}$ | sec  | MPx pin input latency until high/low value is read by core; the duration in the Max column is equal to the period of one audio sample when the DSP is processing 6144 instructions per sample |

**S/PDIF Transmitter and Receiver**

$T_A = -40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ ,  $DVDD = 1.2\text{ V} \pm 5\%$ ,  $IOVDD = 1.8\text{ V} - 10\%$  to  $3.3\text{ V} + 10\%$ .

**Table 10.**

| Parameter         | Min | Max | Unit | Description  |
|-------------------|-----|-----|------|--|
| AUDIO SAMPLE RATE |     |     |      |  |
| Transmitter       | 18  | 192 | kHz  | Audio sample rate of data output from S/PDIF transmitter |
| Receiver          | 18  | 192 | kHz  | Audio sample rate of data input to S/PDIF receiver       |

**I<sup>2</sup>C Interface—Slave**

T<sub>A</sub> = -40°C to +105°C, DVDD = 1.2 V ± 5%, IOVDD = 1.8 V - 5% to 3.3 V + 10%, default drive strength (f<sub>SCL</sub>) = 400 kHz.

**Table 11.**

| Parameter          | Min  | Max  | Unit | Description                                   |
|--------------------|------|------|------|---|
| f <sub>SCL</sub>   |      | 1000 | kHz  | SCL clock frequency                           |
| t <sub>SCLH</sub>  | 0.26 |      | μs   | SCL pulse width high                          |
| t <sub>SCLL</sub>  | 0.5  |      | μs   | SCL pulse width low                           |
| t <sub>SCS</sub>   | 0.26 |      | μs   | Start and repeated start condition setup time |
| t <sub>SCH</sub>   | 0.26 |      | μs   | Start condition hold time                     |
| t <sub>DS</sub>    | 50   |      | ns   | Data setup time                               |
| t <sub>DH</sub>    |      | 0.45 | μs   | Data hold time                                |
| t <sub>SCLR</sub>  |      | 120  | ns   | SCL rise time                                 |
| t <sub>SCLF</sub>  |      | 120  | ns   | SCL fall time                                 |
| t <sub>SDR</sub>   |      | 120  | ns   | SDA rise time                                 |
| t <sub>SDF</sub>   |      | 120  | ns   | SDA fall time                                 |
| t <sub>BFT</sub>   | 0.5  |      | μs   | Bus free time between stop and start          |
| t <sub>SUSTO</sub> | 0.26 |      | μs   | Stop condition setup time                     |

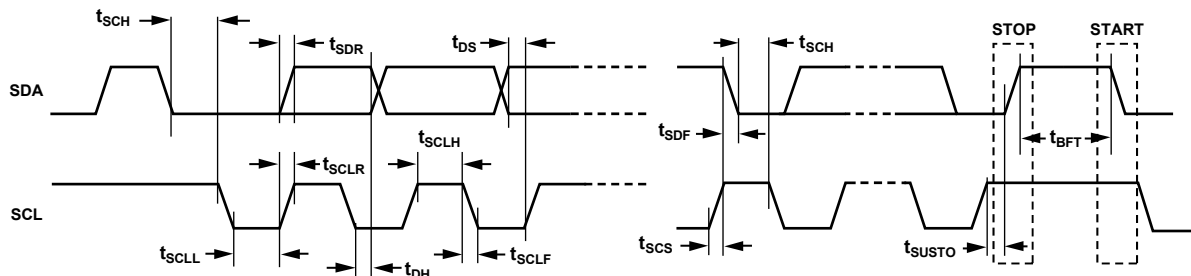


Figure 6. I<sup>2</sup>C Slave Port Timing Specifications

14810-006



**I<sup>2</sup>C Interface—Master**

T<sub>A</sub> = -40°C to +105°C, DVDD = 1.2 V ± 5%, IOVDD = 1.8 V - 5% to 3.3 V + 10%.

**Table 12.**

| Parameter          | Min  | Max  | Unit | Description                                   |
|--------------------|------|------|------|---|
| f <sub>SCL</sub>   |      | 1000 | kHz  | SCL clock frequency                           |
| t <sub>SCLH</sub>  | 0.26 |      | μs   | SCL pulse width high                          |
| t <sub>SCLL</sub>  | 0.5  |      | μs   | SCL pulse width low                           |
| t <sub>SCS</sub>   | 0.26 |      | μs   | Start and repeated start condition setup time |
| t <sub>SCH</sub>   | 0.26 |      | μs   | Start condition hold time                     |
| t <sub>DS</sub>    | 50   |      | ns   | Data setup time                               |
| t <sub>DH</sub>    |      | 0.45 | μs   | Data hold time                                |
| t <sub>SCLR</sub>  |      | 120  | ns   | SCL rise time                                 |
| t <sub>SCLF</sub>  |      | 120  | ns   | SCL fall time                                 |
| t <sub>SDR</sub>   |      | 120  | ns   | SDA rise time                                 |
| t <sub>SDF</sub>   |      | 120  | ns   | SDA fall time                                 |
| t <sub>BFT</sub>   | 0.5  |      | μs   | Bus free time between stop and start          |
| t <sub>SUSTO</sub> | 0.26 |      | μs   | Stop condition setup time                     |

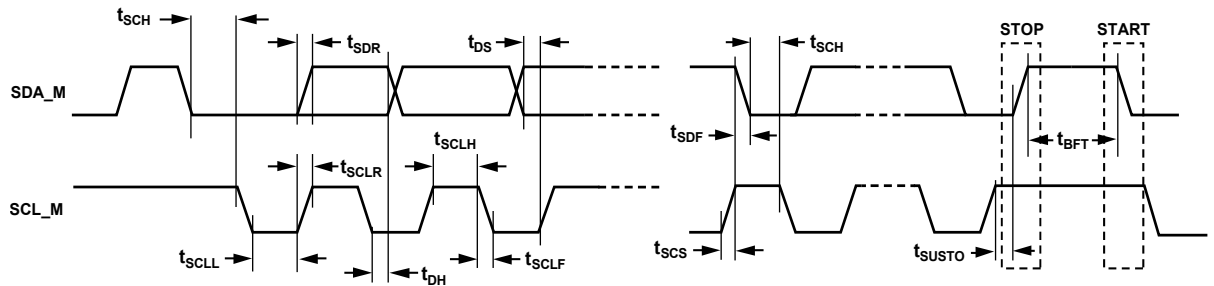


Figure 7. I<sup>2</sup>C Master Port Timing Specifications

14810-007

**SPI Interface—Slave**

$T_A = -40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ , DVDD = 1.2 V  $\pm$  5%, IOVDD = 1.8 V – 5% to 3.3 V + 10%.

**Table 13.**

| Parameter              | Min | Max | Unit | Description                                    |
|------------------------|-----|-----|------|--|
| $f_{\text{SCLKWRITE}}$ |     | 20  | MHz  | SCLK write frequency                           |
| $f_{\text{SCLKREAD}}$  |     | 20  | MHz  | SCLK read frequency                            |
| $t_{\text{SCLKPWL}}$   | 6   |     | ns   | SCLK pulse width low, SCLK = 20 MHz            |
| $t_{\text{SCLKPWH}}$   | 21  |     | ns   | SCLK pulse width high, SCLK = 20 MHz           |
| $t_{\text{SSS}}$       | 1   |     | ns   | SS setup to SCLK rising edge                   |
| $t_{\text{SSH}}$       | 2   |     | ns   | SS hold from SCLK rising edge                  |
| $t_{\text{SSPWH}}$     | 10  |     | ns   | SS pulse width high                            |
| $t_{\text{MOSIS}}$     | 1   |     | ns   | MOSI setup to SCLK rising edge                 |
| $t_{\text{MOSIH}}$     | 2   |     | ns   | MOSI hold from SCLK rising edge                |
| $t_{\text{MISOD}}$     |     | 39  | ns   | MISO valid output delay from SCLK falling edge |

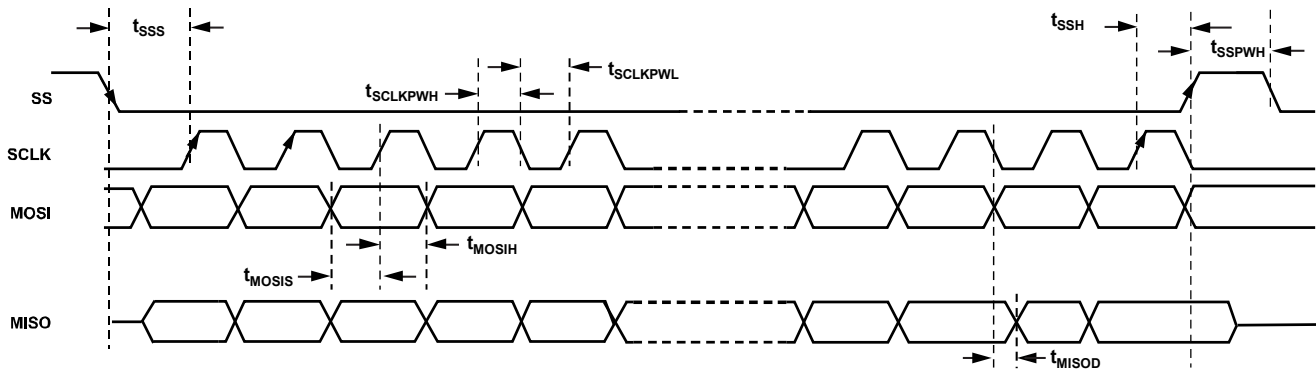


Figure 8. SPI Slave Port Timing Specifications

14610-008

**SPI Interface—Master**

$T_A = -40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ ,  $\text{DVDD} = 1.2\text{ V} \pm 5\%$ ,  $\text{IOVDD} = 1.8\text{ V} - 5\%$  to  $3.3\text{ V} + 10\%$ .

**Table 14.**

| Parameter                        | Min  | Max  | Unit | Description   |
|----------------------------------|------|------|------|---|
| <b>Timing Requirements</b>       |      |      |      |   |
| $t_{\text{SSPIDM}}$              | 15   |      | ns   | MISO_M data input valid to SCLK_M edge (data input setup time)                                  |
| $t_{\text{HSPIDM}}$              | 5    |      | ns   | SCLK_M last sampling edge to data input not valid (data input hold time)                        |
| <b>Switching Characteristics</b> |      |      |      |   |
| $t_{\text{SPICLKM}}$             | 41.7 |      | ns   | SPI master clock cycle period   |
| $f_{\text{SCLK\_M}}$             |      | 24   | MHz  | SPI master clock frequency  |
| $t_{\text{SPICHM}}$              | 17   |      | ns   | SCLK_M high period ( $f_{\text{SCLK\_M}} = 24\text{ MHz}$ )                                     |
| $t_{\text{SPICLM}}$              | 17   |      | ns   | SCLK_M low period ( $f_{\text{SCLK\_M}} = 24\text{ MHz}$ )                                      |
| $t_{\text{DDSPIDM}}$             |      | 16.9 | ns   | SCLK_M edge to data out valid (data out delay time) ( $f_{\text{SCLK\_M}} = 24\text{ MHz}$ )    |
| $t_{\text{HDSPIDM}}$             | 21   |      | ns   | SCLK_M edge to data out not valid (data out hold time) ( $f_{\text{SCLK\_M}} = 24\text{ MHz}$ ) |
| $t_{\text{SDSCIM}}$              | 36   |      | ns   | SS_M (SPI device select) low to first SCLK_M edge ( $f_{\text{SCLK\_M}} = 24\text{ MHz}$ )      |
| $t_{\text{HDSM}}$                | 95   |      | ns   | Last SCLK_M edge to SS_M high ( $f_{\text{SCLK\_M}} = 24\text{ MHz}$ )                          |

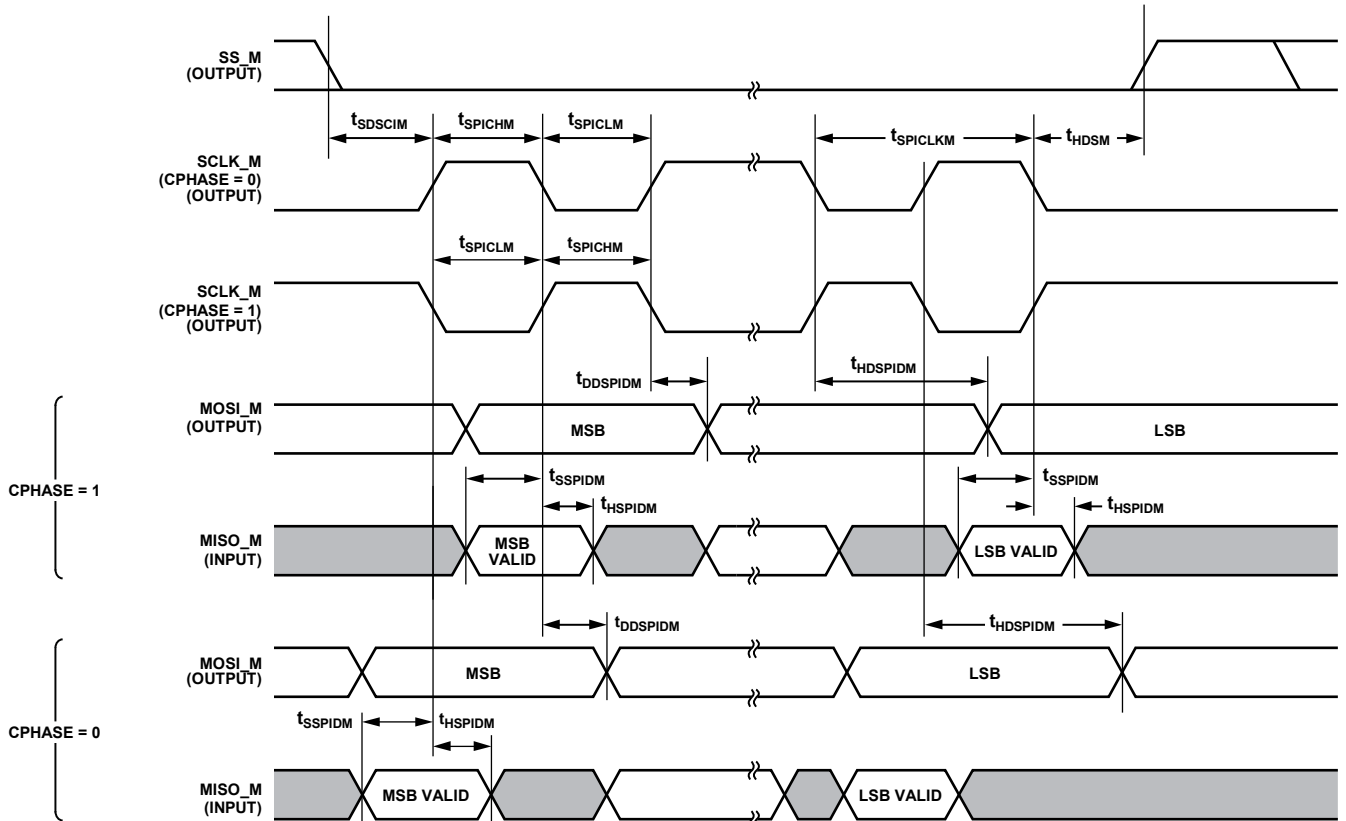


Figure 9. SPI Master Port Timing Specifications

14810-009

**PDM Inputs**

$T_A = -40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ ,  $DVDD = 1.2\text{ V} \pm 5\%$ ,  $IOVDD = 1.8\text{ V} - 5\%$  to  $3.3\text{ V} + 10\%$ . Pulse density modulation (PDM) data is latched on both edges of the clock (see Figure 10).

**Table 15.**

| Parameter          | $t_{\text{MIN}}$ | $t_{\text{MAX}}$ | Unit | Description     |
|--------------------|------------------|------------------|------|-----------------|
| $t_{\text{SETUP}}$ | 10               |                  | ns   | Data setup time |
| $t_{\text{HOLD}}$  | 5                |                  | ns   | Data hold time  |

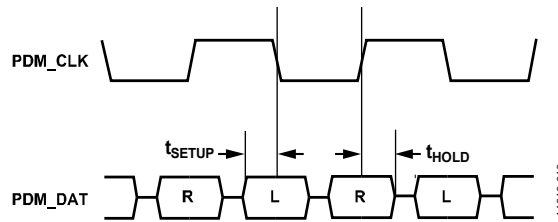


Figure 10. PDM Timing Diagram

144810-010

## ABSOLUTE MAXIMUM RATINGS

Table 16.

| Parameter                         | Rating                        |
|-----------------------------------|-------------------------------|
| DVDD to Ground                    | 0 V to 1.4 V                  |
| AVDD to Ground                    | 0 V to 4.0 V                  |
| IOVDD to Ground                   | 0 V to 4.0 V                  |
| PVDD to Ground                    | 0 V to 4.0 V                  |
| Digital Inputs                    | DGND – 0.3 V to IOVDD + 0.3 V |
| Maximum Ambient Temperature Range | –40°C to +105°C               |
| Maximum Junction Temperature      | 125°C                         |
| Storage Temperature Range         | –65°C to +150°C               |
| Soldering (10 sec)                | 300°C                         |

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

### THERMAL CONSIDERATIONS

The capabilities of the ADAU1462/ADAU1466 are such that it is possible to configure the device in a mode where its power dissipation can risk exceeding the absolute maximum junction temperature. The junction temperature reached in a device is influenced by several factors, for example, the power dissipated in the device; the thermal efficiency of the printed circuit board (PCB) design; the maximum ambient temperature supported in the application.

To ensure that the ADAU1462/ADAU1466 does not exceed its absolute maximum junction temperature in an application, thermal considerations must be taken from the start of the design (for example: likely modes of operation, thermal considerations in the PCB design (see the [AN-772 Application Note](#)), and thermal simulations) to its finish (qualification at the maximum ambient temperature supported in the application).

While all of the following thermal coefficients can be used to analyze the thermal performance of ADAU1462/ADAU1466,  $\psi_{JT}$  is the most reflective of real-world applications and is recommended as the primary approach for thermal qualification.

Table 17. Thermal Coefficients for ADAU1462/ADAU1466

| Thermal Coefficient         | Value | Unit |
|-----------------------------|-------|------|
| $\psi_{JT}$ <sup>1</sup>    | 0.15  | °C/W |
| $\theta_{JA}$ <sup>1</sup>  | 29.15 | °C/W |
| $\theta_{JB}$ <sup>2</sup>  | 10.59 | °C/W |
| $\theta_{JCT}$ <sup>3</sup> | 0.04  | °C/W |
| $\theta_{JCB}$ <sup>4</sup> | 3.39  | °C/W |

<sup>1</sup> Based on simulation using a JEDEC 2s2p thermal test PCB with 25 thermal vias in a JEDEC natural convection environment, as per JESD51.

<sup>2</sup> Based on simulation using a JEDEC 2s2p thermal test PCB with 25 thermal vias in a JEDEC Junction to Board environment, as per JESD51.

<sup>3</sup> Based on simulation using a cold plate attached directly to exposed paddle.

To employ the  $\psi_{JT}$ -based approach to thermal analysis,

1. Configure the ADAU1462/ADAU1466 in the highest power mode of operation to be used in the application and record the power dissipated in the device.
2. Compute the maximum allowable surface temperature,  $T_{S\_MAX}$ :  

$$T_{S\_MAX} = T_{J\_MAX} - (Power \times \psi_{JT})$$
3. Measure the case temperature at the center of the ADAU1462/ADAU1466 package ( $T_s$ ) at the maximum ambient temperature supported in the application and compare to  $T_{S\_MAX}$ .
4. For safe operation, use  $T_s < T_{S\_MAX}$  in the highest power mode of operation in the application.


For more information, see the PCB Design Considerations section and the [AN-772 Application Note, A Design and Manufacturing Guide for the Lead Frame Chip Scale Package \(LFCSP\)](#).

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

# PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

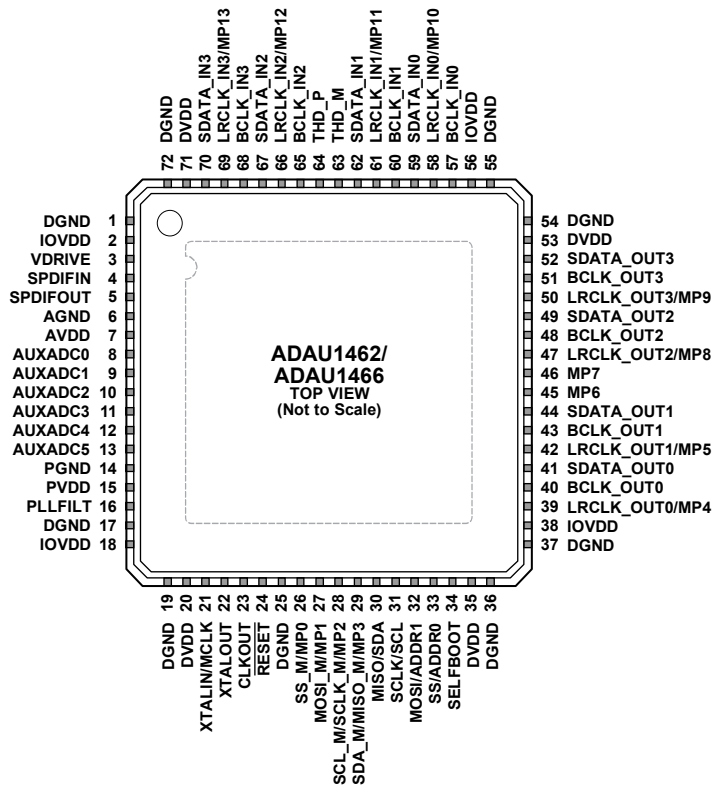

**NOTES**  
 1. THE EXPOSED PAD MUST BE GROUNDED BY SOLDERING IT TO A COPPER SQUARE OF EQUIVALENT SIZE ON THE PCB. IDENTICAL COPPER SQUARES MUST EXIST ON ALL LAYERS OF THE BOARD, CONNECTED BY VIAS, AND THEY MUST BE CONNECTED TO A DEDICATED COPPER GROUND LAYER WITHIN THE PCB.

14810-011

Figure 11. Pin Configuration

Table 18. Pin Function Descriptions

| Pin No. | Mnemonic | Internal Pull Resistor | Description  |
|---------|----------|------------------------|--|
| 1       | DGND     | None                   | Digital and I/O Ground Reference. Tie all DGND, AGND, and PGND pins directly together in a common ground plane. See the Power Supply Bypass Capacitors and Grounding sections.   |
| 2       | IOVDD    | None                   | Input/Output Supply, 1.8 V – 5% to 3.3 V + 10%. Bypass this pin with decoupling capacitors to Pin 1 (DGND). See the Power Supply Bypass Capacitors and Grounding sections.   |
| 3       | VDRIVE   | None                   | PNP Bipolar Junction Transistor-Base Drive Bias Pin for the Digital Supply Regulator. Connect VDRIVE to the base of an external PNP pass transistor (ON Semi NSS1C300ET4G is recommended). If an external supply is provided directly to DVDD, connect the VDRIVE pin to ground. |
| 4       | SPDIFIN  | None                   | Input to the Integrated Sony/Philips Digital Interconnect Format Receiver. Disconnect this pin when not in use. This pin is internally biased to IOVDD/2.  |
| 5       | SPDIFOUT | Configurable           | Output from the Integrated Sony/Philips Digital Interface Format Transmitter. Disconnect this pin when not in use. This pin is internally biased to IOVDD/2.   |
| 6       | AGND     | None                   | Analog Ground Reference. Tie all DGND, AGND, and PGND pins directly together in a common ground plane. See the Power Supply Bypass Capacitors and Grounding sections.  |
| 7       | AVDD     | None                   | Analog (Auxiliary ADC) Supply. Must be 3.3 V ± 10%. Bypass this pin with decoupling capacitors to Pin 6 (AGND). See the Power Supply Bypass Capacitors and Grounding sections.   |
| 8       | AUXADC0  | None                   | Auxiliary ADC Input Channel 0. This pin reads an analog input signal and uses its value in the DSP program. Disconnect this pin when not in use.   |
| 9       | AUXADC1  | None                   | Auxiliary ADC Input Channel 1. This pin reads an analog input signal and uses its value in the DSP program. Disconnect this pin when not in use.   |
| 10      | AUXADC2  | None                   | Auxiliary ADC Input Channel 2. This pin reads an analog input signal and uses its value in the DSP program. Disconnect this pin when not in use.   |

| Pin No. | Mnemonic             | Internal Pull Resistor   | Description   |
|---------|----------------------|--|---|
| 11      | AUXADC3              | None   | Auxiliary ADC Input Channel 3. This pin reads an analog input signal and uses its value in the DSP program. Disconnect this pin when not in use.  |
| 12      | AUXADC4              | None   | Auxiliary ADC Input Channel 4. This pin reads an analog input signal and uses its value in the DSP program. Disconnect this pin when not in use.  |
| 13      | AUXADC5              | None   | Auxiliary ADC Input Channel 5. This pin reads an analog input signal and uses its value in the DSP program. Disconnect this pin when not in use.  |
| 14      | PGND                 | None   | PLL Ground Reference. Tie all DGND, AGND, and PGND pins directly together in a common ground plane. See the Power Supply Bypass Capacitors and Grounding sections.  |
| 15      | PVDD                 | None   | PLL Supply. Must be $3.3\text{ V} \pm 10\%$ . Bypass this pin with decoupling capacitors to Pin 14 (PGND). See the Power Supply Bypass Capacitors and Grounding sections.   |
| 16      | PLLFILT              | None   | PLL Filter. The voltage on the PLLFILT pin, which is internally generated, is typically between 1.65 V and 2.10 V.  |
| 17      | DGND                 | None   | Digital and I/O Ground Reference. Tie all DGND, AGND, and PGND pins directly together in a common ground plane. See the Power Supply Bypass Capacitors and Grounding sections.  |
| 18      | IOVDD                | None   | Input/Output Supply, $1.8\text{ V} - 5\%$ to $3.3\text{ V} + 10\%$ . Bypass this pin to Pin 17 (DGND) with decoupling capacitors. See the Power Supply Bypass Capacitors and Grounding sections.  |
| 19      | DGND                 | None   | Digital and I/O Ground Reference. Tie all DGND, AGND, and PGND pins directly together in a common ground plane. See the Power Supply Bypass Capacitors and Grounding sections.  |
| 20      | DVDD                 | None   | Digital Supply. Must be $1.2\text{ V} \pm 5\%$ . This pin can be supplied externally or by using the internal regulator and external pass transistor. Bypass this pin to Pin 19 (DGND) with decoupling capacitors. See the Power Supply Bypass Capacitors and Grounding sections.   |
| 21      | XTALIN/MCLK          | None   | Crystal Oscillator Input (XTALIN)/Master Clock Input to the PLL (MCLK). This pin can be supplied directly or generated by driving a crystal with the internal crystal oscillator via Pin 22 (XTALOUT). If a crystal is used, refer to the circuit shown in Figure 14.   |
| 22      | XTALOUT              | None   | Crystal Oscillator Output for Driving an External Crystal. If a crystal is used, refer to the circuit shown in Figure 14. Disconnect this pin when not in use.  |
| 23      | CLKOUT               | Configurable   | Master Clock Output. This pin drives a master clock signal to other ICs in the system. CLKOUT can be configured to output a clock signal with a frequency of $1\times$ , $2\times$ , $4\times$ , or $8\times$ the frequency of the divided clock signal being input to the PLL. Disconnect this pin when not in use.  |
| 24      | RESET                | Pull-down  | Active Low Reset Input. A reset is triggered on a high to low edge and exited on a low to high edge. A reset event sets all RAMs and registers to their default values.   |
| 25      | DGND                 | None   | Digital and I/O Ground Reference. Tie all DGND, AGND, and PGND pins directly together in a common ground plane. See the Power Supply Bypass Capacitors and Grounding sections.  |
| 26      | SS_M/MP0             | Pull-up; nominally 250 k $\Omega$ ; can be disabled by a write to control register | SPI Master/Slave Select Port (SS_M)/Multipurpose, General-Purpose Input/Output (MP0). When in SPI master mode, this pin acts as the slave select signal to slave devices on the SPI bus. The pin must go low at the beginning of a master SPI transaction and high at the end of a transaction. This pin has an internal pull-up resistor that is nominally 250 k $\Omega$ . When the SELFBOOT pin is held high and the RESET pin has a transition from low to high, Pin 26 sets the communications protocol for self boot operation. If this pin is left floating, the SPI communications protocol is used for self boot operation. If this pin has a 10 k $\Omega$ pull-down resistor to DGND, the I <sup>2</sup> C communications protocol is used for self boot operation. When self boot operation is not used and this pin is not needed as a general-purpose input or output, leave it disconnected. |
| 27      | MOSI_M/MP1           | Pull-up; can be disabled by a write to control register                            | SPI Master Data Output Port (MOSI_M)/Multipurpose, General-Purpose Input/Output (MP1). When in SPI master mode, this pin sends data from the SPI master port to slave devices on the SPI bus. Disconnect this pin when not in use.  |
| 28      | SCL_M/<br>SCLK_M/MP2 | Pull-up; can be disabled by a write to control register                            | I <sup>2</sup> C Master Serial Clock Port (SCL_M)/SPI Master Mode Serial Clock (SCLK_M)/Multipurpose, General-Purpose Input/Output (MP2). When in I <sup>2</sup> C master mode, this pin functions as an open collector output and drives a serial clock to slave devices on the I <sup>2</sup> C bus; use a 2.0 k $\Omega$ pull-up resistor to IOVDD on the line connected to this pin. When in SPI master mode, this pin drives the clock signal to slave devices on the SPI bus. Disconnect this pin when not in use.  |
| 29      | SDA_M/<br>MISO_M/MP3 | Pull-up; can be disabled by a write to control register                            | I <sup>2</sup> C Master Port Serial Data (SDA_M)/SPI Master Mode Data Input (MISO_M)/Multipurpose, General-Purpose Input/Output (MP3). When in I <sup>2</sup> C master mode, this pin functions as a bi-directional open collector data line between the I <sup>2</sup> C master port and slave devices on the I <sup>2</sup> C bus; use a 2.0 k $\Omega$ pull-up resistor to IOVDD on the line connected to this pin. When in SPI master mode, this pin receives data from slave devices on the SPI bus. Disconnect this pin when not in use.  |

| Pin No. | Mnemonic           | Internal Pull Resistor  | Description   |
|---------|--------------------|---|---|
| 30      | MISO/SDA           | Pull-up; can be disabled by a write to control register                   | SPI Slave Data Output Port (MISO)/I <sup>2</sup> C Slave Serial Data Port (SDA). In SPI slave mode, this pin outputs data to the master device on the SPI bus. In I <sup>2</sup> C slave mode, this pin functions as a bi-directional open collector data line between the I <sup>2</sup> C slave port and the master device on the I <sup>2</sup> C bus; use a 2.0 kΩ pull-up resistor to IOVDD on the line connected to this pin. When this pin is not in use, connect it to IOVDD with a 10.0 kΩ pull-up resistor. |
| 31      | SCLK/SCL           | Pull-up; can be disabled by a write to control register                   | SPI Slave Port Serial Clock (SCLK)/I <sup>2</sup> C Slave Port Serial Clock (SCL). In SPI slave mode, this pin receives the serial clock signal from the master device on the SPI bus. In I <sup>2</sup> C slave mode, this pin receives the serial clock signal from the master device on the I <sup>2</sup> C bus; use a 2.0 kΩ pull-up resistor to IOVDD on the line connected to this pin. When this pin is not in use, connect it to IOVDD with a 10.0 kΩ pull-up resistor.                                      |
| 32      | MOSI/ADDR1         | Pull-up; can be disabled by a write to control register                   | SPI Slave Port Data Input (MOSI)/I <sup>2</sup> C Slave Port Address MSB (ADDR1). In SPI slave mode, this pin receives a data signal from the master device on the SPI bus. In I <sup>2</sup> C slave mode, this pin acts as an input and sets the chip address of the I <sup>2</sup> C slave port, in conjunction with Pin 33 (SS/ADDR0).  |
| 33      | SS/ADDR0           | Pull-up, nominally 250 kΩ; can be disabled by a write to control register | SPI Slave Port Slave Select (SS)/I <sup>2</sup> C Slave Port Address LSB (ADDR0). In SPI slave mode, this pin receives the slave select signal from the master device on the SPI bus. In I <sup>2</sup> C slave mode, this pin acts as an input and sets the chip address of the I <sup>2</sup> C slave port in conjunction with Pin 32 (MOSI/ADDR1).   |
| 34      | SELFBOOT           | Pull-up   | Self Boot Select. This pin allows the device to perform a self boot, in which it loads its random access memory (RAM) and register settings from an external EEPROM. Connecting Pin 34 to logic high (IOVDD) initiates a self boot operation the next time there is a rising edge on Pin 24 (RESET). When this pin is connected to ground, no self boot operation is initiated. This pin can be connected to IOVDD or to ground either directly or pulled up or down with a 1.0 kΩ or larger resistor.                |
| 35      | DVDD               | None  | Digital Supply. Must be 1.2 V ± 5%. This pin can be supplied externally or by using the internal regulator and external pass transistor. Bypass this pin to Pin 36 (DGND) with decoupling capacitors. See the Power Supply Bypass Capacitors and Grounding sections.  |
| 36      | DGND               | None  | Digital and I/O Ground Reference. Tie all DGND, AGND, and PGND pins directly together in a common ground plane. See the Power Supply Bypass Capacitors and Grounding sections.  |
| 37      | DGND               | None  | Digital and I/O Ground Reference. Tie all DGND, AGND, and PGND pins directly together in a common ground plane. See the Power Supply Bypass Capacitors and Grounding sections.  |
| 38      | IOVDD              | None  | Input/Output Supply, 1.8 V – 5% to 3.3 V + 10%. Bypass this pin with decoupling capacitors to Pin 37 (DGND). See the Power Supply Bypass Capacitors and Grounding sections.   |
| 39      | LRCLK_OUT0/<br>MP4 | Configurable  | Frame Clock, Serial Output Port 0 (LRCLK_OUT0)/Multipurpose, General-Purpose Input/Output (MP4). This pin is bidirectional, with the direction depending on whether Serial Output Port 0 is a master or slave. Disconnect this pin when not in use.   |
| 40      | BCLK_OUT0          | Configurable  | Bit Clock, Serial Output Port 0. This pin is bidirectional, with the direction depending on whether the Serial Output Port 0 is a master or slave. Disconnect this pin when not in use.   |
| 41      | SDATA_OUT0         | Configurable  | Serial Data Output Port 0 (Channel 0 to Channel 15). Capable of 2-channel, 4-channel, 8-channel, and 16-channel modes. Disconnect this pin when not in use.   |
| 42      | LRCLK_OUT1/<br>MP5 | Configurable  | Frame Clock, Serial Output Port 1 (LRCLK_OUT1)/Multipurpose, General-Purpose Input/Output (MP5). This pin is bidirectional, with the direction depending on whether Serial Output Port 1 is a master or slave. Disconnect this pin when not in use.   |
| 43      | BCLK_OUT1          | Configurable  | Bit Clock, Serial Output Port 1. This pin is bidirectional, with the direction depending on whether Output Serial Port 1 is a master or slave. Disconnect this pin when not in use.   |
| 44      | SDATA_OUT1         | Configurable  | Serial Data Output Port 1 (Channel 16 to Channel 31). Capable of 2-channel, 4-channel, 8-channel, and 16-channel modes. Disconnect this pin when not in use.  |
| 45      | MP6                | Configurable  | Multipurpose, General-Purpose Input/Output 6. Disconnect this pin when not in use.  |
| 46      | MP7                | Configurable  | Multipurpose, General-Purpose Input/Output 7. Disconnect this pin when not in use.  |
| 47      | LRCLK_OUT2/<br>MP8 | Configurable  | Frame Clock, Serial Output Port 2 (LRCLK_OUT2)/Multipurpose, General-Purpose Input/Output (MP8). This pin is bidirectional, with the direction depending on whether Serial Output Port 2 is a master or slave. Disconnect this pin when not in use.   |
| 48      | BCLK_OUT2          | Configurable  | Bit Clock, Serial Output Port 2. This pin is bidirectional, with the direction depending on whether Serial Output Port 2 is a master or slave. Disconnect this pin when not in use.   |
| 49      | SDATA_OUT2         | Configurable  | Serial Data Output Port 2 (Channel 32 to Channel 39). Capable of 2-channel, 4-channel, 8-channel, or flexible TDM mode. Disconnect this pin when not in use.  |
| 50      | LRCLK_OUT3/<br>MP9 | Configurable  | Frame Clock, Serial Output Port 3 (LRCLK_OUT3)/Multipurpose, General-Purpose Input/Output (MP9). This pin is bidirectional, with the direction depending on whether Serial Output Port 3 is a master or slave. Disconnect this pin when not in use.   |



| Pin No. | Mnemonic           | Internal Pull Resistor | Description   |
|---------|--------------------|------------------------|---|
| 51      | BCLK_OUT3          | Configurable           | Bit Clock, Serial Output Port 3. This pin is bidirectional, with the direction depending on whether Serial Output Port 3 is a master or slave. Disconnect this pin when not in use.   |
| 52      | SDATA_OUT3         | Configurable           | Serial Data Output Port 3 (Channel 40 to Channel 47). Capable of 2-channel, 4-channel, 8-channel, and flexible TDM modes. Disconnect this pin when not in use.  |
| 53      | DVDD               | None                   | Digital Supply. Must be $1.2\text{ V} \pm 5\%$ . This pin can be supplied externally or by using the internal regulator and external pass transistor. Bypass Pin 53 with decoupling capacitors to Pin 54 (DGND). See the Power Supply Bypass Capacitors and Grounding sections.   |
| 54      | DGND               | None                   | Digital and I/O Ground Reference. Tie all DGND, AGND, and PGND pins directly together in a common ground plane. See the Power Supply Bypass Capacitors and Grounding sections.  |
| 55      | DGND               | None                   | Digital and I/O Ground Reference. Tie all DGND, AGND, and PGND pins directly together in a common ground plane. See the Power Supply Bypass Capacitors and Grounding sections.  |
| 56      | IOVDD              | None                   | Input/Output Supply, $1.8\text{ V} - 5\%$ to $3.3\text{ V} + 10\%$ . Bypass this pin with decoupling capacitors to Pin 55 (DGND). See the Power Supply Bypass Capacitors and Grounding sections.  |
| 57      | BCLK_IN0           | Configurable           | Bit Clock, Serial Input Port 0. This pin is bidirectional, with the direction depending on whether Serial Input Port 0 is a master or slave. Disconnect this pin when not in use.   |
| 58      | LRCLK_IN0/<br>MP10 | Configurable           | Frame Clock, Serial Input Port 0 (LRCLK_IN0)/Multipurpose, General-Purpose Input/Output (MP10). This pin is bidirectional, with the direction depending on whether Serial Input Port 0 is a master or slave. Disconnect this pin when not in use.   |
| 59      | SDATA_IN0          | Configurable           | Serial Data Input Port 0 (Channel 0 to Channel 15). Capable of 2-channel, 4-channel, 8-channel, or 16-channel mode. Disconnect this pin when not in use.  |
| 60      | BCLK_IN1           | Configurable           | Bit Clock, Serial Input Port 1. This pin is bidirectional, with the direction depending on whether the Serial Input Port 1 is a master or slave. Disconnect this pin when not in use.   |
| 61      | LRCLK_IN1/<br>MP11 | Configurable           | Frame Clock, Serial Input Port 1 (LRCLK_IN1)/Multipurpose, General-Purpose Input/Output (MP11). This pin is bidirectional, with the direction depending on whether the Serial Input Port 1 is a master or slave. Disconnect this pin when not in use.   |
| 62      | SDATA_IN1          | Configurable           | Serial Data Input Port 1 (Channels 16 to Channel 31). Capable of 2-channel, 4-channel, 8-channel, or 16-channel mode. Disconnect this pin when not in use.  |
| 63      | THD_M              | None                   | Thermal Diode Negative (-) Input. Connect this pin to the D- pin of an external temperature sensor IC. Disconnect this pin when not in use.   |
| 64      | THD_P              | None                   | Thermal Diode Positive (+) Input. Connect this pin to the D+ pin of an external temperature sensor IC. Disconnect this pin when not in use.   |
| 65      | BCLK_IN2           | Configurable           | Bit Clock, Serial Input Port 2. This pin is bidirectional, with the direction depending on whether the Serial Input Port 2 is a master or slave. Disconnect this pin when not in use.   |
| 66      | LRCLK_IN2/<br>MP12 | Configurable           | Frame Clock, Input Serial Port 2 (LRCLK_IN2)/Multipurpose, General-Purpose Input/Output (MP12). This pin is bidirectional, with the direction depending on whether Serial Input Port 2 is a master or slave. Disconnect this pin when not in use.   |
| 67      | SDATA_IN2          | Configurable           | Serial Data Input Port 2 (Channel 32 to Channel 39). Capable of 2-channel, 4-channel, 8-channel, or flexible TDM mode. Disconnect this pin when not in use.   |
| 68      | BCLK_IN3           | Configurable           | Bit Clock, Input Serial Port 3. This pin is bidirectional, with the direction depending on whether Input Serial Port 3 is a master or slave. Disconnect this pin when not in use.   |
| 69      | LRCLK_IN3/<br>MP13 | Configurable           | Frame Clock, Serial Input Port 3 (LRCLK_IN3)/Multipurpose, General-Purpose Input/Output (MP13). This pin is bidirectional, with the direction depending on whether Serial Input Port 3 is a master or slave. Disconnect this pin when not in use.   |
| 70      | SDATA_IN3          | Configurable           | Serial Data Input Port 3 (Channel 40 to Channel 47). Capable of 2-channel, 4-channel, 8-channel, or flexible TDM mode. Disconnect this pin when not in use.   |
| 71      | DVDD               | None                   | Digital Supply. Must be $1.2\text{ V} \pm 5\%$ . This pin can be supplied externally or by using the internal regulator and external pass transistor. Bypass with decoupling capacitors to Pin 72 (DGND).   |
| 72      | DGND               | None                   | Digital and I/O Ground Reference. Tie all DGND, AGND, and PGND pins directly together in a common ground plane. See the Power Supply Bypass Capacitors and Grounding sections.  |
| EP      | Exposed Pad        | None                   | The exposed pad must be grounded by soldering it to a copper square of equivalent size on the PCB. Identical copper squares must exist on all layers of the board, connected by vias, and they must be connected to a dedicated copper ground layer within the PCB. See Exposed Pad PCB Design, Figure 87, and Figure 88. |

**THEORY OF OPERATION**  
**SYSTEM BLOCK DIAGRAM**

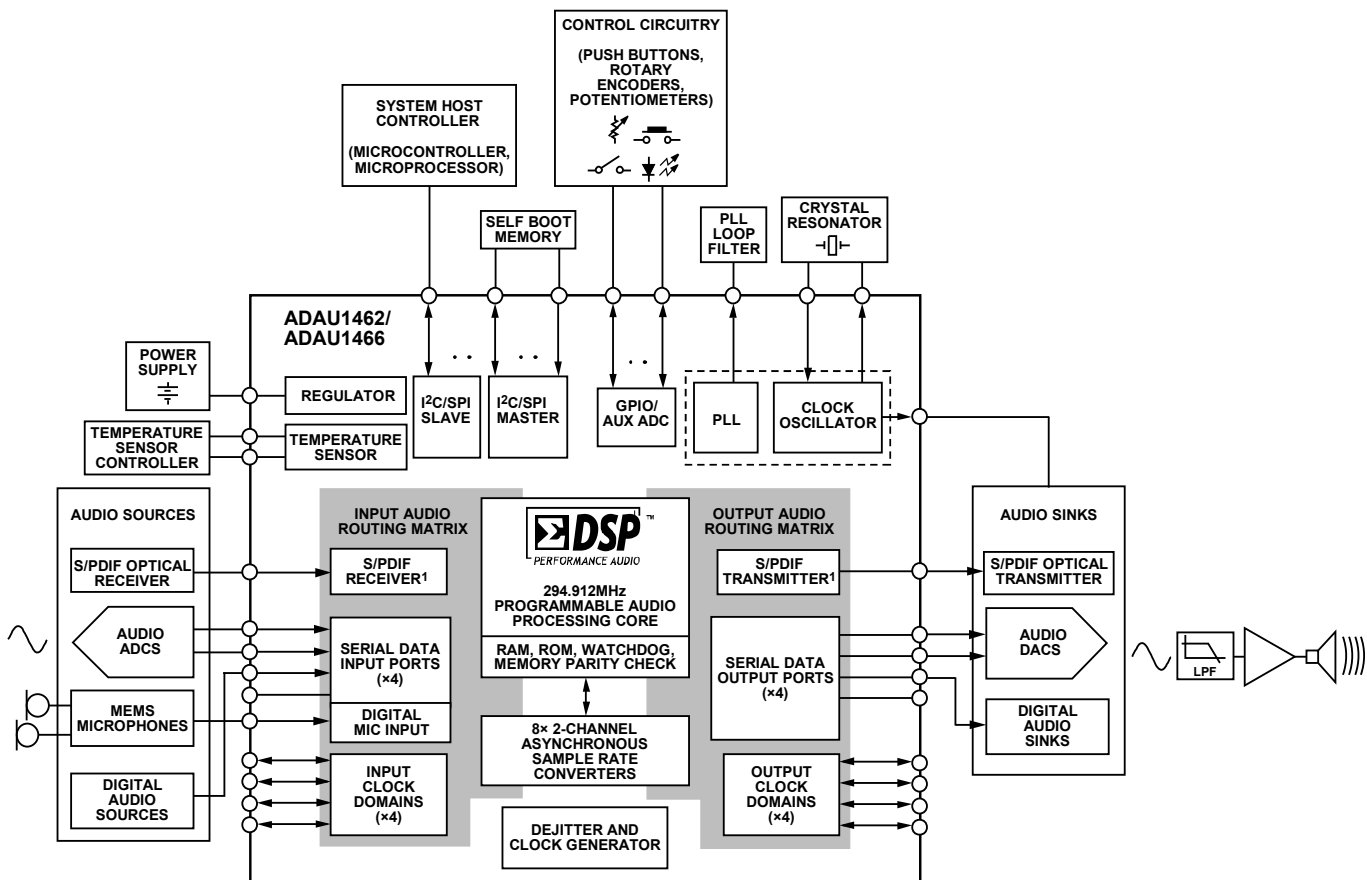


Figure 12. System Block Diagram with Example Connections to External Components

**OVERVIEW**

The ADAU1462/ADAU1466 are enhanced audio processors with 48 channels of input and output. They include options for the hardware routing of audio signals between the various inputs, outputs, SigmaDSP core, and integrated sample rate converters. The SigmaDSP core features full 32-bit processing (that is, 64-bit processing in double precision mode) with an 80-bit arithmetic logic unit (ALU). By using a quadruple multiply accumulator (MAC) data path, the ADAU1462/ADAU1466 can execute more than 1.2 billion MAC operations per second, which allows processing power that far exceeds predecessors in the SigmaDSP family of products. The powerful DSP core can process over 3,000 double precision biquad filters or 24,000 FIR filter taps per sample at the standard 48 kHz audio sampling rate. Other features, including synchronous parameter loading for ensuring filter stability and 100% code efficiency with the [SigmaStudio](#) tools, reduce complexity in audio system development. The [SigmaStudio](#) library of audio processing algorithms allows system designers to compensate for real-world limitations of speakers, amplifiers, and listening environments, through speaker equalization, multiband compression, limiting, and third party branded algorithms.

The input audio routing matrix and output audio routing matrix allow the user to multiplex inputs from multiple sources that are running at various sample rates to or from the SigmaDSP core, and then to pass them on to the desired hardware outputs. This multiplexing drastically reduces the complexity of signal routing and clocking issues in the audio system. The audio subsystem includes eight stereo ASRCs, S/PDIF input and output, and serial audio data ports supporting 2 to 16 channels in formats such as I<sup>2</sup>S and time division multiplexing (TDM). Any of the inputs can be routed to the SigmaDSP core or to any of the ASRCs. Similarly, the output signals can be taken from the SigmaDSP core, any of the ASRC outputs, the serial inputs, the PDM microphones, or the S/PDIF receiver. This routing scheme, which can be modified at any time using control registers, allows maximum system flexibility without requiring hardware design changes.

Two serial input ports and two serial output ports can operate as pairs in a special flexible TDM mode, allowing the user to assign byte specific locations independently to audio streams at varying bit depths. This mode ensures compatibility with codecs that use similar flexible TDM streams.

The DSP core is optimized for audio processing, and it can process audio at sample rates of up to 192 kHz. The program and parameter/data RAMs can be loaded with a custom audio processing signal flow built with the [SigmaStudio](#) graphical programming software from Analog Devices, Inc., which is available for download at [www.analog.com](http://www.analog.com). The values that are stored in the parameter RAM can control individual signal processing blocks, such as infinite impulse response (IIR) and finite impulse response (FIR) equalization filters, dynamics processors, audio delays, and mixer levels. A software safelock feature allows transparent parameter updates and prevents clicks on the output signals.

Reliability features, such as memory parity checking and a program counter watchdog, help ensure that the system can detect and recover from any errors related to memory corruption.

On the ADAU1462/ADAU1466, the audio data in an S/PDIF stream can be routed through an ASRC for processing in the DSP or can be sent directly to a serial audio output. Other components of the stream, including status and user bits, are not lost and can be used in algorithm or output on the MPx pins. The user can also independently program the nonaudio data that is embedded in the output signal of the S/PDIF transmitter.

The 14 MPx pins are available to provide a simple user interface without the need for an external microcontroller. These multipurpose pins are available to input external control signals and output flags or controls to other devices in the system. As inputs, the MPx pins can be connected to push buttons, switches, rotary encoders, or other external control circuitry to control the internal signal processing program. When configured as outputs, these pins can drive LEDs (with a buffer), output flags to a microcontroller, control other ICs, or connect to other external circuitry in an application. In addition to the multipurpose pins, six dedicated input pins (AUXADC5 to AUXADC0) are connected to an auxiliary ADC for use with analog controls such as potentiometers or system voltages.

The [SigmaStudio](#) software programs and controls the device through the control port. In addition to designing and tuning a signal flow, the software can configure all of the DSP registers in real time and download a new program and parameters into the external self boot EEPROM. The [SigmaStudio](#) graphical interface allows anyone with audio processing knowledge to design a DSP signal flow and export production quality code without the need for writing text code. The software provides enough flexibility and programmability to allow an experienced DSP programmer to have in-depth control of the design.

Algorithms are created in [SigmaStudio](#) by dragging and dropping signal processing cells from the library, connecting them together in a flow, compiling the design, and downloading the executable program and parameters to the SigmaDSP memory through the control port. The tasks of linking, compiling, and downloading the project are all handled automatically by the software.

The signal processing cells included in the library range from primitive operations, such as addition and gain, to large and highly optimized building blocks. For example, the libraries include the following:

- Single and double precision biquad filter
- Monochannel and multichannel dynamics processors with peak or rms detection
- Mixer and splitter
- Tone and noise generator
- Fixed and variable gain
- Loudness
- Delay
- Stereo enhancement
- Dynamic bass boost
- Noise and tone source
- Level detector
- MPx pin control and conditioning
- FFT and frequency domain processing algorithms

Analog Devices continuously develops new processing algorithms and provides proprietary and third party algorithms for applications such as matrix decoding, bass enhancement, and surround virtualizers.

Several power saving mechanisms are available, including programmable pad strength for digital I/O pins and the ability to power down unused subsystems.

Fabricated on a single monolithic integrated circuit for operation over the  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$  temperature range, the device is housed in a 72-lead LFCSP package with an exposed pad to assist in heat dissipation.

The device can be controlled in one of two operational modes, as follows:

- The settings of the chip can be loaded and dynamically updated through the SPI/I<sup>2</sup>C port via [SigmaStudio](#) or a processor in the system.
- The DSP can self boot from an external EEPROM in a system with no microcontroller.

## INITIALIZATION

### Power-Up Sequence

The first step in the initialization sequence is to power up the device. First, apply voltage to the power pins. All the power pins can be supplied simultaneously. If the power pins are not supplied simultaneously, supply IOVDD first because the internal ESD protection diodes are referenced to the IOVDD voltage. AVDD, DVDD, and PVDD can be supplied at the same time as IOVDD or after, but they must not be supplied prior to IOVDD. The order in which AVDD, DVDD, and PVDD are supplied does not matter.

DVDD, the power supply for the internal digital logic, can be regulated and supplied directly or it can be generated from IOVDD using an internal voltage regulator. When the internal regulator is not used and DVDD is directly supplied, no special sequence is required when providing the proper voltages to AVDD, DVDD, and PVDD.

When the internal regulator is used, DVDD is derived from IOVDD in combination with an external pass transistor, after AVDD, IOVDD, and PVDD are supplied. See the Power Supplies section for more information.

Each power supply domain has its own internal power-on reset (POR) circuits (also known as power OK circuits) to ensure that the level shifters attached to each power domain can be initialized properly. AVDD and PVDD must reach their nominal level before the auxiliary ADC and PLL can be used, respectively.

However, the AVDD and PVDD supplies have no role in the rest of the power-up sequence. After the AVDD power reaches its nominal threshold, the regulator becomes active and begins to charge up the DVDD supply. The DVDD supply also has a POR circuit to ensure that the level shifters initialize during power-up.

The POR signals are combined into three global level shifter resets that properly initialize the signal crossings between each separate power domain and DVDD.

The digital circuits remain in reset until the IOVDD to DVDD level shifter reset is released. At that point, the digital circuits exit reset.

When a crystal is in use, the crystal oscillator circuit must provide a stable master clock to the XTALIN/MCLK pin by the time the PVDD supply reaches its nominal level. The XTALIN/MCLK pin is restricted from passing into the PLL circuitry until the DVDD POR signal becomes active and the PVDD to DVDD level shifter is initialized.

When all four POR circuits signal that the power-on conditions are met, a reset synchronizer circuit releases the internal digital circuitry from reset, provided that the following conditions are met:

- A valid MCLK signal is provided to the digital circuitry and the PLL.
- The  $\overline{\text{RESET}}$  pin is high.

When the internal digital circuitry becomes active, the DSP core runs eight lines of initialization code stored in read-only memory (ROM), requiring eight cycles of the MCLK signal. For a 12.288 MHz MCLK input, this process takes 650 ns.

After the ROM program completes its execution, the PLL is ready to be configured using register writes to Register 0xF000 (PLL\_CTRL0), Register 0xF001 (PLL\_CTRL1), Register 0xF002 (PLL\_CLK\_SRC), and Register 0xF003 (PLL\_ENABLE).

When the PLL is configured and enabled, the PLL starts to lock to the incoming master clock signal. The absolute maximum PLL lock time is  $32 \times 1024 = 32,768$  clock cycles on the clock signal (after the input prescaler), which is fed to the input of the PLL. In a standard 48 kHz use case, the PLL input clock frequency after the prescaler is 3.072 MHz; therefore, the maximum PLL lock time is 10.666 ms.

Typically, the PLL locks much faster than 10.666 ms. In most systems, the PLL locks within about 3.5 ms. The PLL\_LOCK register (Address 0xF004) can be polled via the control port until Bit 0 (PLL\_LOCK) goes high, signifying that the PLL lock is complete.

While the PLL is attempting to lock to the input clock, the I<sup>2</sup>C slave and SPI slave control ports are inactive; therefore, no other registers are accessible over the control port. While the PLL is attempting to lock, all attempts to write to the control port fail.

Figure 13 shows an example power-up sequence with all relevant signals labeled. If possible, apply the required voltage to all four power supply domains (IOVDD, AVDD, PVDD, and DVDD) simultaneously. If the power supplies are separate, IOVDD, which is the reference for the ESD protection diodes that are situated inside the input and output pins, must be applied first to avoid stressing these diodes. PVDD, AVDD, and DVDD can then be supplied in any order (see the System Initialization Sequence section for more information). Note that the gray areas in Figure 13 represent clock signals.

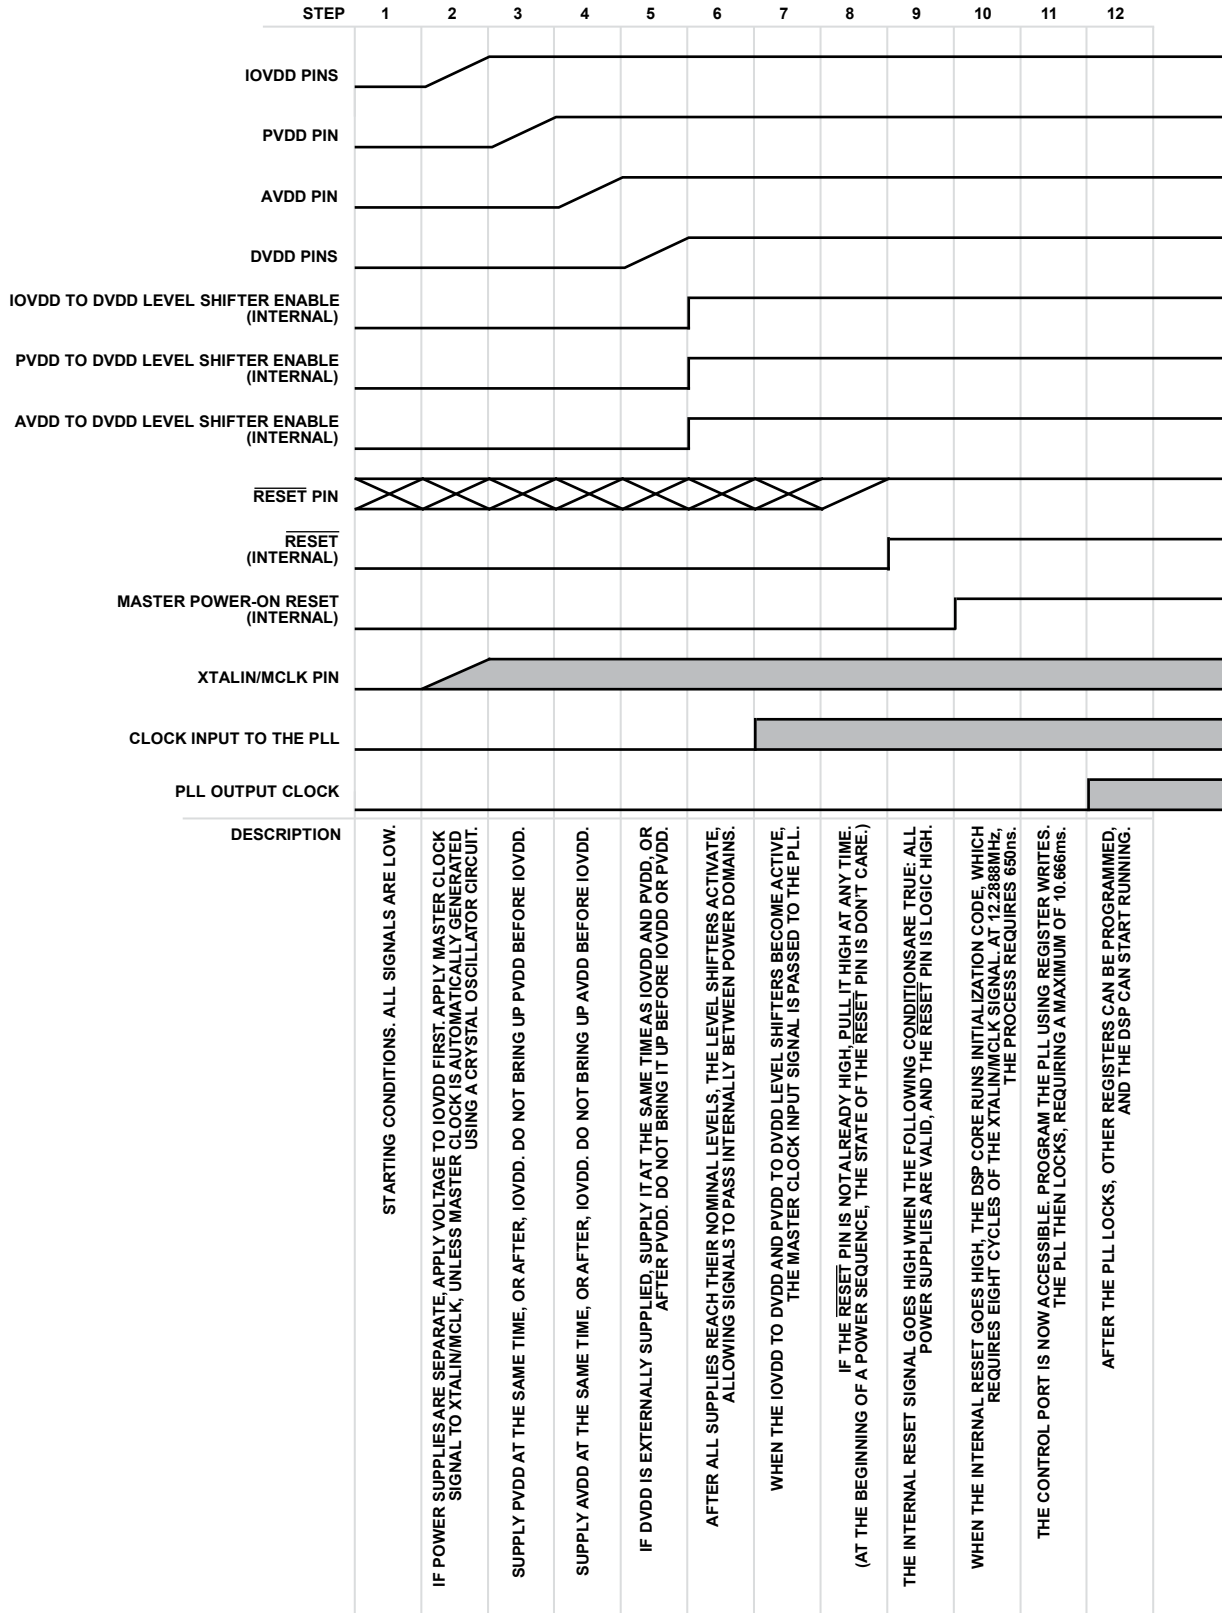


Figure 13. Power Sequencing and POR Timing Diagram for a System with Separate Power Supplies

14810-013

**System Initialization Sequence**

Before the IC can process the audio in the DSP, the following initialization sequence must be completed.

1. If possible, apply the required voltage to all four power supply domains (IOVDD, AVDD, PVDD, and DVDD) simultaneously. If simultaneous application is not possible, supply IOVDD first to prevent damage or reduced operating lifetime. If using the on-board regulator, AVDD and PVDD can be supplied in any order, and DVDD is then generated automatically. If not using the on-board regulator, AVDD, PVDD, and DVDD can be supplied in any order following IOVDD.
2. Start providing a master clock signal to the XTALIN/MCLK pin, or, if using the crystal oscillator, let the crystal oscillator start generating a master clock signal. The master clock signal must be valid when the DVDD supply stabilizes.
3. If the SELFB00T pin is pulled high, a self boot sequence initiates on the master control port. Wait until the self boot operation is complete.
4. If SPI slave control mode is desired, toggle the SS/ADDR0 pin three times. Ensure that each toggle lasts at least the duration of one cycle of the master clock being input to the XTALIN/MCLK pin. When the SS/ADDR0 line rises for the third time, the slave control port is then in SPI mode.
5. Execute the register and memory write sequence that is required to configure the device in the proper operating mode.

Table 19 contains an example series of register writes used to configure the system at startup. The contents of the data column may vary depending on the system configuration. The configuration that is listed in Table 19 represents the default initialization sequence for project files generated in [SigmaStudio](#).

**Recommended Program/Parameter Loading Procedure**

When writing large amounts of data to the program or parameter RAM in direct write mode (such as when downloading the initial contents of the RAMs from an external memory), use the hibernate register (Address 0xF400) to disable the processor core, thus preventing unpleasant noises from appearing at the audio output. When small amounts of data are transmitted during real-time operation of the DSP (such as when updating individual parameters), the software safeload mechanism can be used (see the Software Safeload section).



Table 19. Example System Initialization Register Write Sequence<sup>1</sup>

| Address | Data                          | Register/Memory           | Description  |
|---------|-------------------------------|---------------------------|--|
| N/A     | N/A                           | N/A                       | Toggle SS/ADDR0 three times to enable SPI slave mode, if necessary.  |
| 0xF890  | 0x00, 0x00                    | SOFT_RESET                | Enter soft reset.  |
| 0xF890  | 0x00, 0x01                    | SOFT_RESET                | Exit soft reset.   |
| 0xF000  | 0x00, 0x60                    | PLL_CTRL0                 | Set feedback divider to 96 (this is the default power-on setting).   |
| 0xF001  | 0x00, 0x02                    | PLL_CTRL1                 | Set PLL input clock divider to 4.  |
| 0xF002  | 0x00, 0x01                    | PLL_CLK_SRC               | Set clock source to PLL clock.   |
| 0xF005  | 0x00, 0x05                    | MCLK_OUT                  | Enable MCLK output (12.288 MHz).   |
| 0xF003  | 0x00, 0x01                    | PLL_ENABLE                | Enable PLL.  |
| N/A     | N/A                           | N/A                       | Wait for PLL lock (see the Power-Up Sequence section); the maximum PLL lock time is 10.666 ms.                   |
| 0xF050  | 0x4F, 0xFF                    | POWER_ENABLE0             | Enable power for all major systems except Clock Generator 3 (Clock Generator 3 is rarely used in most systems).  |
| 0xF051  | 0x00, 0x00                    | POWER_ENABLE1             | Disable power for subsystems like PDM microphones, S/PDIF, and the ADC if they are not being used in the system. |
| 0xF899  | 0x00, 0x00                    | SECONDPAGE_ENABLE         | Toggle the SECONDPAGE_ENABLE to point at host port memory Page 0.  |
| 0xC000  | Data generated by SigmaStudio | Program RAM data (Page 0) | Download the lower half of program RAM contents using a block write (data provided by SigmaStudio compiler).     |
| 0x0000  | Data generated by SigmaStudio | DM0 RAM data (Page 0)     | Download the lower half of Data Memory DM0 using a block write (data provided by SigmaStudio compiler).          |
| 0x6000  | Data generated by SigmaStudio | DM1 RAM data (Page 0)     | Download the lower half of Data Memory DM1 using a block write (data provided by SigmaStudio compiler).          |
| 0xF899  | 0x00, 0x01                    | SECONDPAGE_ENABLE         | Toggle the SECONDPAGE_ENABLE to point at host port memory Page 1.  |
| 0xC000  | Data generated by SigmaStudio | Program RAM data (Page 1) | Download the upper half of Program RAM contents using a block write (data provided by SigmaStudio compiler).     |
| 0x0000  | Data generated by SigmaStudio | DM0 RAM data (Page 1)     | Download the upper half of Data Memory DM0 using a block write (data provided by SigmaStudio compiler).          |
| 0x6000  | Data generated by SigmaStudio | DM1 RAM data (Page 2)     | Download the upper half of Data Memory DM1 using a block write (data provided by SigmaStudio compiler).          |
| 0xF404  | 0x00, 0x00                    | START_ADDRESS             | Set program start address as defined by the SigmaStudio compiler.  |
| 0xF401  | 0x00, 0x02                    | START_PULSE               | Set DSP core start pulse to internally generated pulse.  |
| N/A     | N/A                           | N/A                       | Configure any other registers that require nondefault values.  |
| 0xF402  | 0x00, 0x00                    | START_CORE                | Stop the core.   |
| 0xF402  | 0x00, 0x01                    | START_CORE                | Start the core.  |
| N/A     | N/A                           | N/A                       | Wait 50 $\mu$ s for initialization program to execute.   |

<sup>1</sup> N/A means not applicable.

**MASTER CLOCK, PLL, AND CLOCK GENERATORS**

**Clocking Overview**

Connect the clock source directly to the XTALIN/MCLK pin to externally supply the master clock. Alternatively, use the internal clock oscillator to drive an external crystal.

**Using the Oscillator**

The ADAU1462/ADAU1466 can use an on-board oscillator to generate its master clock. However, to complete the oscillator circuit, an external crystal must be attached. The on-board oscillator is designed to work with a crystal that is tuned to resonate at a frequency of the nominal system clock divided by 24. For a normal system, where the nominal system clock is 294.912 MHz, this frequency is 12.288 MHz.

The fundamental frequency of the crystal can be up to 30 MHz. Practically speaking, in most systems the fundamental frequency of the crystal is most easily sourced and simplest to work with when it is in a range from 3.072 MHz to 24.576 MHz.

For the external crystal in the circuit, use an AT-cut parallel resonance device operating at its fundamental frequency. Do not use ceramic resonators, which have poor jitter performance. Quartz crystals are ideal for audio applications. Figure 14 shows the crystal oscillator circuit that is recommended for proper operation.

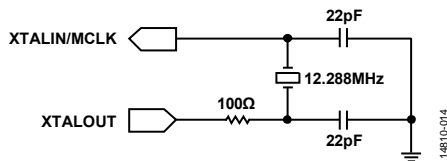


Figure 14. Crystal Resonator Circuit

The 100 Ω damping resistor on XTALOUT provides the oscillator with a voltage swing of approximately 3.1 V at the XTALIN/MCLK pin. The optimal crystal shunt capacitance is 7 pF. Its optimal load capacitance, specified by the manufacturer, is commonly approximately 20 pF, although the circuit supports values of up to 25 pF. Ensure that the equivalent series resistance is as small as possible. Calculate the necessary values of the two load capacitors in the circuit from the crystal load capacitance, using the following equation:

$$C_L = \frac{C1 \times C2}{C1 + C2} + C_{STRAY}$$

where:

C1 and C2 are the load capacitors.

CSTRAY is the stray capacitance in the circuit. CSTRAY is usually assumed to be approximately 2 pF to 5 pF, but it varies depending on the PCB design.

Short trace lengths in the oscillator circuit decrease stray capacitance, thereby increasing the loop gain of the circuit and helping to avoid crystal start-up problems. Therefore, place the crystal as near to the XTALOUT pin as possible and on the same side of the PCB.

On the EVAL-ADAU1466Z evaluation board, the C1 and C2 load capacitors are 22 pF.

Do not directly drive another IC using the crystal signal on XTALOUT. This signal is an analog sine wave with low drive capability and, therefore, is not appropriate to drive an external digital input. A separate pin, CLKOUT, is provided for this purpose. The CLKOUT pin is set up using the MCLK\_OUT register (Address 0xF005). For a more detailed explanation of CLKOUT, refer to the Master Clock Output section or the register map description of the MCLK\_OUT register (see the CLKOUT Control Register section).

If a clock signal is provided from elsewhere in the system directly to the XTALIN/MCLK pin, the crystal resonator circuit is not necessary, and the XTALOUT pin can remain disconnected.

**Setting the Master Clock and PLL Mode**

An integer PLL is available to generate the core system clock from the master clock input signal. The PLL generates the nominal 294.912 MHz core system clock to run the DSP core. The flexible clock generator circuitry enables this nominal core clock frequency to generate a wide range of audio sample rates. An integer prescaler takes the clock signal from the MCLK pin and divides its frequency by 1, 2, 4, or 8 to meet the appropriate frequency range requirements for the PLL itself. The nominal input frequency to the PLL is 3.072 MHz. For systems with an 11.2896 MHz input master clock, the input to the PLL is 2.8224 MHz.




Figure 15. PLL Functional Block Diagram

The master clock input signal ranges in frequency from 2.375 MHz to 36 MHz. For systems that are intended to operate at a 48 kHz, 96 kHz, or 192 kHz audio sample rate, the typical master clock input frequencies are 3.072 MHz, 6.144 MHz, 12.288 MHz, and 24.576 MHz. Note that the flexibility of the PLL allows a large range of other clock frequencies, as well.

The PLL in the ADAU1462 and ADAU1466 has a nominal (and maximum) output frequency of 294.912 MHz.

The PLL is configured by setting Register 0xF000 (PLL\_CTRL0), Register 0xF001 (PLL\_CTRL1), and Register 0xF002 (PLL\_CLK\_SRC). After these registers are modified, set Register 0xF003, Bit 0 (PLL\_ENABLE), forcing the PLL to reset itself and attempt to relock to the incoming clock signal. Typically, the PLL locks within 3.5 ms. When the PLL locks to an input clock and creates a stable output clock, a lock flag is set in Register 0xF004, Bit 0 (PLL\_LOCK).



**Example PLL Settings**

Depending on the input clock frequency, there are several possible configurations for the PLL. Setting the PLL to generate the highest possible system clock, without exceeding the maximum, allows for the execution of more DSP program instructions for each audio frame. Alternatively, setting the PLL to generate a lower frequency system clock allows fewer instructions to be executed and lowers

overall power consumption of the device. Table 20 shows several example MCLK frequencies and the corresponding PLL settings that allow the highest number of program instructions to be executed for each audio frame. The settings provide the highest possible system clock without exceeding the 294.912 MHz upper limit.

**Table 20. Optimal Predivider and Feedback Divider Settings for Varying Input MCLK Frequencies**

| Input MCLK Frequency (MHz) | Predivider Setting | PLL Input Clock (MHz) | Feedback Divider Setting | ADAU1462/ADAU1466 Fast Grade System Clock (MHz) | ADAU1462 Slow Grade System Clock (MHz) |
|----------------------------|--------------------|-----------------------|--------------------------|---|--|
| 2.8224                     | 1                  | 2.8224                | 104                      | 293.5296  | 146.7648                               |
| 3                          | 1                  | 3                     | 98                       | 294   | 147                                    |
| 3.072                      | 1                  | 3.072                 | 96                       | 294.912   | 147.456                                |
| 3.5                        | 1                  | 3.5                   | 84                       | 294   | 147                                    |
| 4                          | 1                  | 4                     | 73                       | 292   | 146                                    |
| 4.5                        | 1                  | 4.5                   | 65                       | 292.5   | 146.25                                 |
| 5                          | 2                  | 2.5                   | 117                      | 292.5   | 146.25                                 |
| 5.5                        | 2                  | 2.75                  | 107                      | 294.25  | 147.125                                |
| 5.6448                     | 2                  | 2.8224                | 104                      | 293.5296  | 146.7648                               |
| 6                          | 2                  | 3                     | 98                       | 294   | 147                                    |
| 6.144                      | 2                  | 3.072                 | 96                       | 294.912   | 147.456                                |
| 6.5                        | 2                  | 3.25                  | 90                       | 292.5   | 146.25                                 |
| 7                          | 2                  | 3.5                   | 84                       | 294   | 147                                    |
| 7.5                        | 2                  | 3.75                  | 78                       | 292.5   | 146.25                                 |
| 8                          | 2                  | 4                     | 73                       | 292   | 146                                    |
| 8.5                        | 2                  | 4.25                  | 69                       | 293.25  | 146.625                                |
| 9                          | 2                  | 4.5                   | 65                       | 292.5   | 146.25                                 |
| 9.5                        | 4                  | 2.375                 | 124                      | 294.5   | 147.25                                 |
| 10                         | 4                  | 2.5                   | 117                      | 292.5   | 146.25                                 |
| 10.5                       | 4                  | 2.625                 | 112                      | 294   | 147                                    |
| 11                         | 4                  | 2.75                  | 107                      | 294.25  | 147.125                                |
| 11.2896                    | 4                  | 2.8224                | 104                      | 293.5296  | 146.7648                               |
| 11.5                       | 4                  | 2.875                 | 102                      | 293.25  | 146.625                                |
| 12                         | 4                  | 3                     | 98                       | 294   | 147                                    |
| 12.288                     | 4                  | 3.072                 | 96                       | 294.912   | 147.456                                |
| 12.5                       | 4                  | 3.125                 | 94                       | 293.75  | 146.875                                |
| 13                         | 4                  | 3.25                  | 90                       | 292.5   | 146.25                                 |
| 13.5                       | 4                  | 3.375                 | 87                       | 293.625   | 146.8125                               |
| 14                         | 4                  | 3.5                   | 84                       | 294   | 147                                    |
| 14.5                       | 4                  | 3.625                 | 81                       | 293.625   | 146.8125                               |
| 15                         | 4                  | 3.75                  | 78                       | 292.5   | 146.25                                 |
| 15.5                       | 4                  | 3.875                 | 76                       | 294.5   | 147.25                                 |
| 16                         | 4                  | 4                     | 73                       | 292   | 146                                    |
| 16.5                       | 4                  | 4.125                 | 71                       | 292.875   | 146.4375                               |
| 17                         | 4                  | 4.25                  | 69                       | 293.25  | 146.625                                |
| 17.5                       | 4                  | 4.375                 | 67                       | 293.125   | 146.5625                               |
| 18                         | 4                  | 4.5                   | 65                       | 292.5   | 146.25                                 |
| 18.5                       | 8                  | 2.3125                | 127                      | 293.6875  | 146.84375                              |
| 19                         | 8                  | 2.375                 | 124                      | 294.5   | 147.25                                 |
| 19.5                       | 8                  | 2.4375                | 120                      | 292.5   | 146.25                                 |
| 20                         | 8                  | 2.5                   | 117                      | 292.5   | 146.25                                 |
| 20.5                       | 8                  | 2.5625                | 115                      | 294.6875  | 147.34375                              |
| 21                         | 8                  | 2.625                 | 112                      | 294   | 147                                    |

| Input MCLK Frequency (MHz) | Predivider Setting | PLL Input Clock (MHz) | Feedback Divider Setting | ADAU1462/ADAU1466 Fast Grade System Clock (MHz) | ADAU1462 Slow Grade System Clock (MHz) |
|----------------------------|--------------------|-----------------------|--------------------------|---|--|
| 21.5                       | 8                  | 2.6875                | 109                      | 292.9375  | 146.46875                              |
| 22                         | 8                  | 2.75                  | 107                      | 294.25  | 147.125                                |
| 22.5                       | 8                  | 2.8125                | 104                      | 292.5   | 146.25                                 |
| 22.5792                    | 8                  | 2.8224                | 104                      | 293.5296  | 146.7648                               |
| 23                         | 8                  | 2.875                 | 102                      | 293.25  | 146.625                                |
| 23.5                       | 8                  | 2.9375                | 100                      | 293.75  | 146.875                                |
| 24                         | 8                  | 3                     | 98                       | 294   | 147                                    |
| 24.5                       | 8                  | 3.0625                | 96                       | 294   | 147                                    |
| 24.576                     | 8                  | 3.072                 | 96                       | 294.912   | 147.456                                |
| 25                         | 8                  | 3.125                 | 94                       | 293.75  | 146.875                                |

**Relationship Between System Clock and Number of Instructions per Sample**

The DSP core executes only a limited number of instructions within the span of each audio sample. The number of instructions that can be executed is a function of the system clock and the DSP core sample rate. The core sample rate is set by Register 0xF401 (START\_PULSE), Bits[4:0] (START\_PULSE).

The number of instructions that can be executed per sample is equal to the system clock frequency divided by the DSP core sample rate. However, the program RAM size is 8192 words; therefore, where the maximum instructions per sample exceeds 8192, subroutines and loops must be used to make use of all available instructions (see Table 21).

**PLL Filter**

An external PLL filter is required to help the PLL maintain stability and to limit the amount of ripple appearing on the phase detector output of the PLL. For a nominal 3.072 MHz PLL input and a 294.912 MHz system clock output (or 147.456 MHz), the recommended filter configuration is shown in Figure 16. This filter works for the full frequency range of the PLL.

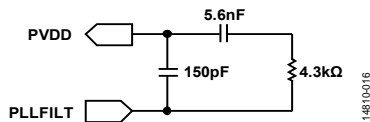


Figure 16. PLL Filter

Because the center frequency and bandwidth of the loop filter is determined by the values of the included components, use high accuracy (low tolerance) components. Components that are valued within 10% of the recommended component values and with a 15% or lower tolerance are suitable for use in the loop filter circuit.

The voltage on the PLLFILT pin, which is internally generated, is typically between 1.65 V and 2.10 V.

Table 21. Maximum Instructions/Sample

| System Clock (MHz) | DSP Core Sample Rate (kHz) | Maximum Instructions per Sample |
|--------------------|----------------------------|---------------------------------|
| 294.912            | 8                          | 36,864 <sup>1</sup>             |
| 294.912            | 12                         | 24,576 <sup>1</sup>             |
| 294.912            | 16                         | 18,432 <sup>1</sup>             |
| 294.912            | 24                         | 12,288 <sup>1</sup>             |
| 294.912            | 32                         | 9216 <sup>1</sup>               |
| 294.912            | 48                         | 6144                            |
| 294.912            | 64                         | 4608                            |
| 294.912            | 96                         | 3072                            |
| 294.912            | 128                        | 2304                            |
| 294.912            | 192                        | 1536                            |
| 293.5296           | 11.025                     | 26,624 <sup>1</sup>             |
| 293.5296           | 22.05                      | 13,312 <sup>1</sup>             |
| 293.5296           | 44.1                       | 6656                            |
| 293.5296           | 88.2                       | 3328                            |
| 293.5296           | 176.4                      | 1664                            |
| 147.456            | 8                          | 184320                          |
| 147.456            | 12                         | 122880                          |
| 147.456            | 16                         | 92160                           |
| 147.456            | 24                         | 61440                           |
| 147.456            | 32                         | 46080                           |
| 147.456            | 48                         | 30720                           |
| 147.456            | 64                         | 23040                           |
| 147.456            | 96                         | 15360                           |
| 147.456            | 128                        | 11520                           |
| 147.456            | 192                        | 7680                            |
| 146.7648           | 11.025                     | 133120                          |
| 146.7648           | 22.05                      | 66560                           |
| 146.7648           | 44.1                       | 33280                           |
| 146.7648           | 88.2                       | 16640                           |
| 146.7648           | 176.4                      | 8320                            |

<sup>1</sup> The instructions per sample in these cases exceed the program memory size of 8192 words; therefore, to utilize the full number of instructions, subroutines or branches are required in the SigmaStudio program.

**Clock Generators**

Three clock generators are available to generate audio clocks for the serial ports, DSP, ASRCs, and other audio related functional blocks in the system. Each clock generator can be configured to generate a base frequency and several fractions or multiples of that base frequency, creating a total of 15 clock domains available for use in the system. Each of the 15 clock domains can create the appropriate frame clock (LRCLK) and bit clock (BCLK) signals for the serial ports. Five BCLK signals are generated at frequencies of 32 BCLK/sample, 64 BCLK/sample, 128 BCLK/sample, 256 BCLK/sample, and 512 BCLK/sample to deal with TDM data. Therefore, with a single master clock input frequency, 15 different frame clock frequencies and 75 different bit clock frequencies can be generated for use in the system.

The nominal output of each clock generator is determined by the following formula:

$$\text{Output Frequency} = (\text{Input Frequency} \times N) / (1024 \times M)$$

where:

*Input Frequency* is the PLL output (nominally 294.912 MHz).

*Output Frequency* is the frame clock output frequency.

*N* and *M* are integers that are configured by writing to the clock generator configuration registers.

In addition to the nominal output, four additional output signals are generated at double, quadruple, half, and a quarter of the frequency of the nominal output frequency.

For Clock Generator 1 and Clock Generator 2, the integer numerator (N) and the integer denominator (M) are each nine bits long. For Clock Generator 3, N and M are each 16 bits long, allowing a higher precision when generating arbitrary clock frequencies.

Figure 17 shows a basic block diagram of the PLL and clock generators. Each division operator symbolizes that the frequency of the clock is divided when passing through that block. Each multiplication operator symbolizes that the frequency of the clock is multiplied when passing through that block.

Figure 18 shows an example where the master clock input has a frequency of 12.288 MHz, and the default settings are used for the PLL predivider, feedback divider, and Clock Generator 1 and Clock Generator 2. The resulting system clock is

$$12.288 \text{ MHz} \div 4 \times 96 = 294.912 \text{ MHz}$$

The base output of Clock Generator 1 is

$$294.912 \text{ MHz} \div 1024 \times 1 \div 6 = 48 \text{ kHz}$$

The base output of Clock Generator 2 is

$$294.912 \text{ MHz} \div 1024 \times 1 \div 9 = 32 \text{ kHz}$$

In this example, Clock Generator 3 is configured with N = 49 and M = 320; therefore, the resulting base output of Clock Generator 3 is

$$294.912 \text{ MHz} \div 1024 \times 49 \div 320 = 44.1 \text{ kHz}$$

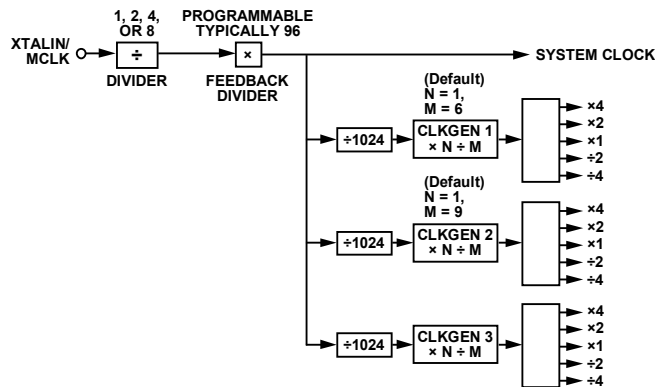


Figure 17. PLL and Clock Generators Block Diagram

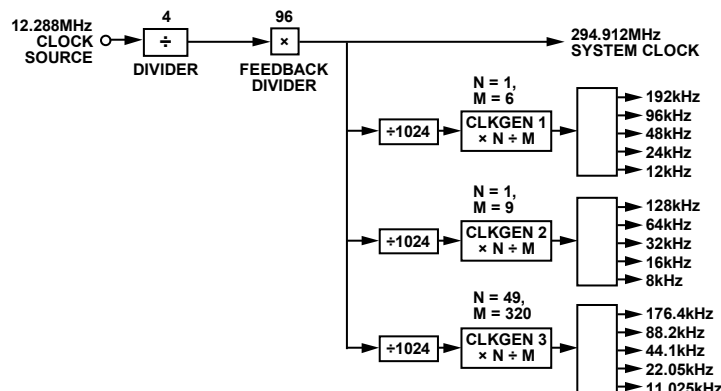


Figure 18. PLL and Audio Clock Generators with Default Settings and Resulting Clock Frequencies Labeled, XTALIN/MCLK = 12.288 MHz

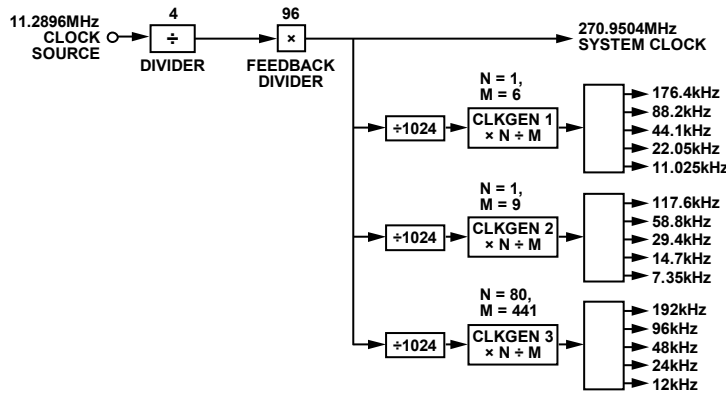


Figure 19. PLL and Audio Clock Generators with Default Settings and Resulting Clock Frequencies Labeled, XTALIN/MCLK = 11.2896 MHz

Figure 19 shows an example where the master clock input has a frequency of 11.2896 MHz, and the default settings are used for the PLL predivider, feedback divider, and Clock Generator 1 and Clock Generator 2. The resulting system clock is

$$11.2896 \text{ MHz} \div 4 \times 96 = 270.9504 \text{ MHz}$$

The base output of Clock Generator 1 is

$$270.9504 \text{ MHz} \div 1024 \times 1 \div 6 = 44.1 \text{ kHz}$$

The base output of Clock Generator 2 is

$$270.9504 \text{ MHz} \div 1024 \times 1 \div 9 = 29.4 \text{ kHz}$$

In this example, Clock Generator 3 is configured with N = 80 and M = 441; therefore, the resulting base output of Clock Generator 3 is

$$270.9504 \text{ MHz} \div 1024 \times 80 \div 441 = 48 \text{ kHz}$$

**Master Clock Output**

The master clock output pin (CLKOUT) is useful in cases where a master clock must be fed to other ICs in the system, such as audio codecs. The master clock output frequency is determined by the setting of the MCLK\_OUT register (Address 0xF005). Four frequencies are possible: 1×, 2×, 4×, or 8× the frequency of the predivider output.

- The predivider output × 1 generates a 3.072 MHz output for a nominal system clock of 294.912 MHz.
- The predivider output × 2 generates a 6.144 MHz output for a nominal system clock of 294.912 MHz.
- The predivider output × 4 generates a 12.288 MHz output for a nominal system clock of 294.912 MHz.
- The predivider output × 8 generates a 24.576 MHz output for a nominal system clock of 294.912 MHz.

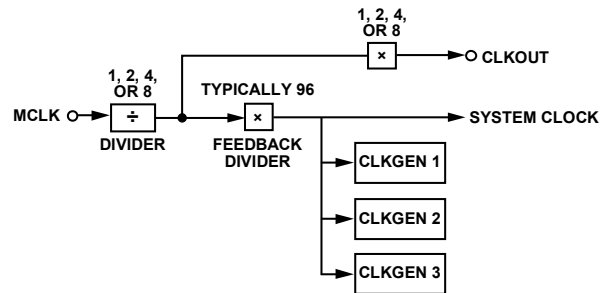


Figure 20. Clock Output Generator

The CLKOUT pin can drive more than one external slave IC if the drive strength is sufficient to drive the traces and external receiver circuitry. The ability to drive external ICs varies greatly, depending on the application and the characteristics of the PCB and the slave ICs. The drive strength and slew rate of the CLKOUT pin is configurable in the CLKOUT\_PIN register (Address 0xF7A3); therefore, its performance can be tuned to match the specific application. The CLKOUT pin is not designed to drive long cables or other high impedance transmission lines. Use the CLKOUT pin only to drive signals to other integrated circuits on the same PCB. When changing the settings for the predivider, disable and then reenble the PLL using Register 0xF003 (PLL\_ENABLE), allowing the frequency of the CLKOUT signal to update.

**Dejitter Circuitry**

To account for jitter between ICs in the system and to handle interfacing safely between internal and external clocks, dejitter circuits are included to guarantee that jitter related clocking errors are avoided. The dejitter circuitry is automated and does not require interaction or control from the user.

**Master Clock, PLL, and Clock Generators Registers**

An overview of the registers related to the master clock, PLL, and clock generators is listed in Table 22. For a more detailed description, see the PLL Configuration Registers section and the Clock Generator Registers section.

**Table 22. Master Clock, PLL, and Clock Generator Registers**

| Address | Register      | Description                                    |
|---------|---------------|--|
| 0xF000  | PLL_CTRL0     | PLL feedback divider                           |
| 0xF001  | PLL_CTRL1     | PLL prescale divider                           |
| 0xF002  | PLL_CLK_SRC   | PLL clock source                               |
| 0xF003  | PLL_ENABLE    | PLL enable                                     |
| 0xF004  | PLL_LOCK      | PLL lock                                       |
| 0xF005  | MCLK_OUT      | CLKOUT control                                 |
| 0xF006  | PLL_WATCHDOG  | Analog PLL watchdog control                    |
| 0xF020  | CLK_GEN1_M    | Denominator (M) for Clock Generator 1          |
| 0xF021  | CLK_GEN1_N    | Numerator (N) for Clock Generator 1            |
| 0xF022  | CLK_GEN2_M    | Denominator (M) for Clock Generator 2          |
| 0xF023  | CLK_GEN2_N    | Numerator (N) for Clock Generator 2            |
| 0xF024  | CLK_GEN3_M    | Denominator (M) for Clock Generator 3          |
| 0xF025  | CLK_GEN3_N    | Numerator (N) for Clock Generator 3            |
| 0xF026  | CLK_GEN3_SRC  | Input source for Clock Generator 3             |
| 0xF027  | CLK_GEN3_LOCK | Lock bit for Clock Generator 3 input reference |

**POWER SUPPLIES, VOLTAGE REGULATOR, AND HARDWARE RESET**

**Power Supplies**

The ADAU1462/ADAU1466 are supplied by four power supplies: IOVDD, DVDD, AVDD, and PVDD.

- IOVDD (input/output supply) sets the reference voltage for all digital input and output pins. It can be any value ranging from 1.8 V – 5% to 3.3 V + 10%. To use the I<sup>2</sup>C/SPI control ports or any of the digital input or output pins, the IOVDD supply must be present.
- DVDD (digital supply) powers the DSP core and supporting digital logic circuitry. It must be 1.2 V ± 5%.
- AVDD (analog supply) powers the analog auxiliary ADC circuitry. It must be supplied even if the auxiliary ADCs are not in use.
- PVDD (PLL supply) powers the PLL and acts as a reference for the voltage controlled oscillator (VCO). It must be supplied even if the PLL is not in use.

**Table 23. Power Supply Details**

| Supply               | Voltage                   | Externally Supplied? | Description   |
|----------------------|---------------------------|----------------------|---|
| IOVDD (Input/Output) | 1.8 V – 5% to 3.3 V + 10% | Yes                  | Can be derived from IOVDD using an internal LDO regulator |
| DVDD (Digital)       | 1.2 V ± 5%                | Optional             |   |
| AVDD (Analog)        | 3.3 V ± 10%               | Yes                  |   |
| PVDD (PLL)           | 3.3 V ± 10%               | Yes                  |   |

**Voltage Regulator**

The ADAU1462/ADAU1466 include a linear regulator that can generate the 1.2 V supply required by the DSP core and other internal digital circuitry from an external supply. Source the linear regulator from the I/O supply (IOVDD), which can range from 1.8 V – 5% to 3.3 V + 10%. A simplified block diagram of the internal structure of the regulator is shown in Figure 22.

For proper operation, the linear regulator requires several external components. A PNP bipolar junction transistor, such as the ON Semiconductor NSS1C300ET4G, acts as an external pass device to bring the higher IOVDD voltage down to the lower DVDD voltage, thus externally dissipating the power of the IC package. Ensure that the current gain of the transistor ( $\beta$ ) is 200 or greater and that the transistor is able to dissipate at least 1 W in the worst case. Place a 1 k $\Omega$  resistor between the transistor emitter and base to help stabilize the regulator for varying loads. This resistor placement also guarantees that current is always flowing into the VDRIVE pin, even for minimal regulator loads. Figure 21 shows the connection of the external components.

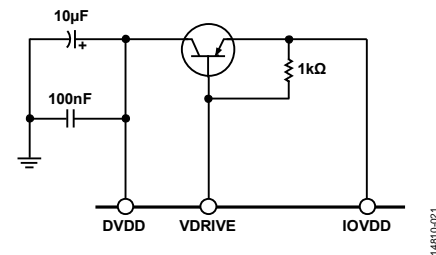


Figure 21. External Components Required for Voltage Regulator Circuit

If an external supply is provided to DVDD, ground the VDRIVE pin. The regulator continues to draw a small amount of current (approximately 100  $\mu$ A) from the IOVDD supply. Do not use the regulator to provide a voltage supply to external ICs. There are no control registers associated with the regulator.

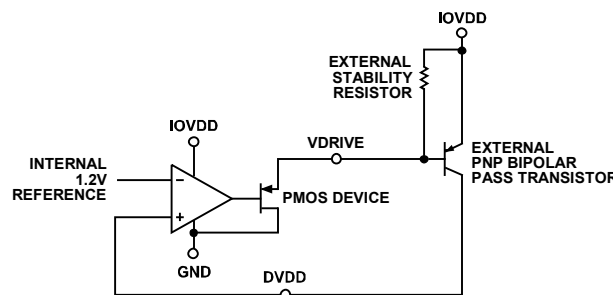


Figure 22. Simplified Block Diagram of Regulator Internal Structure, Including External Components

**Power Reduction Modes**

All sections of the IC have clock gating functionality that allows individual functional blocks to be disabled for power savings. Functional blocks that can optionally be powered down include the following:

- Clock Generator 1, Clock Generator 2, and Clock Generator 3
- S/PDIF receiver
- S/PDIF transmitter
- Serial data input and output ports
- Auxiliary ADC
- ASRCs (in two banks of eight channels each)
- PDM microphone inputs and decimation filters

**Overview of Power Reduction Registers**

An overview of the registers related to power reduction is shown in Table 24. For a more detailed description, refer to the Power Reduction Registers section.

**Table 24. Power Reduction Registers**

| Address | Register      | Description   |
|---------|---------------|---|
| 0xF050  | POWER_ENABLE0 | Disables clock generators, serial ports, and ASRCs                    |
| 0xF051  | POWER_ENABLE1 | Disables PDM microphone inputs, S/PDIF interfaces, and auxiliary ADCs |

**Hardware Reset**

An active low hardware reset pin ( $\overline{\text{RESET}}$ ) is available for externally triggering a reset of the device. When this pin is tied to ground, all functional blocks in the device are disabled, and the current consumption decreases dramatically. The amount of current drawn depends on the leakage current of the silicon, which depends greatly on the ambient temperature and the properties of the die. When the  $\overline{\text{RESET}}$  pin is connected to IOVDD, all control registers are reset to their power-on default values. The state of the RAM is not guaranteed to be cleared after a reset; therefore, the memory must be manually cleared by the DSP program.

The default program generated by SigmaStudio includes code that automatically clears the memory. To ensure that no chatter exists on the  $\overline{\text{RESET}}$  signal line, implement an external reset generation circuit in the system hardware design. Figure 23 shows an example of the ADM811 microprocessor supervisory circuit with a push button connected, providing a method for manually generating a clean  $\overline{\text{RESET}}$  signal. For reliability purposes on the application level, place a weak pull-down resistor (in the range of several kilohms) on the  $\overline{\text{RESET}}$  line to guarantee that the device is held in reset in the event that the reset supervisory circuitry fails.

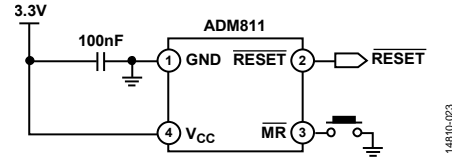


Figure 23. Example Manual Reset Generation Circuit

If the hardware reset function is not required in a system, pull the  $\overline{\text{RESET}}$  pin high to the IOVDD supply using a weak pull-up resistor (in the range of several kilohms). The device is designed to boot properly even when the  $\overline{\text{RESET}}$  pin is permanently pulled high.

**DSP Core Current Consumption**

The DSP core draws varying amounts of current, depending on the processing load required by the program it is running. Figure 24 shows the relationship between program size and digital (DVDD) current draw. The minimum of 0 MIPS signifies the case where no program is running in the DSP core, and the maximum of 294 MIPS signifies that the DSP core is at full utilization, executing a typical audio processing program.

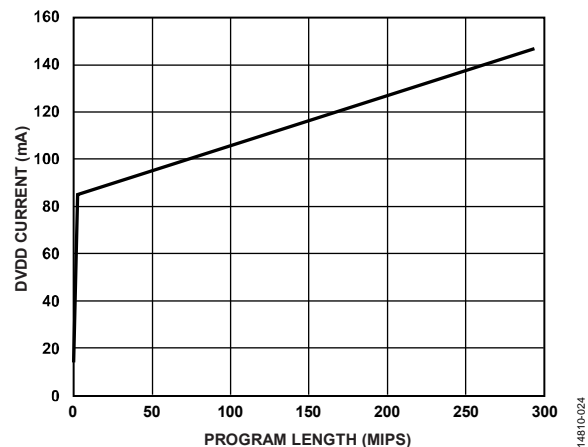


Figure 24. ADAU1466 Typical DVDD Current Draw vs. Program MIPS at an Ambient Temperature of 25°C and a Sample Rate of 48 kHz

**TEMPERATURE SENSOR DIODE**

The chip includes an on-board temperature sensor diode with an approximate range of 0°C to 120°C. The temperature sensor function is enabled by the two sides of a diode connected to the THD\_P and THD\_M pins. Value processing (calculating the actual temperature based on the current through the diode) is handled off chip by an external controller IC. The temperature value is not stored in an internal register; it is available only in the external controller IC. The temperature sensor requires an external IC to operate properly. See the Engineer-to-Engineer Note EE-346 for more information and instructions for using the temperature sensor diode.

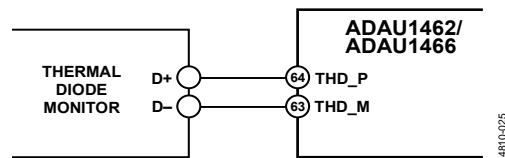


Figure 25. Example External Temperature Sensor Circuit



## SLAVE CONTROL PORTS

A total of four control ports are available: two slave ports and two master ports. The slave I<sup>2</sup>C port and slave SPI port allow an external master device to modify the contents of the memory and registers. The master I<sup>2</sup>C port and master SPI port allow the device to self boot and to send control messages to slave devices on the same bus.

### Slave Control Port Overview

To program the DSP and configure the control registers, a slave port is available that can communicate using either the I<sup>2</sup>C or SPI protocols. Any external device that controls the ADAU1462/ADAU1466, including a hardware interface used with [SigmaStudio](#) for development or a microcontroller in a large running system, uses the slave control port to communicate with the DSP. This port is unrelated to the master communications port that also uses the I<sup>2</sup>C or SPI protocols. The master port enables applications without an external controller and can read from an external EEPROM to self boot and control external ICs.

The slave communications port defaults to I<sup>2</sup>C mode; however, it can be put into SPI mode by toggling SS (SS/ADDR0), the slave select pin, from high to low three times. The slave select pin must be held low for at least one master clock period (that is, one period of the clock on the XTALIN\_MCLK input pin). Only the PLL configuration registers (0xF000 to 0xF004) are accessible before the PLL locks. For this reason, always write to the PLL registers first after the chip powers up. After the PLL locks, the remaining registers and the RAM become accessible. See the System Initialization Sequence section for more information.

## SLAVE CONTROL PORT ADDRESSING

Unlike earlier SigmaDSP processors, the ADAU1462/ADAU1466 slave control port 16-bit addressing cannot provide direct access to the total amount of memory available to the DSP core on its wider internal busses. Full read/write access to all memory and addressable registers is possible, but it must be accessed as two pages of memory in the slave control port address space. Page 0 is referred to as lower memory and Page 1 as upper memory. The single-bit register SECONDPAGE\_ENABLE (0xF899) selects the active page.

Within a page, all addresses are accessible using both single address mode and burst mode. The first byte (Byte 0) of a control port write contains the 7-bit chip address plus the R/W bit. The next two bytes (Byte 1 and Byte 2) together form the subaddress of the register location within the memory maps of the ADAU1462/ADAU1466. This subaddress must be two bytes

long because the memory locations within the devices are directly addressable, and their sizes exceed the range of single byte addressing. The third byte to the end of the sequence contain the data, such as control port data, program data, or parameter data. The number of bytes written per word depends on the type of data. For more information, see the Burst Mode Writing and Reading section. The ADAU1462/ADAU1466 must have a valid master clock to write to the slave control port, with the exception of the PLL configuration registers, 0xF000 to 0xF004.

If large blocks of data must be downloaded, halt the output of the DSP core (using Register 0xF400, HIBERNATE), load new data, and then restart the device (using Register 0xF402, START\_CORE). This process is most common during the booting sequence at startup or when loading a new program into RAM because the ADAU1462/ADAU1466 has several mechanisms for updating signal processing parameters in real time without causing pops or clicks.

When updating a signal processing parameter while the DSP core is running, use the software safeload function. This function allows atomic writes to memory and prevents updates to parameters across the boundary of an audio frame, which can lead to an audio artifact such as a click or pop sound. For more information, see the Software Safeload section.

The slave control port supports either I<sup>2</sup>C or SPI, but not simultaneously. The function of each pin is described in Table 25 for the two modes.

### Burst Mode Writing and Reading

Burst write and read modes are available for convenience when writing large amounts of data to contiguous registers. In these modes, the chip and memory addresses are written once, and then a large amount of data can follow uninterrupted. The subaddresses are automatically incremented at the word boundaries. This increment happens automatically after a single word write or read unless a stop condition is encountered (I<sup>2</sup>C mode) or the slave select is disabled and brought high (SPI mode). A burst write starts like a single word write, but, following the first data-word, the data-word for the next address can be written immediately without sending its 2-byte address. The control registers in the ADAU1462/ADAU1466 are two bytes wide, and the memories are four bytes wide. The auto-increment feature knows the word length at each subaddress; therefore, it is not necessary to manually specify the subaddress for each address in a burst write.

The subaddresses are automatically incremented by one address, following each read or write of a data-word, regardless of whether there is a valid register or RAM word at that address.

Table 25. Control Port Pin Functions

| Pin Name   | I <sup>2</sup> C Slave Mode   | SPI Slave Mode   |
|------------|---|--|
| SS/ADDR0   | Address 0 (Bit 1 of the address word, input to the ADAU1462/ADAU1466) | Slave select (input to the ADAU1462/ADAU1466)                  |
| CCLK/SCL   | Clock (input to the ADAU1462/ADAU1466)                                | Clock (input to the ADAU1462/ADAU1466)                         |
| MOSI/ADDR1 | Address 1 (Bit 2 of the address word, input to the ADAU1462/ADAU1466) | Data; master out, slave in (input to the ADAU1462/ADAU1466)    |
| MISO/SDA   | Data (bidirectional, open collector)                                  | Data; master in, slave out (output from the ADAU1462/ADAU1466) |

**SLAVE PORT TO DSP CORE ADDRESS MAPPING**

The DSP core architecture use of three separate areas of memory, PM, DM0, and DM1 (program memory, Data Memory 0, and Data Memory 1, respectively). To maintain backward compatibility with the ADAU1450/ADAU1451/ADAU1452 family of processors, slave port access to this memory is divided into two pages, Page 1 and Page 2. The single-bit register SECONDPAGE\_ENABLE (0xF899) selects the active page. Figure 26 shows the mapping between slave port addresses and the native address space of the core for ADAU1462. Figure 27 shows the mapping between slave port addresses and the native address space of the core for ADAU1466.

Note that the lower and upper halves of program memory, Data Memory 0, and Data Memory 1 map to the same slave control port addresses. The value of register SECONDPAGE\_ENABLE (Address 0xF899) determines whether a slave control port address points to the lower or upper areas of PM, DM0, and DM1.

Although the slave port accesses memory in pages, the addressing is contiguous and seamless to the DSP core.

Note that there is only one set of control registers, and they are at Address 0xF000 to Address 0xFBFF. The value of SECONDPAGE\_ENABLE has no effect on these registers.

For example,

- A write on the slave port to Address 0x6000 while SECONDPAGE\_ENABLE is set to 0 (on Page 1) changes the value of Address 0x0000 in DM1 memory.
- A write on the slave port to Address 0xAFFF while SECONDPAGE\_ENABLE is set to 0 (on Page 1) changes the value of Address 0x4FFF in DM1 memory.
- A write on the slave port to Address 0x6000 while SECONDPAGE\_ENABLE is set to 1 (on Page 2) changes the value of Address 0x5000 in DM1 memory.
- A write on the slave port to Address 0xAFFF while SECONDPAGE\_ENABLE is set to 1 (on Page 2) changes the value of Address 0x9FFF in DM1 memory.



| PM BUS            |                                    | DM0 BUS            |                                    | DM1 BUS            |                                    |
|-------------------|------------------------------------|--------------------|------------------------------------|--------------------|------------------------------------|
| CORE ADDRESS      | SLAVE CONTROL PORT ADDRESS/MAPPING | CORE ADDRESS       | SLAVE CONTROL PORT ADDRESS/MAPPING | CORE ADDRESS       | SLAVE CONTROL PORT ADDRESS/MAPPING |
| 0x0000            | 0xC000                             | 0x0000             | 0x0000                             | 0x0000             | 0x6000                             |
| 0x1FFF            | 0xDFFF                             |                    |                                    |                    |                                    |
| PM LOWER (PAGE 1) |                                    | DM0 LOWER (PAGE 1) |                                    | DM1 LOWER (PAGE 1) |                                    |
| 0x2000            | 0xC000                             | 0x2FFF             | 0x2FFF                             | 0x2FFF             | 0x8FFF                             |
| 0x3FFF            | 0xDFFF                             | 0x3000             | 0x0000                             | 0x3000             | 0x6000                             |
| PM UPPER (PAGE 2) |                                    | DM0 UPPER (PAGE 2) |                                    | DM1 UPPER (PAGE 2) |                                    |
| 0x4000            |                                    | 0x5FFF             | 0x2FFF                             | 0x5FFF             | 0x8FFF                             |
|                   |                                    | 0x6000             |                                    | 0x6000             |                                    |
| 0xBFFF            |                                    | 0xBFFF             |                                    | 0xBFFF             |                                    |
| 0xC000            |                                    | 0xC000             |                                    | 0xC000             |                                    |
|                   | BOOT ROM                           |                    | DATA ROM 0                         |                    | DATA ROM 1                         |
| 0xEFFF            |                                    | 0xEFFF             |                                    | 0xEFFF             |                                    |
| 0xF000            |                                    | 0xF000             | 0xF000                             | 0xF000             | 0xF000                             |
| 0xFBFF            |                                    | 0xFBFF             | 0xFBFF                             | 0xFBFF             | 0xFBFF                             |
|                   |                                    |                    | REGISTERS                          |                    | REGISTERS                          |

Figure 26. ADAU1462 Slave Port Address to DSP Core Address Mapping

14610-126

| PM BUS       |                                    | DM0 BUS      |                                    | DM1 BUS      |                                    |
|--------------|------------------------------------|--------------|------------------------------------|--------------|------------------------------------|
| CORE ADDRESS | SLAVE CONTROL PORT ADDRESS/MAPPING | CORE ADDRESS | SLAVE CONTROL PORT ADDRESS/MAPPING | CORE ADDRESS | SLAVE CONTROL PORT ADDRESS/MAPPING |
| 0x0000       | 0xC000                             | 0x0000       | 0x0000                             | 0x0000       | 0x6000                             |
|              | PM LOWER (PAGE 1)                  |              | DM0 LOWER (PAGE 1)                 |              | DM1 LOWER (PAGE 1)                 |
| 0x2FFF       | 0xEFFF                             |              |                                    |              |                                    |
| 0x3000       | 0xC000                             | 0x4FFF       | 0x4FFF                             | 0x4FFF       | 0xAFFF                             |
|              | PM UPPER (PAGE 2)                  |              | DM0 UPPER (PAGE 2)                 |              | DM1 UPPER (PAGE 2)                 |
| 0x5FFF       | 0xEFFF                             | 0x5000       | 0x0000                             | 0x5000       | 0x6000                             |
| 0x6000       |                                    |              |                                    |              |                                    |
|              |                                    | 0x9FFF       | 0x4FFF                             | 0x9FFF       | 0xAFFF                             |
|              |                                    | 0xA000       |                                    | 0xA000       |                                    |
| 0xBFFF       |                                    | 0xBFFF       |                                    | 0xBFFF       |                                    |
| 0xC000       |                                    | 0xC000       |                                    | 0xC000       |                                    |
|              | BOOT ROM                           |              | DATA ROM 0                         |              | DATA ROM 1                         |
| 0xEFFF       |                                    | 0xEFFF       |                                    | 0xEFFF       |                                    |
| 0xF000       |                                    | 0xF000       | REGISTERS                          | 0xF000       | REGISTERS                          |
| 0xFBFF       |                                    | 0xFBFF       | 0xFBFF                             | 0xFBFF       | 0xFBFF                             |
|              |                                    |              |                                    |              |                                    |

Figure 27. ADAU1466 Slave Port Address to DSP Core Address Mapping

14810-127

### I<sup>2</sup>C Slave Port

The ADAU1462/ADAU1466 support a 2-wire serial (I<sup>2</sup>C compatible) microprocessor bus driving multiple peripherals. The maximum clock frequency on the I<sup>2</sup>C slave port is 400 kHz. Two pins, serial data (SDA) and serial clock (SCL), carry information between the ADAU1462/ADAU1466 and the system I<sup>2</sup>C master controller. In I<sup>2</sup>C mode, the ADAU1462/ADAU1466 are always slaves on the bus, meaning that they cannot initiate a data transfer. Each slave device is recognized by a unique address. The address bit sequence and the format of the read/write byte is shown in Table 26. The address resides in the first seven bits of the I<sup>2</sup>C write. The two address bits that follow can be set to assign the I<sup>2</sup>C slave address of the device, as follows: Bit 1 can be set by pulling the SS/ADDR0 pin either to IOVDD (by setting it to 1) or to DGND (by setting it to 0); and Bit 2 can be set by pulling the MOSI/ADDR1 pin either to IOVDD (by setting it to 1) or to DGND (by setting it to 0). The LSB of the address (the R/W bit) either specifies a read or write operation. Logic Level 1 corresponds to a read operation; Logic Level 0 corresponds to a write operation.

Table 26 describes the sequence of eight bits that define the I<sup>2</sup>C device address byte.

Table 27 describes the relationship between the state of the address pins (0 represents logic low and 1 represents logic high) and the I<sup>2</sup>C slave address. Ensure that the address pins (SS/ADDR0 and MOSI/ADDR1) are hardwired in the design. Do not allow these pins to change states while the device is operating.

Place a 2 kΩ pull-up resistor on each line connected to the SDA and SCL pins. Ensure that the voltage on these signal lines does not exceed IOVDD (1.8 V – 5% to 3.3 V + 10%).

### Addressing

Initially, each device on the I<sup>2</sup>C bus is in an idle state and monitors the SDA and SCL lines for a start condition and the proper address. The I<sup>2</sup>C master initiates a data transfer by establishing a start

condition, defined by a high to low transition on SDA while SCL remains high. This start condition indicates that an address/data stream follows. All devices on the bus respond to the start condition and shift the next eight bits (the 7-bit address plus the R/W bit), MSB first. The device that recognizes the transmitted address responds by pulling the data line low during the ninth clock pulse. This ninth bit is known as an acknowledge bit. All other devices withdraw from the bus at this point and return to the idle condition.

The R/W bit determines the direction of the data. A Logic 0 on the LSB of the first byte means that the master writes information to the peripheral, whereas a Logic 1 means that the master reads information from the peripheral after writing the subaddress and repeating the start address. A data transfer occurs until a stop condition is encountered. A stop condition occurs when SDA transitions from low to high while SCL is held high.

Figure 28 shows the timing of an I<sup>2</sup>C single word write operation, Figure 29 shows the timing of an I<sup>2</sup>C burst mode write operation, and Figure 30 shows an I<sup>2</sup>C burst mode read operation.

Stop and start conditions can be detected at any stage during the data transfer. If these conditions are asserted out of sequence with normal read and write operations, the slave I<sup>2</sup>C port of the ADAU1462/ADAU1466 immediately jumps to the idle condition. During a given SCL high period, issue only one start condition and one stop condition, or a single stop condition followed by a single start condition. If the user issues an invalid subaddress, the ADAU1462/ADAU1466 do not issue an acknowledge and return to the idle condition.

Note the following conditions:

- Do not issue an autoincrement (burst) write command that exceeds the highest subaddress in the memory.
- Do not issue an autoincrement (burst) write command that writes to subaddresses that are not defined in the Global RAM and Control Register Map section.

**Table 26. Address Bit Sequence**

| Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2                             | Bit 1                           | Bit 0 |
|-------|-------|-------|-------|-------|-----------------------------------|---------------------------------|-------|
| 0     | 1     | 1     | 1     | 0     | ADDR1 (set by the MOSI/ADDR1 pin) | ADDR0 (set by the SS/ADDR0 pin) | R/W   |

**Table 27. I<sup>2</sup>C Slave Addresses**

| MOSI/ADDR1 | SS/ADDR0 | Read/Write <sup>1</sup> | Slave Address (Eight Bits, Including R/W Bit) | Slave Address (Seven Bits, Excluding R/W Bit) |
|------------|----------|-------------------------|---|---|
| 0          | 0        | 0                       | 0x70  | 0x38  |
| 0          | 0        | 1                       | 0x71  | 0x38  |
| 0          | 1        | 0                       | 0x72  | 0x39  |
| 0          | 1        | 1                       | 0x73  | 0x39  |
| 1          | 0        | 0                       | 0x74  | 0x3A  |
| 1          | 0        | 1                       | 0x75  | 0x3A  |
| 1          | 1        | 0                       | 0x76  | 0x3B  |
| 1          | 1        | 1                       | 0x77  | 0x3B  |

<sup>1</sup> 0 means write, 1 means read.

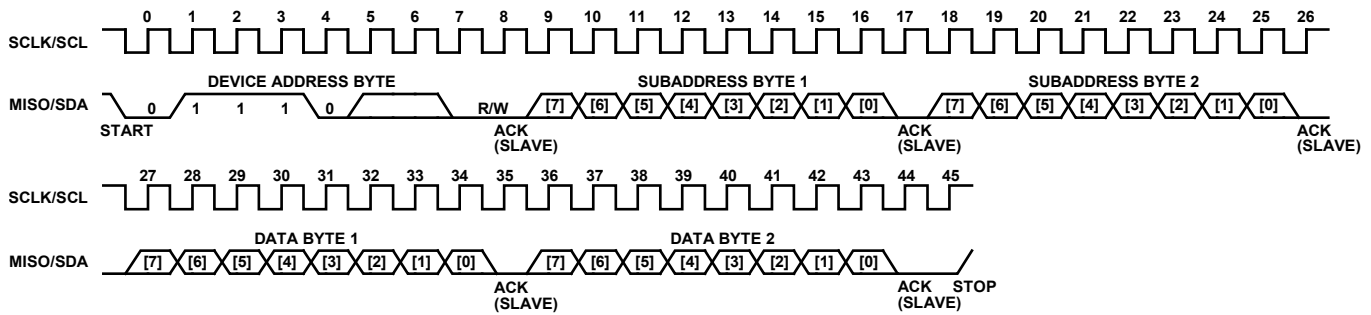


Figure 28. I<sup>2</sup>C Slave Single Word Write Operation (Two Bytes)

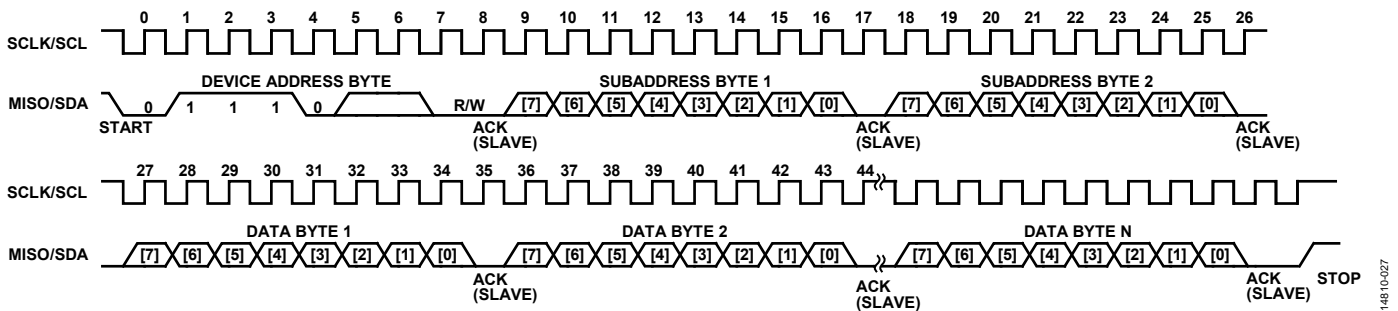


Figure 29. I<sup>2</sup>C Slave Burst Mode Write Operation (N Bytes)

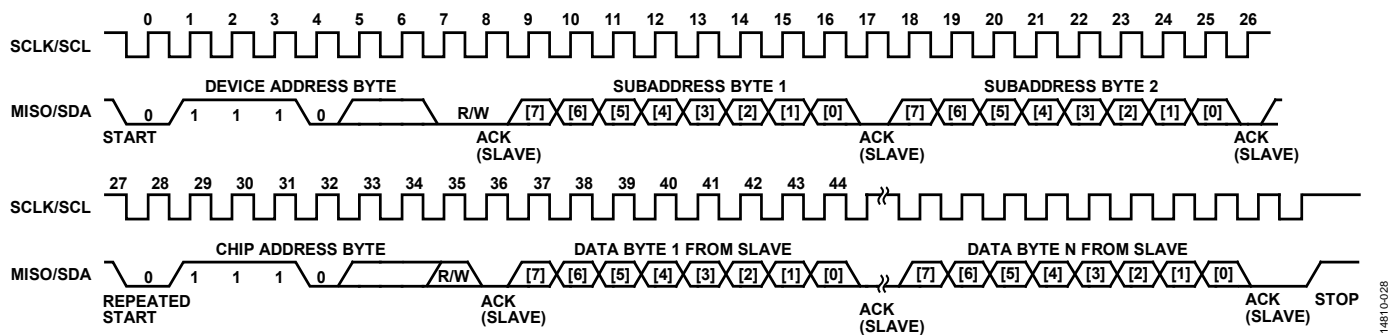


Figure 30. I<sup>2</sup>C Slave Burst Mode Read Operation (N Bytes)

**I<sup>2</sup>C Read and Write Operations**

Figure 31 shows the format of a single word write operation. Every ninth clock pulse, the ADAU1462/ADAU1466 issue an acknowledge by pulling SDA low.

Figure 32 shows the simplified format of a burst mode write sequence. This figure shows an example of a write to sequential single byte registers. The ADAU1462/ADAU1466 increment the subaddress register after every byte because the requested subaddress corresponds to a register or memory area with a 1-byte word length.


Figure 33 shows the format of a single word read operation. The first R/W bit is 0, indicating a write operation. This is because the subaddress still needs to be written to set up the internal address. After the ADAU1462/ADAU1466 acknowledge the receipt of the subaddress, the master must issue a repeated start command followed by the chip address byte with the R/W bit set to 1 (read). The start command causes the SDA pin of the device

to reverse and begin driving data back to the master. The master then responds every ninth pulse with an acknowledge pulse to the device.

Figure 34 shows the format of a burst mode read sequence. This figure shows an example of a read from sequential single byte registers. The ADAU1462/ADAU1466 increment the subaddress register after every byte because the requested subaddress corresponds to a register or memory area with a 1-byte word length. The ADAU1462/ADAU1466 always decode the subaddress and set the auto-increment circuit such that the address increments after the appropriate number of bytes.

Figure 31 to Figure 34 use the following abbreviations:


- S means start bit.
- P means stop bit.
- AM means acknowledge by master.
- AS means acknowledge by slave.



S = START BIT, P = STOP BIT, AM = ACKNOWLEDGE BY MASTER, AS = ACKNOWLEDGE BY SLAVE.  
SHOWS A ONE-WORD WRITE, WHERE EACH WORD HAS N BYTES.

Figure 31. Simplified Single Word I<sup>2</sup>C Write Sequence


14810-029

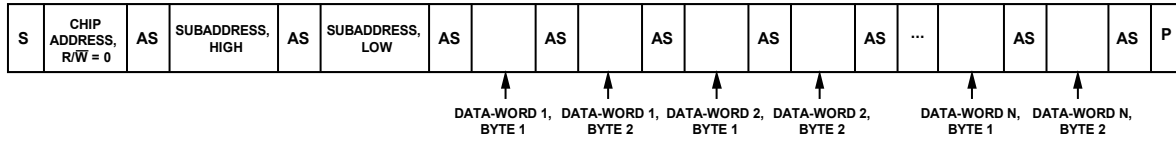

S = START BIT, P = STOP BIT, AM = ACKNOWLEDGE BY MASTER, AS = ACKNOWLEDGE BY SLAVE.  
SHOWS AN N-WORD WRITE, WHERE EACH WORD HAS TWO BYTES. (OTHER WORD LENGTHS ARE POSSIBLE, RANGING FROM ONE TO FIVE BYTES.)

Figure 32. Simplified Burst Mode I<sup>2</sup>C Write Sequence


14810-030



S = START BIT, P = STOP BIT, AM = ACKNOWLEDGE BY MASTER, AS = ACKNOWLEDGE BY SLAVE.  
SHOWS A ONE-WORD WRITE, WHERE EACH WORD HAS N BYTES.

Figure 33. Simplified Single Word I<sup>2</sup>C Read Sequence

14810-031

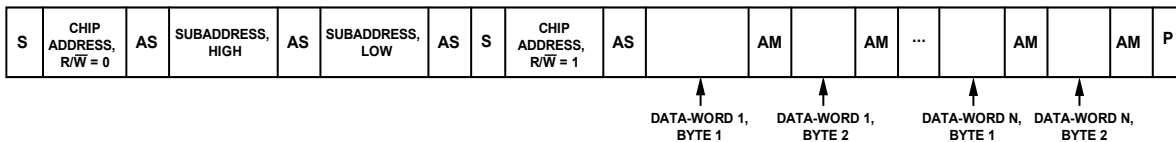

S = START BIT, P = STOP BIT, AM = ACKNOWLEDGE BY MASTER, AS = ACKNOWLEDGE BY SLAVE.  
SHOWS AN N-WORD WRITE, WHERE EACH WORD HAS TWO BYTES. (OTHER WORD LENGTHS ARE POSSIBLE, RANGING FROM ONE TO FIVE BYTES.)

Figure 34. Simplified Burst Mode I<sup>2</sup>C Read Sequence

14810-032

**SPI Slave Port**

By default, the slave port is in I<sup>2</sup>C mode; however, it can be placed into SPI control mode by pulling SS/ADDR0 low three times. This can be done either by toggling the SS/ADDR0 successively between logic high and logic low states, or by performing three dummy writes to the SPI port, writing any arbitrary data to any arbitrary subaddress (the slave port does not acknowledge these three writes). After the SS/ADDR0 is toggled three times, data can be written to or read from the IC. An example of dummy writing is shown in Figure 35. After the being set in SPI slave mode, the only way to revert back to I<sup>2</sup>C slave mode is by executing a full hardware reset using the RESET pin or by power cycling the power supplies.

The SPI port uses a 4-wire interface, consisting of the SS, MOSI, MISO, and SCLK signals, and it is always a slave port. The SS signal goes low at the beginning of a transaction and high at the end of a transaction. The SCLK signal latches MOSI on a low to high transition. MISO data is shifted out of the device on the falling edge of SCLK and must be clocked into a receiving device, such as a microcontroller, on the SCLK rising edge. The MOSI signal carries the serial input data, and the MISO signal carries the serial output data. The MISO signal remains three-state until a read operation is requested, which allows other SPI-compatible peripherals to share the same MISO line. All SPI transactions have the same basic format shown in Table 29. A timing diagram is shown in Figure 8. Write all data MSB first.

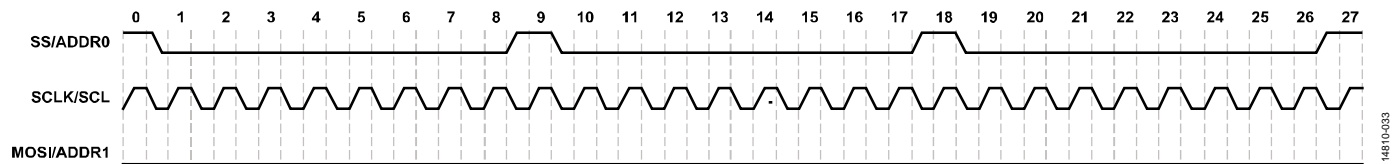


Figure 35. Example of SPI Slave Mode Initialization Sequence Using Dummy Writes

**Table 29. Generic Control Word Sequence**

| Byte 0                 | Byte 1           | Byte 2          | Byte 3 | Byte 4 and Subsequent Bytes |
|------------------------|------------------|-----------------|--------|-----------------------------|
| Chip Address[6:0], R/W | Subaddress[15:8] | Subaddress[7:0] | Data   | Data                        |

There is only one chip address available in SPI mode. The 7-bit chip address is 0b0000000. The LSB of the first byte of an SPI transaction is an R/W bit. This bit determines whether the communication is a read (Logic Level 1) or a write (Logic Level 0). This format is shown in Table 28.

**Table 28. SPI Address and Read/Write Byte Format**

| Bit 0 | Bit 1 | Bit 2 | Bit 3 | Bit 4 | Bit 5 | Bit 6 | Bit 7 |
|-------|-------|-------|-------|-------|-------|-------|-------|
| 0     | 0     | 0     | 0     | 0     | 0     | 0     | R/W   |

The 16-bit subaddress word is decoded into a location in one of the registers. This subaddress is the location of the appropriate register. The MSBs of the subaddress are zero padded to bring the word to a full 2-byte length.

The format for the SPI communications slave port is commonly known as SPI Mode 3, where clock polarity (CPOL) = 1 and clock phase (CPHA) = 1 (see Figure 36). The base value of the clock is 1. Data is captured on the rising edge of the clock, and data is propagated on the falling edge.

The maximum read and write speed for the SPI slave port is 22 MHz, but this speed is valid only after the PLL is locked. Before the PLL locks, the maximum clock rate in the chip is limited to the frequency of the input clock to the PLL, which is nominally 3.072 MHz. Therefore, the SPI clock must not exceed 3.072 MHz until the PLL lock completes.

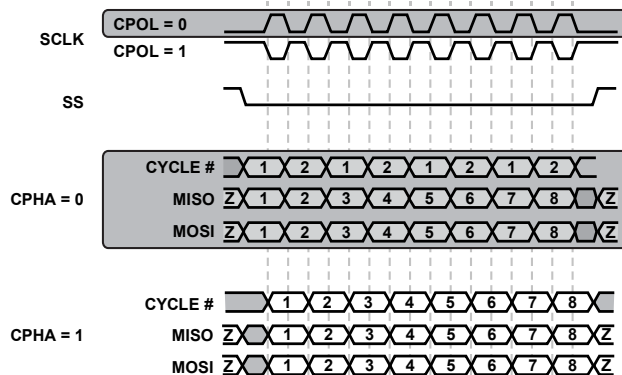


Figure 36. Clock Polarity and Phase for SPI Slave Port

A sample timing diagram for a multiple word SPI write operation to a register is shown in Figure 37. A sample timing diagram of a single word SPI read operation is shown in Figure 38. The MISO/SDA pin transitions from being three-state to being driven at the beginning of Byte 3. In this example, Byte 0 to Byte 2 contain

the addresses and the  $\overline{R/\overline{W}}$  bit, and subsequent bytes carry the data. A sample timing diagram of a multiple word SPI read operation is shown in Figure 39. In Figure 37 to Figure 39, rising edges on SCLK/SCL are indicated with an arrow, signifying that the data lines are sampled on the rising edge.

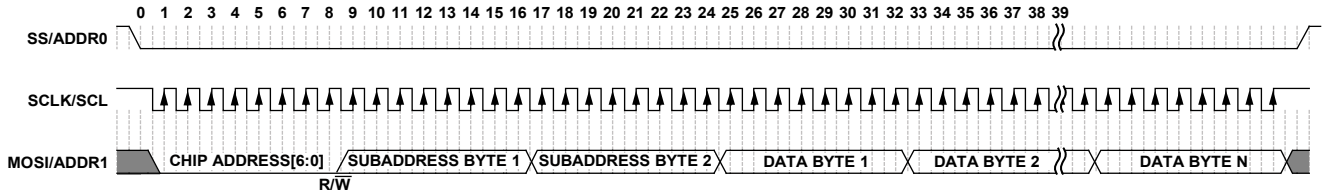


Figure 37. SPI Slave Write Clcking (Burst Write Mode, N Bytes)

14810-035

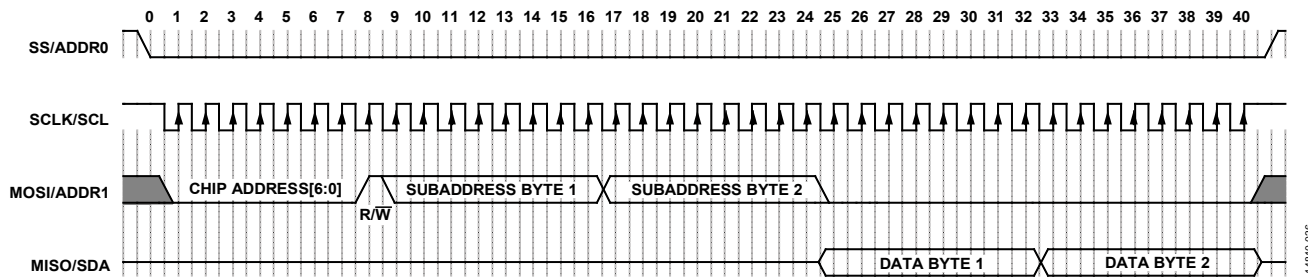


Figure 38. SPI Slave Read Clcking (Single Word Mode, Two Bytes)

14810-036

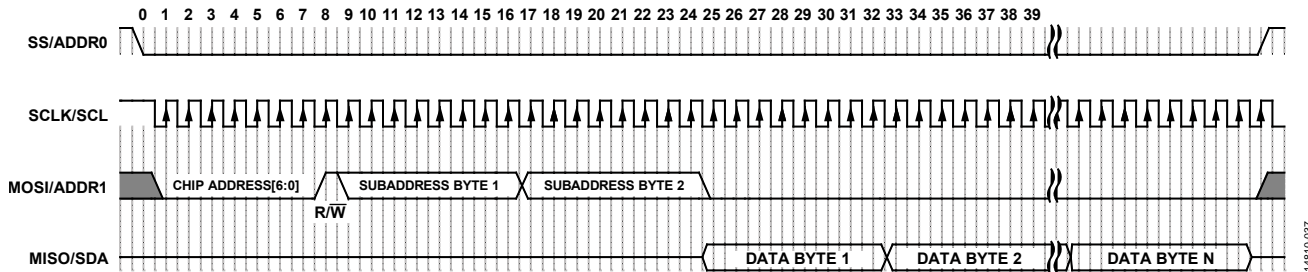


Figure 39. SPI Slave Read Clcking (Burst Read Mode, N Bytes)

14810-037

**MASTER CONTROL PORTS**

The device contains a combined I<sup>2</sup>C and SPI master control port that is accessible through a common interface. The master port can be enabled through a self boot operation or directly from the DSP core. The master control port can buffer up to 128 bits of data per single interrupt period. The smallest data transfer unit for both bus interfaces is one byte, and all transfers are 8-bit aligned. No error detection is supported, and single master operation is assumed. Only one bus interface protocol (I<sup>2</sup>C or SPI) can be used at a time.

The master control port can be used for several purposes:

- Self boot the ADAU1462/ADAU1466 from an external serial EEPROM.
- Boot and control external slave devices such as codecs and amplifiers.
- Read from and write to an external SPI RAM or flash memory.

**SPI Master Interface**

The SPI master supports up to seven slave devices (via the MPx pins) and speeds between 2.3 kHz and 20 MHz. SPI Mode 0 (CPOL = 0, CPHA = 0) and SPI Mode 3 (CPOL = 1, CPHA = 1) are supported. Communication is assumed to be half duplex, and the SPI master does not support a 3-wire interface. There is no JTAG or SGPIO support. The SPI interface uses a minimum of four general-purpose input/output (GPIO) pins of the processor and up to six additional MPx pins for additional slave select signals (SS). See Table 30 for more information.

The SPI master clock frequency can range between 2.3 kHz and 20 MHz. JTAG and SGPIO are not supported. Data transfers are

8-bit aligned. By default, the SPI master port is in Mode 3 (CPOL = 1, CPHA = 1), which matches the mode of the SPI slave port. The SPI master port can be configured to operate in Mode 0 (CPOL = 0, CPHA = 0) in the DSP program. No error detection or handling is implemented. Single master operation is assumed; therefore, no other master devices can exist on the same SPI bus.

The SPI master interface was tested with EEPROM, flash, and serial RAM devices and was confirmed to work in all cases.

When the data rate is very high on the SPI master interface (at 10 MHz or higher), a condition may arise where there is a high level of current draw on the IOVDD supply, which can lead to sagging of the internal IOVDD supply. To avoid potential issues, design the PCB such that the traces connecting the SPI master interface to external devices are kept as short as possible, and the slew rate and drive strength for SPI master interface pins are kept to a minimum to keep current draw as low as possible. Keeping IOVDD low (2.5 V or 1.8 V) also reduces the IOVDD current draw.

SigmaStudio generates EEPROM images for self boot systems, requiring no manual SPI master port configuration or programming on the part of the user.

**I<sup>2</sup>C Master Interface**

The I<sup>2</sup>C master is 7-bit addressable and supports standard and fast mode operation with speeds between 20 kHz and 400 kHz. The serial camera control bus (SCCB) and power management bus (PMBus) protocols are not supported. Data transfers are 8-bit aligned. No error detection or correction is implemented. The I<sup>2</sup>C master interface uses two general-purpose input/output pins, MP2 and MP3. See Table 31 for more information.

**Table 30. SPI Master Interface Pin Functionality**

| Pin Name         | SPI Master Function | Description   |
|------------------|---------------------|---|
| MOSI_M/MP1       | MOSI                | SPI master port data output. This pin sends data from the SPI master port to slave devices on the SPI master bus.   |
| SCL_M/SCLK_M/MP2 | SCLK                | SPI master port serial clock. This pin drives the clock signal to slave devices on the SPI master bus.  |
| SDA_M/MISO_M/MP3 | MISO                | SPI master port data input. This pin receives data from slave devices on the SPI master bus.  |
| SS_M/MP0         | SS                  | SPI master port slave select. This pin acts as the primary slave select signal to slave device on the SPI master bus.   |
| MP4 to MP13      | SS                  | SPI master port slave select. These additional multipurpose pins can be configured to act as secondary slave select signals to additional slave devices on the SPI master bus. Up to seven slave devices, one per pin, are supported. |

**Table 31. I<sup>2</sup>C Master Interface Pin Functionality**

| Pin Name         | I <sup>2</sup> C Master Function | Description   |
|------------------|----------------------------------|---|
| SCL_M/SCLK_M/MP2 | SCL                              | I <sup>2</sup> C master port serial clock. This pin functions as an open collector output and drives a serial clock to slave devices on the I <sup>2</sup> C bus. The line connected to this pin must have a 2.0 kΩ pull-up resistor to IOVDD.                                |
| SDA_M/MISO_M/MP3 | SDA                              | I <sup>2</sup> C master port serial data. This pin functions as a bidirectional open collector data line between the I <sup>2</sup> C master port and slave devices on the I <sup>2</sup> C bus. The line connected to this pin must have a 2.0 kΩ pull-up resistor to IOVDD. |



## SELF BOOT

The master control port is capable of booting the device from a single EEPROM by connecting the SELFBOOT pin to logic high (IOVDD) and powering up the power supplies while the RESET pin is pulled high. This initiates a self boot operation, in which the master control port downloads all required memory and register settings and automatically starts executing the DSP program without requiring external intervention or supervision. A self boot operation can also be triggered while the device is already in operation by initiating a rising edge of the RESET pin while the SELFBOOT pin is held high. When the self boot operation begins, the state of the SS\_M/MP0 pin determines whether the SPI master or the I<sup>2</sup>C master carries out the self boot operation. If the SS\_M/MP0 pin is connected to logic low, the I<sup>2</sup>C master port carries out the self boot operation. Otherwise, connect this pin to the slave select pin of the external slave device. The SPI master port then carries out the self boot operation.

When self booting from SPI, the chip assumes the following:

- The slave EEPROM is selected via the SS\_M/MP0 pin.
- The slave EEPROM has 16-bit or 24-bit addressing, giving it a total memory size of between 4 kb and 64 Mb.
- The slave EEPROM supports serial clock frequencies down to 1 MHz or lower (a majority of the self boot operation uses a much higher clock frequency, but the initial transactions are performed at a slower frequency).
- The data stored in the slave EEPROM follows the format described in the EEPROM Self Boot Data Format section.
- The data is stored in the slave EEPROM with the MSB first.
- The slave EEPROM supports SPI Mode 3.
- The slave EEPROM sequential read operation has the command of 0x03.
- The slave EEPROM can be accessed immediately after it is powered up, with no manual configuration required.

When self booting from I<sup>2</sup>C, the chip assumes the following:

- The slave EEPROM has I<sup>2</sup>C Address 0x50.
- The slave EEPROM has 16-bit addressing, giving it a size of between 16 kb and 512 kb.
- The slave EEPROM supports standard mode clock frequencies of 100 kHz and lower (a majority of the self boot operation uses a much higher clock frequency, but the initial transactions are performed at a slower frequency).
- The data stored in the slave EEPROM follows the format described in the EEPROM Self Boot Data Format section.
- The slave EEPROM can be accessed immediately after it is powered, with no manual configuration required.

### Self Boot Failure

The SPI or I<sup>2</sup>C master port attempts to self boot from the EEPROM three times. If all three self boot attempts fail, the SigmaDSP core issues a software panic and then enters a sleep state. During a self boot operation, the panic manager is unable to output a panic flag on a multipurpose pin. Therefore, the only way to debug a self boot failure is by reading back the status of Register 0xF427 (PANIC\_FLAG) and Register 0xF428 (PANIC\_CODE). The contents of Register 0xF428 indicate the nature of the failure.

**EEPROM Self Boot Data Format**

The self boot EEPROM image is generated using the [SigmaStudio](#) software; therefore, the user does not need to manually create the data that is stored in the EEPROM. However, for reference, the details of the data format are described in this section.

The EEPROM self boot format consists of a fixed header, an arbitrary number of variable length blocks, and a fixed footer. The blocks themselves consist of a fixed header and a block of data with a variable length. Each data block can be placed anywhere in the DSP memory through configuration of the block header.

**Header Format**

The self boot EEPROM header consists of 16 bytes of data, starting at the beginning of the internal memory of the slave EEPROM (Address 0). The header format (see Figure 40) consists of the following:

- 8-bit Sentinel 0xAA (shown in Figure 40 as 0b10101010)
- 24-bit address indicating the byte address of the header of the first block (normally this is 0x000010, which is the address immediately following the header)
- 64-bit PLL configuration (PLL\_CHECKSUM = PLL\_FB\_DIV + MCLK\_OUT + PLL\_DIV)

**Data Block Format**

Following the header, several data blocks are stored in the EEPROM memory (see Figure 41).

Each data block consists of eight bytes that configure the length and address of the data, followed by a series of 4-byte data packets.

Each block consists of the following:

- One LST bit, which signals the last block before the footer. LST = 0b1 indicates the last block; LST = 0b0 indicates that additional blocks are still to follow.
- 13 bits that are reserved for future use. Set these bits to 0b0.
- Two MEM bits that select the target data memory bank (0x0 = Data Memory 0, 0x1 = Data Memory 1, 0x2 = program memory).
- A 16-bit base address that sets the memory address at which the master port starts writing when loading data from the block into memory.
- A 16-bit data length that defines the number of 4-byte data-words to be written.
- A 16-bit jump address that tells the DSP core at which address in program memory to begin execution when the self boot operation is complete. The jump address bits are ignored unless the LST bit is set to 0b1.
- An arbitrary number of packets of 32-bit data. The number of packets is defined by the 16-bit data length.

|                             |   |              |   |         |   |            |   |
|-----------------------------|---|--------------|---|---------|---|------------|---|
| BYTE 0                      |   | BYTE 1       |   | BYTE 2  |   | BYTE 3     |   |
| 1                           | 0 | 1            | 0 | 1       | 0 | 1          | 0 |
| ADDRESS OF FIRST BOOT BLOCK |   |              |   |         |   |            |   |
| BYTE 4                      |   | BYTE 5       |   | BYTE 6  |   | BYTE 7     |   |
| 0x00                        |   | PLL_DIV      |   | 0x00    |   | PLL_FB_DIV |   |
| BYTE 8                      |   | BYTE 9       |   | BYTE 10 |   | BYTE 11    |   |
| 0x00                        |   | PLL_CHECKSUM |   | 0x00    |   | MCLK_OUT   |   |
| BYTE 12                     |   | BYTE 13      |   | BYTE 14 |   | BYTE 15    |   |
| EEPROM SPEED CONFIGURATION  |   |              |   |         |   |            |   |

Figure 40. Self Boot EEPROM Header Format

|             |          |         |  |              |              |         |  |
|-------------|----------|---------|--|--------------|--------------|---------|--|
| BYTE 0      |          | BYTE 1  |  | BYTE 2       |              | BYTE 3  |  |
| LST         | RESERVED |         |  | MEM          | BASE ADDRESS |         |  |
| BYTE 4      |          | BYTE 5  |  | BYTE 6       |              | BYTE 7  |  |
| DATA LENGTH |          |         |  | JUMP ADDRESS |              |         |  |
| BYTE 8      |          | BYTE 9  |  | BYTE 10      |              | BYTE 11 |  |
| DATA-WORD 1 |          |         |  |              |              |         |  |
| BYTE 12     |          | BYTE 13 |  | BYTE 14      |              | BYTE 15 |  |
| DATA-WORD 2 |          |         |  |              |              |         |  |

CONTINUED UNTIL LAST WORD IS REACHED...

|                     |  |                    |  |                     |  |           |  |
|---------------------|--|--------------------|--|---------------------|--|-----------|--|
| FOURTH TO LAST BYTE |  | THIRD TO LAST BYTE |  | SECOND TO LAST BYTE |  | LAST BYTE |  |
| DATA-WORD N         |  |                    |  |                     |  |           |  |

Figure 41. Self Boot EEPROM Data Block Format

**Footer Format**

After all the data blocks, a footer signifies the end of the self boot EEPROM memory (see Figure 42). The footer consists of a 64-bit checksum, which is the sum of the header and all blocks and all data as 32-bit words.

After the self boot operation completes, the checksum of the downloaded data is calculated and the panic manager signals if it does not match the checksum in the EEPROM. If the checksum is set to 0 (decimal), the checksum checking is disabled.

**Considerations when Using a 1 Mb I<sup>2</sup>C Self Boot EEPROM**

Because of the way I<sup>2</sup>C addressing works, 1 Mb of I<sup>2</sup>C EEPROM memory can be divided, with a portion of its address space at Chip Address 0x50; another portion of the memory can be located at a different address (for example, Chip Address 0x51). The memory allocation varies, depending on the EEPROM design. When the EEPROM memory is divided, the memory portion that resides at a different chip address must be handled as though it exists in a separate EEPROM.

**Considerations when Using Multiple EEPROMs on the SPI Master Bus**

When multiple EEPROMs are connected on the same SPI master bus, the self boot mechanism works only with the first EEPROM.

|                              |        |        |        |
|------------------------------|--------|--------|--------|
| BYTE 0                       | BYTE 1 | BYTE 2 | BYTE 3 |
| FIRST FOUR BYTES OF CHECKSUM |        |        |        |
| BYTE 4                       | BYTE 5 | BYTE 6 | BYTE 7 |
| LAST FOUR BYTES OF CHECKSUM  |        |        |        |

14810-040

Figure 42. Self Boot EEPROM Footer Format

**AUDIO SIGNAL ROUTING**

A large number of audio inputs and outputs are available in the device, and control registers are available for configuring how the audio is routed between different functional blocks.

All input channels are accessible by both the DSP core and the ASRCs. Each ASRC can connect to a pair of audio channels from any of the input sources or from the DSP to ASRC channels of the DSP core. The serial outputs can obtain their

data from a number of sources, including the DSP core, ASRCs, PDM microphones, S/PDIF receiver, or directly from the serial inputs.

See Figure 43 for an overview of the audio routing matrix with its available audio data connections.

To route audio to and from the DSP core, select the appropriate input and output cells in [SigmaStudio](#). These cells can be found in the IO folder of the [SigmaStudio](#) algorithm toolbox.

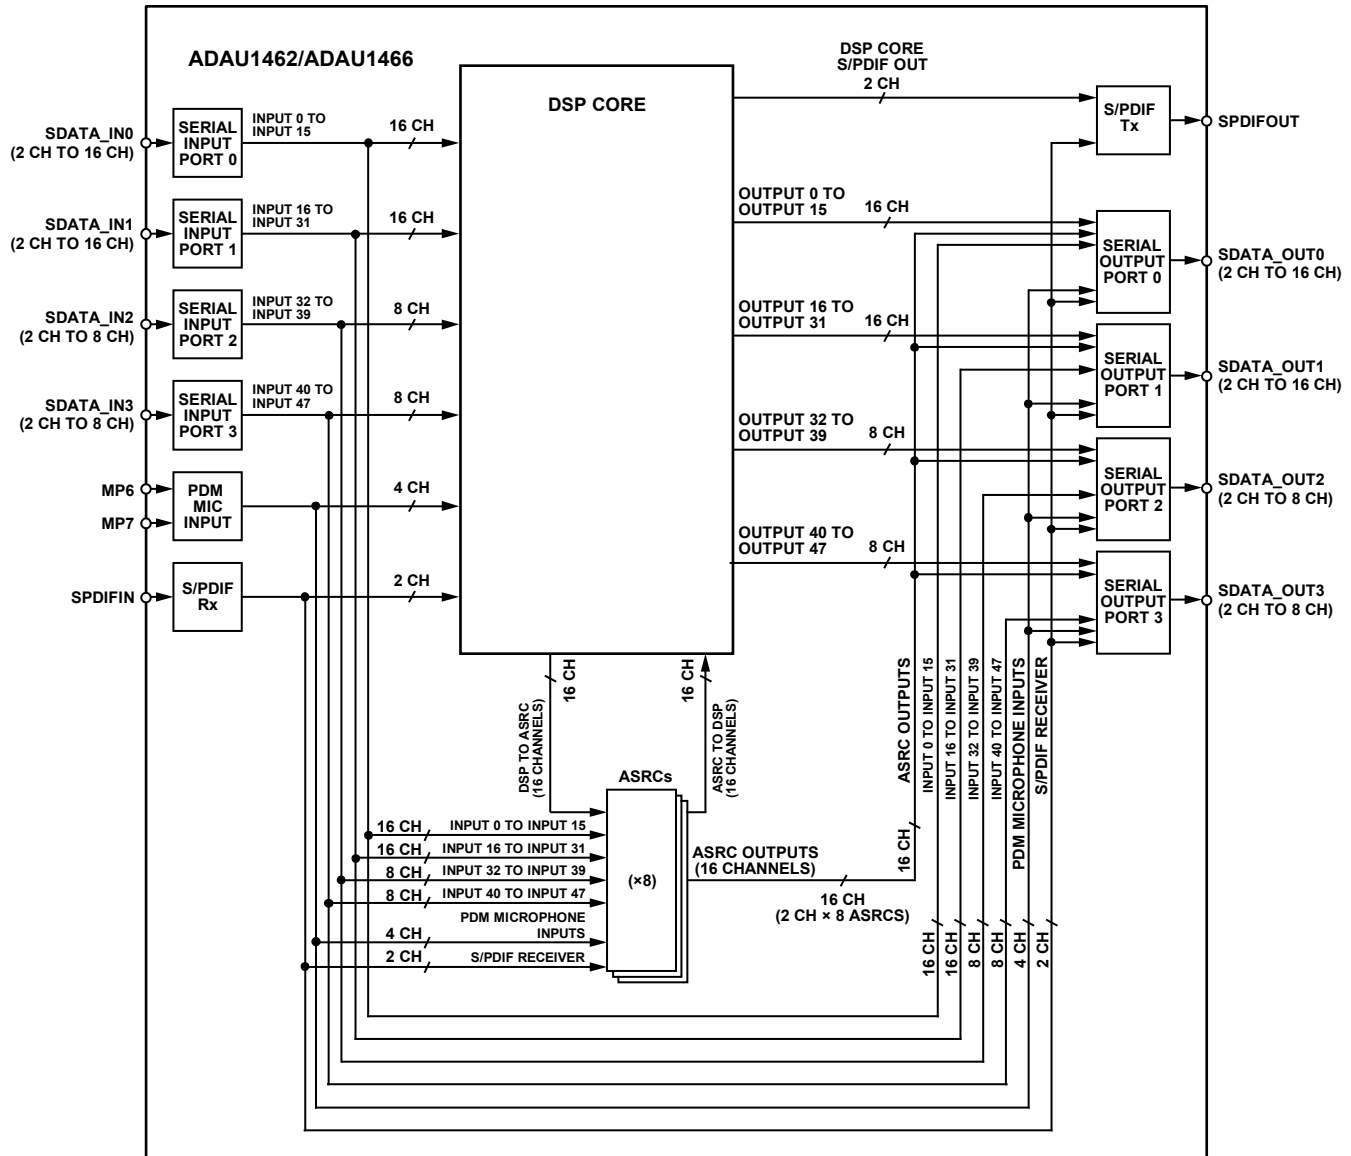


Figure 43. Audio Routing Overview

14810-041

**Serial Audio Inputs to DSP Core**

The 48 serial input channels are mapped to four audio input cells in SigmaStudio. Each input cell corresponds to one of the serial input pins (see Table 32).

Depending on whether the serial port is configured in 2-channel, 4-channel, 8-channel, or 16-channel mode, the available channels in SigmaStudio change. The channel count for each serial port is configured in the SERIAL\_BYTE\_x\_0 registers, Bits[2:0] (TDM\_MODE), at Address 0xF200 to Address 0xF21C (in increments of 0x4).

Figure 44 shows how the input pins map to the input cells in SigmaStudio, including their graphical appearance in the software.

**Table 32. Serial Input Pin Mapping to SigmaStudio Input Cells**

| Serial Input Pin | Channels in SigmaStudio |
|------------------|-------------------------|
| SDATA_IN0        | 0 to 15                 |
| SDATA_IN1        | 16 to 31                |
| SDATA_IN2        | 32 to 39                |
| SDATA_IN3        | 40 to 47                |

**Table 33. Detailed Serial Input Mapping to SigmaStudio Input Channels**

| Serial Input Pin | Position in I <sup>2</sup> S Stream (2-Channel) | Position in TDM4 Stream | Position in TDM8 Stream | Position in TDM16 Stream | Input Channel in SigmaStudio |
|------------------|---|-------------------------|-------------------------|--------------------------|------------------------------|
| SDATA_IN0        | Left  | 0                       | 0                       | 0                        | 0                            |
| SDATA_IN0        | Right   | 1                       | 1                       | 1                        | 1                            |
| SDATA_IN0        | Not applicable                                  | 2                       | 2                       | 2                        | 2                            |
| SDATA_IN0        | Not applicable                                  | 3                       | 3                       | 3                        | 3                            |
| SDATA_IN0        | Not applicable                                  | Not applicable          | 4                       | 4                        | 4                            |
| SDATA_IN0        | Not applicable                                  | Not applicable          | 5                       | 5                        | 5                            |
| SDATA_IN0        | Not applicable                                  | Not applicable          | 6                       | 6                        | 6                            |
| SDATA_IN0        | Not applicable                                  | Not applicable          | 7                       | 7                        | 7                            |
| SDATA_IN0        | Not applicable                                  | Not applicable          | Not applicable          | 8                        | 8                            |
| SDATA_IN0        | Not applicable                                  | Not applicable          | Not applicable          | 9                        | 9                            |
| SDATA_IN0        | Not applicable                                  | Not applicable          | Not applicable          | 10                       | 10                           |
| SDATA_IN0        | Not applicable                                  | Not applicable          | Not applicable          | 11                       | 11                           |
| SDATA_IN0        | Not applicable                                  | Not applicable          | Not applicable          | 12                       | 12                           |
| SDATA_IN0        | Not applicable                                  | Not applicable          | Not applicable          | 13                       | 13                           |
| SDATA_IN0        | Not applicable                                  | Not applicable          | Not applicable          | 14                       | 14                           |
| SDATA_IN0        | Not applicable                                  | Not applicable          | Not applicable          | 15                       | 15                           |
| SDATA_IN1        | Left  | 0                       | 0                       | 0                        | 16                           |
| SDATA_IN1        | Right   | 1                       | 1                       | 1                        | 17                           |
| SDATA_IN1        | Not applicable                                  | 2                       | 2                       | 2                        | 18                           |
| SDATA_IN1        | Not applicable                                  | 3                       | 3                       | 3                        | 19                           |
| SDATA_IN1        | Not applicable                                  | Not applicable          | 4                       | 4                        | 20                           |
| SDATA_IN1        | Not applicable                                  | Not applicable          | 5                       | 5                        | 21                           |
| SDATA_IN1        | Not applicable                                  | Not applicable          | 6                       | 6                        | 22                           |
| SDATA_IN1        | Not applicable                                  | Not applicable          | 7                       | 7                        | 23                           |
| SDATA_IN1        | Not applicable                                  | Not applicable          | Not applicable          | 8                        | 24                           |
| SDATA_IN1        | Not applicable                                  | Not applicable          | Not applicable          | 9                        | 25                           |
| SDATA_IN1        | Not applicable                                  | Not applicable          | Not applicable          | 10                       | 26                           |
| SDATA_IN1        | Not applicable                                  | Not applicable          | Not applicable          | 11                       | 27                           |
| SDATA_IN1        | Not applicable                                  | Not applicable          | Not applicable          | 12                       | 28                           |
| SDATA_IN1        | Not applicable                                  | Not applicable          | Not applicable          | 13                       | 29                           |
| SDATA_IN1        | Not applicable                                  | Not applicable          | Not applicable          | 14                       | 30                           |
| SDATA_IN1        | Not applicable                                  | Not applicable          | Not applicable          | 15                       | 31                           |
| SDATA_IN2        | Left  | 0                       | 0                       | 0                        | 32                           |
| SDATA_IN2        | Right   | 1                       | 1                       | 1                        | 33                           |
| SDATA_IN2        | Not applicable                                  | 2                       | 2                       | 2                        | 34                           |
| SDATA_IN2        | Not applicable                                  | 3                       | 3                       | 3                        | 35                           |
| SDATA_IN2        | Not applicable                                  | Not applicable          | 4                       | 4                        | 36                           |
| SDATA_IN2        | Not applicable                                  | Not applicable          | 5                       | 5                        | 37                           |
| SDATA_IN2        | Not applicable                                  | Not applicable          | 6                       | 6                        | 38                           |
| SDATA_IN2        | Not applicable                                  | Not applicable          | 7                       | 7                        | 39                           |

| Serial Input Pin | Position in I <sup>2</sup> S Stream (2-Channel) | Position in TDM4 Stream | Position in TDM8 Stream | Position in TDM16 Stream | Input Channel in SigmaStudio |
|------------------|---|-------------------------|-------------------------|--------------------------|------------------------------|
| SDATA_IN3        | Left  | 0                       | 0                       | 0                        | 40                           |
| SDATA_IN3        | Right   | 1                       | 1                       | 1                        | 41                           |
| SDATA_IN3        | Not applicable                                  | 2                       | 2                       | 2                        | 42                           |
| SDATA_IN3        | Not applicable                                  | 3                       | 3                       | 3                        | 43                           |
| SDATA_IN3        | Not applicable                                  | Not applicable          | 4                       | 4                        | 44                           |
| SDATA_IN3        | Not applicable                                  | Not applicable          | 5                       | 5                        | 45                           |
| SDATA_IN3        | Not applicable                                  | Not applicable          | 6                       | 6                        | 46                           |
| SDATA_IN3        | Not applicable                                  | Not applicable          | 7                       | 7                        | 47                           |

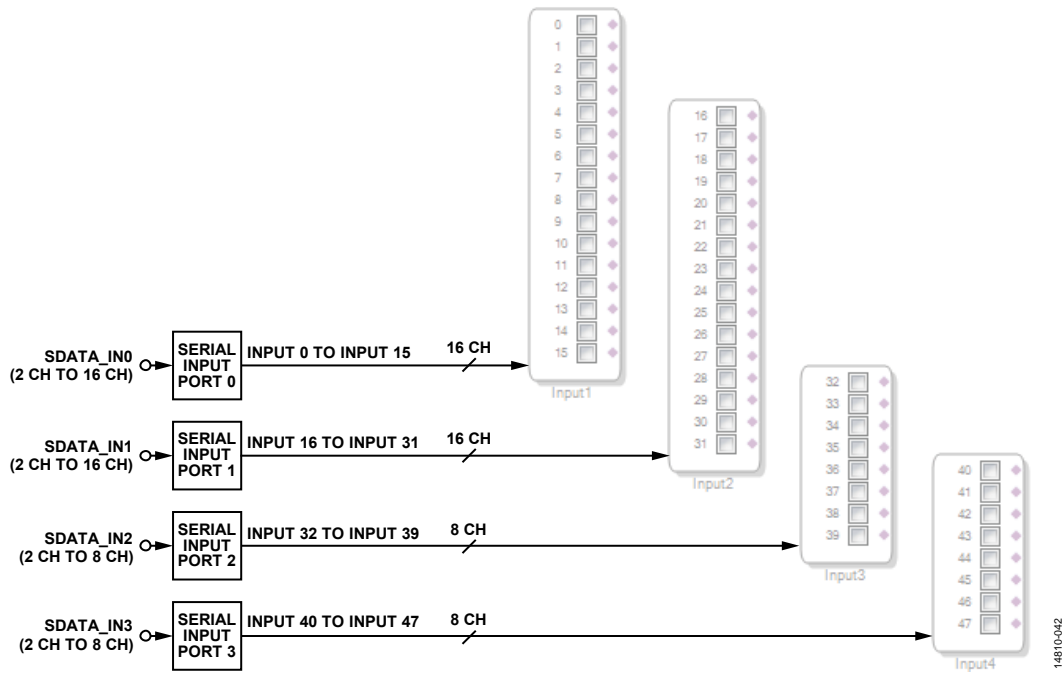


Figure 44. Serial Port Audio Input Mapping to DSP in SigmaStudio

**PDM Microphone Inputs to DSP Core**

The PDM microphone inputs are mapped to a single digital microphone input cell in [SigmaStudio](#) (see Table 34 and Figure 45). The corresponding hardware pins are configured in Register 0xF560 (DMIC\_CTRL0) and Register 0xF561 (DMIC\_CTRL1).

**Table 34. PDM Microphone Input Mapping to [SigmaStudio](#) Channels**

| PDM Data Channel   | PDM Microphone Input Channel in <a href="#">SigmaStudio</a> |
|--------------------|---|
| Left (DMIC_CTRL0)  | 0   |
| Right (DMIC_CTRL0) | 1   |
| Left (DMIC_CTRL1)  | 2   |
| Right (DMIC_CTRL1) | 3   |



Figure 45. PDM Microphone Input Mapping to DSP in [SigmaStudio](#)

**S/PDIF Receiver Inputs to DSP Core**

The S/PDIF receiver can be accessed directly in the DSP core by using the S/PDIF input cell. However, in most applications, the S/PDIF receiver input is asynchronous to the DSP core, so an ASRC is typically required; in such cases, the S/PDIF input cell must not be used.

**Table 35. S/PDIF Input Mapping to [SigmaStudio](#) Channels**

| Channel in S/PDIF Receiver Data Stream | S/PDIF Input Channels in <a href="#">SigmaStudio</a> |
|--|--|
| Left                                   | 0  |
| Right                                  | 1  |

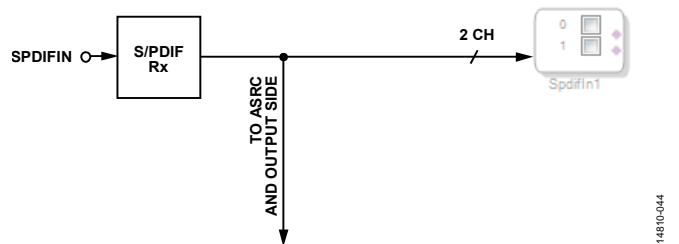


Figure 46. S/PDIF Receiver Direct Input Mapping to DSP in [SigmaStudio](#)

**Serial Audio Outputs from DSP Core**

The 48 serial output channels are mapped to 48 separate audio output cells in [SigmaStudio](#). Each audio output cell corresponds to a single output channel. The first 16 channels are mapped to

the SDATA\_OUT0 pin. The next 16 channels are mapped to the SDATA\_OUT1 pin. The following eight channels are mapped to the SDATA\_OUT2 pin. The last eight channels are mapped to the SDATA\_OUT3 pin (see Table 36 and Figure 47).

**Table 36. Serial Output Pin Mapping from [SigmaStudio](#) Channels**

| Channel in SigmaStudio | Serial Output Pin | Position in I <sup>2</sup> S Stream (2-Channel) | Position in TDM4 Stream | Position in TDM8 Stream | Position in TDM16 Stream |
|------------------------|-------------------|---|-------------------------|-------------------------|--------------------------|
| 0                      | SDATA_OUT0        | Left  | 0                       | 0                       | 0                        |
| 1                      | SDATA_OUT0        | Right   | 1                       | 1                       | 1                        |
| 2                      | SDATA_OUT0        | Not applicable                                  | 2                       | 2                       | 2                        |
| 3                      | SDATA_OUT0        | Not applicable                                  | 3                       | 3                       | 3                        |
| 4                      | SDATA_OUT0        | Not applicable                                  | Not applicable          | 4                       | 4                        |
| 5                      | SDATA_OUT0        | Not applicable                                  | Not applicable          | 5                       | 5                        |
| 6                      | SDATA_OUT0        | Not applicable                                  | Not applicable          | 6                       | 6                        |
| 7                      | SDATA_OUT0        | Not applicable                                  | Not applicable          | 7                       | 7                        |
| 8                      | SDATA_OUT0        | Not applicable                                  | Not applicable          | Not applicable          | 8                        |
| 9                      | SDATA_OUT0        | Not applicable                                  | Not applicable          | Not applicable          | 9                        |
| 10                     | SDATA_OUT0        | Not applicable                                  | Not applicable          | Not applicable          | 10                       |
| 11                     | SDATA_OUT0        | Not applicable                                  | Not applicable          | Not applicable          | 11                       |
| 12                     | SDATA_OUT0        | Not applicable                                  | Not applicable          | Not applicable          | 12                       |
| 13                     | SDATA_OUT0        | Not applicable                                  | Not applicable          | Not applicable          | 13                       |
| 14                     | SDATA_OUT0        | Not applicable                                  | Not applicable          | Not applicable          | 14                       |
| 15                     | SDATA_OUT0        | Not applicable                                  | Not applicable          | Not applicable          | 15                       |
| 16                     | SDATA_OUT1        | Left  | 0                       | 0                       | 0                        |
| 17                     | SDATA_OUT1        | Right   | 1                       | 1                       | 1                        |
| 18                     | SDATA_OUT1        | Not applicable                                  | 2                       | 2                       | 2                        |
| 19                     | SDATA_OUT1        | Not applicable                                  | 3                       | 3                       | 3                        |
| 20                     | SDATA_OUT1        | Not applicable                                  | Not applicable          | 4                       | 4                        |
| 21                     | SDATA_OUT1        | Not applicable                                  | Not applicable          | 5                       | 5                        |
| 22                     | SDATA_OUT1        | Not applicable                                  | Not applicable          | 6                       | 6                        |
| 23                     | SDATA_OUT1        | Not applicable                                  | Not applicable          | 7                       | 7                        |
| 24                     | SDATA_OUT1        | Not applicable                                  | Not applicable          | Not applicable          | 8                        |
| 25                     | SDATA_OUT1        | Not applicable                                  | Not applicable          | Not applicable          | 9                        |
| 26                     | SDATA_OUT1        | Not applicable                                  | Not applicable          | Not applicable          | 10                       |
| 27                     | SDATA_OUT1        | Not applicable                                  | Not applicable          | Not applicable          | 11                       |
| 28                     | SDATA_OUT1        | Not applicable                                  | Not applicable          | Not applicable          | 12                       |
| 29                     | SDATA_OUT1        | Not applicable                                  | Not applicable          | Not applicable          | 13                       |
| 30                     | SDATA_OUT1        | Not applicable                                  | Not applicable          | Not applicable          | 14                       |
| 31                     | SDATA_OUT1        | Not applicable                                  | Not applicable          | Not applicable          | 15                       |
| 32                     | SDATA_OUT2        | Left  | 0                       | 0                       | 0                        |
| 33                     | SDATA_OUT2        | Right   | 1                       | 1                       | 1                        |
| 34                     | SDATA_OUT2        | Not applicable                                  | 2                       | 2                       | 2                        |
| 35                     | SDATA_OUT2        | Not applicable                                  | 3                       | 3                       | 3                        |
| 36                     | SDATA_OUT2        | Not applicable                                  | Not applicable          | 4                       | 4                        |
| 37                     | SDATA_OUT2        | Not applicable                                  | Not applicable          | 5                       | 5                        |
| 38                     | SDATA_OUT2        | Not applicable                                  | Not applicable          | 6                       | 6                        |
| 39                     | SDATA_OUT2        | Not applicable                                  | Not applicable          | 7                       | 7                        |
| 40                     | SDATA_OUT3        | Left  | 0                       | 0                       | 0                        |
| 41                     | SDATA_OUT3        | Right   | 1                       | 1                       | 1                        |
| 42                     | SDATA_OUT3        | Not applicable                                  | 2                       | 2                       | 2                        |
| 43                     | SDATA_OUT3        | Not applicable                                  | 3                       | 3                       | 3                        |
| 44                     | SDATA_OUT3        | Not applicable                                  | Not applicable          | 4                       | 4                        |
| 45                     | SDATA_OUT3        | Not applicable                                  | Not applicable          | 5                       | 5                        |
| 46                     | SDATA_OUT3        | Not applicable                                  | Not applicable          | 6                       | 6                        |
| 47                     | SDATA_OUT3        | Not applicable                                  | Not applicable          | 7                       | 7                        |



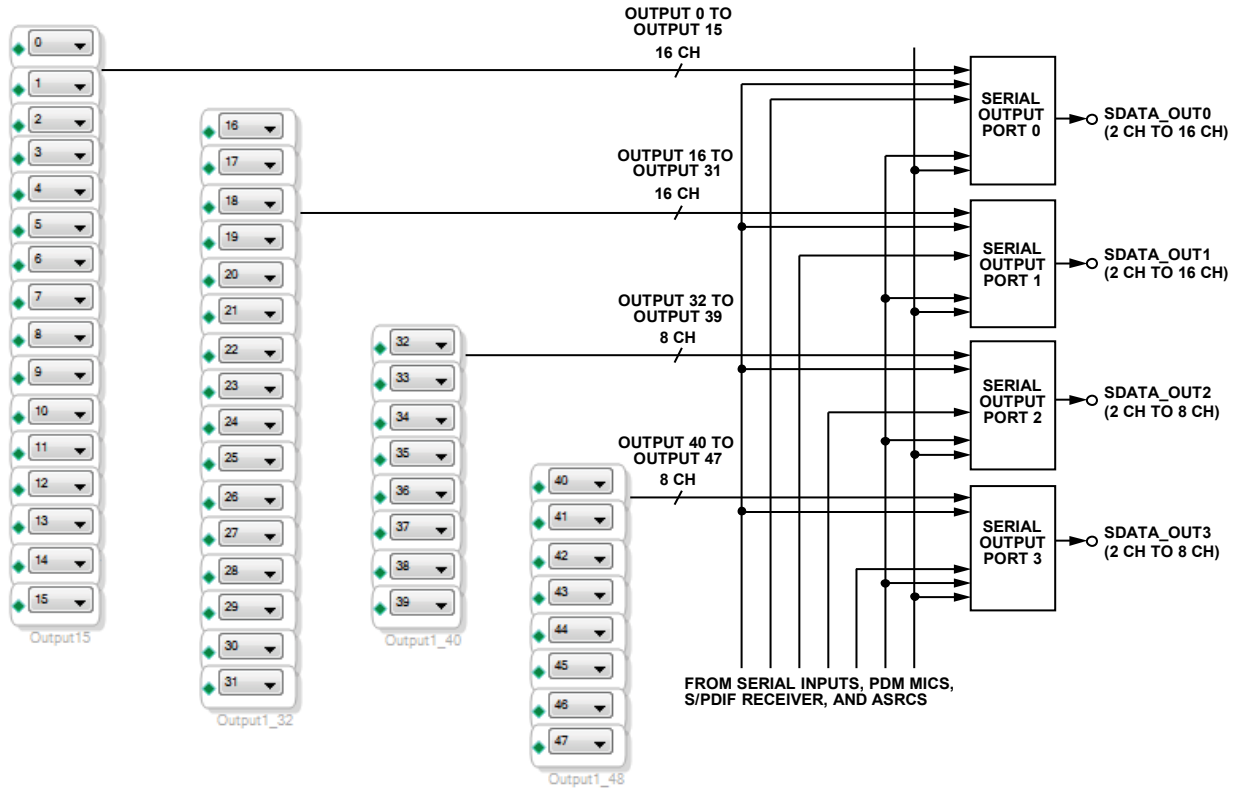


Figure 47. DSP to Serial Output Mapping in SigmaStudio

14810-045

The data that is output from each serial output pin is also configurable, via the SOUT\_SOURCEx registers, to originate from one of the following sources: the DSP, the serial inputs, the PDM microphone inputs, the S/PDIF receiver, or the ASRCs. These registers can be configured graphically in SigmaStudio, as shown in Figure 48.

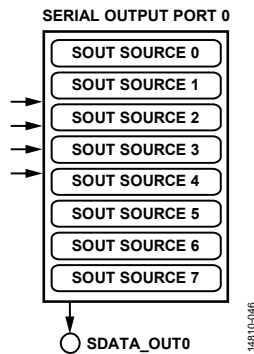


Figure 48. Configuring the Serial Output Data Channels (SOUT\_SOURCEx Registers) Graphically in SigmaStudio

**S/PDIF Audio Outputs from DSP Core to S/PDIF Transmitter**

The output signal of the S/PDIF transmitter can come from the DSP core or directly from the S/PDIF receiver. The selection is controlled by Register 0xF1C0 (SPDIFTX\_INPUT).

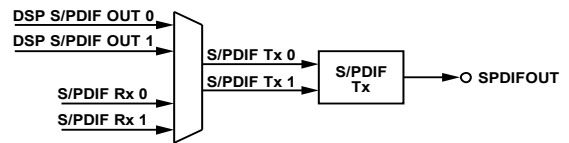


Figure 49. S/PDIF Transmitter Source Selection

When the signal comes from the DSP core, use the S/PDIF output cells in SigmaStudio.

**Table 37. S/PDIF Output Mapping from SigmaStudio Channels**

| S/PDIF Output Channel in SigmaStudio | Channel in S/PDIF Transmitter Data Stream |
|--------------------------------------|---|
| 0                                    | Left                                      |
| 1                                    | Right                                     |

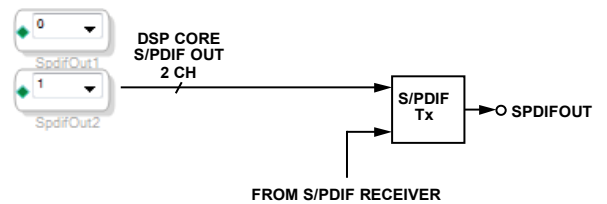


Figure 50. DSP to S/PDIF Transmitter Output Mapping in SigmaStudio

**Asynchronous Sample Rate Converter Input Routing**

Any asynchronous input can be routed to the ASRCs to be resynchronized to a desired target sample rate (see Figure 51). The source signals for any ASRC can come from any of the serial inputs, any of the DSP to ASRC channels, the S/PDIF receiver, or the digital PDM microphone inputs. There are eight ASRCs, each with two input channels and two output channels, for a total of 16 channels can pass through the ASRCs.

Asynchronous input signals (either serial inputs, PDM microphone inputs, or the S/PDIF input) typically need to be routed to an ASRC and then synchronized to the DSP core rate. They are then available for input to the DSP core for processing.

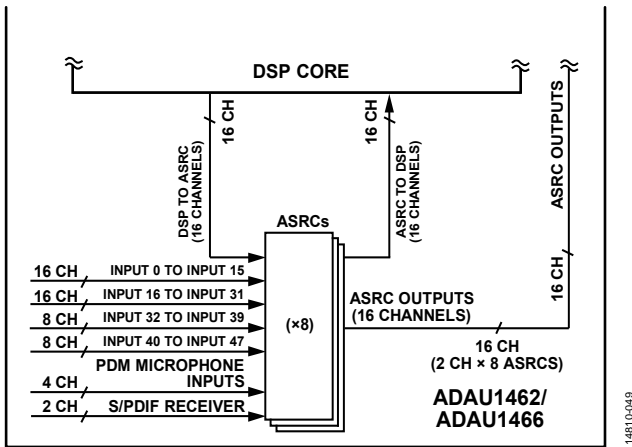


Figure 51. Channel Routing to ASRC Inputs

In the example shown in Figure 52, the two channels from the S/PDIF receiver are routed to one of the ASRCs and then to the DSP core. For this example, the corresponding ASRC input selector register (Register 0xF100 to Register 0xF107, ASRC\_INPUTx), Bits[2:0] (ASRC\_SOURCE) is set to 0b011 to take the input from the S/PDIF receiver. Likewise, the corresponding ASRC output rate selector register (Register 0xF140 to Register 0xF147, ASRC\_OUT\_RATEx, Bits[3:0] (ASRC\_RATE)) is set to 0b0101 to synchronize the ASRC output data to the DSP core sample rate.

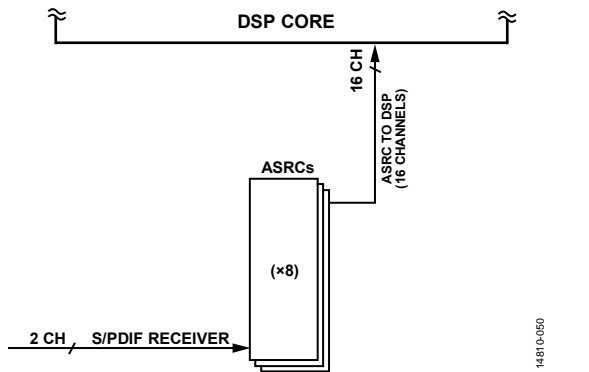


Figure 52. Example ASRC Routing for Asynchronous Input to the DSP Core

When the outputs of the ASRCs are required for processing in the SigmaDSP core, the ASRC input block must be selected in SigmaStudio (see Figure 53 and Figure 54).

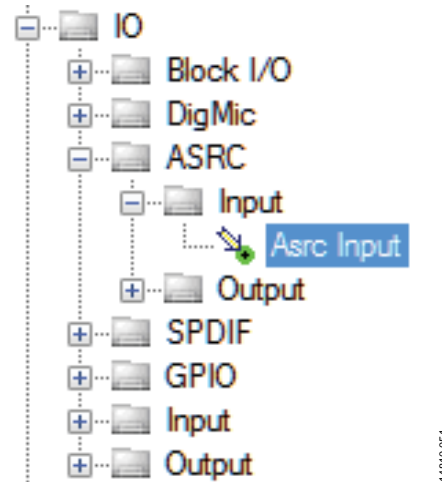


Figure 53. Location of ASRC to DSP Input Cell in SigmaStudio Toolbox

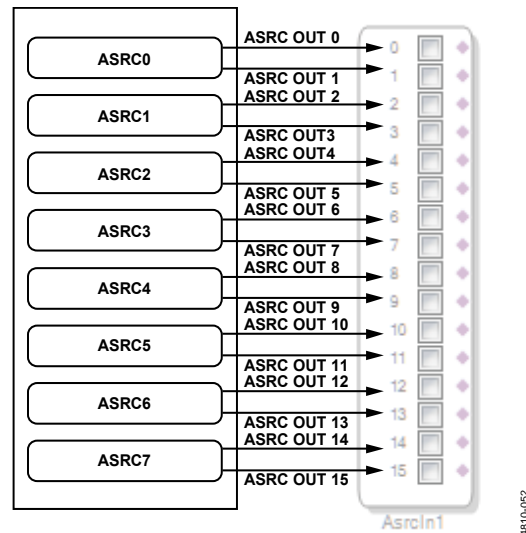


Figure 54. Routing of ASRC Outputs to ASRC to DSP Input Cell in SigmaStudio

Asynchronous output signals (for example, serial outputs that are slaves to an external, asynchronous device) typically are routed from the DSP core into the ASRCs, where they are synchronized to the serial output port that is acting as a slave to the external asynchronous master device.

In the example shown in Figure 55, two (or more) audio channels from the DSP core are routed to one (or more) of the ASRCs and then to the serial outputs. For this example, the corresponding ASRC input selector register (Address 0xF100 to Address 0xF107 (ASRC\_INPUTx), Bits[2:0] (ASRC\_SOURCE)) is set to 0b010 to take the data from the DSP core, and the corresponding ASRC output rate selector register (Address 0xF140 to Address 0xF147 (ASRC\_OUT\_RATEx), Bits[3:0] (ASRC\_RATE)) is set to one of the following:

- 0b0001 to synchronize the ASRC output data to SDATA\_OUT0
- 0b0010 to synchronize the ASRC output data to SDATA\_OUT1
- 0b0011 to synchronize the ASRC output data to SDATA\_OUT2
- 0b0100 to synchronize the ASRC output data to SDATA\_OUT3

Next, the corresponding serial output port data source register (Address 0xF180 to Address 0xF197 (SOUT\_SOURCEx), Bits[2:0] (SOUT\_SOURCE)) must be set to 0b011 to receive the data from the ASRC outputs, and Bits[5:3] (SOUT\_ASRC\_SELECT) must be configured to select the correct ASRC from which to receive the output data.

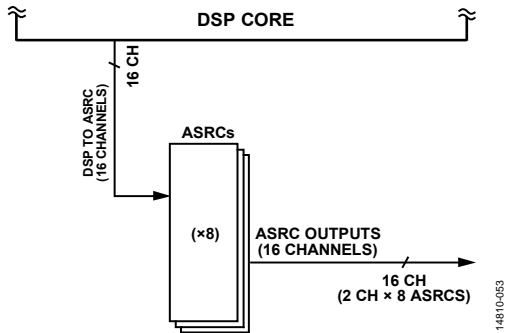


Figure 55. Example ASRC Routing for Asynchronous Serial Output from the DSP Core

When signals must route from the DSP core to the ASRCs, use the DSP to ASRC output cell in [SigmaStudio](#) (see Figure 56).

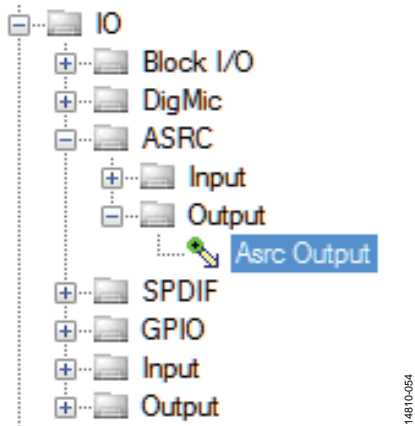


Figure 56. Location of DSP to ASRC Output Cell in [SigmaStudio](#) Toolbox

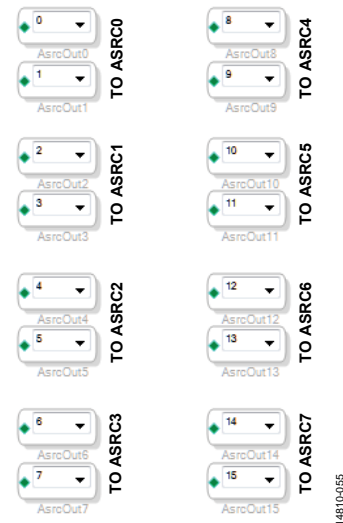


Figure 57. Routing of DSP to ASRC Output Cells in [SigmaStudio](#) to ASRC Inputs

The ASRCs can also take asynchronous inputs and convert them to a different sample rate without doing any processing in the DSP core.

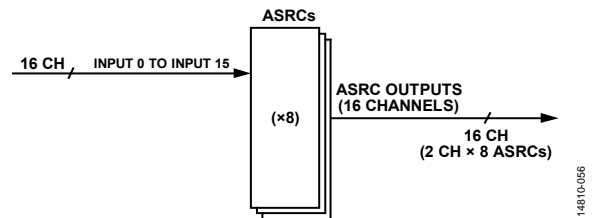


Figure 58. Example ASRC Routing, Bypassing DSP Core

Configure the ASRC routing registers using a graphical interface in the [SigmaStudio](#) software (see Figure 59).

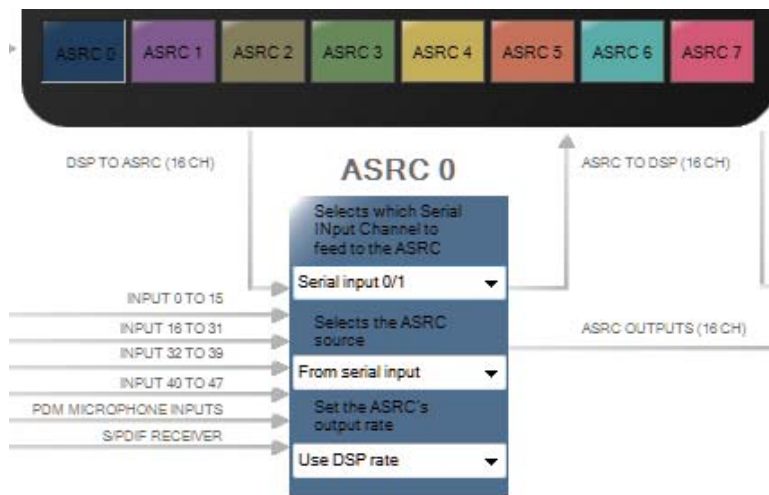


Figure 59. Configuring the ASRC Input Source and Target Rate in [SigmaStudio](#)

**Asynchronous Sample Rate Converter Output Routing**

The outputs of the ASRCs are always available at both the DSP core and the serial outputs. No manual routing is necessary. To route ASRC output data to serial output channels, configure Register 0xF180 to Register 0xF197 (SOUT\_SOURCEx) accordingly. For more information, see Figure 60 and Table 38.

**Audio Signal Routing Registers**

An overview of the registers related to audio routing is listed in Table 38. For more detailed information, see the Audio Signal Routing section.

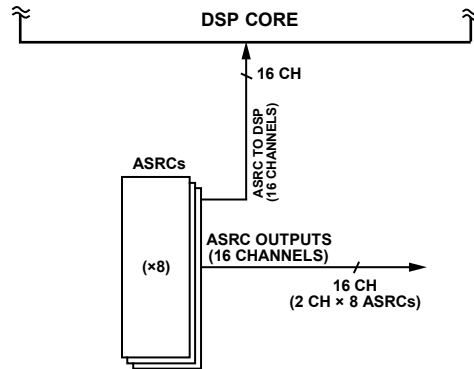


Figure 60. ASRC Outputs

14810-057

Table 38. Audio Routing Matrix Registers

| Address | Register       | Description   |
|---------|----------------|---|
| 0xF100  | ASRC_INPUT0    | ASRC input selector (ASRC 0, Channel 0 and Channel 1)             |
| 0xF101  | ASRC_INPUT1    | ASRC input selector (ASRC 1, Channel 2 and Channel 3)             |
| 0xF102  | ASRC_INPUT2    | ASRC input selector (ASRC 2, Channel 4 and Channel 5)             |
| 0xF103  | ASRC_INPUT3    | ASRC input selector (ASRC 3, Channel 6 and Channel 7)             |
| 0xF104  | ASRC_INPUT4    | ASRC input selector (ASRC 4, Channel 8 and Channel 9)             |
| 0xF105  | ASRC_INPUT5    | ASRC input selector (ASRC 5, Channel 10 and Channel 11)           |
| 0xF106  | ASRC_INPUT6    | ASRC input selector (ASRC 6, Channel 12 and Channel 13)           |
| 0xF107  | ASRC_INPUT7    | ASRC input selector (ASRC 7, Channel 14 and Channel 15)           |
| 0xF140  | ASRC_OUT_RATE0 | ASRC output rate (ASRC 0, Channel 0 and Channel 1)                |
| 0xF141  | ASRC_OUT_RATE1 | ASRC output rate (ASRC 1, Channel 2 and Channel 3)                |
| 0xF142  | ASRC_OUT_RATE2 | ASRC output rate (ASRC 2, Channel 4 and Channel 5)                |
| 0xF143  | ASRC_OUT_RATE3 | ASRC output rate (ASRC 3, Channel 6 and Channel 7)                |
| 0xF144  | ASRC_OUT_RATE4 | ASRC output rate (ASRC 4, Channel 8 and Channel 9)                |
| 0xF145  | ASRC_OUT_RATE5 | ASRC output rate (ASRC 5, Channel 10 and Channel 11)              |
| 0xF146  | ASRC_OUT_RATE6 | ASRC output rate (ASRC 6, Channel 12 and Channel 13)              |
| 0xF147  | ASRC_OUT_RATE7 | ASRC output rate (ASRC 7, Channel 14 and Channel 15)              |
| 0xF180  | SOUT_SOURCE0   | Source of data for serial output port (Channel 0 and Channel 1)   |
| 0xF181  | SOUT_SOURCE1   | Source of data for serial output port (Channel 2 and Channel 3)   |
| 0xF182  | SOUT_SOURCE2   | Source of data for serial output port (Channel 4 and Channel 5)   |
| 0xF183  | SOUT_SOURCE3   | Source of data for serial output port (Channel 6 and Channel 7)   |
| 0xF184  | SOUT_SOURCE4   | Source of data for serial output port (Channel 8 and Channel 9)   |
| 0xF185  | SOUT_SOURCE5   | Source of data for serial output port (Channel 10 and Channel 11) |
| 0xF186  | SOUT_SOURCE6   | Source of data for serial output port (Channel 12 and Channel 13) |
| 0xF187  | SOUT_SOURCE7   | Source of data for serial output port (Channel 14 and Channel 15) |
| 0xF188  | SOUT_SOURCE8   | Source of data for serial output port (Channel 16 and Channel 17) |
| 0xF189  | SOUT_SOURCE9   | Source of data for serial output port (Channel 18 and Channel 19) |
| 0xF18A  | SOUT_SOURCE10  | Source of data for serial output port (Channel 20 and Channel 21) |
| 0xF18B  | SOUT_SOURCE11  | Source of data for serial output port (Channel 22 and Channel 23) |
| 0xF18C  | SOUT_SOURCE12  | Source of data for serial output port (Channel 24 and Channel 25) |
| 0xF18D  | SOUT_SOURCE13  | Source of data for serial output port (Channel 26 and Channel 27) |
| 0xF18E  | SOUT_SOURCE14  | Source of data for serial output port (Channel 28 and Channel 29) |
| 0xF18F  | SOUT_SOURCE15  | Source of data for serial output port (Channel 30 and Channel 31) |
| 0xF190  | SOUT_SOURCE16  | Source of data for serial output port (Channel 32 and Channel 33) |
| 0xF191  | SOUT_SOURCE17  | Source of data for serial output port (Channel 34 and Channel 35) |
| 0xF192  | SOUT_SOURCE18  | Source of data for serial output port (Channel 36 and Channel 37) |
| 0xF193  | SOUT_SOURCE19  | Source of data for serial output port (Channel 38 and Channel 39) |
| 0xF194  | SOUT_SOURCE20  | Source of data for serial output port (Channel 40 and Channel 41) |
| 0xF195  | SOUT_SOURCE21  | Source of data for serial output port (Channel 42 and Channel 43) |
| 0xF196  | SOUT_SOURCE22  | Source of data for serial output port (Channel 44 and Channel 45) |
| 0xF197  | SOUT_SOURCE23  | Source of data for serial output port (Channel 46 and Channel 47) |
| 0xF1C0  | SPDIFTX_INPUT  | S/PDIF transmitter data selector                                  |

**SERIAL DATA INPUT/OUTPUT**

There are four serial data input pins (SDATA\_IN3 to SDATA\_IN0) and four serial data output pins (SDATA\_OUT3 to SDATA\_OUT0). Each pin is capable of 2-channel, 4-channel, or 8-channel mode. In addition, SDATA\_IN0, SDATA\_IN1, SDATA\_OUT0, and SDATA\_OUT1 are capable of 16-channel mode.

The serial ports have a very flexible configuration scheme that allows completely independent and orthogonal configuration of clock pin assignment, clock waveform type, clock polarity, channel count, position of the data bits within the stream, audio word length, slave or master operation, and sample rate. A detailed description of all possible serial port settings is included in the Serial Port Configuration Registers section.

The physical serial data input and output pins are connected to functional blocks called serial ports, which deal with handling the audio data and clocks as they pass in and out of the device. Table 39 describes this relationship.

**Table 39. Relationship Between Hardware Serial Data Pins and Serial Input/Output Ports**

| Serial Data Pin | Serial Port          |
|-----------------|----------------------|
| SDATA_IN0       | Serial Input Port 0  |
| SDATA_IN1       | Serial Input Port 1  |
| SDATA_IN2       | Serial Input Port 2  |
| SDATA_IN3       | Serial Input Port 3  |
| SDATA_OUT0      | Serial Output Port 0 |
| SDATA_OUT1      | Serial Output Port 1 |
| SDATA_OUT2      | Serial Output Port 2 |
| SDATA_OUT3      | Serial Output Port 3 |

There are 48 channels of serial audio data inputs and 48 channels of serial audio data outputs. The 48 audio input channels and 48 audio output channels are distributed among the four serial data input pins and the four serial data output pins. This distribution is described in Table 40.

The maximum sample rate for the serial audio data on the serial ports is 192 kHz. The minimum sample rate is 6 kHz.

SDATA\_IN2, SDATA\_IN3, SDATA\_OUT2, and SDATA\_OUT3 are capable of operating in a special mode called flexible TDM mode, which allows custom byte addressable configuration, where the data for each channel is located in the serial data stream. Flexible TDM mode is not a standard audio interface. Use it only in cases where a customized serial data format is desired. See the Flexible TDM Interface section for more information.

**Serial Audio Data Format**

The serial data input and output ports are designed to work with audio data that is encoded in a linear PCM format, based on the common I<sup>2</sup>S standard. Audio data-words can be 16, 24, or 32 bits in length. The serial ports can handle TDM formats with channel counts ranging from two channels to 16 channels on a single data line.

Almost every aspect of the serial audio data format can be configured using the SERIAL\_BYTE\_x\_0 and SERIAL\_BYTE\_x\_1 registers, and every setting can be configured independently. As a result, there are more than 70,000 valid configurations for each serial audio port.

**Serial Audio Data Timing Diagrams**


Because it is impractical to show timing diagrams for each possible combination, timing diagrams for the more common configurations are shown in Figure 61 to Figure 66. Explanatory text accompanies each figure.

**Table 40. Relationship Between Data Pin, Audio Channels, Clock Pins, and TDM Options**

| Serial Data Pin | Channel Numbering        | Corresponding Clock Pins in Master Mode | Maximum TDM Channels | Flexible TDM Mode |
|-----------------|--------------------------|---|----------------------|-------------------|
| SDATA_IN0       | Channel 0 to Channel 15  | BCLK_IN0, LRCLK_IN0                     | 16 channels          | No                |
| SDATA_IN1       | Channel 16 to Channel 31 | BCLK_IN1, LRCLK_IN1                     | 16 channels          | No                |
| SDATA_IN2       | Channel 32 to Channel 39 | BCLK_IN2, LRCLK_IN2                     | 8 channels           | Yes               |
| SDATA_IN3       | Channel 40 to Channel 47 | BCLK_IN3, LRCLK_IN3                     | 8 channels           | Yes               |
| SDATA_OUT0      | Channel 0 to Channel 15  | BCLK_OUT0, LRCLK_OUT0                   | 16 channels          | No                |
| SDATA_OUT1      | Channel 16 to Channel 31 | BCLK_OUT1, LRCLK_OUT1                   | 16 channels          | No                |
| SDATA_OUT2      | Channel 32 to Channel 39 | BCLK_OUT2, LRCLK_OUT2                   | 8 channels           | Yes               |
| SDATA_OUT3      | Channel 40 to Channel 47 | BCLK_OUT3, LRCLK_OUT3                   | 8 channels           | Yes               |

Figure 61 shows timing diagrams for possible serial port configurations in 2-channel mode, with 32 cycles of the bit clock signal per channel, for a total of 64 bit clock cycles per frame (see the SERIAL\_BYTE\_x\_0 registers, Bits[2:0] (TDM\_MODE) = 0b000). Different bit clock polarities are illustrated in Figure 61 (SERIAL\_BYTE\_x\_0, Bit 7 (BCLK\_POL)), as well as different frame clock waveforms and polarities

(SERIAL\_BYTE\_x\_0, Bit 9 (LRCLK\_MODE) and Bit 8 (LRCLK\_POL)). Excluding flexible TDM mode, there are 12 possible combinations of settings for the audio word length (SERIAL\_BYTE\_x\_0, Bits[6:5] (WORD\_LEN)) and MSB position (SERIAL\_BYTE\_x\_0, Bits[4:3] (DATA\_FMT)), all of which are shown in Figure 61.

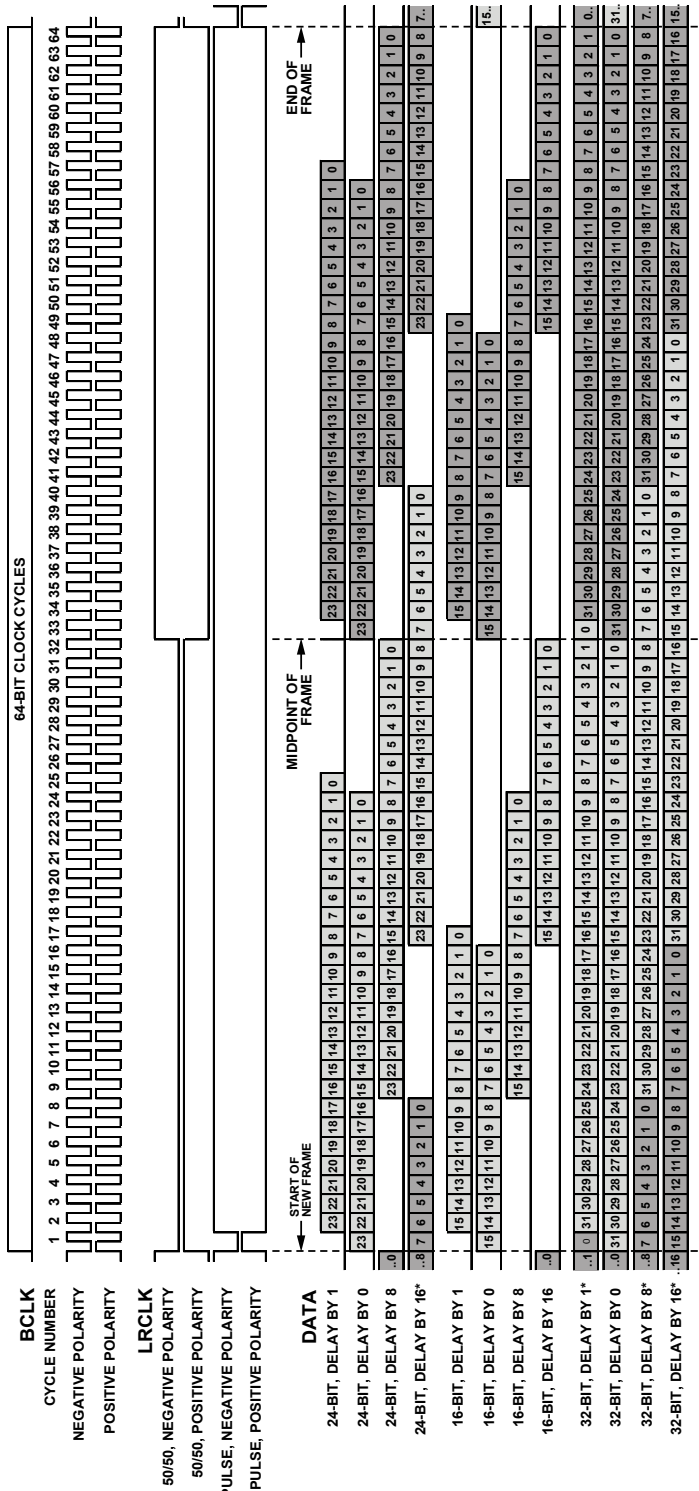

650-01891

\*IT IS POSSIBLE FOR THE USER TO CONFIGURE THE SERIAL PORTS TO OPERATE IN THIS MODE. HOWEVER, IT IS RECOMMENDED THAT THIS MODE NOT BE USED BECAUSE THE AUDIO DATA CROSSES THE THRESHOLD BETWEEN TWO FRAMES, WHICH MAY VIOLATE THE SPECIFICATIONS OF OTHER DEVICES IN THE SYSTEM.

Figure 61. Serial Audio Formats; Two Channels, 32 Bits per Channel  
Rev. C | Page 58 of 202



Figure 62 shows timing diagrams for possible serial port configurations in 4-channel mode, with 32 bit clock cycles per channel, for a total of 128 bit clock cycles per frame (refer to the SERIAL\_BYTE\_x\_0 registers, Bits[2:0] (TDM\_MODE) = 0b001). The bit clock signal is omitted from the figure.

Excluding flexible TDM mode, there are 12 possible combinations of settings for the audio word length (SERIAL\_BYTE\_x\_0, Bits[6:5] (WORD\_LEN)) and MSB position (SERIAL\_BYTE\_x\_0, Bits[4:3] (DATA\_FMT)), all of which are shown in Figure 62.


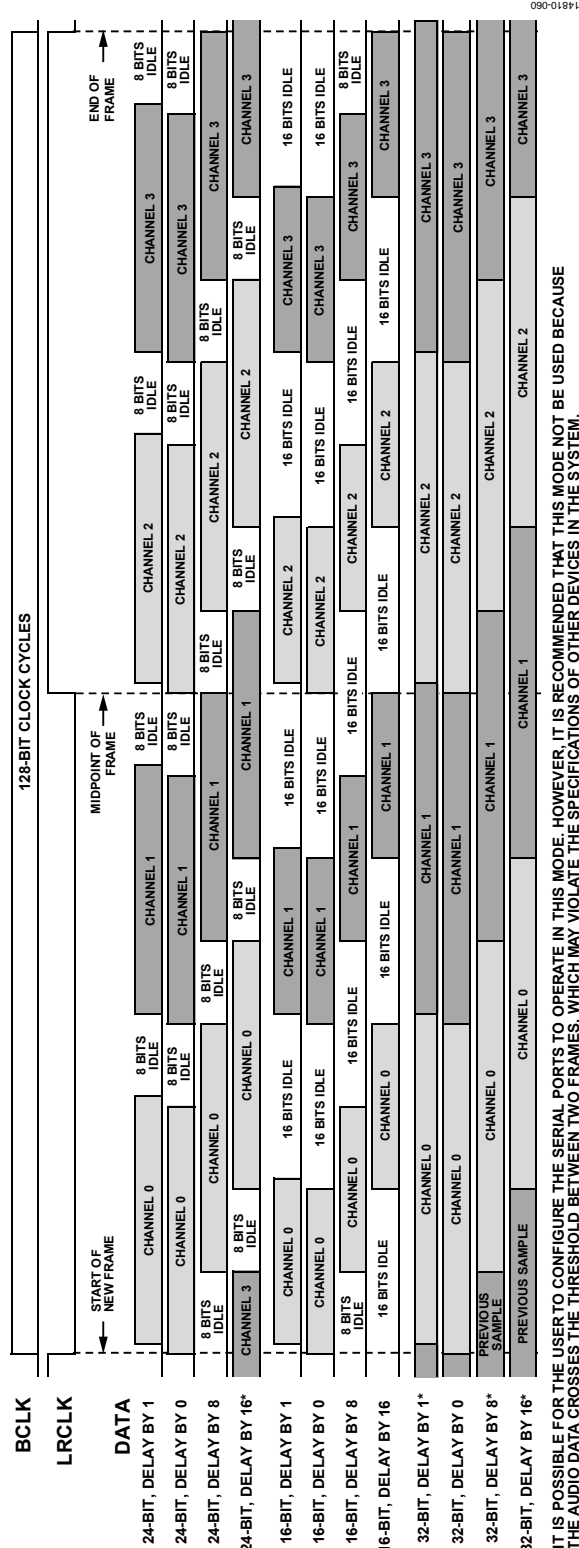


Figure 62. Serial Audio Data Formats; Four Channels, 32 Bits per Channel

Figure 63 shows timing diagrams for possible serial port configurations in 8-channel mode, with 32 bit clock cycles per channel, for a total of 256 bit clock cycles per frame (refer to the SERIAL\_BYTE\_x\_0 registers, Bits[2:0] (TDM\_MODE) = 0b010). The bit clock signal is omitted from the figure.

Excluding flexible TDM mode, there are 12 possible combinations of settings for the audio word length (SERIAL\_BYTE\_x\_0, Bits[6:5] (WORD\_LEN)) and MSB position (SERIAL\_BYTE\_x\_0, Bits[4:3] (DATA\_FMT)), all of which are shown in Figure 63.

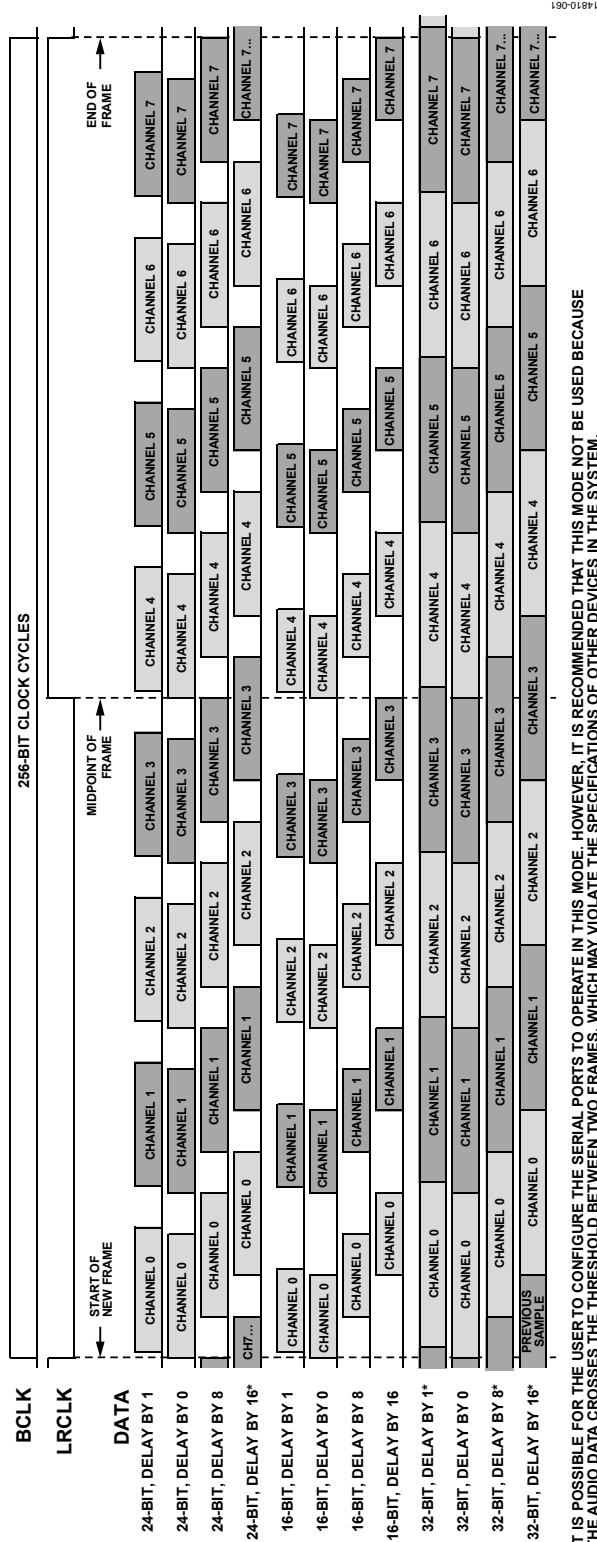

\*IT IS POSSIBLE FOR THE USER TO CONFIGURE THE SERIAL PORTS TO OPERATE IN THIS MODE. HOWEVER, IT IS RECOMMENDED THAT THIS MODE NOT BE USED BECAUSE THE AUDIO DATA CROSSES THE THRESHOLD BETWEEN TWO FRAMES, WHICH MAY VIOLATE THE SPECIFICATIONS OF OTHER DEVICES IN THE SYSTEM.

Figure 63. Serial Audio Data Formats; Eight Channels, 32 Bits per Channel



Figure 64 shows some timing diagrams for possible serial port configurations in 16-channel mode, with 32 bit clock cycles per channel, for a total of 512 bit clock cycles per frame (refer to the SERIAL\_BYTE\_x\_0 registers, Bits[2:0] (TDM\_MODE) = 0b011). The bit clock signal is omitted from the figure.

Excluding flexible TDM mode, there are 12 possible combinations of settings for the audio word length (SERIAL\_BYTE\_x\_0, Bits[6:5] (WORD\_LEN)) and MSB position (SERIAL\_BYTE\_x\_0, Bits[4:3] (DATA\_FMT)), all of which are shown in Figure 64.

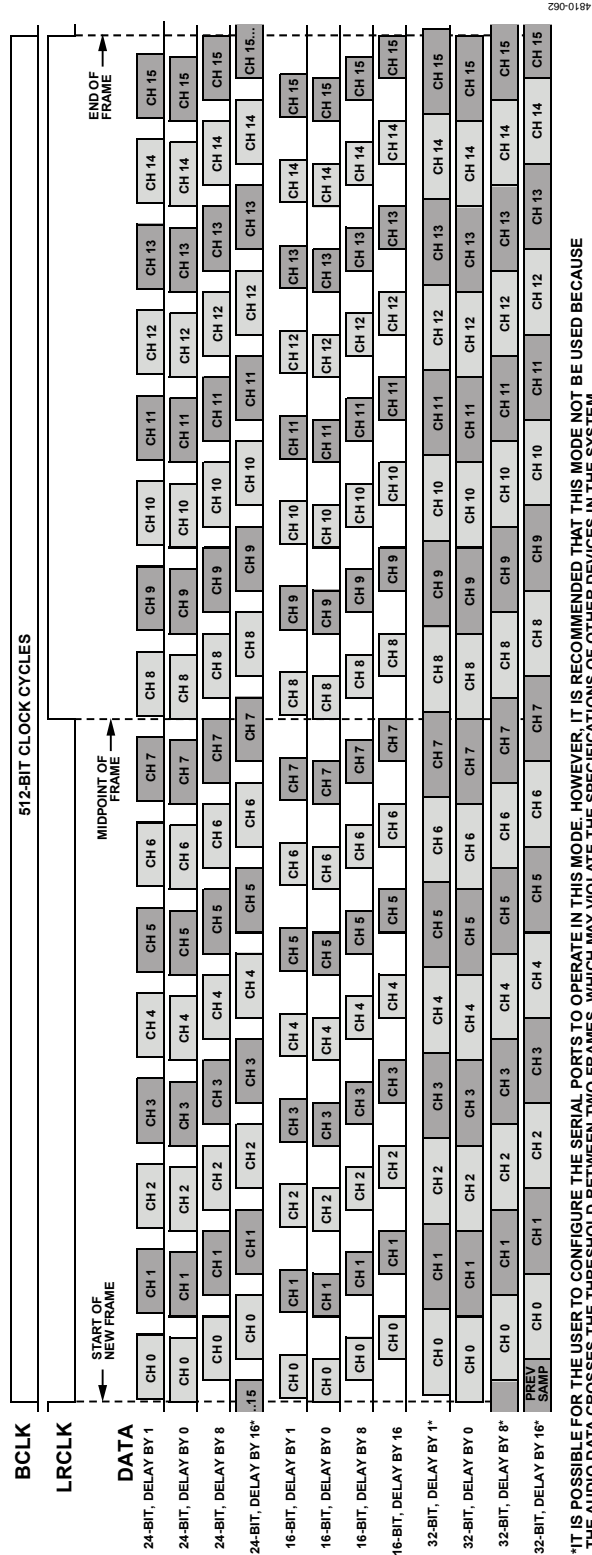


Figure 64. Serial Audio Data Formats; 16 Channels, 32 Bits per Channel

Figure 65 shows some timing diagrams for possible serial port configurations in 4-channel mode, with 16 bit clock cycles per channel, for a total of 64 bit clock cycles per frame (refer to the SERIAL\_BYTE\_x\_0 registers, Bits[2:0] (TDM\_MODE) = 0b100). Different bit clock polarities are shown (refer to the SERIAL\_

BYTE\_x\_0 registers, Bit 7 (BCLK\_POL)). The audio word length is fixed at 16 bits (refer to the SERIAL\_BYTE\_x\_0 registers, Bits[6:5] (WORD\_LEN) = 0b01), and there are four possible configurations for MSB position (SERIAL\_BYTE\_x\_0, Bits[4:3] (DATA\_FMT)), all of which are shown in Figure 65.

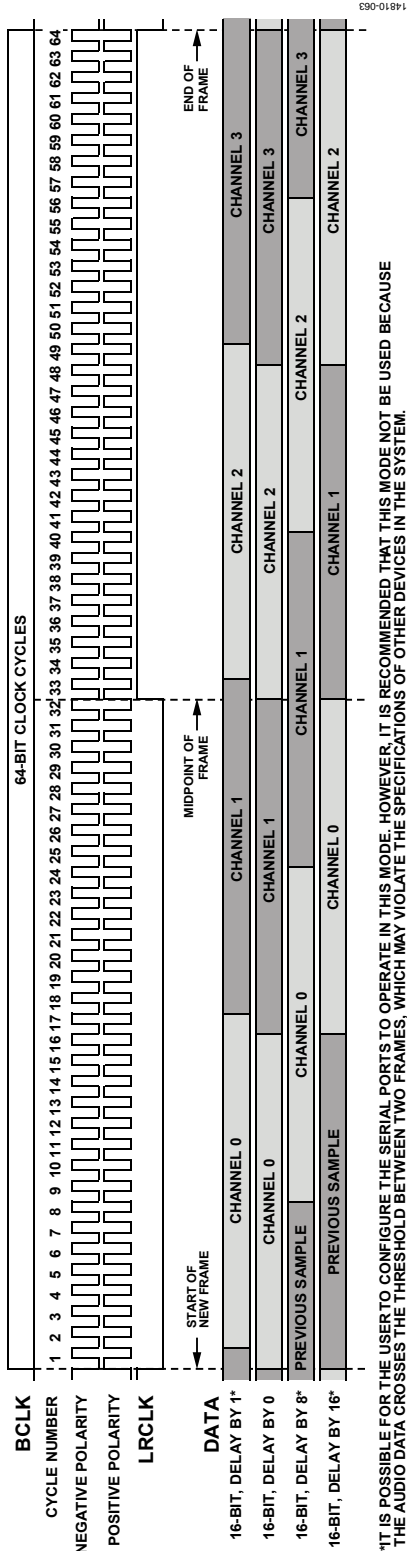


Figure 65. Serial Audio Data Formats; Four Channels, 16 Bits per Channel

Figure 66 shows some timing diagrams for possible serial port configurations in two channel mode, with 16 bit clock cycles per channel, for a total of 32 bit clock cycles per frame (refer to the SERIAL\_BYTE\_x\_0 registers, Register 0xF200 to Register 0xF21C, Bits[2:0] (TDM\_MODE) = 0b101).

Different bit clock polarities are illustrated (SERIAL\_BYTE\_x\_0, Bit 7 (BCLK\_POL)). The audio word length is fixed at 16 bits (SERIAL\_BYTE\_x\_0, Bits[6:5] (WORD\_LEN) = 0b01), and there are four possible configurations for MSB position (SERIAL\_BYTE\_x\_0, Bits[4:3] (DATA\_FMT)), all of which are shown in Figure 66.

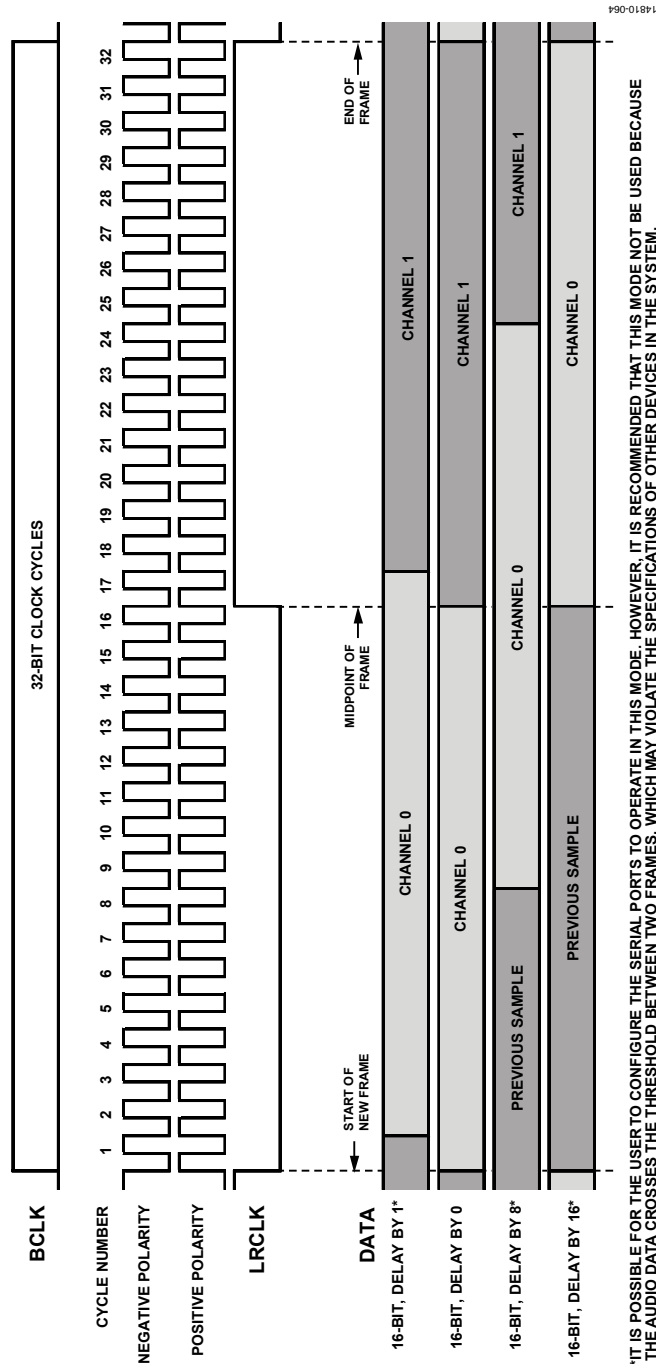


Figure 66. Serial Audio Data Formats; Two Channels, 16 Bits per Channel

**Serial Clock Domains**

There are four input clock domains and four output clock domains. A clock domain consists of a pair of LRCLK\_OUTx and LRCLK\_INx (frame clock) and BCLK\_OUTx and BCLK\_INx (bit clock) pins, which are used to synchronize the transmission of audio data to and from the device. There are eight total clock domains. Four of them are input domains and four of them are output domains. In master mode (refer to the SERIAL\_BYTE\_x\_0 registers, Register 0xF200 to Register 0xF21C, Bits[15:13] (LRCLK\_SRC) = 0b100 and Bits[12:10] (BCLK\_SRC) = 0b100), each clock domain corresponds to exactly one serial data pin, one frame clock pin, and one bit clock pin.

Any serial data input can be clocked by any input clock domains when it is configured in slave mode (refer to the SERIAL\_BYTE\_x\_0 registers, Bits[15:13] (LRCLK\_SRC), which can be set to 0b000, 0b001, 0b010, or 0b011; and Bits[12:10] (BCLK\_SRC), which can be set to 0b000, 0b001, 0b010, or 0b011). Any serial data output can be clocked by any output clock domain when it is configured in slave mode (see the SERIAL\_BYTE\_x\_0 registers, Bits[15:13] (LRCLK\_SRC), which can be set to 0b000, 0b001, 0b010, or 0b011; and Bits[12:10] (BCLK\_SRC), which can be set to 0b000, 0b001, 0b010, or 0b011).

**Table 41. Relationship Between Serial Data Pins and Clock Pins in Master or Slave Mode**

| Serial Data Pin | Corresponding Clock Pins in Master Mode | Corresponding Clock Pins in Slave Mode  |
|-----------------|---|---|
| SDATA_IN0       | BCLK_IN0, LRCLK_IN0 (LRCLK_IN0/MP10)    | BCLK_IN0, LRCLK_IN0 or<br>BCLK_IN1, LRCLK_IN1 or<br>BCLK_IN2, LRCLK_IN2 or<br>BCLK_IN3, LRCLK_IN3         |
| SDATA_IN1       | BCLK_IN1, LRCLK_IN1 (LRCLK_IN1/MP11)    | BCLK_IN0, LRCLK_IN0 or<br>BCLK_IN1, LRCLK_IN1 or<br>BCLK_IN2, LRCLK_IN2 or<br>BCLK_IN3, LRCLK_IN3         |
| SDATA_IN2       | BCLK_IN2, LRCLK_IN2 (LRCLK_IN2/MP12)    | BCLK_IN0, LRCLK_IN0 or<br>BCLK_IN1, LRCLK_IN1 or<br>BCLK_IN2, LRCLK_IN2 or<br>BCLK_IN3, LRCLK_IN3         |
| SDATA_IN3       | BCLK_IN3, LRCLK_IN3 (LRCLK_IN3/MP13)    | BCLK_IN0, LRCLK_IN0 or<br>BCLK_IN1, LRCLK_IN1 or<br>BCLK_IN2, LRCLK_IN2 or<br>BCLK_IN3, LRCLK_IN3         |
| SDATA_OUT0      | BCLK_OUT0, LRCLK_OUT0 (LRCLK_OUT0/MP4)  | BCLK_OUT0, LRCLK_OUT0 or<br>BCLK_OUT1, LRCLK_OUT1 or<br>BCLK_OUT2, LRCLK_OUT2 or<br>BCLK_OUT3, LRCLK_OUT3 |
| SDATA_OUT1      | BCLK_OUT1, LRCLK_OUT1 (LRCLK_OUT1/MP5)  | BCLK_OUT0, LRCLK_OUT0 or<br>BCLK_OUT1, LRCLK_OUT1 or<br>BCLK_OUT2, LRCLK_OUT2 or<br>BCLK_OUT3, LRCLK_OUT3 |
| SDATA_OUT2      | BCLK_OUT2, LRCLK_OUT2 (LRCLK_OUT2/MP8)  | BCLK_OUT0, LRCLK_OUT0 or<br>BCLK_OUT1, LRCLK_OUT1 or<br>BCLK_OUT2, LRCLK_OUT2 or<br>BCLK_OUT3, LRCLK_OUT3 |
| SDATA_OUT3      | BCLK_OUT3, LRCLK_OUT3 (LRCLK_OUT3/MP9)  | BCLK_OUT0, LRCLK_OUT0 or<br>BCLK_OUT1, LRCLK_OUT1 or<br>BCLK_OUT2, LRCLK_OUT2 or<br>BCLK_OUT3, LRCLK_OUT3 |

**Serial Input Ports**

There is a one to one mapping between the serial input ports and the audio input channels in the DSP and the ASRC input selectors, which is described in Table 42.

**Table 42. Relationship Between Serial Input Port and Corresponding Channel Numbers on the DSP and ASRC Inputs**

| Serial Port    | Audio Input Channels in the DSP and ASRC                       |
|----------------|--|
| Serial Input 0 | 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15           |
| Serial Input 1 | 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31 |
| Serial Input 2 | 32, 33, 34, 35, 36, 37, 38, 39                                 |
| Serial Input 3 | 40, 41, 42, 43, 44, 45, 46, 47                                 |

If a serial input port is configured using the SERIAL\_BYTE\_x\_0 registers, Bits[2:0] (TDM\_MODE) for a number of channels that is less than its maximum channel count, the unused channels carry zero data. For example, if Serial Input 0 is set in 8-channel (TDM8) mode, the first eight channels (Channel 0 to Channel 7) carry data, and the unused channels (Channel 8 to Channel 15) carry no data.

There are four options for the word length of each serial input port: 24 bits, 16 bits, 32 bits, or flexible TDM. The flexible TDM option is described in the Flexible TDM Input section.

In 32-bit mode (see Figure 67), the 32 bits received on the serial input are mapped directly to a 32-bit word in the DSP core. To use 32-bit mode, the 32-bit input cells must be used in SigmaStudio.

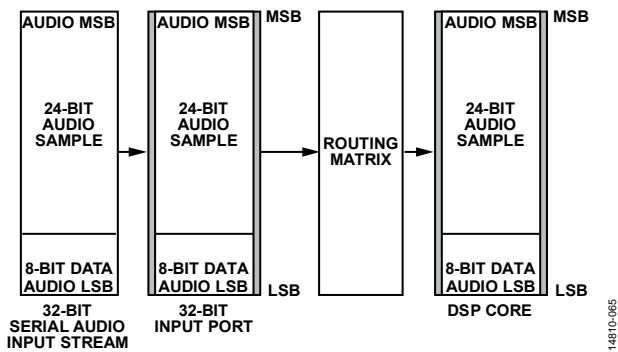


Figure 67. 32-Bit Serial Input Example

In 24-bit mode (see Figure 69), the 24-bit audio sample (in 1.23 format) is padded with eight zeros below its LSB (in 1.31 format) as it is input to the routing matrix. Then, the audio data is shifted such that the audio sample has 7 sign-extended zeros on top, 1 padded zero on the bottom, and 24 bits of data in the middle (8.24 format).

Whereas 16-bit mode is similar to 24-bit mode, the 16-bit audio data has 16 zeros below its LSB instead of just 8 zeros (in the 24-bit case). The resulting 8.24 sample, therefore, has 7 sign-extended zeros on top, 9 padded zeros on the bottom, and 16 bits of data in the middle (8.24 format).

**Serial Output Ports**

There is a one-to-one mapping between the serial output ports and the output audio channels in the DSP (see Table 43).

**Table 43. Relationship Between Serial Input Port and Corresponding DSP Output Channel Numbers**

| Serial Input Port | Audio Output Channels from the DSP                             |
|-------------------|--|
| Serial Output 0   | 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15           |
| Serial Output 1   | 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31 |
| Serial Output 2   | 32, 33, 34, 35, 36, 37, 38, 39                                 |
| Serial Output 3   | 40, 41, 42, 43, 44, 45, 46, 47                                 |

If a serial output port is configured using the SERIAL\_BYTE\_x\_0 registers, Bits[2:0] (TDM\_MODE), for a number of channels that is less than its maximum channel count, the unused channels are ignored. For example, if Serial Output Port 0 is set in 8-channel (TDM8) mode, and data is routed to it from the DSP, the first eight DSP output channels (Channel 0 through Channel 7) are output on SDATA\_OUT0, but the remaining channels (Channel 8 through Channel 15) are not output from the device.

There are four options for the word length of each serial output port: 24 bits, 16 bits, 32 bits, or flexible TDM. See the Flexible TDM Output section for more information.

In 32-bit mode (see Figure 68), all 32 bits from the 8.24 word in the DSP core are copied directly to the serial output. To use 32-bit mode, the 32-bit output cells must be used in SigmaStudio.

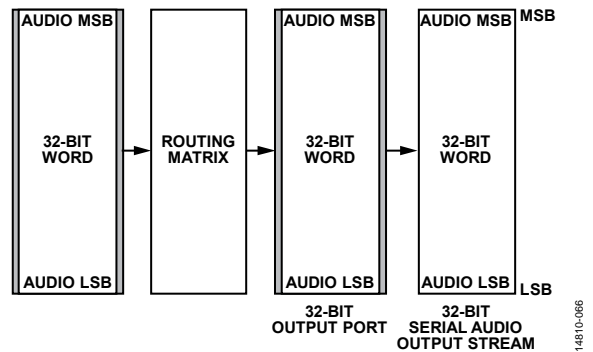


Figure 68. 32-Bit Serial Output Example

In 24-bit mode, the top 7 MSBs of the 8.24 audio word in the DSP core are saturated, and the resulting 1.23 word is output from the serial port, with 8 zeros padded under the LSB (see Figure 70).

In 16-bit mode, the top 7 MSBs of the 8.24 audio word in the DSP core are saturated, and the resulting 1.23 word is then truncated to a 1.15 word by removing the 8 LSBs. The resulting 1.15 word is then zero padded with 16 zeros under the LSB and output from the serial port.

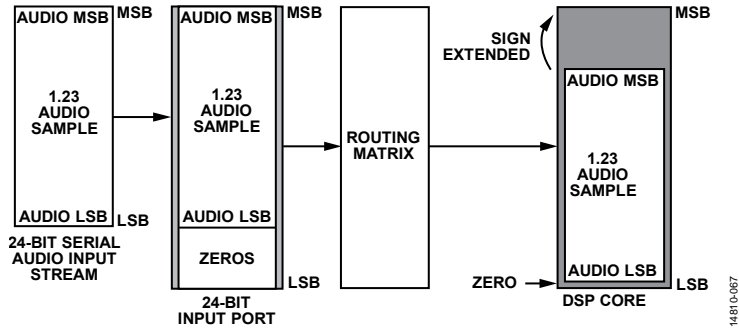


Figure 69. 24-Bit Serial Input Example




Figure 70. 24-Bit Serial Output Example

**Serial Port Registers**

An overview of the registers related to the serial ports is shown in Table 44. For a more detailed description, see the Serial Port Configuration Registers section.

**Table 44. Serial Port Registers**

| Address | Register        | Description                            |
|---------|-----------------|--|
| 0xF200  | SERIAL_BYTE_0_0 | Serial Port Control 0 (SDATA_IN0 pin)  |
| 0xF201  | SERIAL_BYTE_0_1 | Serial Port Control 1 (SDATA_IN0 pin)  |
| 0xF204  | SERIAL_BYTE_1_0 | Serial Port Control 0 (SDATA_IN1 pin)  |
| 0xF205  | SERIAL_BYTE_1_1 | Serial Port Control 1 (SDATA_IN1 pin)  |
| 0xF208  | SERIAL_BYTE_2_0 | Serial Port Control 0 (SDATA_IN2 pin)  |
| 0xF209  | SERIAL_BYTE_2_1 | Serial Port Control 1 (SDATA_IN2 pin)  |
| 0xF20C  | SERIAL_BYTE_3_0 | Serial Port Control 0 (SDATA_IN3 pin)  |
| 0xF20D  | SERIAL_BYTE_3_1 | Serial Port Control 1 (SDATA_IN3 pin)  |
| 0xF210  | SERIAL_BYTE_4_0 | Serial Port Control 0 (SDATA_OUT0 pin) |
| 0xF211  | SERIAL_BYTE_4_1 | Serial Port Control 1 (SDATA_OUT0 pin) |
| 0xF214  | SERIAL_BYTE_5_0 | Serial Port Control 0 (SDATA_OUT1 pin) |
| 0xF215  | SERIAL_BYTE_5_1 | Serial Port Control 1 (SDATA_OUT1 pin) |
| 0xF218  | SERIAL_BYTE_6_0 | Serial Port Control 0 (SDATA_OUT2 pin) |
| 0xF219  | SERIAL_BYTE_6_1 | Serial Port Control 1 (SDATA_OUT2 pin) |
| 0xF21C  | SERIAL_BYTE_7_0 | Serial Port Control 0 (SDATA_OUT3 pin) |
| 0xF21D  | SERIAL_BYTE_7_1 | Serial Port Control 1 (SDATA_OUT3 pin) |

## FLEXIBLE TDM INTERFACE

The flexible TDM interface is available as an optional mode of operation on the SDATA\_IN2 and SDATA\_IN3 serial input ports, as well as on the SDATA\_OUT2 and SDATA\_OUT3 serial output ports. To use flexible TDM mode, the corresponding serial ports must be set in flexible TDM mode (SERIAL\_BYTE\_x\_0 register, Bits[6:5] (WORD\_LEN) = 0b11 and SERIAL\_BYTE\_x\_0 register, Bits[2:0] = 0b010). Flexible TDM input mode requires that both SDATA\_IN2 and SDATA\_IN3 be configured for flexible TDM mode. Likewise, flexible TDM output mode requires that both SDATA\_OUT2 and SDATA\_OUT3 pins be configured for flexible TDM mode.

The flexible TDM interface provides byte addressable data placement in the input and output data streams on the corresponding serial data input/output pins. Each data stream is configured like a standard 8-channel TDM interface, with a total of 256 data bits (or 32 bytes) in the span of an audio frame. Because flexible TDM mode runs on two pins simultaneously, and each pin has 32 bytes of data, this means that there are a total of 64 data bytes. In flexible TDM input mode, each input channel inside the device can select its source data from any of the 64 input data bytes. In flexible TDM output mode, any serial output channel can be routed to any of the 64 output data bytes.

### **Flexible TDM Input**

In flexible TDM input mode, two 256-bit data streams are input to the SDATA\_IN2 and SDATA\_IN3 pins. These 256 bits of data compose eight channels of four bytes each, for a total of 32 bytes on each pin, and a total of 64 bytes when both input pins are combined. The flexible TDM input functional block routes the desired input byte to a given byte in the serial input channels. Those serial input channels are then available as normal audio data in the audio routing matrix. The data can be passed to the DSP core, the ASRC inputs, or the serial outputs as needed.

There are a total of 64 control registers (FTDM\_INx) that can be configured to set up the mapping of input data bytes to the corresponding bytes in the serial input channels. Each byte in each serial input channel has a corresponding control register, which selects the incoming data byte on the serial input pins that must be mapped to it. Figure 71 shows, from left to right, the data streams entering the serial input pins, the serial input channels, and the registers (see FTDM\_INx, Register 0xF300 to Register 0xF33F) that correspond to each byte in the serial input channels.

### **Flexible TDM Output**

In flexible TDM output mode, two 256-bit data streams are output from the SDATA\_OUT2 and SDATA\_OUT3 pins. These 256 bits of data compose eight channels of four bytes each, for a total of 32 bytes on each pin, and a total of 64 bytes when both input pins are combined. The flexible TDM output functional block routes the desired byte from the desired serial output channel to a given byte in the output streams. The serial output channels originate from the audio routing matrix, which is configured using the SOUT\_SOURCEx control registers.

There are a total of 64 control registers (see FTDM\_OUTx, Register 0xF388 to Register 0xF3BF) that can be configured to set up the mapping of the bytes in the serial output channels and the bytes in the data streams exiting the serial output pins. Each byte in the data streams being output from the serial output pins has a corresponding control register, which selects the desired byte from the desired serial output channel. Figure 72 shows, from left to right, the serial output channels originating from the routing matrix, the serial output pins and data streams, and the control registers (FTDM\_OUTx) that correspond to each byte in the serial output data streams.



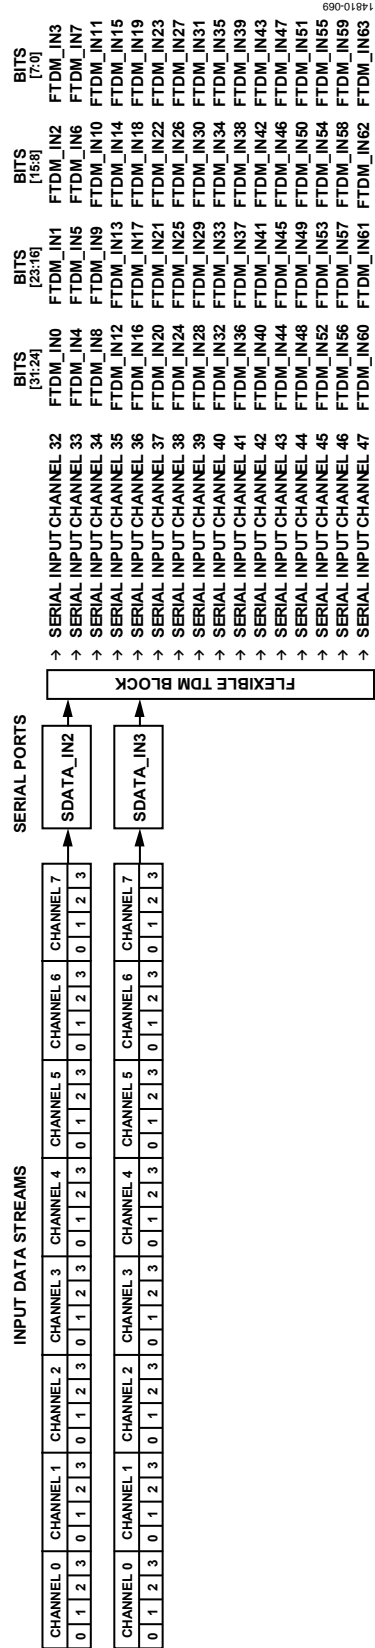


Figure 71. Flexible TDM Input Mapping

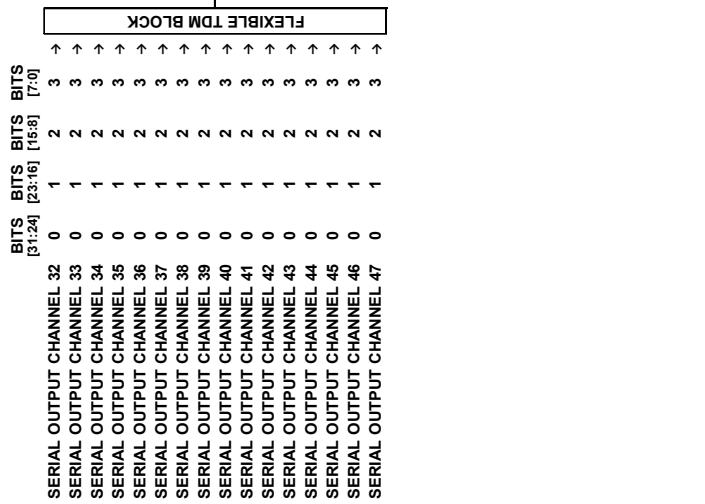


Figure 72. Flexible TDM Output Mapping

14810-070

**Flexible TDM Registers**

An overview of the registers related to the flexible TDM interface is shown in Table 45. For a more detailed description, see the Flexible TDM Interface Registers section.

**Table 45. Flexible TDM Registers**

| Address | Register  | Description  |
|---------|-----------|--|
| 0xF300  | FTDM_IN0  | FTDM mapping for the serial inputs (Channel 32, Bits[31:24]) |
| 0xF301  | FTDM_IN1  | FTDM mapping for the serial inputs (Channel 32, Bits[23:16]) |
| 0xF302  | FTDM_IN2  | FTDM mapping for the serial inputs (Channel 32, Bits[15:8])  |
| 0xF303  | FTDM_IN3  | FTDM mapping for the serial inputs (Channel 32, Bits[7:0])   |
| 0xF304  | FTDM_IN4  | FTDM mapping for the serial inputs (Channel 33, Bits[31:24]) |
| 0xF305  | FTDM_IN5  | FTDM mapping for the serial inputs (Channel 33, Bits[23:16]) |
| 0xF306  | FTDM_IN6  | FTDM mapping for the serial inputs (Channel 33, Bits[15:8])  |
| 0xF307  | FTDM_IN7  | FTDM mapping for the serial inputs Channel 33, Bits[7:0])    |
| 0xF308  | FTDM_IN8  | FTDM mapping for the serial inputs (Channel 34, Bits[31:24]) |
| 0xF309  | FTDM_IN9  | FTDM mapping for the serial inputs (Channel 34, Bits[23:16]) |
| 0xF30A  | FTDM_IN10 | FTDM mapping for the serial inputs (Channel 34, Bits[15:8])  |
| 0xF30B  | FTDM_IN11 | FTDM mapping for the serial inputs (Channel 34, Bits[7:0])   |
| 0xF30C  | FTDM_IN12 | FTDM mapping for the serial inputs (Channel 35, Bits[31:24]) |
| 0xF30D  | FTDM_IN13 | FTDM mapping for the serial inputs (Channel 35, Bits[23:16]) |
| 0xF30E  | FTDM_IN14 | FTDM mapping for the serial inputs (Channel 35, Bits[15:8])  |
| 0xF30F  | FTDM_IN15 | FTDM mapping for the serial inputs (Channel 35, Bits[7:0])   |
| 0xF310  | FTDM_IN16 | FTDM mapping for the serial inputs (Channel 36, Bits[31:24]) |
| 0xF311  | FTDM_IN17 | FTDM mapping for the serial inputs (Channel 36, Bits[23:16]) |
| 0xF312  | FTDM_IN18 | FTDM mapping for the serial inputs (Channel 36, Bits[15:8])  |
| 0xF313  | FTDM_IN19 | FTDM mapping for the serial inputs (Channel 36, Bits[7:0])   |
| 0xF314  | FTDM_IN20 | FTDM mapping for the serial inputs (Channel 37, Bits[31:24]) |
| 0xF315  | FTDM_IN21 | FTDM mapping for the serial inputs (Channel 37, Bits[23:16]) |
| 0xF316  | FTDM_IN22 | FTDM mapping for the serial inputs (Channel 37, Bits[15:8])  |
| 0xF317  | FTDM_IN23 | FTDM mapping for the serial inputs (Channel 37, Bits[7:0])   |
| 0xF318  | FTDM_IN24 | FTDM mapping for the serial inputs (Channel 38, Bits[31:24]) |
| 0xF319  | FTDM_IN25 | FTDM mapping for the serial inputs (Channel 38, Bits[23:16]) |
| 0xF31A  | FTDM_IN26 | FTDM mapping for the serial inputs (Channel 38, Bits[15:8])  |
| 0xF31B  | FTDM_IN27 | FTDM mapping for the serial inputs (Channel 38, Bits[7:0])   |
| 0xF31C  | FTDM_IN28 | FTDM mapping for the serial inputs (Channel 39, Bits[31:24]) |
| 0xF31D  | FTDM_IN29 | FTDM mapping for the serial inputs (Channel 39, Bits[23:16]) |
| 0xF31E  | FTDM_IN30 | FTDM mapping for the serial inputs (Channel 39, Bits[15:8])  |
| 0xF31F  | FTDM_IN31 | FTDM mapping for the serial inputs (Channel 39, Bits[7:0])   |
| 0xF320  | FTDM_IN32 | FTDM mapping for the serial inputs (Channel 40, Bits[31:24]) |
| 0xF321  | FTDM_IN33 | FTDM mapping for the serial inputs (Channel 40, Bits[23:16]) |
| 0xF322  | FTDM_IN34 | FTDM mapping for the serial inputs (Channel 40, Bits[15:8])  |
| 0xF323  | FTDM_IN35 | FTDM mapping for the serial inputs (Channel 40, Bits[7:0])   |
| 0xF324  | FTDM_IN36 | FTDM mapping for the serial inputs (Channel 41, Bits[31:24]) |
| 0xF325  | FTDM_IN37 | FTDM mapping for the serial inputs (Channel 41, Bits[23:16]) |
| 0xF326  | FTDM_IN38 | FTDM mapping for the serial inputs (Channel 41, Bits[15:8])  |
| 0xF327  | FTDM_IN39 | FTDM mapping for the serial inputs (Channel 41, Bits[7:0])   |
| 0xF328  | FTDM_IN40 | FTDM mapping for the serial inputs (Channel 42, Bits[31:24]) |
| 0xF329  | FTDM_IN41 | FTDM mapping for the serial inputs (Channel 42, Bits[23:16]) |
| 0xF32A  | FTDM_IN42 | FTDM mapping for the serial inputs (Channel 42, Bits[15:8])  |
| 0xF32B  | FTDM_IN43 | FTDM mapping for the serial inputs (Channel 42, Bits[7:0])   |
| 0xF32C  | FTDM_IN44 | FTDM mapping for the serial inputs (Channel 43, Bits[31:24]) |
| 0xF32D  | FTDM_IN45 | FTDM mapping for the serial inputs (Channel 43, Bits[23:16]) |
| 0xF32E  | FTDM_IN46 | FTDM mapping for the serial inputs (Channel 43, Bits[15:8])  |
| 0xF32F  | FTDM_IN47 | FTDM mapping for the serial inputs (Channel 43, Bits[7:0])   |

| Address | Register   | Description  |
|---------|------------|--|
| 0xF330  | FTDM_IN48  | FTDM mapping for the serial inputs (Channel 44, Bits[31:24])         |
| 0xF331  | FTDM_IN49  | FTDM mapping for the serial inputs (Channel 44, Bits[23:16])         |
| 0xF332  | FTDM_IN50  | FTDM mapping for the serial inputs (Channel 44, Bits[15:8])          |
| 0xF333  | FTDM_IN51  | FTDM mapping for the serial inputs (Channel 44, Bits[7:0])           |
| 0xF334  | FTDM_IN52  | FTDM mapping for the serial inputs (Channel 45, Bits[31:24])         |
| 0xF335  | FTDM_IN53  | FTDM mapping for the serial inputs (Channel 45, Bits[23:16])         |
| 0xF336  | FTDM_IN54  | FTDM mapping for the serial inputs (Channel 45, Bits[15:8])          |
| 0xF337  | FTDM_IN55  | FTDM mapping for the serial inputs (Channel 45, Bits[7:0])           |
| 0xF338  | FTDM_IN56  | FTDM mapping for the serial inputs (Channel 46, Bits[31:24])         |
| 0xF339  | FTDM_IN57  | FTDM mapping for the serial inputs (Channel 46, Bits[23:16])         |
| 0xF33A  | FTDM_IN58  | FTDM mapping for the serial inputs (Channel 46, Bits[15:8])          |
| 0xF33B  | FTDM_IN59  | FTDM mapping for the serial inputs (Channel 46, Bits[7:0])           |
| 0xF33C  | FTDM_IN60  | FTDM mapping for the serial inputs (Channel 47, Bits[31:24])         |
| 0xF33D  | FTDM_IN61  | FTDM mapping for the serial inputs (Channel 47, Bits[23:16])         |
| 0xF33E  | FTDM_IN62  | FTDM mapping for the serial inputs (Channel 47, Bits[15:8])          |
| 0xF33F  | FTDM_IN63  | FTDM mapping for the serial inputs (Channel 47, Bits[7:0])           |
| 0xF380  | FTDM_OUT0  | FTDM mapping for the serial outputs (Port 2, Channel 0, Bits[31:24]) |
| 0xF381  | FTDM_OUT1  | FTDM mapping for the serial outputs (Port 2, Channel 0, Bits[23:16]) |
| 0xF382  | FTDM_OUT2  | FTDM mapping for the serial outputs (Port 2, Channel 0, Bits[15:8])  |
| 0xF383  | FTDM_OUT3  | FTDM mapping for the serial outputs (Port 2, Channel 0, Bits[7:0])   |
| 0xF384  | FTDM_OUT4  | FTDM mapping for the serial outputs (Port 2, Channel 1, Bits[31:24]) |
| 0xF385  | FTDM_OUT5  | FTDM mapping for the serial outputs (Port 2, Channel 1, Bits[23:16]) |
| 0xF386  | FTDM_OUT6  | FTDM mapping for the serial outputs (Port 2, Channel 1, Bits[15:8])  |
| 0xF387  | FTDM_OUT7  | FTDM mapping for the serial outputs (Port 2, Channel 1, Bits[7:0])   |
| 0xF388  | FTDM_OUT8  | FTDM mapping for the serial outputs (Port 2, Channel 2, Bits[31:24]) |
| 0xF389  | FTDM_OUT9  | FTDM mapping for the serial outputs (Port 2, Channel 2, Bits[23:16]) |
| 0xF38A  | FTDM_OUT10 | FTDM mapping for the serial outputs (Port 2, Channel 2, Bits[15:8])  |
| 0xF38B  | FTDM_OUT11 | FTDM mapping for the serial outputs (Port 2, Channel 2, Bits[7:0])   |
| 0xF38C  | FTDM_OUT12 | FTDM mapping for the serial outputs (Port 2, Channel 3, Bits[31:24]) |
| 0xF38D  | FTDM_OUT13 | FTDM mapping for the serial outputs (Port 2, Channel 3, Bits[23:16]) |
| 0xF38E  | FTDM_OUT14 | FTDM mapping for the serial outputs (Port 2, Channel 3, Bits[15:8])  |
| 0xF38F  | FTDM_OUT15 | FTDM mapping for the serial outputs (Port 2, Channel 3, Bits[7:0])   |
| 0xF390  | FTDM_OUT16 | FTDM mapping for the serial outputs (Port 2, Channel 4, Bits[31:24]) |
| 0xF391  | FTDM_OUT17 | FTDM mapping for the serial outputs (Port 2, Channel 4, Bits[23:16]) |
| 0xF392  | FTDM_OUT18 | FTDM mapping for the serial outputs (Port 2, Channel 4, Bits[15:8])  |
| 0xF393  | FTDM_OUT19 | FTDM mapping for the serial outputs (Port 2, Channel 4, Bits[7:0])   |
| 0xF394  | FTDM_OUT20 | FTDM mapping for the serial outputs (Port 2, Channel 5, Bits[31:24]) |
| 0xF395  | FTDM_OUT21 | FTDM mapping for the serial outputs (Port 2, Channel 5, Bits[23:16]) |
| 0xF396  | FTDM_OUT22 | FTDM mapping for the serial outputs (Port 2, Channel 5, Bits[15:8])  |
| 0xF397  | FTDM_OUT23 | FTDM mapping for the serial outputs (Port 2, Channel 5, Bits[7:0])   |
| 0xF398  | FTDM_OUT24 | FTDM mapping for the serial outputs (Port 2, Channel 6, Bits[31:24]) |
| 0xF399  | FTDM_OUT25 | FTDM mapping for the serial outputs (Port 2, Channel 6, Bits[23:16]) |
| 0xF39A  | FTDM_OUT26 | FTDM mapping for the serial outputs (Port 2, Channel 6, Bits[15:8])  |
| 0xF39B  | FTDM_OUT27 | FTDM mapping for the serial outputs (Port 2, Channel 6, Bits[7:0])   |
| 0xF39C  | FTDM_OUT28 | FTDM mapping for the serial outputs (Port 2, Channel 7, Bits[31:24]) |
| 0xF39D  | FTDM_OUT29 | FTDM mapping for the serial outputs (Port 2, Channel 7, Bits[23:16]) |
| 0xF39E  | FTDM_OUT30 | FTDM mapping for the serial outputs (Port 2, Channel 7, Bits[15:8])  |
| 0xF39F  | FTDM_OUT31 | FTDM mapping for the serial outputs (Port 2, Channel 7, Bits[7:0])   |
| 0xF3A0  | FTDM_OUT32 | FTDM mapping for the serial outputs (Port 3, Channel 0, Bits[31:24]) |
| 0xF3A1  | FTDM_OUT33 | FTDM mapping for the serial outputs (Port 3, Channel 0, Bits[23:16]) |
| 0xF3A2  | FTDM_OUT34 | FTDM mapping for the serial outputs (Port 3, Channel 0, Bits[15:8])  |
| 0xF3A3  | FTDM_OUT35 | FTDM mapping for the serial outputs (Port 3, Channel 0, Bits[7:0])   |
| 0xF3A4  | FTDM_OUT36 | FTDM mapping for the serial outputs (Port 3, Channel 1, Bits[31:24]) |

| Address | Register   | Description  |
|---------|------------|--|
| 0xF3A5  | FTDM_OUT37 | FTDM mapping for the serial outputs (Port 3, Channel 1, Bits[23:16]) |
| 0xF3A6  | FTDM_OUT38 | FTDM mapping for the serial outputs (Port 3, Channel 1, Bits[15:8])  |
| 0xF3A7  | FTDM_OUT39 | FTDM mapping for the serial outputs (Port 3, Channel 1, Bits[7:0])   |
| 0xF3A8  | FTDM_OUT40 | FTDM mapping for the serial outputs (Port 3, Channel 2, Bits[31:24]) |
| 0xF3A9  | FTDM_OUT41 | FTDM mapping for the serial outputs (Port 3, Channel 2, Bits[23:16]) |
| 0xF3AA  | FTDM_OUT42 | FTDM mapping for the serial outputs (Port 3, Channel 2, Bits[15:8])  |
| 0xF3AB  | FTDM_OUT43 | FTDM mapping for the serial outputs (Port 3, Channel 2, Bits[7:0])   |
| 0xF3AC  | FTDM_OUT44 | FTDM mapping for the serial outputs (Port 3, Channel 3, Bits[31:24]) |
| 0xF3AD  | FTDM_OUT45 | FTDM mapping for the serial outputs (Port 3, Channel 3, Bits[23:16]) |
| 0xF3AE  | FTDM_OUT46 | FTDM mapping for the serial outputs (Port 3, Channel 3, Bits[15:8])  |
| 0xF3AF  | FTDM_OUT47 | FTDM mapping for the serial outputs (Port 3, Channel 3, Bits[7:0])   |
| 0xF3B0  | FTDM_OUT48 | FTDM mapping for the serial outputs (Port 3, Channel 4, Bits[31:24]) |
| 0xF3B1  | FTDM_OUT49 | FTDM mapping for the serial outputs (Port 3, Channel 4, Bits[23:16]) |
| 0xF3B2  | FTDM_OUT50 | FTDM mapping for the serial outputs (Port 3, Channel 4, Bits[15:8])  |
| 0xF3B3  | FTDM_OUT51 | FTDM mapping for the serial outputs (Port 3, Channel 4, Bits[7:0])   |
| 0xF3B4  | FTDM_OUT52 | FTDM mapping for the serial outputs (Port 3, Channel 5, Bits[31:24]) |
| 0xF3B5  | FTDM_OUT53 | FTDM mapping for the serial outputs (Port 3, Channel 5, Bits[23:16]) |
| 0xF3B6  | FTDM_OUT54 | FTDM mapping for the serial outputs (Port 3, Channel 5, Bits[15:8])  |
| 0xF3B7  | FTDM_OUT55 | FTDM mapping for the serial outputs (Port 3, Channel 5, Bits[7:0])   |
| 0xF3B8  | FTDM_OUT56 | FTDM mapping for the serial outputs (Port 3, Channel 6, Bits[31:24]) |
| 0xF3B9  | FTDM_OUT57 | FTDM mapping for the serial outputs (Port 3, Channel 6, Bits[23:16]) |
| 0xF3BA  | FTDM_OUT58 | FTDM mapping for the serial outputs (Port 3, Channel 6, Bits[15:8])  |
| 0xF3BB  | FTDM_OUT59 | FTDM mapping for the serial outputs (Port 3, Channel 6, Bits[7:0])   |
| 0xF3BC  | FTDM_OUT60 | FTDM mapping for the serial outputs (Port 3, Channel 7, Bits[31:24]) |
| 0xF3BD  | FTDM_OUT61 | FTDM mapping for the serial outputs (Port 3, Channel 7, Bits[23:16]) |
| 0xF3BE  | FTDM_OUT62 | FTDM mapping for the serial outputs (Port 3, Channel 7, Bits[15:8])  |
| 0xF3BF  | FTDM_OUT63 | FTDM mapping for the serial outputs (Port 3, Channel 7, Bits[7:0])   |

**ASYNCHRONOUS SAMPLE RATE CONVERTERS**

Sixteen channels of integrated asynchronous sample rate converters are available in the ADAU1462/ADAU1466. These sample rate converters are capable of receiving audio data input signals, along with their corresponding clocks, and resynchronizing the data stream to an arbitrary target sample rate. The sample rate converters use some filtering to accomplish this task; therefore, the data output from the sample rate converter is not a bit-accurate representation of the data input.

The 16 channels of sample rate converters are grouped into eight stereo sets. These eight stereo sample rate converters are individually configurable and are referred to as ASRC 0 through ASRC 7. Channel 0 and Channel 1 belong to ASRC 0; Channel 2 and Channel 3 belong to ASRC 1; Channel 4 and Channel 5 belong to ASRC 2; Channel 6 and Channel 7 belong to ASRC 3; Channel 8 and Channel 9 belong to ASRC 4; Channel 10 and Channel 11 belong to ASRC 5; Channel 12 and Channel 13 belong to ASRC 6; and Channel 14 and Channel 15 belong to ASRC 7.

Audio is routed to the sample rate converters using the ASRC\_INPUTx registers, and the target sample rate of each ASRC is configured using the ASRC\_OUT\_RATEx registers. A complete description of audio routing is included in the Audio Signal Routing section.

**Asynchronous Sample Rate Converter Group Delay**

The group delay of the sample rate converter is dependent on the input and output sampling frequencies as described in the following equations:

For  $f_{S\_OUT} > f_{S\_IN}$ ,

$$GDS = \frac{16}{f_{S\_IN}} + \frac{32}{f_{S\_IN}}$$

For  $f_{S\_OUT} < f_{S\_IN}$ ,

$$GDS = \frac{16}{f_{S\_IN}} + \left(\frac{32}{f_{S\_IN}}\right) \times \left(\frac{f_{S\_IN}}{f_{S\_OUT}}\right)$$

where *GDS* is the group delay in seconds.

**ASRC Lock**

Each ASRC monitors the incoming signal and attempts to lock on to the clock and data signals. When a valid signal is detected and several consecutive valid samples are received, and there is a valid output target sample rate, the corresponding bit in Register 0xF580 (ASRC\_LOCK) signifies that the ASRC has successfully locked to the incoming signal.

**ASRC Muting**

The ASRC outputs can be manually muted at any time using the corresponding bits in Register 0xF581 (ASRC\_MUTE). However, for creating a smooth volume ramp when muting audio signals, more options are available in the DSP core; therefore, in most cases, using the DSP program to manually mute signals is preferable to using Register 0xF581.

**Asynchronous Sample Rate Converters Registers**

An overview of the registers related to the ASRCs is shown in Table 46. For a more detailed description, refer to the ASRC Status and Control Registers section.

**Table 46. Asynchronous Sample Rate Converters Registers**

| Address | Register    | Description                                    |
|---------|-------------|--|
| 0xF580  | ASRC_LOCK   | ASRC lock status                               |
| 0xF581  | ASRC_MUTE   | ASRC mute                                      |
| 0xF582  | ASRC0_RATIO | ASRC ratio (ASRC 0, Channel 0 and Channel 1)   |
| 0xF583  | ASRC1_RATIO | ASRC ratio (ASRC 1, Channel 2 and Channel 3)   |
| 0xF584  | ASRC2_RATIO | ASRC ratio (ASRC 2, Channel 4 and Channel 5)   |
| 0xF585  | ASRC3_RATIO | ASRC ratio (ASRC 3, Channel 6 and Channel 7)   |
| 0xF586  | ASRC4_RATIO | ASRC ratio (ASRC 4, Channel 8 and Channel 9)   |
| 0xF587  | ASRC5_RATIO | ASRC ratio (ASRC 5, Channel 10 and Channel 11) |
| 0xF588  | ASRC6_RATIO | ASRC ratio (ASRC 6, Channel 12 and Channel 13) |
| 0xF589  | ASRC7_RATIO | ASRC ratio (ASRC 7, Channel 14 and Channel 15) |

**S/PDIF INTERFACE**

To simplify interfacing at the system level, wire the on-chip S/PDIF receiver and transmitter data ports directly to other S/PDIF-compatible equipment. The S/PDIF receiver consists of two audio channels input on one hardware pin (SPDIFIN). The clock signal is embedded in the data using biphasic mark code. The S/PDIF transmitter consists of two audio channels output on one hardware pin (SPDIFOUT). The clock signal is embedded in the data using biphasic mark code. The S/PDIF input and output word lengths can be independently set to 16, 20, or 24 bits.

The S/PDIF interface meets the S/PDIF consumer performance specification. It does not meet the AES3 professional specification.

**S/PDIF Receiver**

The S/PDIF input port is designed to accept both transistor-transistor logic (TTL) and bipolar signals, provided there is an ac coupling capacitor on the input pin of the chip. Because the S/PDIF input data is most likely asynchronous to the DSP core, it must be routed through an ASRC.

The S/PDIF receiver works over a wide range of sampling frequencies between 18 kHz and 192 kHz.

The S/PDIF receiver input is a comparator that is centered at IOVDD/2 and requires an input signal level of at least 200 mV p-p to operate properly.

In addition to audio data, S/PDIF streams contain user data, channel status, validity bit, virtual LRCLK, and block start information. The receiver decodes audio data and sends it to the corresponding registers in the control register map, where the information can be read over the I<sup>2</sup>C or SPI slave port.



For improved jitter performance, the S/PDIF clock recovery implementation is completely digital. The S/PDIF ports are designed to meet the following AES and EBU specifications: a jitter of 0.25 UI p-p at 8 kHz and above, a jitter of 10 UI p-p below 200 Hz, and a minimum signal voltage of 200 mV.

### S/PDIF Transmitter

The S/PDIF transmitter outputs two channels of audio data directly from the DSP core at the core rate. The extra nonaudio data bits on the transmitted signal can be copied directly from the S/PDIF receiver or programmed manually, using the corresponding registers in the control register map.

### Auxiliary Output Mode

The received data on the S/PDIF receiver can be converted to a TDM8 stream, bypass the SigmaDSP core, and be output directly on a serial data output pin. This mode of operation is called auxiliary output mode. Configure this mode using Register 0xF608 (SPDIF\_AUX\_EN). The TDM8 output from the S/PDIF receiver regroups the recovered data in a TDM-like format, as shown in Table 47.

The S/PDIF receiver, when operating in auxiliary output mode, also recovers the embedded BCLK\_OUTx and LRCLK\_OUTx signals in the S/PDIF stream and outputs them on the corresponding BCLK\_OUTx and LRCLK\_OUTx pins in master mode when Register 0xF608 (SPDIF\_AUX\_EN), Bits[3:0] (TDMOUT) are configured to enable auxiliary output mode.

The selected BCLK\_OUTx signal has a frequency of 256× the recovered sample rate, and the LRCLK\_OUTx signal is a 50% duty cycle square wave that has the same frequency as the audio sample rate (see Table 138).

**Table 47. S/PDIF Auxiliary Output Mode, TDM8 Data Format**

| TDM8 Channel | Description of Data Format  |
|--------------|---|
| 0            | 8 zero bits followed by 24 audio bits, recovered from the left audio channel of the S/PDIF stream                         |
| 1            | 28 zero bits followed by the left parity bit, left validity bit, left user data, and left channel status                  |
| 2            | 30 zero bits followed by the compression type bit (0b0 = AC3, 0b1 = DTS) and the audio type bit (0 = PCM, 1 = compressed) |
| 3            | No data   |
| 4            | 8 zero bits followed by 24 audio bits, recovered from the right audio channel of the S/PDIF stream                        |
| 5            | 28 zero bits followed by the right parity bit, right validity bit, right user data, and right channel status              |
| 6            | No data   |
| 7            | 31 zero bits followed by the block start signal   |

### S/PDIF Interface Registers

An overview of the registers related to the S/PDIF interface is shown in Table 48. For a more detailed description, refer to the S/PDIF Interface Registers section.

**Table 48. S/PDIF Interface Registers**

| Address          | Register               | Description                                      |
|------------------|------------------------|--|
| 0xF600           | SPDIF_LOCK_DET         | S/PDIF receiver lock bit detection               |
| 0xF601           | SPDIF_RX_CTRL          | S/PDIF receiver control                          |
| 0xF602           | SPDIF_RX_DECODE        | Decoded signals from the S/PDIF receiver         |
| 0xF603           | SPDIF_RX_COMPRMODE     | Compression mode from the S/PDIF receiver        |
| 0xF604           | SPDIF_RESTART          | Automatically resume S/PDIF receiver audio input |
| 0xF605           | SPDIF_LOSS_OF_LOCK     | S/PDIF receiver loss of lock detection           |
| 0xF608           | SPDIF_AUX_EN           | S/PDIF receiver auxiliary outputs enable         |
| 0xF60F           | SPDIF_RX_AUXBIT_READY  | S/PDIF receiver auxiliary bits ready flag        |
| 0xF610 to 0xF61B | SPDIF_RX_CS_LEFT_x     | S/PDIF receiver channel status bits (left)       |
| 0xF620 to 0xF62B | SPDIF_RX_CS_RIGHT_x    | S/PDIF receiver channel status bits (right)      |
| 0xF630 to 0xF63B | SPDIF_RX_UD_LEFT_x     | S/PDIF receiver user data bits (left)            |
| 0xF640 to 0xF64B | SPDIF_RX_UD_RIGHT_x    | S/PDIF receiver user data bits (right)           |
| 0xF650 to 0xF65B | SPDIF_RX_VB_LEFT_x     | S/PDIF receiver validity bits (left)             |
| 0xF660 to 0xF66B | SPDIF_RX_VB_RIGHT_x    | S/PDIF receiver validity bits (right)            |
| 0xF670 to 0xF67B | SPDIF_RX_PB_LEFT_x     | S/PDIF receiver parity bits (left)               |
| 0xF680 to 0xF68B | SPDIF_RX_PB_RIGHT_x    | S/PDIF receiver parity bits (right)              |
| 0xF690           | SPDIF_TX_EN            | S/PDIF transmitter enable                        |
| 0xF691           | SPDIF_TX_CTRL          | S/PDIF transmitter control                       |
| 0xF69F           | SPDIF_TX_AUXBIT_SOURCE | S/PDIF transmitter auxiliary bits source select  |
| 0xF6A0 to 0xF6AB | SPDIF_TX_CS_LEFT_x     | S/PDIF transmitter channel status bits (left)    |
| 0xF6B0 to 0xF6BB | SPDIF_TX_CS_RIGHT_x    | S/PDIF transmitter channel status bits (right)   |
| 0xF6C0 to 0xF6CB | SPDIF_TX_UD_LEFT_x     | S/PDIF transmitter user data bits (left)         |
| 0xF6D0 to 0xF6DB | SPDIF_TX_UD_RIGHT_x    | S/PDIF transmitter user data bits (right)        |
| 0xF6E0 to 0xF6EB | SPDIF_TX_VB_LEFT_x     | S/PDIF transmitter validity bits (left)          |
| 0xF6F0 to 0xF6FB | SPDIF_TX_VB_RIGHT_x    | S/PDIF transmitter validity bits (right)         |
| 0xF700 to 0xF70B | SPDIF_TX_PB_LEFT_x     | S/PDIF transmitter parity bits (left)            |
| 0xF710 to 0xF71B | SPDIF_TX_PB_RIGHT_x    | S/PDIF transmitter parity bits (right)           |

**DIGITAL PDM MICROPHONE INTERFACE**

Up to four pulse density modulation (PDM) microphones can be connected as audio inputs. Each pair of microphones can share a single data line; therefore, using four PDM microphones requires two GPIO pins. Any multipurpose pin can be used as a microphone data input, with up to two microphones connected to each pin. This configuration is set up using the corresponding MPx\_MODE and DMIC\_CTRLx registers.

A bit clock pin from one of the serial input clock domains (BCLK\_INx) or one of the serial output clock domains (BCLK\_OUTx) must be a master clock source, and its output signal must be connected to the PDM microphones to provide them with a clock.

PDM microphones, such as the ICS-41350 from InvenSense, typically require a bit clock frequency in the range of 1 MHz to 3.3 MHz, corresponding to audio sample rates of 15.625 kHz to 51.5625 kHz. This means that the serial port corresponding to the BCLK\_INx pin or BCLK\_OUTx pin driving the PDM microphones must operate in 2-channel mode at a sample rate between 16 kHz and 48 kHz.

PDM microphone inputs are automatically routed through decimation filters and then are available for use at the DSP core, the ASRCs, and the serial output ports.

Figure 73 shows an example circuit with two ICS-41350 PDM output MEMS microphones connected to the ADAU1466. Any of the BCLK\_INx pins or BCLK\_OUTx pins can be used to provide

a clock signal to the microphones, and the data output of the microphones can be connected to any MPx pin that has been configured as a PDM microphone data input.

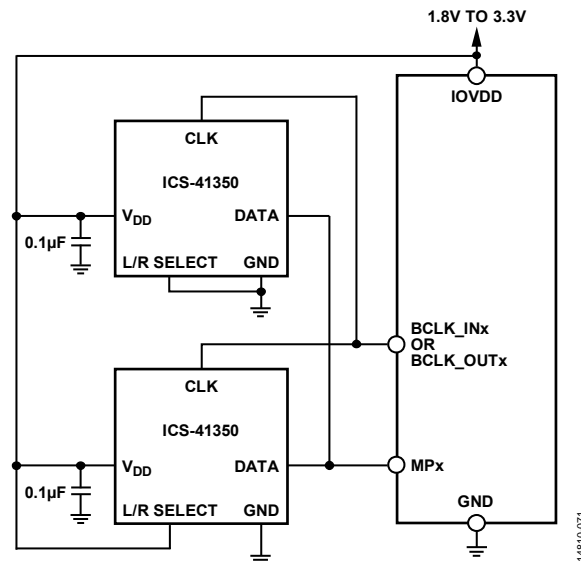


Figure 73. Example Stereo PDM Microphone Input Circuit

**Digital PDM Microphone Interface Registers**

An overview of the registers related to the digital microphone interface is shown in Table 49. For a more detailed description, see the Digital PDM Microphone Control Register.

**Table 49. Digital PDM Microphone Interface Registers**

| Address | Register   | Description  |
|---------|------------|--|
| 0xF560  | DMIC_CTRL0 | Digital PDM microphone control (Channel 0 and Channel 1) |
| 0xF561  | DMIC_CTRL1 | Digital PDM microphone control (Channel 2 and Channel 3) |



**MULTIPURPOSE PINS**

A total of 14 pins are available for use as GPIOs that are multiplexed with other functions, such as clock inputs/outputs. Because these pins have multiple functions, they are referred to as multipurpose pins, or MPx pins.

Multipurpose pins can be configured in several modes using the MPx\_MODE registers:

- Hardware input from pin
- Software input (written via I<sup>2</sup>C or SPI slave control port)
- Hardware output with internal pull-up resistor
- Hardware output without internal pull-up resistor
- PDM microphone data input
- Flag output from panic manager
- Slave select line for master SPI port

When configured in hardware input mode, a debounce circuit is available to avoid data glitches.

When operating in GPIO mode, pin status is updated once per sample, which means that the state of a GPIO (MPx pin) cannot change more than once in a sample period.

**General-Purpose Inputs to the DSP Core**

When a multipurpose pin is configured as a general-purpose input, its value can be used as a control logic signal in the DSP program, which is configured using *SigmaStudio*. Figure 74 shows the location of the general-purpose input cell within the *SigmaStudio* toolbox.

The 14 available general-purpose inputs in *SigmaStudio* map to the corresponding 14 multipurpose pins; however, their data is valid only if the corresponding multipurpose pin has been configured as an input using the MPx\_MODE registers. Figure 76 shows all of the general-purpose inputs as they appear in the *SigmaStudio* signal flow.

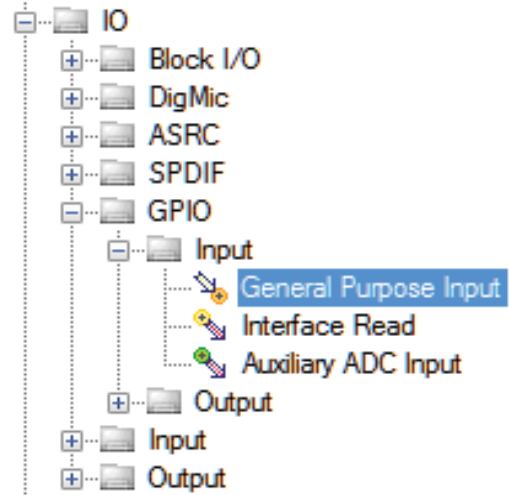


Figure 74. General-Purpose Input in the *SigmaStudio* Toolbox

**General-Purpose Outputs from the DSP Core**

When a multipurpose pin is configured as a general-purpose output, a Boolean value is output from the DSP program to the corresponding multipurpose pin. Figure 75 shows the location of the general-purpose output cell within the *SigmaStudio* toolbox.

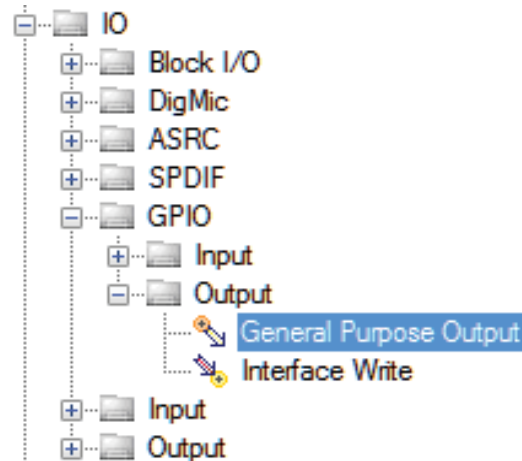


Figure 75. General-Purpose Output in the *SigmaStudio* Toolbox



Figure 76. Complete Set of General-Purpose Inputs in *SigmaStudio*

The 14 available general-purpose outputs in [SigmaStudio](#) map to the corresponding 14 multipurpose pins; however, their data is output to the pin only if the corresponding multipurpose pin

is configured as an output using the MP<sub>x</sub>\_MODE registers. Figure 77 shows all of the general-purpose inputs as they appear in the [SigmaStudio](#) signal flow.



Figure 77. Complete Set of General-Purpose Outputs in [SigmaStudio](#)

14810-075

**Multipurpose Pin Registers**

An overview of the registers related to GPIO is shown in Table 50. For a more detailed description, refer to the Multipurpose Pin Configuration Registers section.

**Table 50. Multipurpose Pins Registers**

| Address | Register   | Description                                     |
|---------|------------|---|
| 0xF510  | MP0_MODE   | Multipurpose pin mode (SS_M/MP0)                |
| 0xF511  | MP1_MODE   | Multipurpose pin mode (MOSI_M/MP1)              |
| 0xF512  | MP2_MODE   | Multipurpose pin mode (SCL_M/SCLK_M/MP2)        |
| 0xF513  | MP3_MODE   | Multipurpose pin mode (SDA_M/MISO_M/MP3)        |
| 0xF514  | MP4_MODE   | Multipurpose pin mode (LRCLK_OUT0/MP4)          |
| 0xF515  | MP5_MODE   | Multipurpose pin mode (LRCLK_OUT1/MP5)          |
| 0xF516  | MP6_MODE   | Multipurpose pin mode (MP6)                     |
| 0xF517  | MP7_MODE   | Multipurpose pin mode (MP7)                     |
| 0xF518  | MP8_MODE   | Multipurpose pin mode (LRCLK_OUT2/MP8)          |
| 0xF519  | MP9_MODE   | Multipurpose pin mode (LRCLK_OUT3/MP9)          |
| 0xF51A  | MP10_MODE  | Multipurpose pin mode (LRCLK_IN0/MP10)          |
| 0xF51B  | MP11_MODE  | Multipurpose pin mode (LRCLK_IN1/MP11)          |
| 0xF51C  | MP12_MODE  | Multipurpose pin mode (LRCLK_IN2/MP12)          |
| 0xF51D  | MP13_MODE  | Multipurpose pin mode (LRCLK_IN3/MP13)          |
| 0xF520  | MP0_WRITE  | Multipurpose pin write value (SS_M/MP0)         |
| 0xF521  | MP1_WRITE  | Multipurpose pin write value (MOSI_M/MP1)       |
| 0xF522  | MP2_WRITE  | Multipurpose pin write value (SCL_M/SCLK_M/MP2) |
| 0xF523  | MP3_WRITE  | Multipurpose pin write value (SDA_M/MISO_M/MP3) |
| 0xF524  | MP4_WRITE  | Multipurpose pin write value (LRCLK_OUT0/MP4)   |
| 0xF525  | MP5_WRITE  | Multipurpose pin write value (LRCLK_OUT1/MP5)   |
| 0xF526  | MP6_WRITE  | Multipurpose pin write value (MP6)              |
| 0xF527  | MP7_WRITE  | Multipurpose pin write value (MP7)              |
| 0xF528  | MP8_WRITE  | Multipurpose pin write value (LRCLK_OUT2/MP8)   |
| 0xF529  | MP9_WRITE  | Multipurpose pin write value (LRCLK_OUT3/MP9)   |
| 0xF52A  | MP10_WRITE | Multipurpose pin write value (LRCLK_IN0/MP10)   |
| 0xF52B  | MP11_WRITE | Multipurpose pin write value (LRCLK_IN1/MP11)   |
| 0xF52C  | MP12_WRITE | Multipurpose pin write value (LRCLK_IN2/MP12)   |
| 0xF52D  | MP13_WRITE | Multipurpose pin write value (LRCLK_IN3/MP13)   |
| 0xF530  | MP0_READ   | Multipurpose pin read value (SS_M/MP0)          |
| 0xF531  | MP1_READ   | Multipurpose pin read value (MOSI_M/MP1)        |
| 0xF532  | MP2_READ   | Multipurpose pin read value (SCL_M/SCLK_M/MP2)  |
| 0xF533  | MP3_READ   | Multipurpose pin read value (SDA_M/MISO_M/MP3)  |
| 0xF534  | MP4_READ   | Multipurpose pin read value (LRCLK_OUT0/MP4)    |
| 0xF535  | MP5_READ   | Multipurpose pin read value (LRCLK_OUT1/MP5)    |
| 0xF536  | MP6_READ   | Multipurpose pin read value (MP6)               |
| 0xF537  | MP7_READ   | Multipurpose pin read value (MP7)               |
| 0xF538  | MP8_READ   | Multipurpose pin read value (LRCLK_OUT2/MP8)    |
| 0xF539  | MP9_READ   | Multipurpose pin read value (LRCLK_OUT3/MP9)    |
| 0xF53A  | MP10_READ  | Multipurpose pin read value (LRCLK_IN0/MP10)    |
| 0xF53B  | MP11_READ  | Multipurpose pin read value (LRCLK_IN1/MP11)    |
| 0xF53C  | MP12_READ  | Multipurpose pin read value (LRCLK_IN2/MP12)    |
| 0xF53D  | MP13_READ  | Multipurpose pin read value (LRCLK_IN3/MP13)    |

**AUXILIARY ADC**

There are six auxiliary ADC inputs with 10 bits of accuracy. They are intended to be used as control signal inputs, such as potentiometer outputs or battery monitor signals.

The auxiliary ADC samples each channel at a frequency of the core system clock divided by 6144. In the case of a default clocking scheme, the system clock is 294.912 MHz; therefore, the auxiliary ADC sample rate is 48 kHz. If the system clock is scaled down by configuring the PLL to generate a lower output frequency, the auxiliary ADC sample rate is scaled down proportionately.

The auxiliary ADC is referenced so that a full-scale input is achieved when the input voltage is equal to AVDD, and an input of zero is achieved when the input is connected to ground.

The input impedance of the auxiliary ADC is approximately 200 kΩ at dc (0 Hz).

Auxiliary ADC inputs can be used directly in the DSP program (as configured in the SigmaStudio software). The instantaneous value of each ADC is also available in the ADC\_READx registers, which are accessible via the I<sup>2</sup>C or SPI slave control port.

**Auxiliary ADC Inputs to the DSP Core**

Auxiliary ADC inputs can be used as control signals in the DSP program as configured by SigmaStudio. Figure 78 shows the location of the auxiliary ADC input cell in the SigmaStudio toolbox.

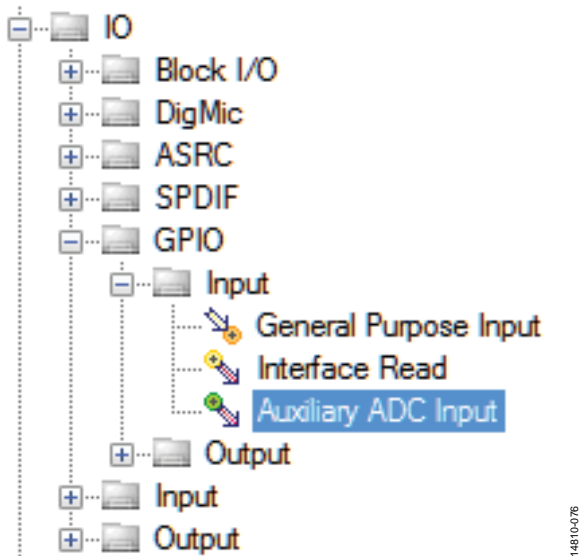


Figure 78. Auxiliary ADC Input Cell in the SigmaStudio Toolbox

The six auxiliary input pins map to the corresponding six auxiliary ADC input cells. Figure 79 shows the complete set of auxiliary ADC input cells in SigmaStudio.



Figure 79. Complete Set of Auxiliary ADC Inputs in SigmaStudio

**Auxiliary ADC Registers**

An overview of the registers related to the auxiliary ADC is shown in Table 51. For a more detailed description, see the Auxiliary ADC Registers section.

**Table 51. Auxiliary ADC Registers**

| Address | Register  | Description                        |
|---------|-----------|------------------------------------|
| 0xF5A0  | ADC_READ0 | Auxiliary ADC read value (AUXADC0) |
| 0xF5A1  | ADC_READ1 | Auxiliary ADC read value (AUXADC1) |
| 0xF5A2  | ADC_READ2 | Auxiliary ADC read value (AUXADC2) |
| 0xF5A3  | ADC_READ3 | Auxiliary ADC read value (AUXADC3) |
| 0xF5A4  | ADC_READ4 | Auxiliary ADC read value (AUXADC4) |
| 0xF5A5  | ADC_READ5 | Auxiliary ADC read value (AUXADC5) |

**SigmaDSP CORE**

The SigmaDSP core operates at a maximum frequency of 294.912 MHz (or 147.456 MHz), which is equivalent to 6144 clock cycles per sample at a sample rate of 48 kHz. For a sample rate of 48 kHz, the largest program possible consists of 6144 program instructions per sample (or 3072 clock cycles per sample in the nominal 150 MHz speed grade). If the system clock remains at 294.912 MHz but the audio frame rate of the DSP core is decreased, programs consisting of more clock cycles per sample are possible.

The core consists of four multipliers and two accumulators. At an operating frequency of 294.912 MHz, the core performs 1.2 billion MAC operations per second. At maximum efficiency, the core processes 3072 IIR biquad filters (single or double precision) per sample at a sample rate of 48 kHz. At maximum efficiency, the core processes approximately 24,000 FIR filter taps per sample at a sample rate of 48 kHz. The instruction set is a single instruction, multiple data (SIMD) computing model. The DSP core is 32-bit fixed point, with an 8.24 data format for audio.

The four multipliers are 64-bit double precision, capable of multiplying an 8.56 format number by an 8.24 number. The multiply accumulators consist of 16 registers, with a depth of 80 bits. The core can access RAM with a load/store width of 256 bits (eight 32-bit words per frame). The two ALUs have an 80-bit width and operate on numbers in 24.56 format. The 24.56-bit format provides more than 42 dB of headroom.

It is possible to create combinations of time domain and frequency domain processing, using block and sample frame interrupts. Sixteen data address generator (DAG) registers are available, and circular buffer addressing is possible.

Many of the signal processing functions are coded using full, 64-bit, double precision arithmetic. The serial port input and output word lengths are 24 bits; however, eight extra headroom bits are used in the processor to allow internal gains of up to 48 dB without clipping. Additional gains can be achieved by initially scaling down the input signal in the DSP signal flow.

**Numeric Formats**

DSP systems commonly use a standard numeric format. Fractional number systems are specified by an A.B format, where A is the number of bits to the left of the decimal point and B is the number of bits to the right of the decimal point.

The same numeric format is used for both the parameter and data values.

A digital clipper circuit is used within the DSP core before outputting to the serial port outputs, ASRCs, and S/PDIF. This circuit clips the top seven bits (and the least significant bit) of the signal to produce a 24-bit output with a range of +1.0 (minus 1 LSB) to -1.0. Figure 80 shows the maximum signal levels at each point in the data flow in both binary and decibel levels.

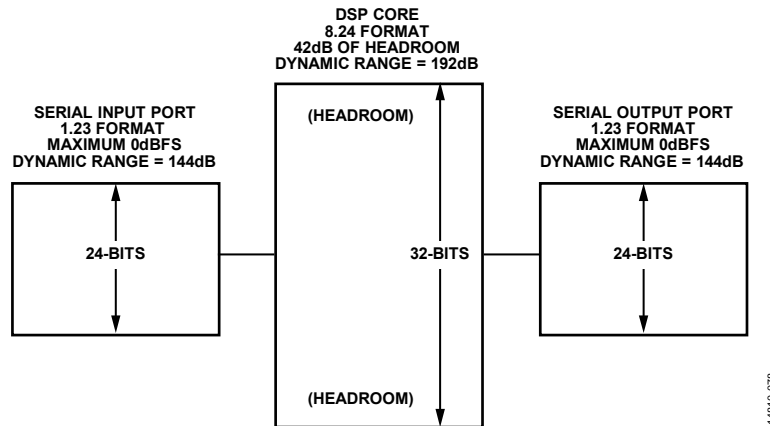


Figure 80. Signal Range for 1.23 Format (Serial Ports, ASRCs) and 8.24 Format (DSP Core)

14610-078

**Numerical Format: 8.24**

The linear range is -128.0 to (+128.0 - 1 LSB). The dynamic range (ratio of the largest possible signal level to the smallest possible nonzero signal level) is 192 dB.

The following are examples of this numerical format:

```

0b 1000 0000 0000 0000 0000 0000 0000 0000 = 0x80000000 = -128.0
0b 1110 0000 0000 0000 0000 0000 0000 0000 = 0xE0000000 = -32.0
0b 1111 1000 0000 0000 0000 0000 0000 0000 = 0xF8000000 = -8.0
0b 1111 1110 0000 0000 0000 0000 0000 0000 = 0xFE000000 = -2
0b 1111 1111 0000 0000 0000 0000 0000 0000 = 0xFF000000 = -1
0b 1111 1111 1000 0000 0000 0000 0000 0000 = 0xFF800000 = -0.5
0b 1111 1111 1110 0110 0110 0110 0110 0110 = 0xFFE66666 = -0.1
0b 1111 1111 1111 1111 1111 1111 1111 1111 = 0xFFFFFFFF = -0.00000005 (1 LSB below 0.0)
0b 0000 0000 0000 0000 0000 0000 0000 0000 = 0x00000000 = 0.0
0b 0000 0000 0000 0000 0000 0000 0000 0001 = 0x00000001 = 0.00000005 (1 LSB above 0.0)
0b 0000 0000 0001 1001 1001 1001 1001 1001 = 0x00199999 = 0.1
0b 0000 0000 0100 0000 0000 0000 0000 0000 = 0x00400000 = 0.25
0b 0000 0000 1000 0000 0000 0000 0000 0000 = 0x00800000 = 0.5
0b 0000 0001 0000 0000 0000 0000 0000 0000 = 0x01000000 = 1.0
0b 0000 0010 0000 0000 0000 0000 0000 0000 = 0x02000000 = 2.0
0b 0111 1111 1111 1111 1111 1111 1111 1111 = 0x7FFFFFFF = 127.99999994 (1 LSB below 128.0)
    
```

**Numerical Format: 32.0**

The 32.0 format is used for logic signals in the DSP program flow that are integers. The linear range is  $-2,147,483,648$  to  $+2,147,483,647$ . The dynamic range (ratio of the largest possible signal level to the smallest possible nonzero signal level) is 192 dB.

The following are examples of this numerical format:

```
0b 1000 0000 0000 0000 0000 0000 0000 0000 = 0x80000000 = -2147483648
0b 1000 0000 0000 0000 0000 0000 0000 0001 = 0x80000001 = -2147483647
0b 1000 0000 0000 0000 0000 0000 0000 0010 = 0x80000002 = -2147483646
0b 1100 0000 0000 0000 0000 0000 0000 0000 = 0xC0000000 = -1073741824
0b 1110 0000 0000 0000 0000 0000 0000 0000 = 0xE0000000 = -536870912
0b 1111 1111 1111 1111 1111 1111 1111 1100 = 0xFFFFFFFFC = -4
0b 1111 1111 1111 1111 1111 1111 1111 1110 = 0xFFFFFFFFE = -2
0b 1111 1111 1111 1111 1111 1111 1111 1111 = 0xFFFFFFFFF = -1
0b 0000 0000 0000 0000 0000 0000 0000 0000 = 0x00000000 = 0
0b 0000 0000 0000 0000 0000 0000 0000 0001 = 0x00000001 = 1
0b 0000 0000 0000 0000 0000 0000 0000 0010 = 0x00000002 = 2
0b 0000 0000 0000 0000 0000 0000 0000 0011 = 0x00000003 = 3
0b 0000 0000 0000 0000 0000 0000 0000 0100 = 0x00000004 = 4
0b 0111 1111 1111 1111 1111 1111 1111 1110 = 0x7FFFFFFE = 2147483646
0b 0111 1111 1111 1111 1111 1111 1111 1111 = 0x7FFFFFFF = 2147483647
```

### Hardware Accelerators

The core includes accelerators like division, square root, barrel shifters, Base 2 logarithm, Base 2 exponential, slew, and a pseudorandom number generator. These hardware accelerators reduce the number of instructions required for complex audio processing algorithms.

The division accelerator enables efficient processing for audio algorithms like compression and limiting. The square root accelerator enables efficient processing for audio algorithms such as loudness, rms envelopes, and filter coefficient calculations. The logarithm and exponent accelerators enable efficient processing for audio algorithms involving decibel conversion. The slew accelerators provide click free updates of parameters that must change slowly over time, allowing audio processing algorithms such as mixers, crossfaders, dynamic filters, and dynamic volume controls. The pseudorandom number generator can efficiently produce white noise, pink noise, and dither.

### Programming the SigmaDSP Core

The SigmaDSP is programmable via the [SigmaStudio](#) graphical development tools.

When the SigmaDSP core is running a program and the user needs to reprogram the program and data memories during operation of the device, the core must be stopped while the memory is being updated to avoid undesired noises on the DSP outputs.

The following sequence of steps is appropriate for programming the memories at boot time, or reprogramming the memories during operation:

1. Enable soft reset (Register 0xF890 (SOFT\_RESET), Bit 0 (SOFT\_RESET) = 0b0), then disable soft reset (Register 0xF890 (SOFT\_RESET), Bit 0 (SOFT\_RESET) = 0b1).
2. If the DSP is in the process of executing a program, wait for the current sample or block to finish processing. For programs with no block processing elements in the signal flow, use the length of one sample. For example, at a sample rate of 48 kHz, one sample is 1/48000 sec, or 20.83  $\mu$ s. For programs with block processing elements in the signal flow, use the length of one block. For example, at a sample rate of 48 kHz, with a block size of 256 samples, one block is 256/48,000 sec, or 53.3 ms.
3. After waiting the appropriate amount of time, as defined in the previous step, download the new program and data memory contents to the corresponding memory locations using the I<sup>2</sup>C/SPI slave control port.
4. Start the DSP core (Register 0xF402 (START\_CORE), Bit 0 (START\_CORE) = 0b1).
5. Wait at least two audio samples for the DSP initialization to execute. For example, at a sample rate of 48 kHz, two samples are equal to 2/48,000 sec, or 41.66  $\mu$ s.



**Reliability Features**

Several reliability features are controlled by a panic manager subsystem that monitors the state of the SigmaDSP core and memories and generates alerts if error conditions are encountered. The panic manager indicates error conditions to the user via register flags and GPIO outputs. The origin of the error can be traced to different functional blocks such as the watchdog, memory, stack, software program, and core op codes.

Although designed mostly as an aid for software development, the panic manager is also useful in monitoring the state of the memories over long periods of time, such as in applications where the system operates unattended for an extended period, and resets are infrequent. The memories in the device have a built in self test feature that runs automatically while the device is in operation.

If a memory corruption is detected, the appropriate flag is signaled in the panic manager. The program running in the DSP core can monitor the state of the panic manager and can mute the audio outputs if an error is encountered, and external devices, such as microcontrollers, can poll the panic manager registers or monitor the multipurpose pins to perform some preprogrammed action, if necessary.

**DSP Core and Reliability Registers**

An overview of the registers related to the DSP core is shown in Table 52. For a more detailed description, see the DSP Core Control Registers section and Debug and Reliability Registers section.

**Table 52. DSP Core and Reliability Registers**

| Address | Register             | Description                                 |
|---------|----------------------|---|
| 0xF400  | HIBERNATE            | Hibernate setting                           |
| 0xF401  | START_PULSE          | Start pulse selection                       |
| 0xF402  | START_CORE           | Instruction to start the core               |
| 0xF403  | KILL_CORE            | Instruction to stop the core                |
| 0xF404  | START_ADDRESS        | Start address of the program                |
| 0xF405  | CORE_STATUS          | Core status                                 |
| 0xF421  | PANIC_CLEAR          | Clear the panic manager                     |
| 0xF422  | PANIC_PARITY_MASK    | Panic parity                                |
| 0xF423  | PANIC_SOFTWARE_MASK  | Panic Mask 0                                |
| 0xF424  | PANIC_WD_MASK        | Panic Mask 1                                |
| 0xF425  | PANIC_STACK_MASK     | Panic Mask 2                                |
| 0xF426  | PANIC_LOOP_MASK      | Panic Mask 3                                |
| 0xF427  | PANIC_FLAG           | Panic flag                                  |
| 0xF428  | PANIC_CODE           | Panic code                                  |
| 0xF432  | EXECUTE_COUNT        | Execute stage error program count           |
| 0xF443  | WATCHDOG_MAXCOUNT    | Watchdog maximum count                      |
| 0xF444  | WATCHDOG_PRESCALE    | Watchdog prescale                           |
| 0xF450  | BLOCKINT_EN          | Enable block interrupts                     |
| 0xF451  | BLOCKINT_VALUE       | Value for the block interrupt counter       |
| 0xF460  | PROG_CNTR0           | Program counter, Bits[23:16]                |
| 0xF461  | PROG_CNTR1           | Program counter, Bits[15:0]                 |
| 0xF462  | PROG_CNTR_CLEAR      | Program counter clear                       |
| 0xF463  | PROG_CNTR_LENGTH0    | Program counter length, Bits[23:16]         |
| 0xF464  | PROG_CNTR_LENGTH1    | Program counter length, Bits[15:0]          |
| 0xF465  | PROG_CNTR_MAXLENGTH0 | Program counter maximum length, Bits[23:16] |

**SOFTWARE FEATURES**

**Software Safeload**

To avoid from making the filter unstable during coefficient transitions, the [SigmaStudio](#) compiler implements a software safeload mechanism that is enabled by default. The safeload mechanism is also helpful for reducing pops and clicks during parameter updates. [SigmaStudio](#) automatically sets up the necessary code and parameters for all new projects. The safeload code, together with other initialization code, fills the beginning section of program RAM. Several data memory locations are reserved by the compiler for use with the software safeload feature. The exact parameter addresses are not fixed; therefore, the addresses must be obtained by reading the log file generated by the compiler. In most cases, the addresses for software safeload parameters match the defaults shown in Table 53.

**Table 53. Software Safeload Memory Address Defaults**

| Address (Hex) | Parameter          | Function  |
|---------------|--------------------|---|
| 0x6000        | data_SafeLoad[0]   | Safeload Data Slot 0  |
| 0x6001        | data_SafeLoad[1]   | Safeload Data Slot 1  |
| 0x6002        | data_SafeLoad[2]   | Safeload Data Slot 2  |
| 0x6003        | data_SafeLoad[3]   | Safeload Data Slot 3  |
| 0x6004        | data_SafeLoad[4]   | Safeload Data Slot 4  |
| 0x6005        | address_SafeLoad   | Target address for safeload transfer                                |
| 0x6006        | num_SafeLoad_Lower | Number of words to write/safeload trigger if on Page 1 lower memory |
| 0x6007        | num_SafeLoad_Upper | Number of words to write/safeload trigger if on Page 2 upper memory |

The first five addresses in Table 53 are the five data\_SafeLoad parameters, which are slots for storing the data that is going to be transferred into another target memory location. The safeload parameter space contains five data slots, by default, because most standard signal processing algorithms have five parameters or fewer.

The address\_SafeLoad parameter is the target address in parameter RAM. This designates the first address to be written in the safeload transfer. If more than one word is written, the address increments automatically for each data-word.

The num\_SafeLoad parameters designates the number of words to be written. For a biquad filter algorithm, the number of words to be written is five because there are five coefficients in a biquad IIR filter. For a simple mono gain algorithm, the number of words to be written is one. This parameter also serves as the trigger; when it is written, a safeload write is triggered on the next frame.

Because the slave port cannot access all of the core data memory from a single 16-bit address space, the safeload subroutine needs to know whether to write to the lower (Page 1) or upper (Page 2) section of memory. If the first parameter is to be placed on Page 1 (lower memory), write the number of parameters to be atomically written (1 to 5) to num\_SafeLoad\_Lower and write 0 to num\_SafeLoad\_Upper. Conversely, if the first parameter is to be placed on Page 2 (upper memory), write 0 to num\_SafeLoad\_Lower and write the number of parameters to be atomically written (1 to 5) to num\_SafeLoad\_Upper. One of these values passed must always be a number between one and five inclusive, and the other value must be zero. The second write triggers the safeload operation.

The safeload mechanism is software based and executes once per audio frame. Therefore, system designers must take care when designing the communication protocol. A delay that is equal to or greater than the sampling period (the inverse of the sampling frequency) is required between each safeload write. At a sample rate of 48 kHz, the delay is equal to  $\geq 20.83 \mu s$ . Not observing this delay corrupts the downloaded data.

Because the compiler has control over the addresses used for software safeload, the addresses assigned to each parameter may differ from the default values in Table 53. The compiler generates a file named compiler\_output.log in the project folder where the [SigmaStudio](#) project is stored on the hard drive. In this file, the addresses assigned to the software safeload parameters can be confirmed.

Figure 81 shows an example of the software safeload parameter definitions in an excerpt from the compiler\_output.log file.

The following steps are necessary for executing a software safeload:

1. Confirm that no safeload operation has been executed in the span of the last audio sample.
2. Write the desired data to the data\_SafeLoad, Bit x parameters, starting at data\_SafeLoad, Bit 0, and incrementing, as needed, up to a maximum of five parameters.
3. Write the desired starting target address to the address\_SafeLoad parameter.
4. Write the number of words to be transferred to the num\_SafeLoad parameter. The minimum write length is one word, and the maximum write length is five words.
5. Wait one audio frame for the safeload operation to complete.

```

#### DMO Allocation Summary ####
ModuleMemoryRegions:   Addr:   Module: Length:
__STACK_MODULO__      0x0     0      16

Address:  Module:          Param:
0x0      __STACK__        __STACK__ [16] =0x00000000,0x00000000,0x00000000,0x00000000,
0x00000000,0x00000000,0x00000000,0x00000000,0x00000000,0x00000000,
0x00000000,0x00000000,0x00000000,0x00000000,0x00000000,0x00000000
0x10      MPI_DM1 [4] =0x00000000,0x00000000,0x00000008,0x00000000
0x14      __SafeLoad_Module__ data_SafeLoad [5] =0x00000000,0x00000000,0x00000000,0x00000000,0x00000000
0x19      __SafeLoad_Module__ address_SafeLoad =0x00000000
0x1A      __SafeLoad_Module__ num_SafeLoad =0x00000000
0x1B      EQS300MultiS1      B2_1 =0x00000000
0x1C      EQS300MultiS1      B1_1 =0x00000000
0x1D      EQS300MultiS1      B0_1 =0x00000000
0x1E      EQS300MultiS1      A2_1 =0x00000000
0x1F      EQS300MultiS1      A1_1 =0x00000000
0x20      __DMO_PADDING__    __DMO_PADDING__ [4] =0x00000000,0x00000000,0x00000000,0x00000000
    
```

Figure 81. Compiler Log Output Excerpt with SafeLoad Module Definitions

14810-079

**Soft Reset Function**

The soft reset function allows the device to enter a state similar to when the hardware RESET pin is connected to ground. All control registers are reset to their default values, except the PLL registers, as follows: Register 0xF000 (PLL\_CTRL0), Register 0xF001 (PLL\_CTRL1), Register 0xF002 (PLL\_CLK\_SRC), Register 0xF003 (PLL\_ENABLE), Register 0xF004 (PLL\_LOCK), Register 0xF005 (MCLK\_OUT), and Register 0xF006 (PLL\_WATCHDOG), as well as the registers related to the panic manager.

Table 54 shows an overview of the register related to the soft reset function. For more details, see the Soft Reset Register section.

**Table 54. Soft Reset Register**

| Address | Name       | Description    |
|---------|------------|----------------|
| 0xF890  | SOFT_RESET | Software reset |

**PIN DRIVE STRENGTH, SLEW RATE, AND PULL CONFIGURATION**

Every digital output pin has configurable drive strength and slew rate. This allows the current sourcing ability of the driver to be modified to fit the application circuit. In general, higher drive strength is needed to improve signal integrity when driving high frequency clocks over long distances. Lower drive strength can be used for lower frequency clock signals, shorter traces, or when reduced system electromagnetic interference (EMI) is desired. Slew rate can be increased if the edges of the clock signal have rise or fall times that are too long. To achieve adequate signal integrity and minimize electromagnetic emissions, use the drive strength and slew rate settings in combination with good mixed-signal PCB design practices.

**Pin Drive Strength, Slew Rate, and Pull Configuration Registers**

An overview of the registers related to pin drive strength, slew rate, and pull configuration is shown in Table 55. For a more detailed description, see the Hardware Interfacing Registers section.

Table 55. Pin Drive Strength, Slew Rate, and Pull Configuration Registers

| Address | Register       | Description  |
|---------|----------------|--|
| 0xF780  | BCLK_IN0_PIN   | BCLK input pin drive strength and slew rate (BCLK_IN0)     |
| 0xF781  | BCLK_IN1_PIN   | BCLK input pin drive strength and slew rate (BCLK_IN1)     |
| 0xF782  | BCLK_IN2_PIN   | BCLK input pin drive strength and slew rate (BCLK_IN2)     |
| 0xF783  | BCLK_IN3_PIN   | BCLK input pin drive strength and slew rate (BCLK_IN3)     |
| 0xF784  | BCLK_OUT0_PIN  | BCLK output pin drive strength and slew rate (BCLK_OUT0)   |
| 0xF785  | BCLK_OUT1_PIN  | BCLK output pin drive strength and slew rate (BCLK_OUT1)   |
| 0xF786  | BCLK_OUT2_PIN  | BCLK output pin drive strength and slew rate (BCLK_OUT2)   |
| 0xF787  | BCLK_OUT3_PIN  | BCLK output pin drive strength and slew rate (BCLK_OUT3)   |
| 0xF788  | LRCLK_IN0_PIN  | LRCLK input pin drive strength and slew rate (LRCLK_IN0)   |
| 0xF789  | LRCLK_IN1_PIN  | LRCLK input pin drive strength and slew rate (LRCLK_IN1)   |
| 0xF78A  | LRCLK_IN2_PIN  | LRCLK input pin drive strength and slew rate (LRCLK_IN2)   |
| 0xF78B  | LRCLK_IN3_PIN  | LRCLK input pin drive strength and slew rate (LRCLK_IN3)   |
| 0xF78C  | LRCLK_OUT0_PIN | LRCLK output pin drive strength and slew rate (LRCLK_OUT0) |
| 0xF78D  | LRCLK_OUT1_PIN | LRCLK output pin drive strength and slew rate (LRCLK_OUT1) |
| 0xF78E  | LRCLK_OUT2_PIN | LRCLK output pin drive strength and slew rate (LRCLK_OUT2) |
| 0xF78F  | LRCLK_OUT3_PIN | LRCLK output pin drive strength and slew rate (LRCLK_OUT3) |
| 0xF790  | SDATA_IN0_PIN  | SDATA input pin drive strength and slew rate (SDATA_IN0)   |
| 0xF791  | SDATA_IN1_PIN  | SDATA input pin drive strength and slew rate (SDATA_IN1)   |
| 0xF792  | SDATA_IN2_PIN  | SDATA input pin drive strength and slew rate (SDATA_IN2)   |
| 0xF793  | SDATA_IN3_PIN  | SDATA input pin drive strength and slew rate (SDATA_IN3)   |
| 0xF794  | SDATA_OUT0_PIN | SDATA output pin drive strength and slew rate (SDATA_OUT0) |
| 0xF795  | SDATA_OUT1_PIN | SDATA output pin drive strength and slew rate (SDATA_OUT1) |
| 0xF796  | SDATA_OUT2_PIN | SDATA output pin drive strength and slew rate (SDATA_OUT2) |
| 0xF797  | SDATA_OUT3_PIN | SDATA output pin drive strength and slew rate (SDATA_OUT3) |
| 0xF798  | SPDIF_TX_PIN   | S/PDIF transmitter pin drive strength and slew rate        |
| 0xF799  | SCLK_SCL_PIN   | SCLK/SCL pin drive strength and slew rate                  |
| 0xF79A  | MISO_SDA_PIN   | MISO/SDA pin drive strength and slew rate                  |
| 0xF79B  | SS_PIN         | SS/ADDR0 pin drive strength and slew rate                  |
| 0xF79C  | MOSI_ADDR1_PIN | MOSI/ADDR1 pin drive strength and slew rate                |
| 0xF79D  | SCLK_SCL_M_PIN | SCL_M/SCLK_M/MP2 pin drive strength and slew rate          |
| 0xF79E  | MISO_SDA_M_PIN | SDA_M/MISO_M/MP3 pin drive strength and slew rate          |
| 0xF79F  | SS_M_PIN       | SS_M/MP0 pin drive strength and slew rate                  |
| 0xF7A0  | MOSI_M_PIN     | MOSI_M/MP1 pin drive strength and slew rate                |
| 0xF7A1  | MP6_PIN        | MP6 pin drive strength and slew rate                       |
| 0xF7A2  | MP7_PIN        | MP7 pin drive strength and slew rate                       |
| 0xF7A3  | CLKOUT_PIN     | CLKOUT pin drive strength and slew rate                    |

## GLOBAL RAM AND CONTROL REGISTER MAP

The complete set of addresses accessible via the slave I<sup>2</sup>C/SPI control port is described in this section. The addresses are divided into two main parts: memory and registers.

### RANDOM ACCESS MEMORY

The ADAU1466 has 1.28 Mb of data memory (40 kWords storing 32-bit data). The ADAU1462 has 512 kb of data (16 kWords storing 32-bit data).

The ADAU1462/ADAU1466 have 8 kWords of program memory. Program memory consists of 32-bit words. Op codes for the DSP core are either 32 bits or 64 bits; therefore, program instructions can take up one or two addresses in memory. The program memory has parity bit protection. The panic manager flags parity errors when they are detected.

Program memory can only be written or read when the core is stopped. The program memory is hardware protected so that it cannot be accidentally overwritten or corrupted at run time.

The DSP core is able to access directly all memory and registers.

Data memory acts as a storage area for both audio data and signal processing parameters, such as filter coefficients. The data memory

has parity bit protection. The panic manager flags parity errors when they are detected. Modulo memory addressing is used in several audio processing algorithms. The boundaries between the fixed and rotating memories are set in [SigmaStudio](#) by the compiler, and they require no action on the part of the user.

Data and parameters assignment to the different memory spaces are handled in software. The modulo boundary locations are flexible.

A ROM table (of over 7 kWords), containing a set of commonly used constants, can be accessed by the DSP core. This memory increases the efficiency of audio processing algorithm development. The table includes information such as trigonometric tables, including sine, cosine, tangent, and hyperbolic tangent, twiddle factors for frequency domain processing, real mathematical constants, such as pi and factors of 2, and complex constants. The ROM table is not accessible from the I<sup>2</sup>C or SPI slave control port.

All memory addresses store 32 bits (4 bytes) of data. The memory spaces for the ADAU1466 are defined in Table 56. The memory spaces for the ADAU1462 are defined in Table 57.

**Table 56. ADAU1466 Memory Map**

| Address Range    | Length      | Memory                             | Data-Word Size |
|------------------|-------------|------------------------------------|----------------|
| 0x0000 to 0x4FFF | 20480 words | DM0 (Data Memory 0)—lower (Page 1) | 32 bits        |
| 0x0000 to 0x4FFF | 20480 words | DM0 (Data Memory 0)—upper (Page 2) | 32 bits        |
| 0x6000 to 0xAFFF | 20480 words | DM1 (Data Memory 1)—lower (Page 1) | 32 bits        |
| 0x6000 to 0xAFFF | 20480 words | DM1 (Data Memory 1)—upper (Page 2) | 32 bits        |
| 0xC000 to 0xEFFF | 12288 words | Program memory—lower (Page 1)      | 32 bits        |
| 0xC000 to 0xEFFF | 12288 words | Program memory—upper (Page 2)      | 32 bits        |

**Table 57. ADAU1462 Memory Map**

| Address Range    | Length      | Memory                             | Data-Word Size |
|------------------|-------------|------------------------------------|----------------|
| 0x0000 to 0x2FFF | 12288 words | DM0 (Data Memory 0)—lower (Page 1) | 32 bits        |
| 0x0000 to 0x2FFF | 12288 words | DM0 (Data Memory 0)—upper (Page 2) | 32 bits        |
| 0x6000 to 0x8FFF | 12288 words | DM1 (Data Memory 1)—lower (Page 1) | 32 bits        |
| 0x6000 to 0x8FFF | 12288 words | DM1 (Data Memory 1)—lower (Page 2) | 32 bits        |
| 0xC000 to 0xDFFF | 8192 words  | Program memory—lower (Page 1)      | 32 bits        |
| 0xC000 to 0xDFFF | 8192 words  | Program memory—lower (Page 2)      | 32 bits        |

| PM BUS       |                                    | DM0 BUS      |                                    | DM1 BUS      |                                    |
|--------------|------------------------------------|--------------|------------------------------------|--------------|------------------------------------|
| CORE ADDRESS | SLAVE CONTROL PORT ADDRESS/MAPPING | CORE ADDRESS | SLAVE CONTROL PORT ADDRESS/MAPPING | CORE ADDRESS | SLAVE CONTROL PORT ADDRESS/MAPPING |
| 0x0000       | 0xC000                             | 0x0000       | 0x0000                             | 0x0000       | 0x6000                             |
| 0x1FFF       | 0xDFFF                             |              | DM0 LOWER (PAGE 1)                 |              | DM1 LOWER (PAGE 1)                 |
| 0x2000       | 0xC000                             | 0x2FFF       | 0x2FFF                             | 0x2FFF       | 0x8FFF                             |
| 0x3FFF       | 0xDFFF                             | 0x3000       | 0x0000                             | 0x3000       | 0x6000                             |
| 0x4000       |                                    |              | DM0 UPPER (PAGE 2)                 |              | DM1 UPPER (PAGE 2)                 |
|              |                                    | 0x5FFF       | 0x2FFF                             | 0x5FFF       | 0x8FFF                             |
|              |                                    | 0x6000       |                                    | 0x6000       |                                    |
| 0xBFFF       |                                    | 0xBFFF       |                                    | 0xBFFF       |                                    |
| 0xC000       |                                    | 0xC000       |                                    | 0xC000       |                                    |
|              | BOOT ROM                           |              | DATA ROM 0                         |              | DATA ROM 1                         |
| 0xEFFF       |                                    | 0xEFFF       |                                    | 0xEFFF       |                                    |
| 0xF000       |                                    | 0xF000       | 0xF000                             | 0xF000       | 0xF000                             |
| 0xFBFF       |                                    | 0xFBFF       | REGISTERS                          | 0xFBFF       | REGISTERS                          |
|              |                                    |              |                                    |              |                                    |

Figure 82. ADAU1462 Slave Port Memory Map and the Mapping onto the SigmaDSP Core Memory

14810-181

| PM BUS       |                                    | DM0 BUS      |                                    | DM1 BUS      |                                    |
|--------------|------------------------------------|--------------|------------------------------------|--------------|------------------------------------|
| CORE ADDRESS | SLAVE CONTROL PORT ADDRESS/MAPPING | CORE ADDRESS | SLAVE CONTROL PORT ADDRESS/MAPPING | CORE ADDRESS | SLAVE CONTROL PORT ADDRESS/MAPPING |
| 0x0000       | 0xC000                             | 0x0000       | 0x0000                             | 0x0000       | 0x6000                             |
|              | PM LOWER (PAGE 1)                  |              | DM0 LOWER (PAGE 1)                 |              | DM1 LOWER (PAGE 1)                 |
| 0x2FFF       | 0xEFFF                             |              |                                    |              |                                    |
| 0x3000       | 0xC000                             | 0x4FFF       | 0x4FFF                             | 0x4FFF       | 0xAFFF                             |
|              | PM UPPER (PAGE 2)                  |              | DM0 UPPER (PAGE 2)                 |              | DM1 UPPER (PAGE 2)                 |
| 0x5FFF       | 0xEFFF                             | 0x5000       | 0x0000                             | 0x5000       | 0x6000                             |
| 0x6000       |                                    |              |                                    |              |                                    |
|              |                                    | 0x9FFF       | 0x4FFF                             | 0x9FFF       | 0xAFFF                             |
| 0xBFFF       |                                    | 0xA000       |                                    | 0xA000       |                                    |
| 0xC000       |                                    | 0xBFFF       |                                    | 0xBFFF       |                                    |
|              | BOOT ROM                           | 0xC000       |                                    | 0xC000       | DATA ROM 1                         |
| 0xEFFF       |                                    | 0xEFFF       |                                    | 0xEFFF       |                                    |
| 0xF000       |                                    | 0xF000       | 0xF000                             | 0xF000       | REGISTERS                          |
| 0xFBFF       |                                    | 0xFBFF       | 0xFBFF                             | 0xFBFF       | REGISTERS                          |
|              |                                    |              |                                    |              |                                    |

Figure 83. ADAU1466 Slave Port Memory Map and the Mapping onto the SigmaDSP Core Memory

14810-182

**CONTROL REGISTERS**

All control registers store 16 bits (two bytes) of data. The register map is defined in Table 58.

**Table 58. Control Register Summary**

| Reg                     | Name             | Bits            | Bit 7  | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 | Reset  | RW |
|-------------------------|------------------|-----------------|--|-------|-------|-------|-------|-------|-------|-------|--------|----|
| 0xF000                  | PLL_CTRL0        | [15:8]<br>[7:0] | RESERVED[8:1]<br>RESERVED[0] PLL_FBDIVIDER   |       |       |       |       |       |       |       | 0x0060 | RW |
| 0xF001                  | PLL_CTRL1        | [15:8]<br>[7:0] | RESERVED[13:6]<br>RESERVED[5:0] PLL_DIV  |       |       |       |       |       |       |       | 0x0000 | RW |
| 0xF002                  | PLL_CLK_SRC      | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0] CLKSRC   |       |       |       |       |       |       |       | 0x0000 | RW |
| 0xF003                  | PLL_ENABLE       | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0] PLL_ENABLE   |       |       |       |       |       |       |       | 0x0000 | RW |
| 0xF004                  | PLL_LOCK         | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0] PLL_LOCK   |       |       |       |       |       |       |       | 0x0000 | R  |
| 0xF005                  | MCLK_OUT         | [15:8]<br>[7:0] | RESERVED[12:5]<br>RESERVED[4:0] CLKOUT_RATE CLKOUT_ENABLE  |       |       |       |       |       |       |       | 0x0000 | R  |
| 0xF006                  | PLL_WATCHDOG     | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0] PLL_WATCHDOG   |       |       |       |       |       |       |       | 0x0001 | R  |
| 0xF00A                  | DISABLE_AUTOLOCK | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0] DISABLE_AUTOLOCK   |       |       |       |       |       |       |       | 0x0000 | RW |
| 0xF020                  | CLK_GEN1_M       | [15:8]<br>[7:0] | RESERVED<br>CLOCKGEN1_M[7:0] CLOCKGEN1_M[8]  |       |       |       |       |       |       |       | 0x0006 | RW |
| 0xF021                  | CLK_GEN1_N       | [15:8]<br>[7:0] | RESERVED<br>CLOCKGEN1_N[7:0] CLOCKGEN1_N[8]  |       |       |       |       |       |       |       | 0x0001 | RW |
| 0xF022                  | CLK_GEN2_M       | [15:8]<br>[7:0] | RESERVED<br>CLOCKGEN2_M[7:0] CLOCKGEN2_M[8]  |       |       |       |       |       |       |       | 0x0009 | RW |
| 0xF023                  | CLK_GEN2_N       | [15:8]<br>[7:0] | RESERVED<br>CLOCKGEN2_N[7:0] CLOCKGEN2_N[8]  |       |       |       |       |       |       |       | 0x0001 | RW |
| 0xF024                  | CLK_GEN3_M       | [15:8]<br>[7:0] | CLOCKGEN3_M[15:8]<br>CLOCKGEN3_M[7:0]  |       |       |       |       |       |       |       | 0x0000 | RW |
| 0xF025                  | CLK_GEN3_N       | [15:8]<br>[7:0] | CLOCKGEN3_N[15:8]<br>CLOCKGEN3_N[7:0]  |       |       |       |       |       |       |       | 0x0000 | RW |
| 0xF026                  | CLK_GEN3_SRC     | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0] CLK_GEN3_SRC FREF_PIN  |       |       |       |       |       |       |       | 0x000E | RW |
| 0xF027                  | CLK_GEN3_LOCK    | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0] GEN3_LOCK  |       |       |       |       |       |       |       | 0x0000 | R  |
| 0xF050                  | POWER_ENABLE0    | [15:8]<br>[7:0] | RESERVED<br>SOUT3_PWR SOUT2_PWR SOUT1_PWR SOUT0_PWR CLK_GEN3_PWR CLK_GEN2_PWR CLK_GEN1_PWR ASRCBANK1_PWR ASRCBANK0_PWR SIN3_PWR SIN2_PWR SIN1_PWR SIN0_PWR |       |       |       |       |       |       |       | 0x0000 | RW |
| 0xF051                  | POWER_ENABLE1    | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0] PDM1_PWR PDM0_PWR TX_PWR RX_PWR ADC_PWR  |       |       |       |       |       |       |       | 0x0000 | RW |
| 0xF100<br>...<br>0xF107 | ASRC_INPUTx      | [15:8]<br>[7:0] | RESERVED<br>ASRC_SIN_CHANNEL ASRC_SOURCE   |       |       |       |       |       |       |       | 0x0000 | RW |
| 0xF140<br>...<br>0xF147 | ASRC_OUT_RATEx   | [15:8]<br>[7:0] | RESERVED[11:4]<br>RESERVED[3:0] ASRC_RATE  |       |       |       |       |       |       |       | 0x0000 | RW |
| 0xF180<br>...<br>0xF197 | SOUT_SOURCEx     | [15:8]<br>[7:0] | RESERVED[9:2]<br>RESERVED[1:0] SOUT_ASRC_SELECT SOUT_SOURCE  |       |       |       |       |       |       |       | 0x0000 | RW |
| 0xF1C0                  | SPDIFTX_INPUT    | [15:8]<br>[7:0] | RESERVED[13:6]<br>RESERVED[5:0] SPDIFTX_SOURCE   |       |       |       |       |       |       |       | 0x0000 | RW |
| 0xF200<br>...<br>0xF21C | SERIAL_BYTE_x_0  | [15:8]<br>[7:0] | LRCLK_SRC BCLK_SRC LRCLK_MODE LRCLK_POL<br>BCLK_POL WORD_LEN DATA_FMT TDM_MODE   |       |       |       |       |       |       |       | 0x0000 | RW |
| 0xF201<br>...<br>0xF21D | SERIAL_BYTE_x_1  | [15:8]<br>[7:0] | RESERVED[9:2]<br>RESERVED[1:0] TRISTATE CLK_DOMAIN FS  |       |       |       |       |       |       |       | 0x0002 | RW |
| 0xF300<br>...<br>0xF33F | FTDM_INx         | [15:8]<br>[7:0] | RESERVED<br>SLOT_ENABLE_IN REVERSE_IN_BYTE SERIAL_IN_SEL CHANNEL_IN_POS BYTE_IN_POS  |       |       |       |       |       |       |       | 0x0000 | RW |



| Reg                     | Name                | Bits            | Bit 7  | Bit 6    | Bit 5     | Bit 4        | Bit 3     | Bit 2     | Bit 1     | Bit 0     | Reset     | RW        |           |           |         |         |           |           |        |   |
|-------------------------|---------------------|-----------------|--|----------|-----------|--------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|---------|-----------|-----------|--------|---|
| 0xF380<br>...<br>0xF3BF | FTDM_OUTx           | [15:8]<br>[7:0] | RESERVED   |          |           |              |           |           |           |           |           |           | 0x0000    | RW        |         |         |           |           |        |   |
| 0xF400                  | HIBERNATE           | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | RW        |         |         |           |           |        |   |
| 0xF401                  | START_PULSE         | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0]      START_PULSE   |          |           |              |           |           |           |           |           |           | 0x0002    | RW        |         |         |           |           |        |   |
| 0xF402                  | START_CORE          | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | RW        |         |         |           |           |        |   |
| 0xF403                  | KILL_CORE           | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | RW        |         |         |           |           |        |   |
| 0xF404                  | START_ADDRESS       | [15:8]<br>[7:0] | START_ADDRESS[15:8]<br>START_ADDRESS[7:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | RW        |         |         |           |           |        |   |
| 0xF405                  | CORE_STATUS         | [15:8]<br>[7:0] | RESERVED[12:5]<br>RESERVED[4:0]      CORE_STATUS   |          |           |              |           |           |           |           |           |           | 0x0000    | R         |         |         |           |           |        |   |
| 0xF420                  | DEBUG_MODE          | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | RW        |         |         |           |           |        |   |
| 0xF421                  | PANIC_CLEAR         | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | RW        |         |         |           |           |        |   |
| 0xF422                  | PANIC_PARITY_MASK   | [15:8]<br>[7:0] | RESERVED<br>DM1_BANK3_MASK    DM1_BANK2_MASK    DM1_BANK1_MASK    DM1_BANK0_MASK<br>DM0_BANK3_MASK    DM0_BANK2_MASK    DM0_BANK1_MASK    DM0_BANK0_MASK    PM1_MASK    PM0_MASK    ASRC1_MASK    ASRC0_MASK |          |           |              |           |           |           |           |           |           | 0x0003    | RW        |         |         |           |           |        |   |
| 0xF423                  | PANIC_SOFTWARE_MASK | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | RW        |         |         |           |           |        |   |
| 0xF424                  | PANIC_WD_MASK       | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | RW        |         |         |           |           |        |   |
| 0xF425                  | PANIC_STACK_MASK    | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | RW        |         |         |           |           |        |   |
| 0xF426                  | PANIC_LOOP_MASK     | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | RW        |         |         |           |           |        |   |
| 0xF427                  | PANIC_FLAG          | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | R         |         |         |           |           |        |   |
| 0xF428                  | PANIC_CODE          | [15:8]<br>[7:0] | ERR_SOFT   | ERR_LOOP | ERR_STACK | ERR_WATCHDOG | ERR_DM1B3 | ERR_DM1B2 | ERR_DM1B1 | ERR_DM1B0 | ERR_DM0B3 | ERR_DM0B2 | ERR_DM0B1 | ERR_DM0B0 | ERR_PM1 | ERR_PM0 | ERR_ASRC1 | ERR_ASRC0 | 0x0000 | R |
| 0xF429                  | DECODE_OP0          | [15:8]<br>[7:0] | DECODE_OP0[15:8]<br>DECODE_OP0[7:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | R         |         |         |           |           |        |   |
| 0xF42A                  | DECODE_OP1          | [15:8]<br>[7:0] | DECODE_OP1[15:8]<br>DECODE_OP1[7:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | R         |         |         |           |           |        |   |
| 0xF42B                  | DECODE_OP2          | [15:8]<br>[7:0] | DECODE_OP2[15:8]<br>DECODE_OP2[7:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | R         |         |         |           |           |        |   |
| 0xF42C                  | DECODE_OP3          | [15:8]<br>[7:0] | DECODE_OP3[15:8]<br>DECODE_OP3[7:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | R         |         |         |           |           |        |   |
| 0xF42D                  | EXECUTE_OP0         | [15:8]<br>[7:0] | DECODE_EX0[15:8]<br>DECODE_EX0[7:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | R         |         |         |           |           |        |   |
| 0xF42E                  | EXECUTE_OP1         | [15:8]<br>[7:0] | DECODE_EX1[15:8]<br>DECODE_EX1[7:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | R         |         |         |           |           |        |   |
| 0xF42F                  | EXECUTE_OP2         | [15:8]<br>[7:0] | DECODE_EX2[15:8]<br>DECODE_EX2[7:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | R         |         |         |           |           |        |   |
| 0xF430                  | EXECUTE_OP3         | [15:8]<br>[7:0] | DECODE_EX3[15:8]<br>DECODE_EX3[7:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | R         |         |         |           |           |        |   |
| 0xF431                  | DECODE_COUNT        | [15:8]<br>[7:0] | DECODE_COUNT[15:8]<br>DECODE_COUNT[7:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | R         |         |         |           |           |        |   |
| 0xF432                  | EXECUTE_COUNT       | [15:8]<br>[7:0] | EXECUTE_COUNT[15:8]<br>EXECUTE_COUNT[7:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | R         |         |         |           |           |        |   |
| 0xF433                  | SOFTWARE_VALUE_0    | [15:8]<br>[7:0] | SOFTWARE_VALUE_0[15:8]<br>SOFTWARE_VALUE_0[7:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | R         |         |         |           |           |        |   |
| 0xF434                  | SOFTWARE_VALUE_1    | [15:8]<br>[7:0] | SOFTWARE_VALUE_1[15:8]<br>SOFTWARE_VALUE_1[7:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | R         |         |         |           |           |        |   |
| 0xF443                  | WATCHDOG_MAXCOUNT   | [15:8]<br>[7:0] | RESERVED<br>WD_MAXCOUNT[12:8]<br>WD_MAXCOUNT[7:0]  |          |           |              |           |           |           |           |           |           | 0x0000    | RW        |         |         |           |           |        |   |

| Reg    | Name                 | Bits   | Bit 7                    | Bit 6 | Bit 5                   | Bit 4                   | Bit 3                   | Bit 2                    | Bit 1                   | Bit 0                  | Reset | RW     |        |    |
|--------|----------------------|--------|--------------------------|-------|-------------------------|-------------------------|-------------------------|--------------------------|-------------------------|------------------------|-------|--------|--------|----|
| 0xF444 | WATCHDOG_PRESALE     | [15:8] | RESERVED[11:4]           |       |                         |                         |                         | RESERVED[11:4]           |                         |                        |       |        | 0x0000 | RW |
|        |                      | [7:0]  | RESERVED[3:0]            |       |                         | WD_PRESALE              |                         |                          |                         |                        |       |        |        |    |
| 0xF450 | BLOCKINT_EN          | [15:8] | RESERVED[14:7]           |       |                         |                         |                         | RESERVED[14:7]           |                         |                        |       |        | 0x0000 | RW |
|        |                      | [7:0]  | RESERVED[6:0]            |       |                         |                         |                         |                          | BLOCKINT_EN             |                        |       |        |        |    |
| 0xF451 | BLOCKINT_VALUE       | [15:8] | BLOCKINT_VALUE[15:8]     |       |                         |                         |                         | BLOCKINT_VALUE[15:8]     |                         |                        |       |        | 0x0000 | RW |
|        |                      | [7:0]  | BLOCKINT_VALUE[7:0]      |       |                         |                         |                         |                          |                         |                        |       |        |        |    |
| 0xF460 | PROG_CNTR0           | [15:8] | RESERVED                 |       |                         |                         |                         | RESERVED                 |                         |                        |       |        | 0x0000 | R  |
|        |                      | [7:0]  | PROG_CNTR_MSB            |       |                         |                         |                         |                          |                         |                        |       |        |        |    |
| 0xF461 | PROG_CNTR1           | [15:8] | PROG_CNTR_LSB[15:8]      |       |                         |                         |                         | PROG_CNTR_LSB[15:8]      |                         |                        |       |        | 0x0000 | R  |
|        |                      | [7:0]  | PROG_CNTR_LSB[7:0]       |       |                         |                         |                         |                          |                         |                        |       |        |        |    |
| 0xF462 | PROG_CNTR_CLEAR      | [15:8] | RESERVED[14:7]           |       |                         |                         |                         | RESERVED[14:7]           |                         |                        |       |        | 0x0000 | RW |
|        |                      | [7:0]  | RESERVED[6:0]            |       |                         |                         |                         |                          | PROG_CNTR_CLEAR         |                        |       |        |        |    |
| 0xF463 | PROG_CNTR_LENGTH0    | [15:8] | RESERVED                 |       |                         |                         |                         | RESERVED                 |                         |                        |       |        | 0x0000 | R  |
|        |                      | [7:0]  | PROG_LENGTH_MSB          |       |                         |                         |                         |                          |                         |                        |       |        |        |    |
| 0xF464 | PROG_CNTR_LENGTH1    | [15:8] | PROG_LENGTH_LSB[15:8]    |       |                         |                         |                         | PROG_LENGTH_LSB[15:8]    |                         |                        |       |        | 0x0000 | R  |
|        |                      | [7:0]  | PROG_LENGTH_LSB[7:0]     |       |                         |                         |                         |                          |                         |                        |       |        |        |    |
| 0xF465 | PROG_CNTR_MAXLENGTH0 | [15:8] | RESERVED                 |       |                         |                         |                         | RESERVED                 |                         |                        |       |        | 0x0000 | R  |
|        |                      | [7:0]  | PROG_MAXLENGTH_MSB       |       |                         |                         |                         |                          |                         |                        |       |        |        |    |
| 0xF466 | PROG_CNTR_MAXLENGTH1 | [15:8] | PROG_MAXLENGTH_LSB[15:8] |       |                         |                         |                         | PROG_MAXLENGTH_LSB[15:8] |                         |                        |       |        | 0x0000 | R  |
|        |                      | [7:0]  | PROG_MAXLENGTH_LSB[7:0]  |       |                         |                         |                         |                          |                         |                        |       |        |        |    |
| 0xF467 | PANIC_PARITY_MASK1   | [15:8] | RESERVED                 |       | DM0_BANK1_SUBBANK4_MASK | DM0_BANK1_SUBBANK3_MASK | DM0_BANK1_SUBBANK2_MASK | DM0_BANK1_SUBBANK1_MASK  | DM0_BANK1_SUBBANK0_MASK |                        |       | 0x0000 | RW     |    |
|        |                      | [7:0]  | RESERVED                 |       | DM0_BANK0_SUBBANK4_MASK | DM0_BANK0_SUBBANK3_MASK | DM0_BANK0_SUBBANK2_MASK | DM0_BANK0_SUBBANK1_MASK  | DM0_BANK0_SUBBANK0_MASK |                        |       |        |        |    |
| 0xF468 | PANIC_PARITY_MASK2   | [15:8] | RESERVED                 |       | DM0_BANK3_SUBBANK4_MASK | DM0_BANK3_SUBBANK3_MASK | DM0_BANK3_SUBBANK2_MASK | DM0_BANK3_SUBBANK1_MASK  | DM0_BANK3_SUBBANK0_MASK |                        |       | 0x0000 | RW     |    |
|        |                      | [7:0]  | RESERVED                 |       | DM0_BANK2_SUBBANK4_MASK | DM0_BANK2_SUBBANK3_MASK | DM0_BANK2_SUBBANK2_MASK | DM0_BANK2_SUBBANK1_MASK  | DM0_BANK2_SUBBANK0_MASK |                        |       |        |        |    |
| 0xF469 | PANIC_PARITY_MASK3   | [15:8] | RESERVED                 |       | DM1_BANK1_SUBBANK4_MASK | DM1_BANK1_SUBBANK3_MASK | DM1_BANK1_SUBBANK2_MASK | DM1_BANK1_SUBBANK1_MASK  | DM1_BANK1_SUBBANK0_MASK |                        |       | 0x0000 | RW     |    |
|        |                      | [7:0]  | RESERVED                 |       | DM1_BANK0_SUBBANK4_MASK | DM1_BANK0_SUBBANK3_MASK | DM1_BANK0_SUBBANK2_MASK | DM1_BANK0_SUBBANK1_MASK  | DM1_BANK0_SUBBANK0_MASK |                        |       |        |        |    |
| 0xF46A | PANIC_PARITY_MASK4   | [15:8] | RESERVED                 |       | DM1_BANK3_SUBBANK4_MASK | DM1_BANK3_SUBBANK3_MASK | DM1_BANK3_SUBBANK2_MASK | DM1_BANK3_SUBBANK1_MASK  | DM1_BANK3_SUBBANK0_MASK |                        |       | 0x0000 | RW     |    |
|        |                      | [7:0]  | RESERVED                 |       | DM1_BANK2_SUBBANK4_MASK | DM1_BANK2_SUBBANK3_MASK | DM1_BANK2_SUBBANK2_MASK | DM1_BANK2_SUBBANK1_MASK  | DM1_BANK2_SUBBANK0_MASK |                        |       |        |        |    |
| 0xF46B | PANIC_PARITY_MASK5   | [15:8] | RESERVED                 |       | PM_BANK1_SUBBANK5_MASK  | PM_BANK1_SUBBANK4_MASK  | PM_BANK1_SUBBANK3_MASK  | PM_BANK1_SUBBANK2_MASK   | PM_BANK1_SUBBANK1_MASK  | PM_BANK1_SUBBANK0_MASK |       | 0x0000 | RW     |    |
|        |                      | [7:0]  | RESERVED                 |       | PM_BANK0_SUBBANK5_MASK  | PM_BANK0_SUBBANK4_MASK  | PM_BANK0_SUBBANK3_MASK  | PM_BANK0_SUBBANK2_MASK   | PM_BANK0_SUBBANK1_MASK  | PM_BANK0_SUBBANK0_MASK |       |        |        |    |
| 0xF46C | PANIC_CODE1          | [15:8] | RESERVED                 |       | ERR_DM0B1SB4            | ERR_DM0B1SB3            | ERR_DM0B1SB2            | ERR_DM0B1SB1             | ERR_DM0B1SB0            |                        |       | 0x0000 | R      |    |
|        |                      | [7:0]  | RESERVED                 |       | ERR_DM0B0SB4            | ERR_DM0B0SB3            | ERR_DM0B0SB2            | ERR_DM0B0SB1             | ERR_DM0B0SB0            |                        |       |        |        |    |
| 0xF46D | PANIC_CODE2          | [15:8] | RESERVED                 |       | ERR_DM0B3SB4            | ERR_DM0B3SB3            | ERR_DM0B3SB2            | ERR_DM0B3SB1             | ERR_DM0B3SB0            |                        |       | 0x0000 | R      |    |
|        |                      | [7:0]  | RESERVED                 |       | ERR_DM0B2SB4            | ERR_DM0B2SB3            | ERR_DM0B2SB2            | ERR_DM0B2SB1             | ERR_DM0B2SB0            |                        |       |        |        |    |
| 0xF46E | PANIC_CODE3          | [15:8] | RESERVED                 |       | ERR_DM1B1SB4            | ERR_DM1B1SB3            | ERR_DM1B1SB2            | ERR_DM1B1SB1             | ERR_DM1B1SB0            |                        |       | 0x0000 | R      |    |
|        |                      | [7:0]  | RESERVED                 |       | ERR_DM1B0SB4            | ERR_DM1B0SB3            | ERR_DM1B0SB2            | ERR_DM1B0SB1             | ERR_DM1B0SB0            |                        |       |        |        |    |
| 0xF46F | PANIC_CODE4          | [15:8] | RESERVED                 |       | ERR_DM1B3SB4            | ERR_DM1B3SB3            | ERR_DM1B3SB2            | ERR_DM1B3SB1             | ERR_DM1B3SB0            |                        |       | 0x0000 | R      |    |
|        |                      | [7:0]  | RESERVED                 |       | ERR_DM1B2SB4            | ERR_DM1B2SB3            | ERR_DM1B2SB2            | ERR_DM1B2SB1             | ERR_DM1B2SB0            |                        |       |        |        |    |
| 0xF470 | PANIC_CODE5          | [15:8] | RESERVED                 |       | ERR_PM_B1SB5            | ERR_PM_B1SB4            | ERR_PM_B1SB3            | ERR_PM_B1SB2             | ERR_PM_B1SB1            | ERR_PM_B1SB0           |       | 0x0000 | R      |    |
|        |                      | [7:0]  | RESERVED                 |       | ERR_PM_B0SB5            | ERR_PM_B0SB4            | ERR_PM_B0SB3            | ERR_PM_B0SB2             | ERR_PM_B0SB1            | ERR_PM_B0SB0           |       |        |        |    |

| Reg                     | Name                  | Bits            | Bit 7                   | Bit 6  | Bit 5 | Bit 4          | Bit 3                  | Bit 2                   | Bit 1         | Bit 0         | Reset      | RW     |        |        |        |    |
|-------------------------|-----------------------|-----------------|-------------------------|--------|-------|----------------|------------------------|-------------------------|---------------|---------------|------------|--------|--------|--------|--------|----|
| 0xF510<br>...<br>0xF51D | MPx_MODE              | [15:8]<br>[7:0] | RESERVED                |        |       |                | SS_SELECT              |                         |               | MP_ENABLE     |            | 0x0000 | RW     |        |        |    |
| 0xF520<br>...<br>0xF52D | MPx_WRITE             | [15:8]<br>[7:0] | RESERVED[14:7]          |        |       |                | RESERVED[6:0]          |                         |               | MP_REG_WRITE  |            | 0x0000 | RW     |        |        |    |
| 0xF530<br>...<br>0xF53D | MPx_READ              | [15:8]<br>[7:0] | RESERVED[14:7]          |        |       |                | RESERVED[6:0]          |                         |               | MP_REG_READ   |            | 0x0000 | R      |        |        |    |
| 0xF560<br>...<br>0xF561 | DMIC_CTRLn            | [15:8]<br>[7:0] | RESERVED                | CUTOFF |       |                | MIC_DATA_SRC           |                         |               |               | 0x4000     | RW     |        |        |        |    |
| 0xF580                  | ASRC_LOCK             | [15:8]<br>[7:0] | RESERVED                |        |       |                | ASRC7L                 | ASRC6L                  | ASRC5L        | ASRC4L        | ASRC3L     | ASRC2L | ASRC1L | ASRC0L | 0x0000 | R  |
| 0xF581                  | ASRC_MUTE             | [15:8]<br>[7:0] | RESERVED                |        |       |                | ASRC7M                 | ASRC6M                  | ASRC5M        | ASRC4M        | ASRC3M     | ASRC2M | ASRC1M | ASRC0M | 0x0000 | RW |
| 0xF582<br>...<br>0xF589 | ASRCx_RATIO           | [15:8]<br>[7:0] | ASRC_RATIO[15:8]        |        |       |                | ASRC_RATIO[7:0]        |                         |               |               | 0x0000     | R      |        |        |        |    |
| 0xF590                  | ASRC_RAMPMAX_OVR      | [15:8]<br>[7:0] | ASRC_RAMPMAX_OVR[15:12] |        |       |                | OVERVERRIDE            | OVR_RAMPMAX_VALUE[10:8] |               |               |            | 0x07FF | RW     |        |        |    |
| 0xF591<br>...<br>0xF598 | ASRCx_RAMPMAX         | [15:8]<br>[7:0] | ASRCx_RAMPMAX[15:11]    |        |       |                | RAMPMAX_VALUE[10:8]    |                         |               |               | 0x07FF     | RW     |        |        |        |    |
| 0xF5A0<br>...<br>0xF5A5 | ADC_READx             | [15:8]<br>[7:0] | ADC_VALUE[15:8]         |        |       |                | ADC_VALUE[7:0]         |                         |               |               | 0x0000     | R      |        |        |        |    |
| 0xF600                  | SPDIF_LOCK_DET        | [15:8]<br>[7:0] | RESERVED[14:7]          |        |       |                | RESERVED[6:0]          |                         |               | LOCK          |            | 0x0000 | R      |        |        |    |
| 0xF601                  | SPDIF_RX_CTRL         | [15:8]<br>[7:0] | RESERVED[3:0]           |        |       | RESERVED[11:4] |                        | FASTLOCK                | FSOUTSTRENGTH | RX_LENGTHCTRL |            | 0x0000 | RW     |        |        |    |
| 0xF602                  | SPDIF_RX_DECODE       | [15:8]<br>[7:0] | RESERVED                |        |       |                | RX_WORDLENGTH_R[3:2]   |                         |               | COMPR_TYPE    | AUDIO_TYPE | 0x0000 | R      |        |        |    |
| 0xF603                  | SPDIF_RX_COMPRMODE    | [15:8]<br>[7:0] | COMPR_MODE[15:8]        |        |       |                | COMPR_MODE[7:0]        |                         |               |               | 0x0000     | R      |        |        |        |    |
| 0xF604                  | SPDIF_RESTART         | [15:8]<br>[7:0] | RESERVED[14:7]          |        |       |                | RESERVED[6:0]          |                         |               | RESTART_AUDIO |            | 0x0000 | RW     |        |        |    |
| 0xF605                  | SPDIF_LOSS_OF_LOCK    | [15:8]<br>[7:0] | RESERVED[14:7]          |        |       |                | RESERVED[6:0]          |                         |               | LOSS_OF_LOCK  |            | 0x0000 | R      |        |        |    |
| 0xF606                  | SPDIF_RX_MCLKSPEED    | [15:8]<br>[7:0] | RESERVED[14:7]          |        |       |                | RESERVED[6:0]          |                         |               | RX_MCLKSPEED  |            | 0x0001 | RW     |        |        |    |
| 0xF607                  | SPDIF_TX_MCLKSPEED    | [15:8]<br>[7:0] | RESERVED[14:7]          |        |       |                | RESERVED[6:0]          |                         |               | TX_MCLKSPEED  |            | 0x0001 | RW     |        |        |    |
| 0xF608                  | SPDIF_AUX_EN          | [15:8]<br>[7:0] | RESERVED[10:3]          |        |       | TDMOUT_CLK     | TDMOUT                 |                         |               |               | 0x0000     | RW     |        |        |        |    |
| 0xF60F                  | SPDIF_RX_AUXBIT_READY | [15:8]<br>[7:0] | RESERVED[14:7]          |        |       |                | RESERVED[6:0]          |                         |               | AUXBITS_READY |            | 0x0000 | R      |        |        |    |
| 0xF610<br>...<br>0xF61B | SPDIF_RX_CS_LEFT_x    | [15:8]<br>[7:0] | SPDIF_RX_CS_LEFT[15:8]  |        |       |                | SPDIF_RX_CS_LEFT[7:0]  |                         |               |               | 0x0000     | R      |        |        |        |    |
| 0xF620<br>...<br>0xF62B | SPDIF_RX_CS_RIGHT_x   | [15:8]<br>[7:0] | SPDIF_RX_CS_RIGHT[15:8] |        |       |                | SPDIF_RX_CS_RIGHT[7:0] |                         |               |               | 0x0000     | R      |        |        |        |    |
| 0xF630<br>...<br>0xF63B | SPDIF_RX_UD_LEFT_x    | [15:8]<br>[7:0] | SPDIF_RX_UD_LEFT[15:8]  |        |       |                | SPDIF_RX_UD_LEFT[7:0]  |                         |               |               | 0x0000     | R      |        |        |        |    |
| 0xF640<br>...<br>0xF64B | SPDIF_RX_UD_RIGHT_x   | [15:8]<br>[7:0] | SPDIF_RX_UD_RIGHT[15:8] |        |       |                | SPDIF_RX_UD_RIGHT[7:0] |                         |               |               | 0x0000     | R      |        |        |        |    |
| 0xF650<br>...<br>0xF65B | SPDIF_RX_VB_LEFT_x    | [15:8]<br>[7:0] | SPDIF_RX_VB_LEFT[15:8]  |        |       |                | SPDIF_RX_VB_LEFT[7:0]  |                         |               |               | 0x0000     | R      |        |        |        |    |
| 0xF660<br>...<br>0xF66B | SPDIF_RX_VB_RIGHT_x   | [15:8]<br>[7:0] | SPDIF_RX_VB_RIGHT[15:8] |        |       |                | SPDIF_RX_VB_RIGHT[7:0] |                         |               |               | 0x0000     | R      |        |        |        |    |
| 0xF670<br>...<br>0xF67B | SPDIF_RX_PB_LEFT_x    | [15:8]<br>[7:0] | SPDIF_RX_PB_LEFT[15:8]  |        |       |                | SPDIF_RX_PB_LEFT[7:0]  |                         |               |               | 0x0000     | R      |        |        |        |    |

| Reg                     | Name                       | Bits            | Bit 7   | Bit 6 | Bit 5 | Bit 4           | Bit 3           | Bit 2            | Bit 1 | Bit 0 | Reset             | RW     |    |
|-------------------------|----------------------------|-----------------|---|-------|-------|-----------------|-----------------|------------------|-------|-------|-------------------|--------|----|
| 0xF680<br>...<br>0xF68B | SPDIF_RX_PB_RIGHT_x        | [15:8]<br>[7:0] | SPDIF_RX_PB_RIGHT[15:8]<br>SPDIF_RX_PB_RIGHT[7:0] |       |       |                 |                 |                  |       |       |                   | 0x0000 | R  |
| 0xF690                  | SPDIF_TX_EN                | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0]                   |       |       |                 |                 |                  |       |       | TXEN              | 0x0000 | RW |
| 0xF691                  | SPDIF_TX_CTRL              | [15:8]<br>[7:0] | RESERVED[13:6]<br>RESERVED[5:0]                   |       |       |                 |                 |                  |       |       | TX_LENGTHCTRL     | 0x0000 | RW |
| 0xF69F                  | SPDIF_TX_AUXBIT_SOU<br>RCE | [15:8]<br>[7:0] | RESERVED[14:7]<br>RESERVED[6:0]                   |       |       |                 |                 |                  |       |       | TX_AUXBITS_SOURCE | 0x0000 | RW |
| 0xF6A0<br>...<br>0xF6AB | SPDIF_TX_CS_LEFT_x         | [15:8]<br>[7:0] | SPDIF_TX_CS_LEFT[15:8]<br>SPDIF_TX_CS_LEFT[7:0]   |       |       |                 |                 |                  |       |       |                   | 0x0000 | RW |
| 0xF6B0<br>...<br>0xF6BB | SPDIF_TX_CS_RIGHT_x        | [15:8]<br>[7:0] | SPDIF_TX_CS_RIGHT[15:8]<br>SPDIF_TX_CS_RIGHT[7:0] |       |       |                 |                 |                  |       |       |                   | 0x0000 | RW |
| 0xF6C0<br>...<br>0xF6CB | SPDIF_TX_UD_LEFT_x         | [15:8]<br>[7:0] | SPDIF_TX_UD_LEFT[15:8]<br>SPDIF_TX_UD_LEFT[7:0]   |       |       |                 |                 |                  |       |       |                   | 0x0000 | RW |
| 0xF6D0<br>...<br>0xF6DB | SPDIF_TX_UD_RIGHT_x        | [15:8]<br>[7:0] | SPDIF_TX_UD_RIGHT[15:8]<br>SPDIF_TX_UD_RIGHT[7:0] |       |       |                 |                 |                  |       |       |                   | 0x0000 | RW |
| 0xF6E0<br>...<br>0xF6EB | SPDIF_TX_VB_LEFT_x         | [15:8]<br>[7:0] | SPDIF_TX_VB_LEFT[15:8]<br>SPDIF_TX_VB_LEFT[7:0]   |       |       |                 |                 |                  |       |       |                   | 0x0000 | RW |
| 0xF6F0<br>...<br>0xF6FB | SPDIF_TX_VB_RIGHT_x        | [15:8]<br>[7:0] | SPDIF_TX_VB_RIGHT[15:8]<br>SPDIF_TX_VB_RIGHT[7:0] |       |       |                 |                 |                  |       |       |                   | 0x0000 | RW |
| 0xF700<br>...<br>0xF70B | SPDIF_TX_PB_LEFT_x         | [15:8]<br>[7:0] | SPDIF_TX_PB_LEFT[15:8]<br>SPDIF_TX_PB_LEFT[7:0]   |       |       |                 |                 |                  |       |       |                   | 0x0000 | RW |
| 0xF710<br>...<br>0xF71B | SPDIF_TX_PB_RIGHT_x        | [15:8]<br>[7:0] | SPDIF_TX_PB_RIGHT[15:8]<br>SPDIF_TX_PB_RIGHT[7:0] |       |       |                 |                 |                  |       |       |                   | 0x0000 | RW |
| 0xF780<br>...<br>0xF783 | BCLK_INx_PIN               | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0]                   |       |       | BCLK_IN_PULL    | BCLK_IN_SLEW    | BCLK_IN_DRIVE    |       |       | 0x0018            | RW     |    |
| 0xF784<br>...<br>0xF787 | BCLK_OUTx_PIN              | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0]                   |       |       | BCLK_OUT_PULL   | BCLK_OUT_SLEW   | BCLK_OUT_DRIVE   |       |       | 0x0018            | RW     |    |
| 0xF788<br>...<br>0xF78B | LRCLK_INx_PIN              | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0]                   |       |       | LRCLK_IN_PULL   | LRCLK_IN_SLEW   | LRCLK_IN_DRIVE   |       |       | 0x0018            | RW     |    |
| 0xF78C<br>...<br>0xF78F | LRCLK_OUTx_PIN             | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0]                   |       |       | LRCLK_OUT_PULL  | LRCLK_OUT_SLEW  | LRCLK_OUT_DRIVE  |       |       | 0x0018            | RW     |    |
| 0xF790<br>...<br>0xF793 | SDATA_INx_PIN              | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0]                   |       |       | SDATA_IN_PULL   | SDATA_IN_SLEW   | SDATA_IN_DRIVE   |       |       | 0x0018            | RW     |    |
| 0xF794<br>...<br>0xF797 | SDATA_OUTx_PIN             | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0]                   |       |       | SDATA_OUT_PULL  | SDATA_OUT_SLEW  | SDATA_OUT_DRIVE  |       |       | 0x0008            | RW     |    |
| 0xF798                  | SPDIF_TX_PIN               | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0]                   |       |       | SPDIF_TX_PULL   | SPDIF_TX_SLEW   | SPDIF_TX_DRIVE   |       |       | 0x0008            | RW     |    |
| 0xF799                  | SCLK_SCL_PIN               | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0]                   |       |       | SCLK_SCL_PULL   | SCLK_SCL_SLEW   | SCLK_SCL_DRIVE   |       |       | 0x0008            | RW     |    |
| 0xF79A                  | MISO_SDA_PIN               | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0]                   |       |       | MISO_SDA_PULL   | MISO_SDA_SLEW   | MISO_SDA_DRIVE   |       |       | 0x0008            | RW     |    |
| 0xF79B                  | SS_PIN                     | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0]                   |       |       | SS_PULL         | SS_SLEW         | SS_DRIVE         |       |       | 0x0018            | RW     |    |
| 0xF79C                  | MOSI_ADDR1_PIN             | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0]                   |       |       | MOSI_ADDR1_PULL | MOSI_ADDR1_SLEW | MOSI_ADDR1_DRIVE |       |       | 0x0018            | RW     |    |
| 0xF79D                  | SCLK_SCL_M_PIN             | [15:8]<br>[7:0] | RESERVED[10:3]<br>RESERVED[2:0]                   |       |       | SCLK_SCL_M_PULL | SCLK_SCL_M_SLEW | SCLK_SCL_M_DRIVE |       |       | 0x0008            | RW     |    |

| Reg    | Name              | Bits            | Bit 7 | Bit 6         | Bit 5 | Bit 4           | Bit 3           | Bit 2 | Bit 1            | Bit 0      | Reset  | RW |
|--------|-------------------|-----------------|-------|---------------|-------|-----------------|-----------------|-------|------------------|------------|--------|----|
| 0xF79E | MISO_SDA_M_PIN    | [15:8]<br>[7:0] |       | RESERVED[2:0] |       | MISO_SDA_M_PULL | MISO_SDA_M_SLEW |       | MISO_SDA_M_DRIVE |            | 0x0008 | RW |
| 0xF79F | SS_M_PIN          | [15:8]<br>[7:0] |       | RESERVED[2:0] |       | SS_M_PULL       | SS_M_SLEW       |       | SS_M_DRIVE       |            | 0x0018 | RW |
| 0xF7A0 | MOSI_M_PIN        | [15:8]<br>[7:0] |       | RESERVED[2:0] |       | MOSI_M_PULL     | MOSI_M_SLEW     |       | MOSI_M_DRIVE     |            | 0x0018 | RW |
| 0xF7A1 | MP6_PIN           | [15:8]<br>[7:0] |       | RESERVED[2:0] |       | MP6_PULL        | MP6_SLEW        |       | MP6_DRIVE        |            | 0x0018 | RW |
| 0xF7A2 | MP7_PIN           | [15:8]<br>[7:0] |       | RESERVED[2:0] |       | MP7_PULL        | MP7_SLEW        |       | MP7_DRIVE        |            | 0x0018 | RW |
| 0xF7A3 | CLKOUT_PIN        | [15:8]<br>[7:0] |       | RESERVED[2:0] |       | CLKOUT_PULL     | CLKOUT_SLEW     |       | CLKOUT_DRIVE     |            | 0x0008 | RW |
| 0xF899 | SECONDPAGE_ENABLE | [15:8]<br>[7:0] |       |               |       |                 | RESERVED[14:7]  |       |                  | PAGE       | 0x0000 | RW |
| 0xF890 | SOFT_RESET        | [15:8]<br>[7:0] |       |               |       |                 | RESERVED[14:7]  |       |                  | SOFT_RESET | 0x0000 | RW |

## CONTROL REGISTER DETAILS

### PLL CONFIGURATION REGISTERS

#### PLL Feedback Divider Register

Address: 0xF000, Reset: 0x0060, Name: PLL\_CTRL0

This register is the value of the feedback divider in the PLL. This value effectively multiplies the frequency of the input clock to the PLL, creating the output system clock, which clocks the DSP core and other digital circuit blocks. The format of the value stored in this register is binary integer in 7.0 format. For example, the default feedback divider value of 96 is stored as 0x60. The value written to this register does not take effect until Register 0xF003 (PLL\_ENABLE), Bit 0 (PLL\_ENABLE) changes state from 0b0 to 0b1.

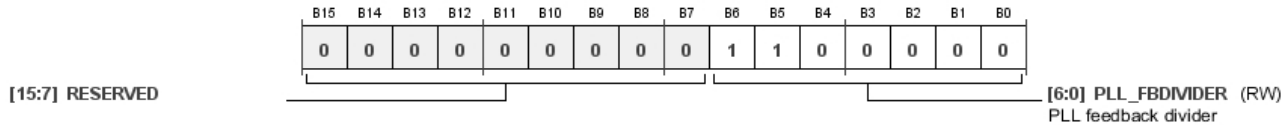


Table 59. Bit Descriptions for PLL\_CTRL0

| Bits   | Bit Name      | Settings | Description   | Reset | Access |
|--------|---------------|----------|---|-------|--------|
| [15:7] | RESERVED      |          |   | 0x0   | RW     |
| [6:0]  | PLL_FBDIVIDER |          | PLL feedback divider. This is the value of the feedback divider in the PLL, which effectively multiplies the frequency of the input clock to the PLL, creating the output system clock, which clocks the DSP core and other digital circuit blocks. The format of the value stored in this register is binary integer in 7.0 format. For example, the default feedback divider value of 96 is stored as 0x60. | 0x60  | RW     |

#### PLL Prescale Divider Register

Address: 0xF001, Reset: 0x0000, Name: PLL\_CTRL1

This register sets the input prescale divider for the PLL. The value written to this register does not take effect until Register 0xF003 (PLL\_ENABLE), Bit 0 (PLL\_ENABLE) changes state from 0b0 to 0b1.

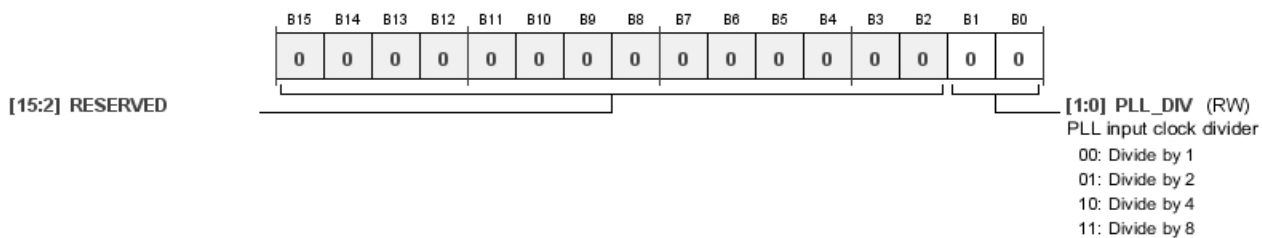


Table 60. Bit Descriptions for PLL\_CTRL1

| Bits   | Bit Name | Settings | Description  | Reset | Access |
|--------|----------|----------|--|-------|--------|
| [15:2] | RESERVED |          |  | 0x0   | RW     |
| [1:0]  | PLL_DIV  |          | PLL input clock divider. This prescale clock divider creates the PLL input clock from the externally input master clock. The nominal frequency of the PLL input is 3.072 MHz. Therefore, if the input master clock frequency is 3.072 MHz, set the prescale clock divider to divide by 1. If the input clock is 12.288 MHz, set the prescale clock divider to divide by 4. The goal is to make the input to the PLL as close to 3.072 MHz as possible. | 0x0   | RW     |
|        |          | 00       | Divide by 1  |       |        |
|        |          | 01       | Divide by 2  |       |        |
|        |          | 10       | Divide by 4  |       |        |
|        |          | 11       | Divide by 8  |       |        |

**PLL Clock Source Register**

Address: 0xF002, Reset: 0x0000, Name: PLL\_CLK\_SRC

This register selects the source of the clock used for input to the core and the clock generators. The clock can either be taken directly from the signal on the XTALIN/MCLK pin or from the output of the PLL. In almost every case, it is recommended to use the PLL clock. The value written to this register does not take effect until Register 0xF003 (PLL\_ENABLE), Bit 0 (PLL\_ENABLE) changes state from 0b0 to 0b1.

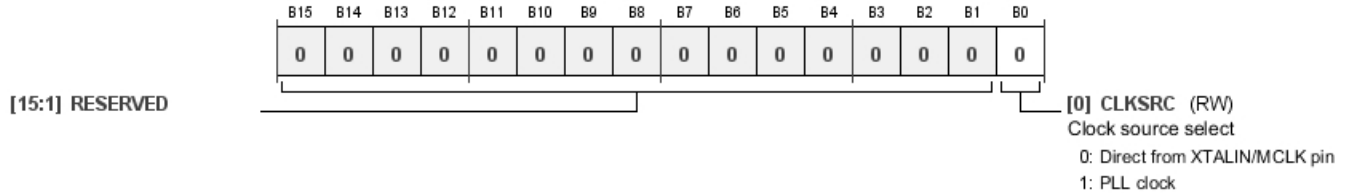


Table 61. Bit Descriptions for PLL\_CLK\_SRC

| Bits   | Bit Name | Settings | Description  | Reset | Access |
|--------|----------|----------|--|-------|--------|
| [15:1] | RESERVED |          |  | 0x0   | RW     |
| 0      | CLKSRC   | 0<br>1   | Clock source select. The PLL output is nominally 294.912 MHz, which is the nominal operating frequency of the core and the clock generator inputs. In most use cases, do not use the direct XTALIN/MCLK input option because the range of allowable frequencies on the XTALIN/MCLK pin is has an upper limit that is significantly lower in frequency than the nominal system clock frequency.<br>0 Direct from XTALIN/MCLK pin<br>1 PLL clock | 0x0   | RW     |

**PLL Enable Register**

Address: 0xF003, Reset: 0x0000, Name: PLL\_ENABLE

This register enables or disables the PLL. The PLL does not attempt to lock to an incoming clock until Bit 0 (PLL\_ENABLE) is enabled. When Bit 0 (PLL\_ENABLE) is set to 0b0, the PLL does not output a clock signal, causing all other clock circuits in the device that rely on the PLL to become idle. When Bit 0 (PLL\_ENABLE) transitions from 0b0 to 0b1, the settings in Register 0xF000 (PLL\_CTRL0), Register 0xF001 (PLL\_CTRL1), Register 0xF002 (PLL\_CLK\_SRC), and Register 0xF005 (MCLK\_OUT) are activated.

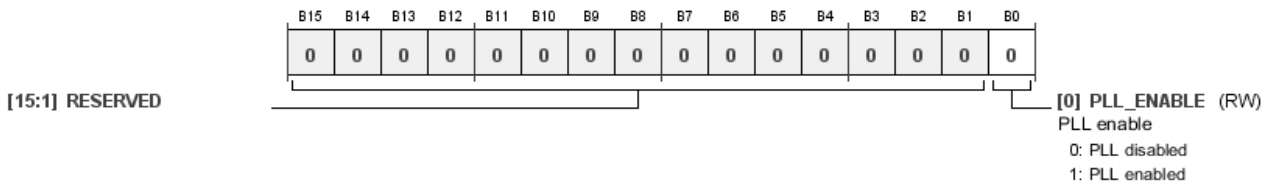


Table 62. Bit Descriptions for PLL\_ENABLE

| Bits   | Bit Name   | Settings | Description   | Reset | Access |
|--------|------------|----------|---|-------|--------|
| [15:1] | RESERVED   |          |   | 0x0   | RW     |
| 0      | PLL_ENABLE | 0<br>1   | PLL enable. Load the values of Register 0xF000, Register 0xF001, Register 0xF002, and Register 0xF005 when this bit transitions from 0b0 to 0b1.<br>0 PLL disabled<br>1 PLL enabled | 0x0   | RW     |

**PLL Lock Register**

Address: 0xF004, Reset: 0x0000, Name: PLL\_LOCK

This register contains a flag that represents the lock status of the PLL. Lock status has four prerequisites: a stable input clock is being routed to the PLL, the related PLL registers (Register 0xF000 (PLL\_CTRL0), Register 0xF001 (PLL\_CTRL1), and Register 0xF002 (PLL\_CLK\_SRC)) are set appropriately, the PLL is enabled (Register 0xF003 (PLL\_ENABLE), Bit 0 (PLL\_ENABLE) = 0b1), and the PLL has had adequate time to adjust its feedback path and provide a stable output clock to the rest of the device. The amount of time required to achieve lock to a new input clock signal varies based on system conditions, so Bit 0 (PLL\_LOCK) provides a clear indication of when lock has been achieved.

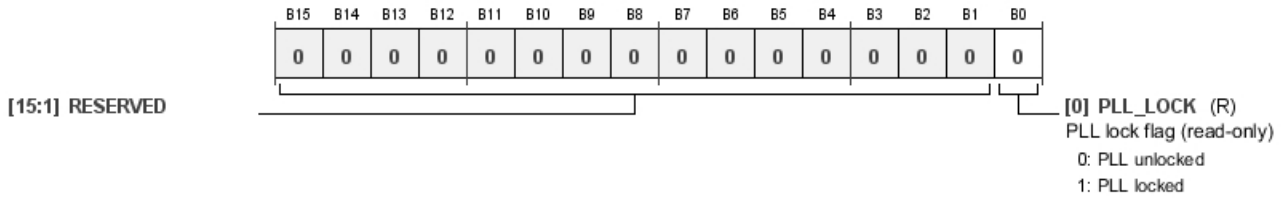


Table 63. Bit Descriptions for PLL\_LOCK


| Bits   | Bit Name | Settings | Description  | Reset | Access |
|--------|----------|----------|--|-------|--------|
| [15:1] | RESERVED |          |  | 0x0   | RW     |
| 0      | PLL_LOCK | 0<br>1   | PLL lock flag (read only).<br>PLL unlocked<br>PLL locked | 0x0   | R      |



**CLKOUT Control Register**

Address: 0xF005, Reset: 0x0000, Name: MCLK\_OUT

This register enables and configures the signal output from the CLKOUT pin. The value written to this register does not take effect until Register 0xF003 (PLL\_ENABLE), Bit 0 (PLL\_ENABLE), changes state from 0b0 to 0b1.

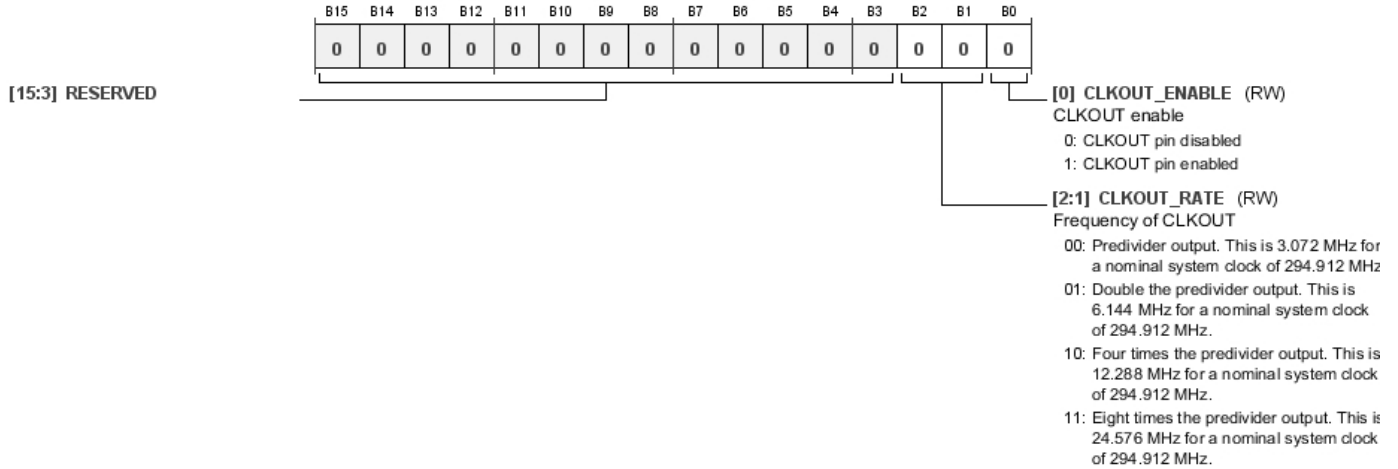

**Table 64. Bit Descriptions for MCLK\_OUT**

| Bits   | Bit Name      | Settings | Description   | Reset | Access |
|--------|---------------|----------|---|-------|--------|
| [15:3] | RESERVED      |          |   | 0x0   | RW     |
| [2:1]  | CLKOUT_RATE   |          | Frequency of CLKOUT. Frequency of the signal output from the CLKOUT pin. These bits set the frequency of the signal on the CLKOUT pin. The frequencies documented in Table 64 are examples that are valid for a master clock input that is a binary multiple of 3.072 MHz. In this case, the options for output rates are 3.072 MHz, 6.144 MHz, 12.288 MHz, or 24.576 MHz. If the input master clock is scaled down (for example, to a binary multiple of 2.8224 MHz), the possible output rates are 2.8224 MHz, 5.6448 MHz, 11.2896 MHz, or 22.5792 MHz.<br><br>00 Predivider output. This is 3.072 MHz for a nominal system clock of 294.912 MHz.<br>01 Double the predivider output. This is 6.144 MHz for a nominal system clock of 294.912 MHz.<br>10 Four times the predivider output. This is 12.288 MHz for a nominal system clock of 294.912 MHz.<br>11 Eight times the predivider output. This is 24.576 MHz for a nominal system clock of 294.912 MHz. | 0x0   | RW     |
| 0      | CLKOUT_ENABLE |          | CLKOUT enable. When this bit is enabled, a clock signal is output from the CLKOUT pin of the device. When disabled, the CLKOUT pin is high impedance.<br><br>0 CLKOUT pin disabled<br>1 CLKOUT pin enabled  | 0x0   | RW     |

**Analog PLL Watchdog Control Register**

Address: 0xF006, Reset: 0x0001, Name: PLL\_WATCHDOG

The PLL watchdog is a feature that monitors the PLL and automatically resets it in the event that it reaches an unstable condition. The PLL resets itself and automatically attempts to lock to the incoming clock signal again, with the same settings as before. This functionality requires no interaction on the part of the user. Ensure that the PLL watchdog is enabled at all times.

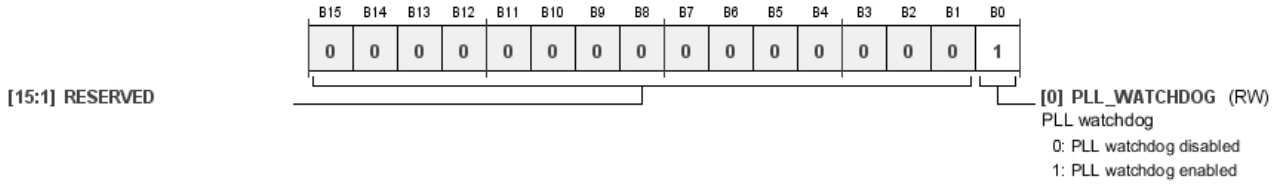


Table 65. Bit Descriptions for PLL\_WATCHDOG

| Bits   | Bit Name     | Settings | Description  | Reset | Access |
|--------|--------------|----------|--|-------|--------|
| [15:1] | RESERVED     |          |  | 0x0   | RW     |
| 0      | PLL_WATCHDOG | 0<br>1   | PLL watchdog.<br>PLL watchdog disabled<br>PLL watchdog enabled | 0x1   | RW     |

**CLOCK GENERATOR REGISTERS**

**Denominator (M) for Clock Generator 1 Register**

Address: 0xF020, Reset: 0x0006, Name: CLK\_GEN1\_M

This register contains the denominator (M) for Clock Generator 1.

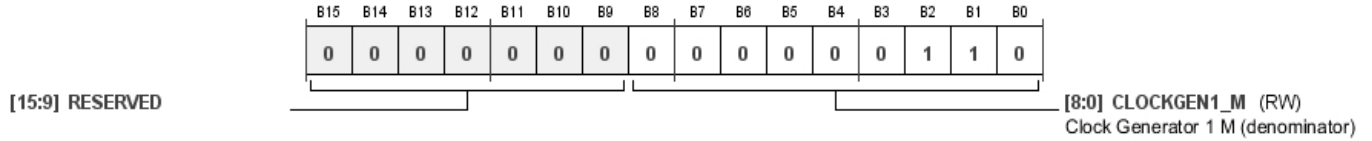


Table 66. Bit Descriptions for CLK\_GEN1\_M

| Bits   | Bit Name    | Settings | Description  | Reset | Access |
|--------|-------------|----------|--|-------|--------|
| [15:9] | RESERVED    |          |  | 0x0   | RW     |
| [8:0]  | CLOCKGEN1_M |          | Clock Generator 1 M (denominator). Format is binary integer. | 0x006 | RW     |

**Numerator (N) for Clock Generator 1 Register**

Address: 0xF021, Reset: 0x0001, Name: CLK\_GEN1\_N

This register contains the numerator (N) for Clock Generator 1.

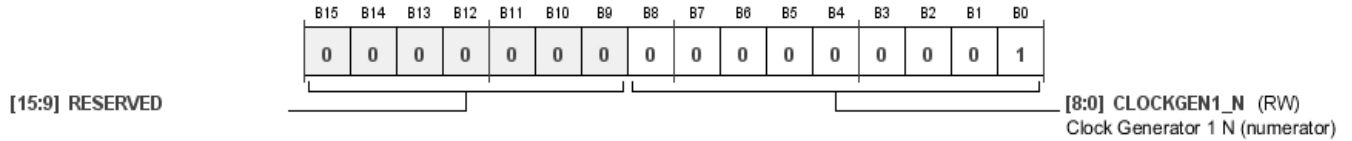


Table 67. Bit Descriptions for CLK\_GEN1\_N

| Bits   | Bit Name    | Settings | Description  | Reset | Access |
|--------|-------------|----------|--|-------|--------|
| [15:9] | RESERVED    |          |  | 0x0   | RW     |
| [8:0]  | CLOCKGEN1_N |          | Clock Generator 1 N (numerator). Format is binary integer. | 0x001 | RW     |

**Denominator (M) for Clock Generator 2 Register**

Address: 0xF022, Reset: 0x0009, Name: CLK\_GEN2\_M

This register contains the denominator (M) for Clock Generator 2.

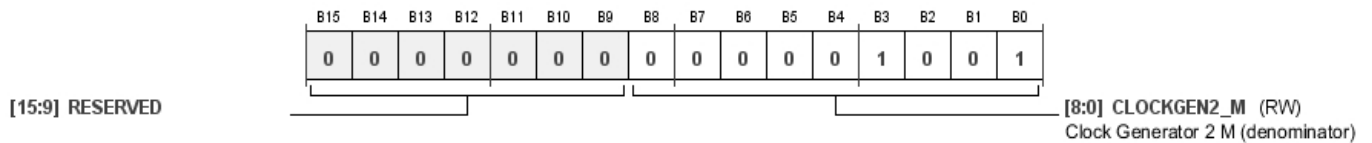


Table 68. Bit Descriptions for CLK\_GEN2\_M

| Bits   | Bit Name    | Settings | Description  | Reset | Access |
|--------|-------------|----------|--|-------|--------|
| [15:9] | RESERVED    |          |  | 0x0   | RW     |
| [8:0]  | CLOCKGEN2_M |          | Clock Generator 2 M (denominator). Format is binary integer. | 0x009 | RW     |

**Numerator (N) for Clock Generator 2 Register**

Address: 0xF023, Reset: 0x0001, Name: CLK\_GEN2\_N

This register contains the numerator (N) for Clock Generator 2.

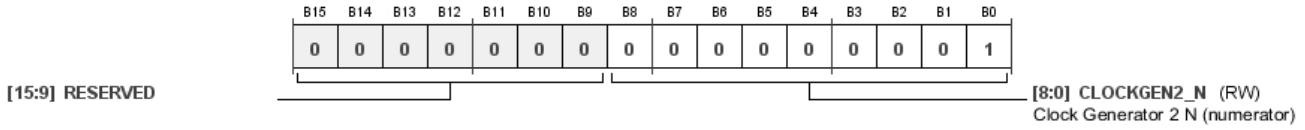


Table 69. Bit Descriptions for CLK\_GEN2\_N

| Bits   | Bit Name    | Settings | Description  | Reset | Access |
|--------|-------------|----------|--|-------|--------|
| [15:9] | RESERVED    |          |  | 0x0   | RW     |
| [8:0]  | CLOCKGEN2_N |          | Clock Generator 2 N (numerator). Format is binary integer. | 0x001 | RW     |

**Denominator (M) for Clock Generator 3 Register**

Address: 0xF024, Reset: 0x0000, Name: CLK\_GEN3\_M

This register contains the denominator (M) for Clock Generator 3.

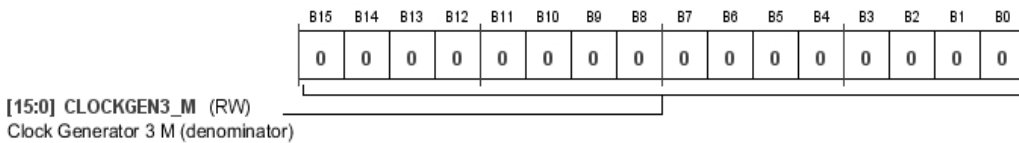


Table 70. Bit Descriptions for CLK\_GEN3\_M

| Bits   | Bit Name    | Settings | Description  | Reset  | Access |
|--------|-------------|----------|--|--------|--------|
| [15:0] | CLOCKGEN3_M |          | Clock Generator 3 M (denominator). Format is binary integer. | 0x0000 | RW     |

**Numerator for (N) Clock Generator 3 Register**

Address: 0xF025, Reset: 0x0000, Name: CLK\_GEN3\_N

This register contains the numerator (N) for Clock Generator 3.

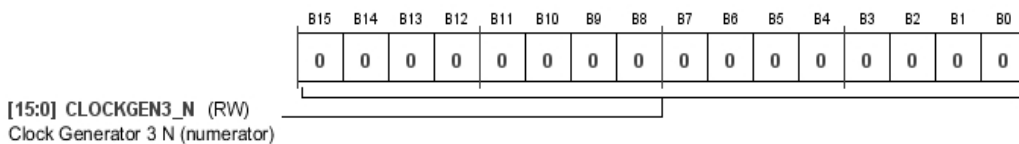


Table 71. Bit Descriptions for CLK\_GEN3\_N

| Bits   | Bit Name    | Settings | Description  | Reset  | Access |
|--------|-------------|----------|--|--------|--------|
| [15:0] | CLOCKGEN3_N |          | Clock Generator 3 N (numerator). Format is binary integer. | 0x0000 | RW     |

**Input Reference for Clock Generator 3 Register**

Address: 0xF026, Reset: 0x000E, Name: CLK\_GEN3\_SRC

Clock Generator 3 can generate audio clocks using the PLL output (system clock) as a reference, or it can optionally use a reference clock entering the device from an external source either on a multipurpose pin (MPx) or the S/PDIF receiver. This register determines the source of the reference signal.

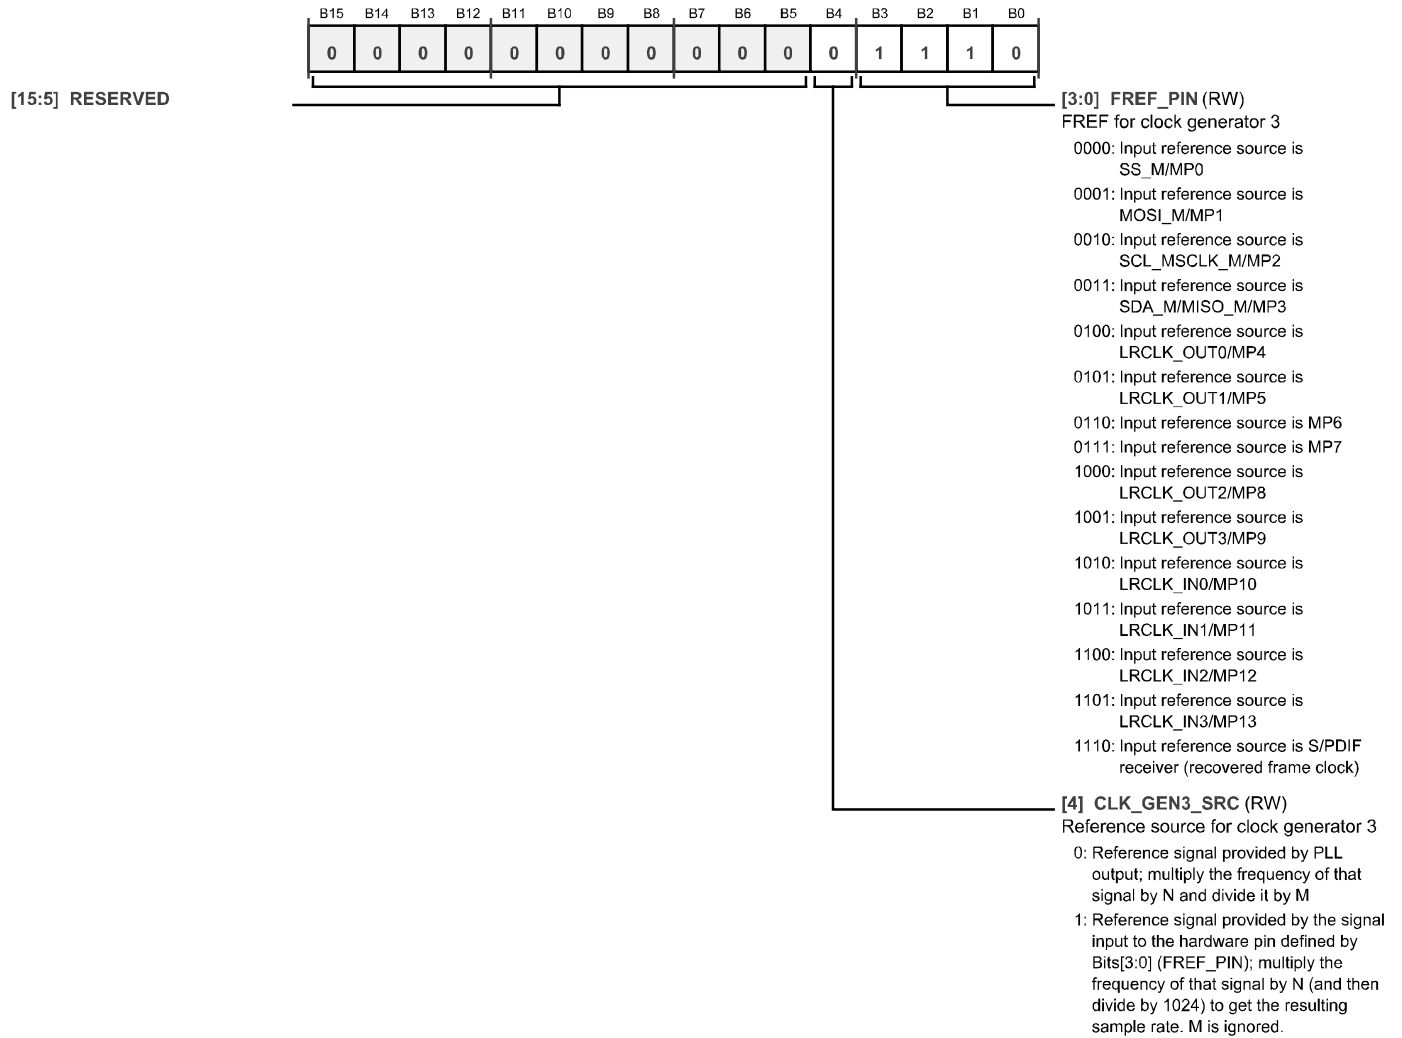



Table 72. Bit Descriptions for CLK\_GEN3\_SRC

| Bits   | Bit Name     | Settings  | Description   | Reset | Access |
|--------|--------------|---|---|-------|--------|
| [15:5] | RESERVED     |   |   | 0x0   | RW     |
| 4      | CLK_GEN3_SRC | <p>0 Reference signal provided by PLL output; multiply the frequency of that signal by N and divide it by M.</p> <p>1 Reference signal provided by the signal input to the hardware pin defined by Bits[3:0] (FREF_PIN); multiply the frequency of that signal by N (and then divide by 1024) to get the resulting sample rate. M is ignored.</p>   | Reference source for Clock Generator 3. This bit selects the reference of Clock Generator 3. If set to use an external reference clock, Bits[3:0] define the source pin. Otherwise, the PLL output is used as the reference clock. When an external reference clock is used for Clock Generator 3, the resulting base output frequency of Clock Generator 3 is the frequency of the input reference clock multiplied by the Clock Generator 3 numerator, divided by 1024. For example: if Bit 4 (CLK_GEN3_SRC) = 0b1 (an external reference clock is used); Bits[3:0] (FREF_PIN) = 0b1110 (the input signal of the S/PDIF receiver is used as the reference source); the sample rate of the S/PDIF input signal = 48 kHz; and the numerator of Clock Generator 3 = 2048; the resulting base output sample rate of Clock Generator 3 is 48 kHz × 2048/1024 = 96 kHz. | 0x0   | RW     |
| [3:0]  | FREF_PIN     | <p>0000 Input reference source is SS_M/MP0</p> <p>0001 Input reference source is MOSI_M/MP1</p> <p>0010 Input reference source is SCL_M/SCLK_M/MP2</p> <p>0011 Input reference source is SDA_M/MISO_M/MP3</p> <p>0100 Input reference source is LRCLK_OUT0/MP4</p> <p>0101 Input reference source is LRCLK_OUT1/MP5</p> <p>0110 Input reference source is MP6</p> <p>0111 Input reference source is MP7</p> <p>1000 Input reference source is LRCLK_OUT2/MP8</p> <p>1001 Input reference source is LRCLK_OUT3/MP9</p> <p>1010 Input reference source is LRCLK_IN0/MP10</p> <p>1011 Input reference source is LRCLK_IN1/MP11</p> <p>1100 Input reference source is LRCLK_IN2/MP12</p> <p>1101 Input reference source is LRCLK_IN3/MP13</p> <p>1110 Input reference source is S/PDIF receiver (recovered frame clock)</p> | Input reference for Clock Generator 3. If Clock Generator 3 is set up to lock to an external reference clock (Bit 4 (CLK_GEN3_SRC) = 0b1), these bits allow the user to specify which pin is receiving the reference clock. The signal input to the corresponding pin must be a 50% duty cycle square wave clock representing the reference sample rate.  | 0xE   | RW     |

**Lock Bit for Clock Generator 3 Input Reference Register**

Address: 0xF027, Reset: 0x0000, Name: CLK\_GEN3\_LOCK

This register monitors whether or not Clock Generator 3 has locked to its reference clock source, regardless of whether it is coming from the PLL output or from an external reference signal, which is configured in Register 0xF026, Bit 4 (CLK\_GEN3\_SRC).

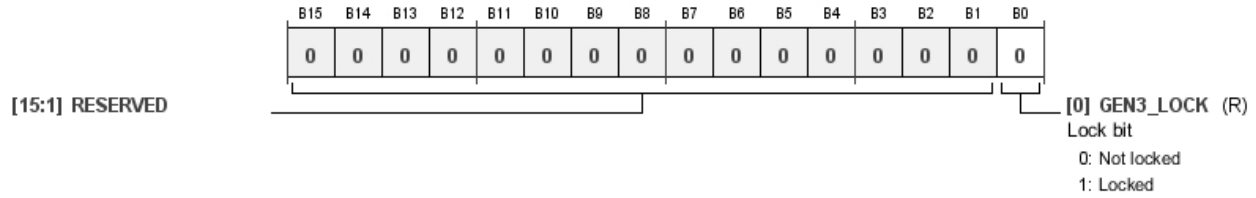

**Table 73. Bit Descriptions for CLK\_GEN3\_LOCK**


| Bits   | Bit Name  | Settings | Description                       | Reset | Access |
|--------|-----------|----------|-----------------------------------|-------|--------|
| [15:1] | RESERVED  |          |                                   | 0x0   | RW     |
| 0      | GEN3_LOCK | 0<br>1   | Lock bit.<br>Not locked<br>Locked | 0x0   | R      |

**POWER REDUCTION REGISTERS**

**Power Enable 0 Register**

Address: 0xF050, Reset: 0x0000, Name: POWER\_ENABLE0

For the purpose of power savings, this register allows the clock generators, ASRCs, and serial ports to be disabled when not in use. When these functional blocks are disabled, the current draw on the corresponding supply pins decreases.

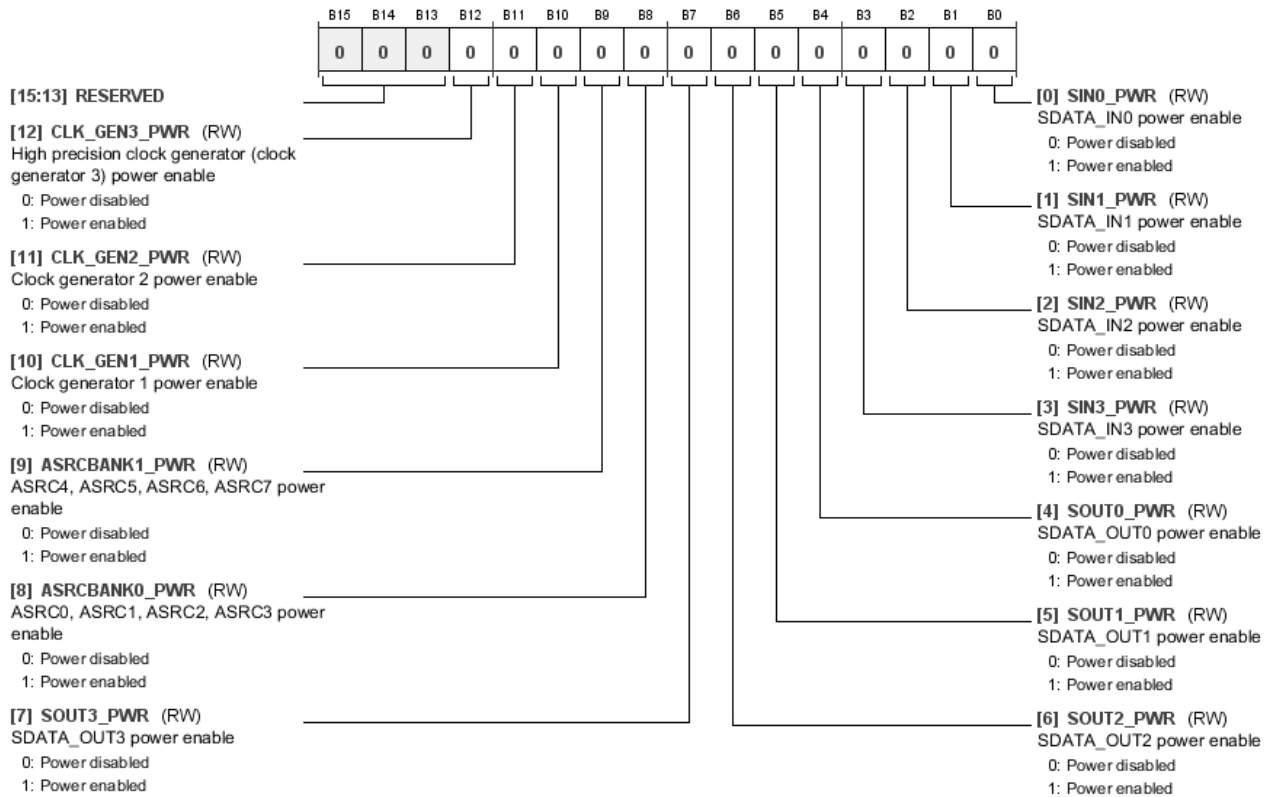

**Table 74. Bit Descriptions for POWER\_ENABLE0**

| Bits    | Bit Name     | Settings | Description  | Reset | Access |
|---------|--------------|----------|--|-------|--------|
| [15:13] | RESERVED     |          |  | 0x0   | RW     |
| 12      | CLK_GEN3_PWR | 0<br>1   | High precision clock generator (Clock Generator 3) power enable. When this bit is disabled, Clock Generator 3 is disabled and ceases to output audio clocks. Any functional block in hardware, including the DSP core, that has been configured to be clocked by Clock Generator 3 ceases to function while this bit is disabled.<br>0 Power disabled<br>1 Power enabled   | 0x0   | RW     |
| 11      | CLK_GEN2_PWR | 0<br>1   | Clock Generator 2 power enable. When this bit is disabled, Clock Generator 2 is disabled and ceases to output audio clocks. Any LRCLK_OUTx, LRCLK_INx or BCLK_OUTx, BCLK_INx pins that have been configured to output clocks generated by Clock Generator 2 output a logic low signal while Clock Generator 2 is disabled. Any functional block in hardware, including the DSP core, that has been configured to be clocked by Clock Generator 2 ceases to function while this bit is disabled.<br>0 Power disabled<br>1 Power enabled | 0x0   | RW     |




| Bits | Bit Name      | Settings | Description   | Reset | Access |
|------|---------------|----------|---|-------|--------|
| 10   | CLK_GEN1_PWR  | 0<br>1   | Clock Generator 1 power enable. When this bit is disabled, Clock Generator 1 is disabled and ceases to output audio clocks. Any LRCLK_OUTx, LRCLK_INx or BCLK_OUTx, BCLK_INx pins that are configured to output clocks generated by Clock Generator 1 output a logic low signal while Clock Generator 1 is disabled. Any functional block in hardware, including the DSP core, that is configured to be clocked by Clock Generator 1 ceases to function when this bit is disabled.<br>Power disabled<br>Power enabled | 0x0   | RW     |
| 9    | ASRCBANK1_PWR | 0<br>1   | ASRC 4, ASRC 5, ASRC 6, ASRC 7 power enable. When this bit is disabled, ASRC Channel 8 to Channel 15 are disabled, and their output data streams cease.<br>Power disabled<br>Power enabled  | 0x0   | RW     |
| 8    | ASRCBANK0_PWR | 0<br>1   | ASRC 0, ASRC 1, ASRC 2, ASRC 3 power enable. When this bit is disabled, ASRC Channel 0 to Channel 7 are disabled, and their output data streams cease.<br>Power disabled<br>Power enabled   | 0x0   | RW     |
| 7    | SOUT3_PWR     | 0<br>1   | SDATA_OUT3 power enable. When this bit is disabled, the SDATA_OUT3 pin and associated serial port circuitry are also disabled. LRCLK_OUT3 and BCLK_OUT3 are not affected.<br>Power disabled<br>Power enabled  | 0x0   | RW     |
| 6    | SOUT2_PWR     | 0<br>1   | SDATA_OUT2 power enable. When this bit is disabled, the SDATA_OUT2 pin and associated serial port circuitry is disabled. LRCLK_OUT2 and BCLK_OUT2 are not affected.<br>Power disabled<br>Power enabled  | 0x0   | RW     |
| 5    | SOUT1_PWR     | 0<br>1   | SDATA_OUT1 power enable. When this bit is disabled, the SDATA_OUT1 pin and associated serial port circuitry are also disabled. LRCLK_OUT1 and BCLK_OUT1 are not affected.<br>Power disabled<br>Power enabled  | 0x0   | RW     |
| 4    | SOUT0_PWR     | 0<br>1   | SDATA_OUT0 power enable. When this bit is disabled, the SDATA_OUT0 pin and associated serial port circuitry are disabled. LRCLK_OUT0 and BCLK_OUT0 are not affected.<br>Power disabled<br>Power enabled   | 0x0   | RW     |
| 3    | SIN3_PWR      | 0<br>1   | SDATA_IN3 power enable. When this bit is disabled, the SDATA_IN3 pin and associated serial port circuitry are disabled. LRCLK_IN3 and BCLK_IN3 are not affected.<br>Power disabled<br>Power enabled   | 0x0   | RW     |
| 2    | SIN2_PWR      | 0<br>1   | SDATA_IN2 power enable. When this bit is disabled, the SDATA_IN2 pin and associated serial port circuitry are disabled. LRCLK_IN2 and BCLK_IN2 are not affected.<br>Power disabled<br>Power enabled   | 0x0   | RW     |
| 1    | SIN1_PWR      | 0<br>1   | SDATA_IN1 power enable. When this bit is disabled, the SDATA_IN1 pin and associated serial port circuitry are disabled. The LRCLK_IN1 and BCLK_IN1 pins are not affected.<br>Power disabled<br>Power enabled  | 0x0   | RW     |
| 0    | SIN0_PWR      | 0<br>1   | SDATA_IN0 power enable. When this bit is disabled, the SDATA_IN0 pin and associated serial port circuitry are disabled. The LRCLK_IN0 and BCLK_IN0 pins are not affected.<br>Power disabled<br>Power enabled  | 0x0   | RW     |

**Power Enable 1 Register**

Address: 0xF051, Reset: 0x0000, Name: POWER\_ENABLE1

For the purpose of power savings, this register allows the PDM microphone interfaces, S/PDIF interfaces, and auxiliary ADCs to be disabled when not in use. When these functional blocks are disabled, the current draw on the corresponding supply pins decreases.

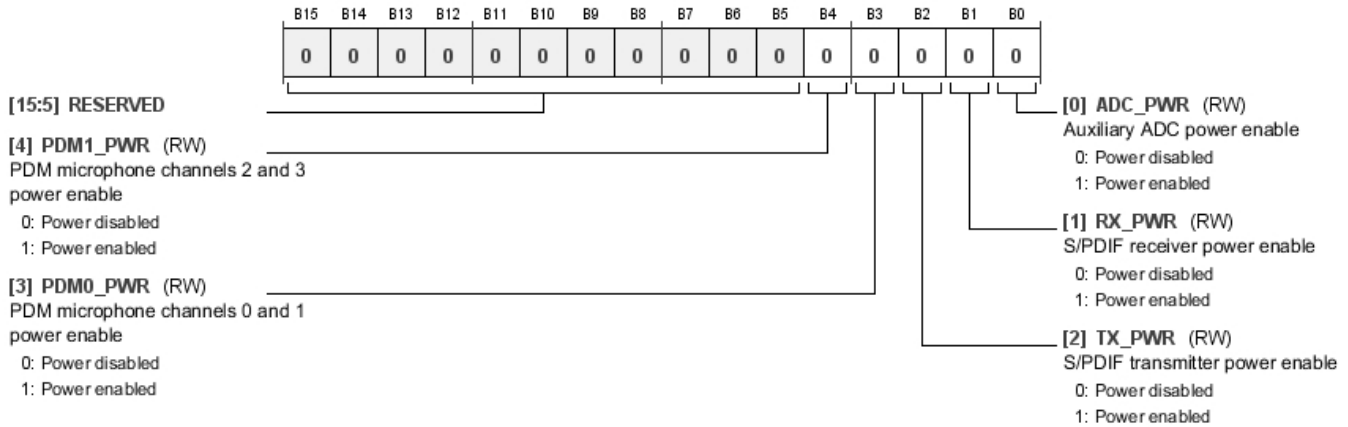

**Table 75. Bit Descriptions for POWER\_ENABLE1**

| Bits   | Bit Name | Settings | Description   | Reset | Access |
|--------|----------|----------|---|-------|--------|
| [15:5] | RESERVED |          |   | 0x0   | RW     |
| 4      | PDM1_PWR | 0<br>1   | PDM Microphone Channel 2 and PDM Microphone Channel 3 power enable. When this bit is disabled, PDM Microphone Channel 2 and PDM Microphone Channel 3 and their associated circuitry are disabled, and their data values cease to update.<br>0 Power disabled<br>1 Power enabled | 0x0   | RW     |
| 3      | PDM0_PWR | 0<br>1   | PDM Microphone Channel 0 and PDM Microphone Channel 1 power enable. When this bit is disabled, PDM Microphone Channel 0 and PDM Microphone Channel 1 and their associated circuitry are disabled, and their data values cease to update.<br>0 Power disabled<br>1 Power enabled | 0x0   | RW     |
| 2      | TX_PWR   | 0<br>1   | S/PDIF transmitter power enable. This bit disables the S/PDIF transmitter circuit. Clock and data ceases to output from the S/PDIF transmitter pin, and the output is held at logic low as long as this bit is disabled.<br>0 Power disabled<br>1 Power enabled                 | 0x0   | RW     |
| 1      | RX_PWR   | 0<br>1   | S/PDIF receiver power enable. This bit disables the S/PDIF receiver circuit. Clock and data recovery from the S/PDIF input stream ceases until this bit is reenabled.<br>0 Power disabled<br>1 Power enabled  | 0x0   | RW     |
| 0      | ADC_PWR  | 0<br>1   | Auxiliary ADC power enable. When this bit is disabled, the auxiliary ADCs are powered down, their outputs cease to update, and they hold their last value.<br>0 Power disabled<br>1 Power enabled   | 0x0   | RW     |

**AUDIO SIGNAL ROUTING REGISTERS**

**ASRC Input Selector Register**

Address: 0xF100 to Address 0xF107 (Increments of 0x1), Reset: 0x0000, Name: ASRC\_INPUTx

These eight registers configure the input signal to the corresponding eight stereo ASRCs on the ADAU1466 and ADAU1462. ASRC\_INPUT0 configures ASRC Channel 0 and ASRC Channel 1, ASRC\_INPUT1 configures ASRC Channel 2 and ASRC Channel 3, and so on. Valid input signals to the ASRCs include Serial Input Channel 0 to Serial Input Channel 47, the PDM Microphone Input Channel 0 to PDM Microphone Input Channel 3, and the S/PDIF Receiver Channel 0 to S/PDIF Receiver Channel 1.

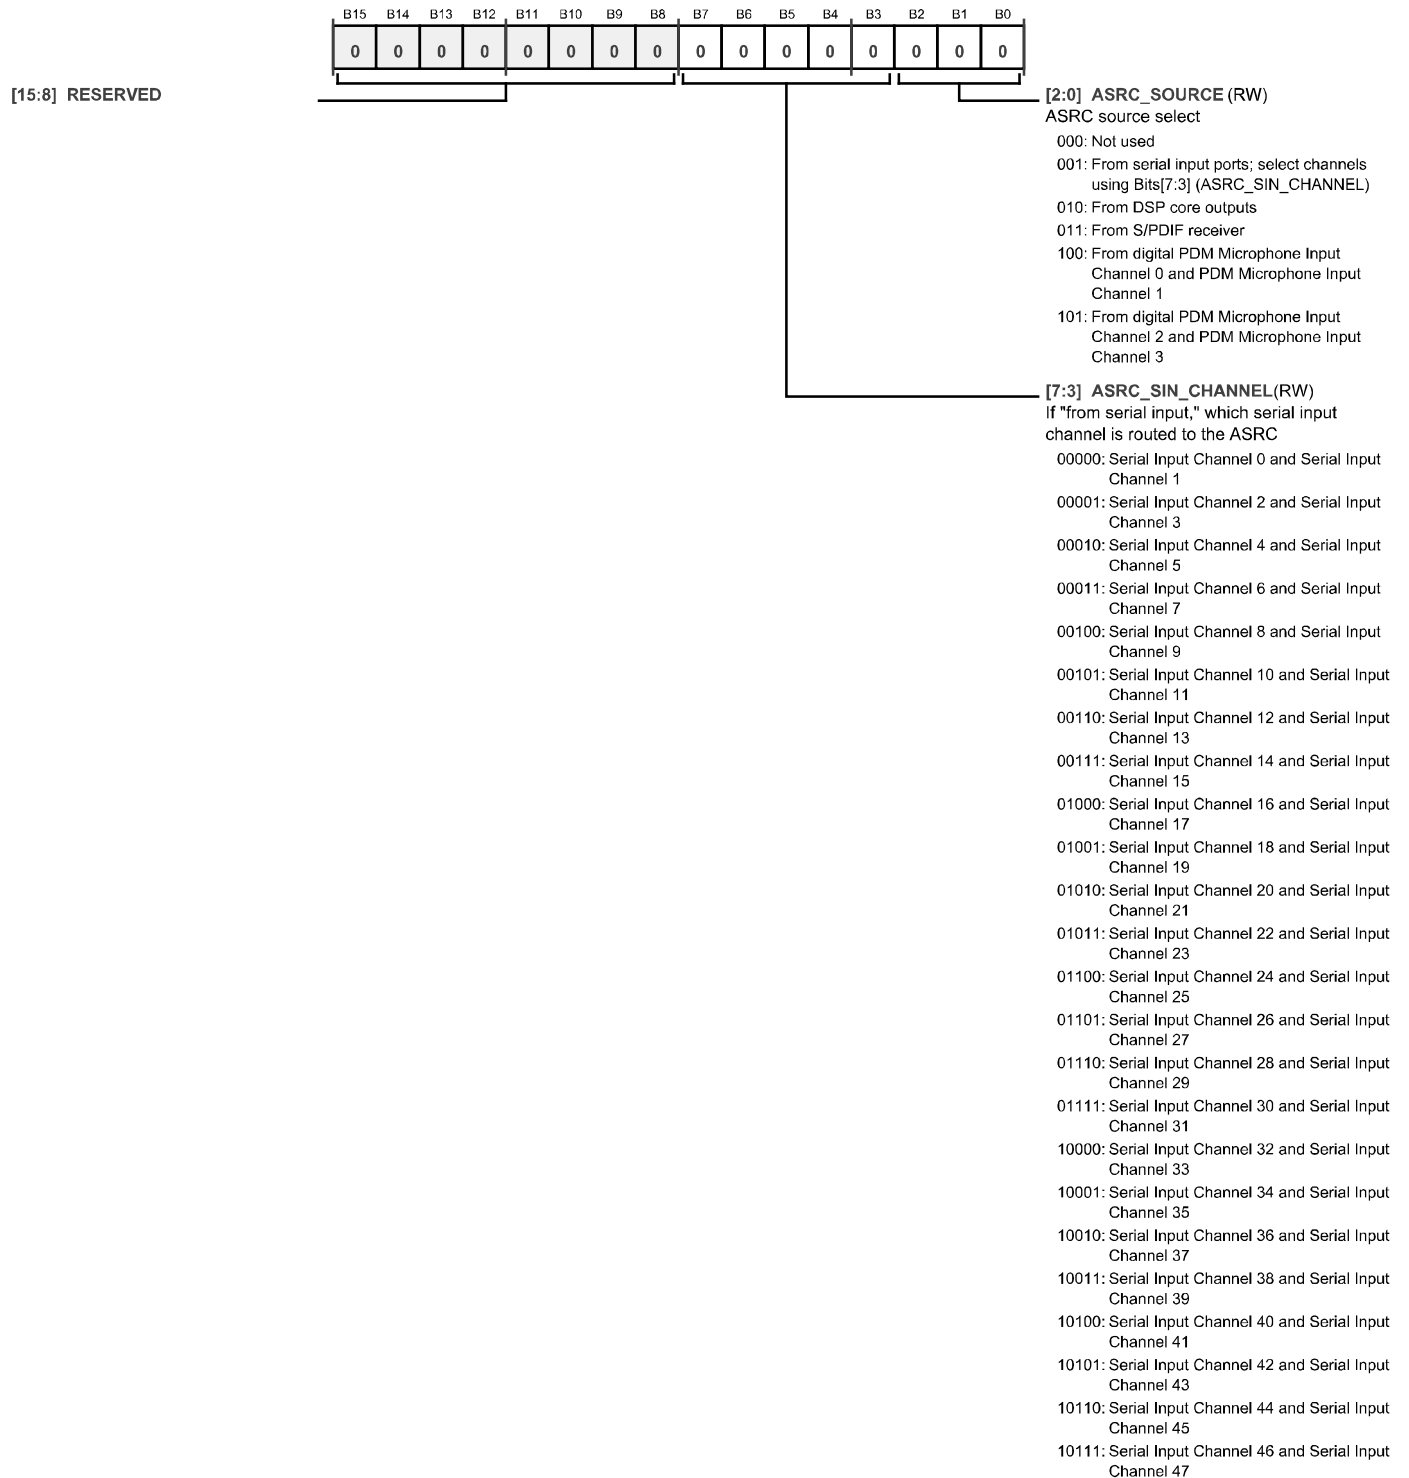


Table 76. Bit Descriptions for ASRC\_INPUTx

| Bits   | Bit Name         | Settings   | Description   | Reset | Access |
|--------|------------------|--|---|-------|--------|
| [15:8] | RESERVED         |  |   | 0x0   | RW     |
| [7:3]  | ASRC_SIN_CHANNEL | 00000 Serial Input Channel 0 and Serial Input Channel 1<br>00001 Serial Input Channel 2 and Serial Input Channel 3<br>00010 Serial Input Channel 4 and Serial Input Channel 5<br>00011 Serial Input Channel 6 and Serial Input Channel 7<br>00100 Serial Input Channel 8 and Serial Input Channel 9<br>00101 Serial Input Channel 10 and Serial Input Channel 11<br>00110 Serial Input Channel 12 and Serial Input Channel 13<br>00111 Serial Input Channel 14 and Serial Input Channel 15<br>01000 Serial Input Channel 16 and Serial Input Channel 17<br>01001 Serial Input Channel 18 and Serial Input Channel 19<br>01010 Serial Input Channel 20 and Serial Input Channel 21<br>01011 Serial Input Channel 22 and Serial Input Channel 23<br>01100 Serial Input Channel 24 and Serial Input Channel 25<br>01101 Serial Input Channel 26 and Serial Input Channel 27<br>01110 Serial Input Channel 28 and Serial Input Channel 29<br>01111 Serial Input Channel 30 and Serial Input Channel 31<br>10000 Serial Input Channel 32 and Serial Input Channel 33<br>10001 Serial Input Channel 34 and Serial Input Channel 35<br>10010 Serial Input Channel 36 and Serial Input Channel 37<br>10011 Serial Input Channel 38 and Serial Input Channel 39<br>10100 Serial Input Channel 40 and Serial Input Channel 41<br>10101 Serial Input Channel 42 and Serial Input Channel 43<br>10110 Serial Input Channel 44 and Serial Input Channel 45<br>10111 Serial Input Channel 46 and Serial Input Channel 47 | If Bits[2:0] (ASRC_SOURCE) = 0b001, these bits select which serial input channel is routed to the ASRC. | 0x00  | RW     |
| [2:0]  | ASRC_SOURCE      | 000 Not used<br>001 From serial input ports; select channels using Bits[7:3] (ASRC_SIN_CHANNEL)<br>010 From DSP core outputs<br>011 From S/PDIF receiver<br>100 From digital PDM Microphone Input Channel 0 and PDM Microphone Input Channel 1<br>101 From digital PDM Microphone Input Channel 2 and PDM Microphone Input Channel 3   | ASRC source select.   | 0x0   | RW     |

**ASRC Output Rate Selector Register**

**Address: 0xF140 to Address 0xF147 (Increments of 0x1), Reset: 0x0000, Name: ASRC\_OUT\_RATEx**

These eight registers configure the target output sample rates of the corresponding eight stereo ASRCs on the ADAU1466 and ADAU1462. The ASRC takes any arbitrary input sample rate and automatically attempts to resample the data in that signal and output it at the target sample rate as configured by these registers. Each of the eight registers corresponds to one of the eight stereo ASRCs. ASRC\_OUT\_RATE0 configures ASRC Channel 0 and ASRC Channel 1, ASRC\_INPUT1 configures ASRC Channel 2 and ASRC Channel 3, ASRC\_OUT\_RATE2 configures ASRC Channel 4 and ASRC Channel 5, ASRC\_OUT\_RATE3 configures ASRC Channel 6 and ASRC Channel 7, ASRC\_OUT\_RATE4 configures ASRC Channel 8 and ASRC Channel 9, ASRC\_OUT\_RATE5 configures ASRC Channel 10 and ASRC Channel 11, ASRC\_OUT\_RATE6 configures ASRC Channel 12 and ASRC Channel 13, and ASRC\_OUT\_RATE7 configures ASRC Channel 14 and ASRC Channel 15. The ASRCs lock their output frequencies to the audio sample rates of any of the serial output ports, the DSP start pulse rate of the core, or one of several internally generated sample rates coming from the clock generators.

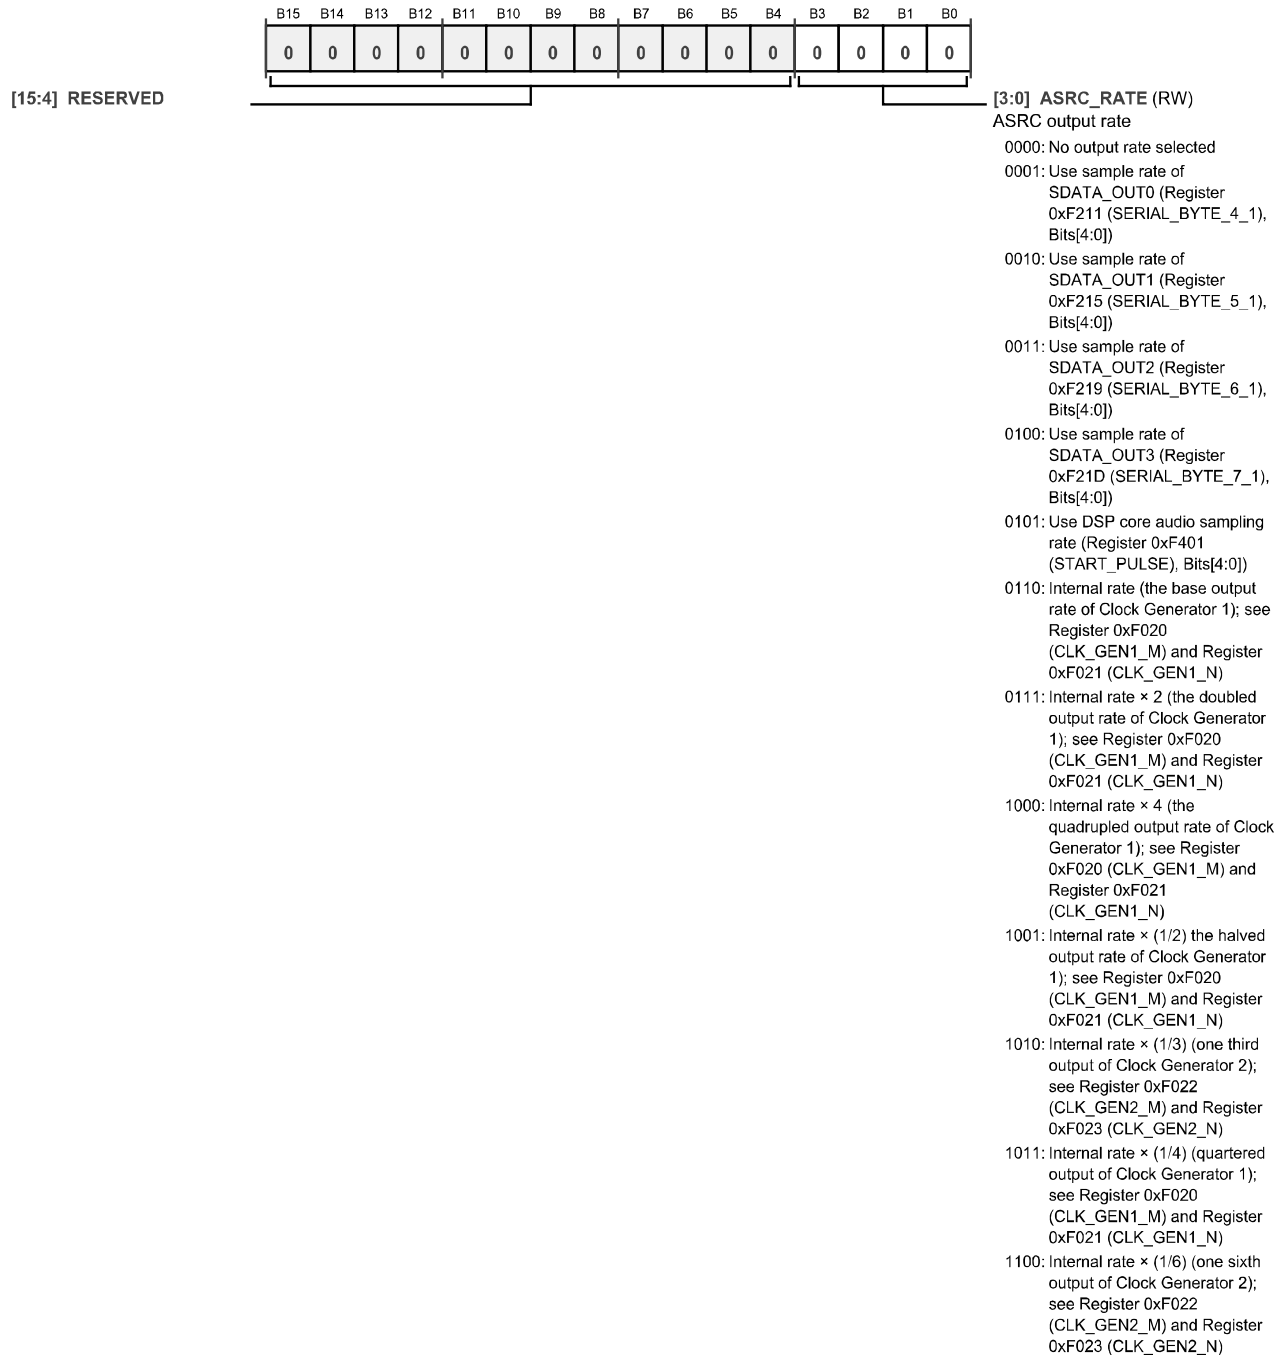



Table 77. Bit Descriptions for ASRC\_OUT\_RATEx

| Bits   | Bit Name  | Settings | Description  | Reset | Access |
|--------|-----------|----------|--|-------|--------|
| [15:4] | RESERVED  |          |  | 0x0   | RW     |
| [3:0]  | ASRC_RATE |          | ASRC target audio output sample rate. The corresponding ASRC can lock its output to a serial output port, the DSP core, or an internally generated rate. | 0x0   | RW     |
|        |           | 0000     | No output rate selected  |       |        |
|        |           | 0001     | Use sample rate of SDATA_OUT0 (Register 0xF211 (SERIAL_BYTE_4_1), Bits[4:0])   |       |        |
|        |           | 0010     | Use sample rate of SDATA_OUT1 (Register 0xF215 (SERIAL_BYTE_5_1), Bits[4:0])   |       |        |
|        |           | 0011     | Use sample rate of SDATA_OUT2 (Register 0xF219 (SERIAL_BYTE_6_1), Bits[4:0])   |       |        |
|        |           | 0100     | Use sample rate of SDATA_OUT3 (Register 0xF21D (SERIAL_BYTE_7_1), Bits[4:0])   |       |        |
|        |           | 0101     | Use DSP core audio sampling rate (Register 0xF401 (START_PULSE), Bits[4:0])  |       |        |
|        |           | 0110     | Internal rate (the base output rate of Clock Generator 1); see Register 0xF020 (CLK_GEN1_M) and Register 0xF021 (CLK_GEN1_N)                             |       |        |
|        |           | 0111     | Internal rate × 2 (the doubled output rate of Clock Generator 1); see Register 0xF020 (CLK_GEN1_M) and Register 0xF021 (CLK_GEN1_N)                      |       |        |
|        |           | 1000     | Internal rate × 4 (the quadrupled output rate of Clock Generator 1); see Register 0xF020 (CLK_GEN1_M) and Register 0xF021 (CLK_GEN1_N)                   |       |        |
|        |           | 1001     | Internal rate × (1/2) the halved output rate of Clock Generator 1; see Register 0xF020 (CLK_GEN1_M) and Register 0xF021 (CLK_GEN1_N)                     |       |        |
|        |           | 1010     | Internal rate × (1/3) (one-third output of Clock Generator 2); see Register 0xF022 (CLK_GEN2_M) and Register 0xF023 (CLK_GEN2_N)                         |       |        |
|        |           | 1011     | Internal rate × (1/4) (quartered output of Clock Generator 1); see Register 0xF020 (CLK_GEN1_M) and Register 0xF021 (CLK_GEN1_N)                         |       |        |
|        |           | 1100     | Internal rate × (1/6) (one-sixth output of Clock Generator 2); see Register 0xF022 (CLK_GEN2_M) and Register 0xF023 (CLK_GEN2_N)                         |       |        |

**Source of Data for Serial Output Ports Register**

**Address: 0xF180 to 0xF197 (Increments of 0x1), Reset: 0x0000, Name: SOUT\_SOURCEx**

These 24 registers correspond to the 24 pairs of output channels used by the serial output ports. Each register corresponds to two audio channels. SOUT\_SOURCE0 corresponds to Channel 0 and Channel 1, SOUT\_SOURCE1 corresponds to Channel 2 and Channel 3, and so on. SOUT\_SOURCE0 to SOUT\_SOURCE7 map to the 16 total channels (Channel 0 to Channel 15) that are fed to SDATA\_OUT0. SOUT\_SOURCE8 to SOUT\_SOURCE15 map to the 16 total channels (Channel 16 to Channel 31) that are fed to SDATA\_OUT1. SOUT\_SOURCE16 to SOUT\_SOURCE19 map to the eight total channels (Channel 32 to Channel 39) that are fed to SDATA\_OUT2. SOUT\_SOURCE20 to SOUT\_SOURCE23 map to the eight total channels (Channel 40 to Channel 47) that are fed to SDATA\_OUT3. Data originates from several places, including directly from the corresponding input audio channels from the serial input ports, from the corresponding audio output channels of the DSP core, from an ASRC output pair, or directly from the PDM microphone inputs.

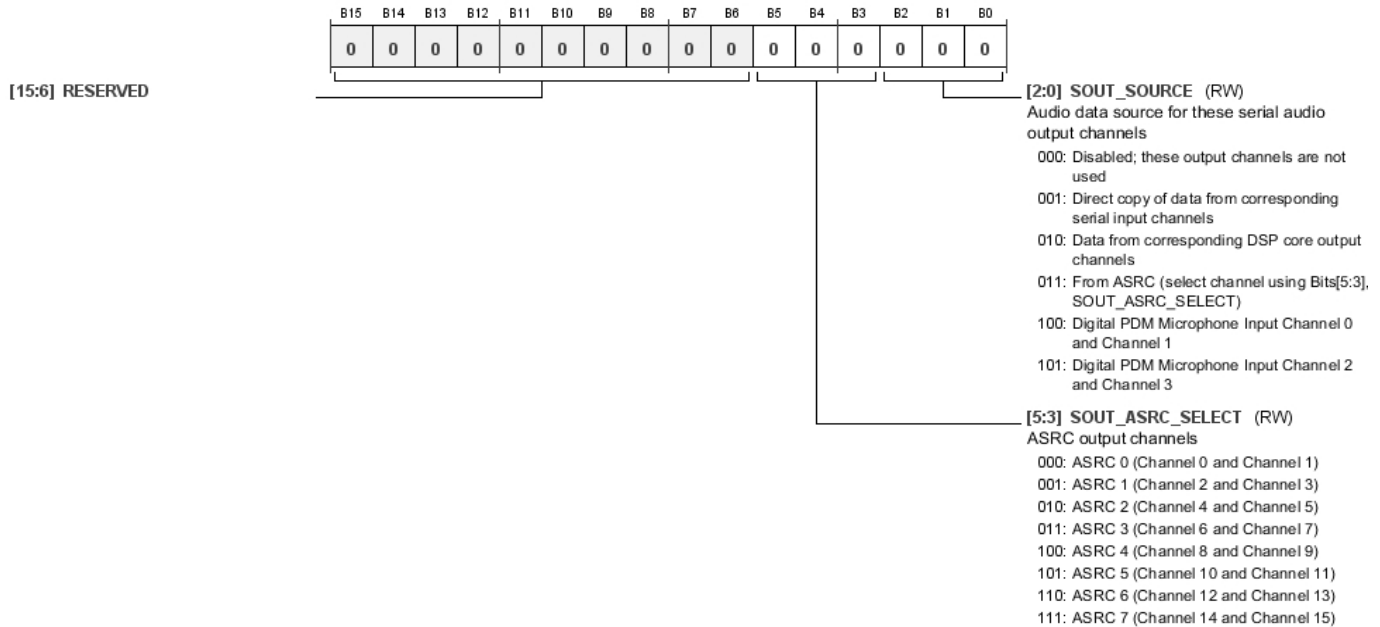

**Table 78. Bit Descriptions for SOUT\_SOURCEx**


| Bits   | Bit Name         | Settings   | Description  | Reset | Access |
|--------|------------------|--|--|-------|--------|
| [15:6] | RESERVED         |  |  | 0x000 | RW     |
| [5:3]  | SOUT_ASRC_SELECT | 000 ASRC 0 (Channel 0 and Channel 1)<br>001 ASRC 1 (Channel 2 and Channel 3)<br>010 ASRC 2 (Channel 4 and Channel 5)<br>011 ASRC 3 (Channel 6 and Channel 7)<br>100 ASRC 4 (Channel 8 and Channel 9)<br>101 ASRC 5 (Channel 10 and Channel 11)<br>110 ASRC 6 (Channel 12 and Channel 13)<br>111 ASRC 7 (Channel 14 and Channel 15) | ASRC output channels. If Bits[2:0] (SOUT_SOURCE) are set to 0b011, these bits select which ASRC channels are routed to the serial output channels. | 0x0   | RW     |

| Bits  | Bit Name    | Settings   | Description   | Reset | Access |
|-------|-------------|--|---|-------|--------|
| [2:0] | SOUT_SOURCE | 000 Disabled; these output channels are not used<br>001 Direct copy of data from corresponding serial input channels<br>010 Data from corresponding DSP core output channels<br>011 From ASRC (select channel using Bits[5:3], SOUT_ASRC_SELECT)<br>100 Digital PDM Microphone Input Channel 0 and Digital PDM Microphone Input Channel 1<br>101 Digital PDM Microphone Input Channel 2 and Digital PDM Microphone Input Channel 3 | Audio data source for these serial audio output channels. If these bits are set to 0b001, the corresponding output channels output a copy of the data from the corresponding input channels. For example, if Address 0xF180, Bits[2:0] are set to 0b001, Serial Input Channel 0 and Serial Input Channel 1 copy to Serial Output Channel 0 and Serial Output Channel 1, respectively. If these bits are set to 0b010, DSP Output Channel 0 and DSP Output Channel 1 copy to Serial Output Channel 0 and Serial Output Channel 1, respectively. If these bits are set to 0b011, Bits[5:3] (SOUT_ASRC_SELECT) must be configured to select the desired ASRC output. | 0x0   | RW     |

**S/PDIF Transmitter Data Selector Register**

Address: 0xF1C0, Reset: 0x0000, Name: SPDIFTX\_INPUT

This register configures which data source feeds the S/PDIF transmitter on the ADAU1466 and ADAU1462. Data can originate from the S/PDIF outputs of the DSP core or directly from the S/PDIF receiver.

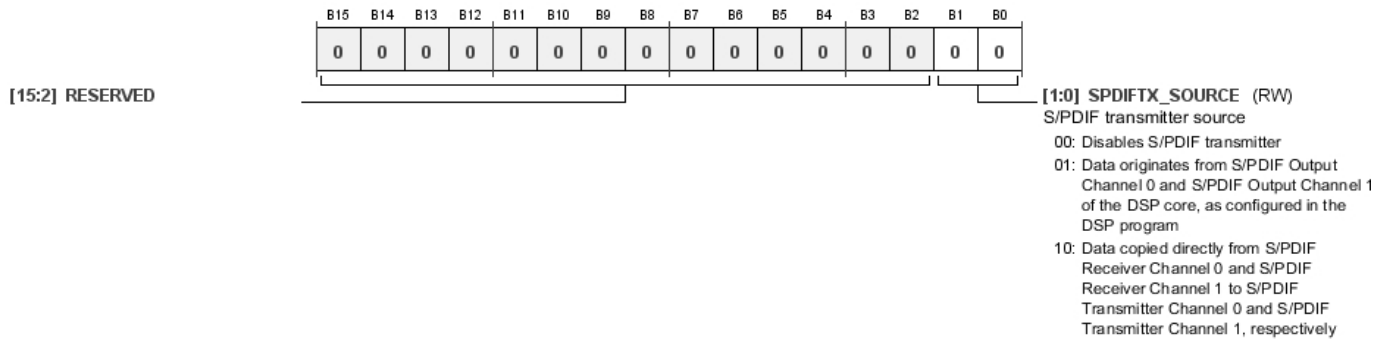

**Table 79. Bit Descriptions for SPDIFTX\_INPUT**

| Bits   | Bit Name       | Settings   | Description                | Reset | Access |
|--------|----------------|--|----------------------------|-------|--------|
| [15:2] | RESERVED       |  |                            | 0x0   | RW     |
| [1:0]  | SPDIFTX_SOURCE | 00 Disables S/PDIF transmitter<br>01 Data originates from S/PDIF Output Channel 0 and S/PDIF Output Channel 1 of the DSP core, as configured in the DSP program<br>10 Data copied directly from S/PDIF Receiver Channel 0 and S/PDIF Receiver Channel 1 to S/PDIF Transmitter Channel 0 and S/PDIF Transmitter Channel 1, respectively | S/PDIF transmitter source. | 0x0   | RW     |



**SERIAL PORT CONFIGURATION REGISTERS**

**Serial Port Control 0 Register**

Address: 0xF200 to 0xF21C (Increments of 0x4), Reset: 0x0000, Name: SERIAL\_BYTE\_x\_0

These eight registers configure several settings for the corresponding serial input and serial output ports. Channel count, MSB position, data-word length, clock polarity, clock sources, and clock type are configured using these registers. On the input side, Register 0xF200 (SERIAL\_BYTE\_0\_0) corresponds to SDATA\_IN0; Register 0xF204 (SERIAL\_BYTE\_1\_0) corresponds to SDATA\_IN1; Register 0xF208 (SERIAL\_BYTE\_2\_0) corresponds to SDATA\_IN2; and Register 0xF20C (SERIAL\_BYTE\_3\_0) corresponds to SDATA\_IN3. On the output side, Register 0xF210 (SERIAL\_BYTE\_4\_0) corresponds to SDATA\_OUT0; Register 0xF214 (SERIAL\_BYTE\_5\_0) corresponds to SDATA\_OUT1; Register 0xF218 (SERIAL\_BYTE\_6\_0) corresponds to SDATA\_OUT2; and Register 0xF21C (SERIAL\_BYTE\_7\_0) corresponds to SDATA\_OUT3.

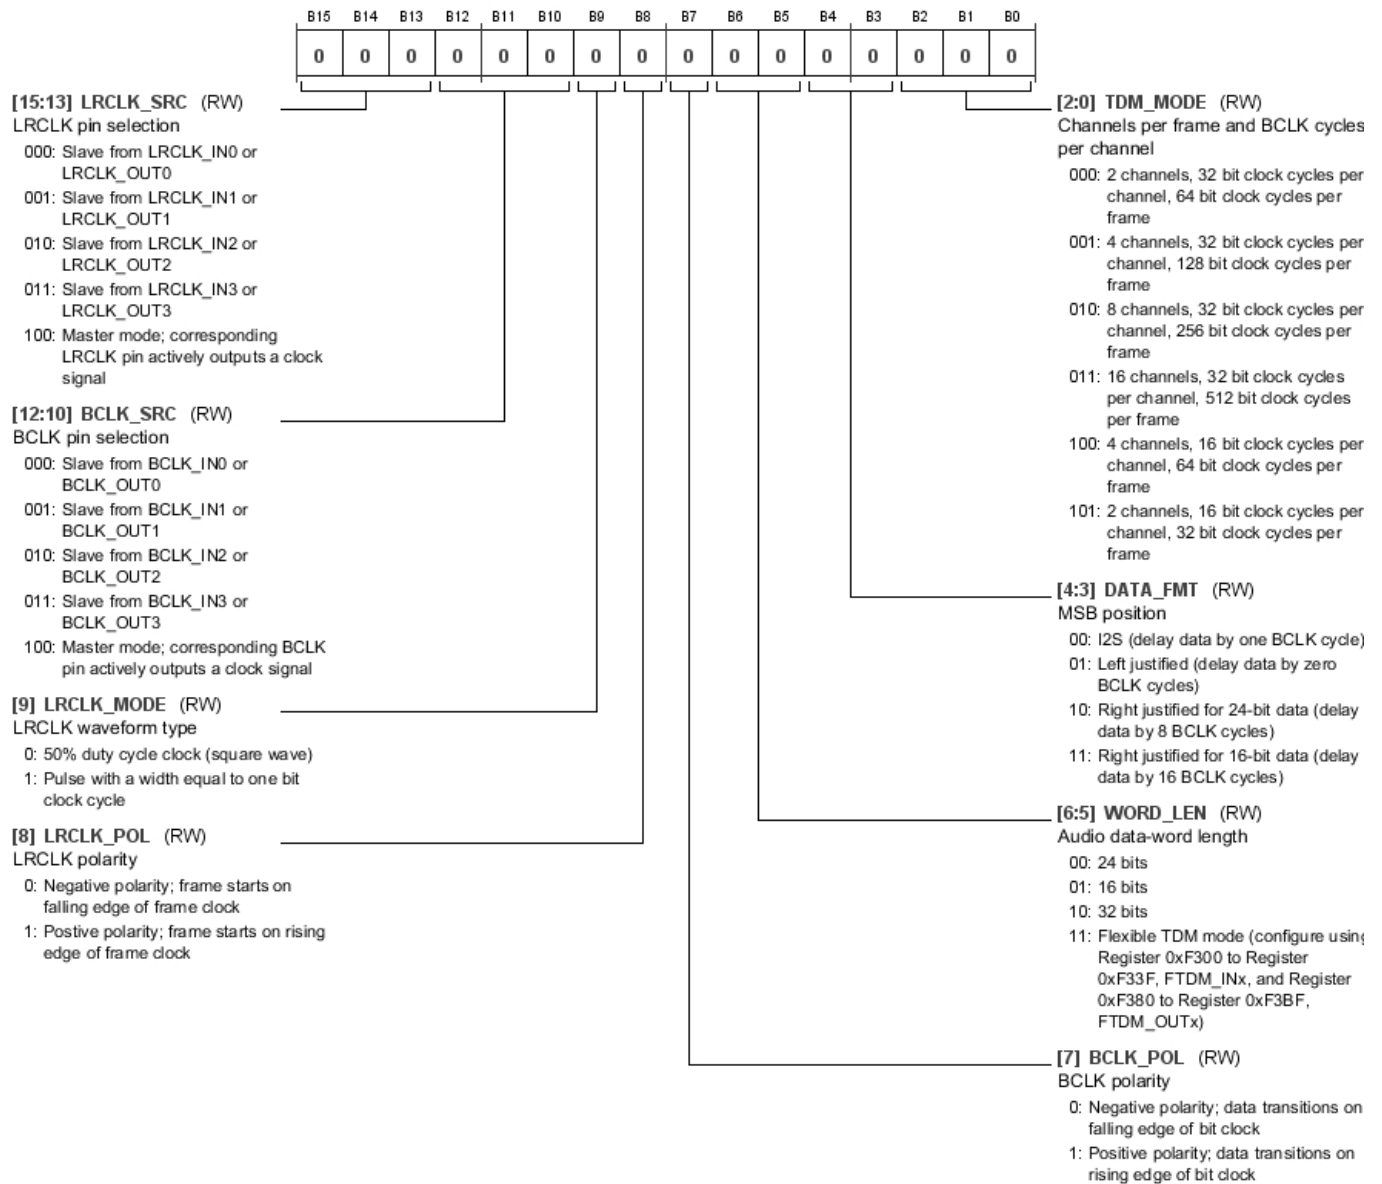


Table 80. Bit Descriptions for SERIAL\_BYTE\_x\_0


| Bits    | Bit Name   | Settings   | Description   | Reset | Access |
|---------|------------|--|---|-------|--------|
| [15:13] | LRCLK_SRC  | 000 Slave from LRCLK_IN0 or LRCLK_OUT0<br>001 Slave from LRCLK_IN1 or LRCLK_OUT1<br>010 Slave from LRCLK_IN2 or LRCLK_OUT2<br>011 Slave from LRCLK_IN3 or LRCLK_OUT3<br>100 Master mode; corresponding LRCLK pin actively outputs a clock signal | LRCLK pin selection. These bits configure whether the corresponding serial port is a frame clock master or slave. When configured as a master, the corresponding LRCLK pin (LRCLK_INx for SDATA_INx pins and LRCLK_OUTx for SDATA_OUTx pins) with the same number as the serial port (for example, LRCLK_OUT0 for SDATA_OUT0) actively drives out a clock signal. When configured as a slave, the serial port can receive its clock signal from any of the four corresponding LRCLK pins (LRCLK_INx pins for SDATA_INx pins or LRCLK_OUTx pins for SDATA_OUTx pins).  | 0x0   | RW     |
| [12:10] | BCLK_SRC   | 000 Slave from BCLK_IN0 or BCLK_OUT0<br>001 Slave from BCLK_IN1 or BCLK_OUT1<br>010 Slave from BCLK_IN2 or BCLK_OUT2<br>011 Slave from BCLK_IN3 or BCLK_OUT3<br>100 Master mode; corresponding BCLK pin actively outputs a clock signal          | BCLK pin selection. These bits configure whether the corresponding serial port is a bit clock master or slave. When configured as a master, the corresponding BCLK pin (BCLK_INx for SDATA_INx pins and BCLK_OUTx for SDATA_OUTx pins) with the same number as the serial port (for example, BCLK_OUT0 for SDATA_OUT0) actively drives out a clock signal. When configured as a slave, the serial port can receive its clock signal from any of the four corresponding BCLK pins (BCLK_INx pins for SDATA_INx pins or BCLK_OUTx pins for SDATA_OUTx pins).  | 0x0   | RW     |
| 9       | LRCLK_MODE | 0 50% duty cycle clock (square wave)<br>1 Pulse with a width equal to one bit clock cycle  | LRCLK waveform type. The frame clock can be a 50/50 duty cycle square wave or a short pulse.  | 0x0   | RW     |
| 8       | LRCLK_POL  | 0 Negative polarity; frame starts on falling edge of frame clock<br>1 Positive polarity; frame starts on rising edge of frame clock  | LRCLK polarity. This bit sets the frame clock polarity on the corresponding serial port. Negative polarity means that the frame starts on the falling edge of the frame clock. This conforms to the I <sup>2</sup> S standard audio format.   | 0x0   | RW     |
| 7       | BCLK_POL   | 0 Negative polarity; data transitions on falling edge of bit clock<br>1 Positive polarity; data transitions on rising edge of bit clock  | BCLK polarity. This bit sets the bit clock polarity on the corresponding serial port. Negative polarity means that the data signal transitions on the falling edge of the bit clock. This conforms to the I <sup>2</sup> S standard audio format.   | 0x0   | RW     |
| [6:5]   | WORD_LEN   | 00 24 bits<br>01 16 bits<br>10 32 bits<br>11 Flexible TDM mode (configure using Register 0xF300 to Register 0xF33F, FTDM_INx, and Register 0xF380 to Register 0xF3BF, FTDM_OUTx)   | Audio data-word length. These bits set the word length of the audio data channels on the corresponding serial port. For serial input ports, if the input data has more words than the length as configured by these bits, the extra data bits are ignored. For output serial ports, if the word length, as configured by these bits, is shorter than the data length coming from the data source (the DSP, ASRCs, S/PDIF receiver, PDM inputs, or serial inputs), the extra data bits are truncated and output as 0s. If Bits[6:5] (WORD_LEN) are set to 0b10 for 32-bit mode, the corresponding 32-bit input or output cells are required in <a href="#">SigmaStudio</a> . | 0x0   | RW     |

| Bits  | Bit Name | Settings                               | Description  | Reset | Access |
|-------|----------|--|--|-------|--------|
| [4:3] | DATA_FMT | 00<br>01<br>10<br>11                   | MSB position. These bits set the positioning of the data in the frame on the corresponding serial port.<br>I <sup>2</sup> S (delay data by one BCLK cycle)<br>Left justified (delay data by zero BCLK cycles)<br>Right justified for 24-bit data (delay data by 8 BCLK cycles)<br>Right justified for 16-bit data (delay data by 16 BCLK cycles)   | 0x0   | RW     |
| [2:0] | TDM_MODE | 000<br>001<br>010<br>011<br>100<br>101 | Channels per frame and BCLK cycles per channel. These bits set the number of channels per frame and the number of bit clock cycles per frame on the corresponding serial port.<br>2 channels, 32 bit clock cycles per channel, 64 bit clock cycles per frame<br>4 channels, 32 bit clock cycles per channel, 128 bit clock cycles per frame<br>8 channels, 32 bit clock cycles per channel, 256 bit clock cycles per frame<br>16 channels, 32 bit clock cycles per channel, 512 bit clock cycles per frame<br>4 channels, 16 bit clock cycles per channel, 64 bit clock cycles per frame<br>2 channels, 16 bit clock cycles per channel, 32 bit clock cycles per frame | 0x0   | RW     |

**Serial Port Control 1 Register**

Address: 0xF201 to 0xF21D (Increments of 0x4), Reset: 0x0002, Name: SERIAL\_BYTE\_x\_1

These eight registers configure several settings for the corresponding serial input and serial output ports. Clock generator, sample rate, and behavior during inactive channels are configured with these registers. On the input side, Register 0xF201 (SERIAL\_BYTE\_0\_1) corresponds to SDATA\_IN0; Register 0xF205 (SERIAL\_BYTE\_1\_1) corresponds to SDATA\_IN1; Register 0xF209 (SERIAL\_BYTE\_2\_1) corresponds to SDATA\_IN2; and Register 0xF20D (SERIAL\_BYTE\_3\_1) corresponds to SDATA\_IN3. On the output side, Register 0xF211 (SERIAL\_BYTE\_4\_1) corresponds to SDATA\_OUT0; Register 0xF215 (SERIAL\_BYTE\_5\_1) corresponds to SDATA\_OUT1; Register 0xF219 (SERIAL\_BYTE\_6\_1) corresponds to SDATA\_OUT2; and Register 0xF21D (SERIAL\_BYTE\_7\_1) corresponds to SDATA\_OUT3.

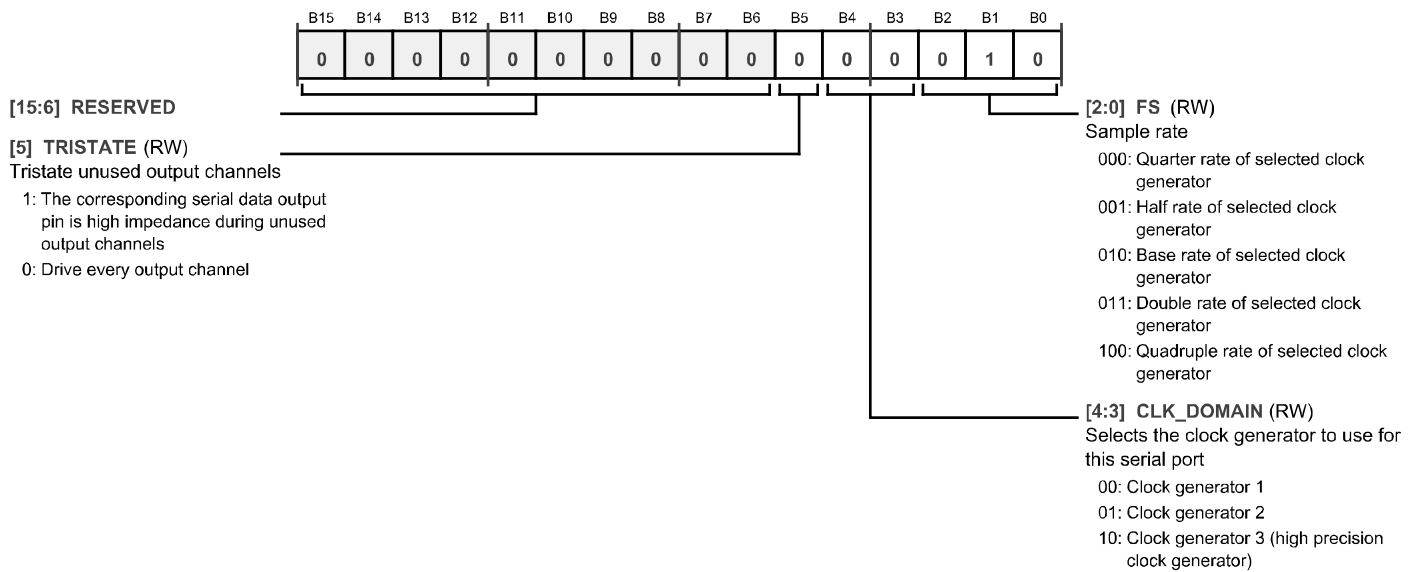

**Table 81. Bit Descriptions for SERIAL\_BYTE\_x\_1**

| Bits   | Bit Name | Settings | Description  | Reset | Access |
|--------|----------|----------|--|-------|--------|
| [15:6] | RESERVED |          |  | 0x000 | RW     |
| 5      | TRISTATE | 1<br>0   | Tristate unused output channels. This bit has no effect on serial input ports.<br>1 The corresponding serial data output pin is high impedance during unused output channels<br>0 Drive every output channel | 0x0   | RW     |


| Bits  | Bit Name   | Settings  | Description   | Reset | Access |
|-------|------------|---|---|-------|--------|
| [4:3] | CLK_DOMAIN | 00 Clock Generator 1<br>01 Clock Generator 2<br>10 Clock Generator 3 (high precision clock generator)   | Selects the clock generator to use for the serial port. These bits select the clock generator to use for this serial port when it is configured as a clock master. This setting is valid only when Bits[15:13] (LRCLK_SRC) of the corresponding SERIAL_BYTE_x_0 register are set to 0b100 (master mode) and Bits[12:10] (BCLK_SRC) are set to 0b100 (master mode).  | 0x0   | RW     |
| [2:0] | FS         | 000 Quarter rate of selected clock generator<br>001 Half rate of selected clock generator<br>010 Base rate of selected clock generator<br>011 Double rate of selected clock generator<br>100 Quadruple rate of selected clock generator | Sample rate. These bits set the sample rate to use for the serial port when it is configured as a clock master. This setting is valid only when Bits[15:13] (LRCLK_SRC) of the corresponding SERIAL_BYTE_x_0 register are set to 0b100 (master mode) and Bits[12:10] BCLK_SRC are set to 0b100 (master mode). Bits[4:3] (CLK_DOMAIN) select which clock generator to use, and Bits[2:0] (FS) select which of the five clock generator outputs to use. | 0x2   | RW     |

**FLEXIBLE TDM INTERFACE REGISTERS**

**FTDM Mapping for the Serial Inputs Register**

Address: 0xF300 to 0xF33F (Increments of 0x1), Reset: 0x0000, Name: FTDM\_INx

These 64 registers correspond to the 64 bytes of data that combine to form the 16 audio channels derived from the data streams being input to the SDATA\_IN2 and SDATA\_IN3 pins.

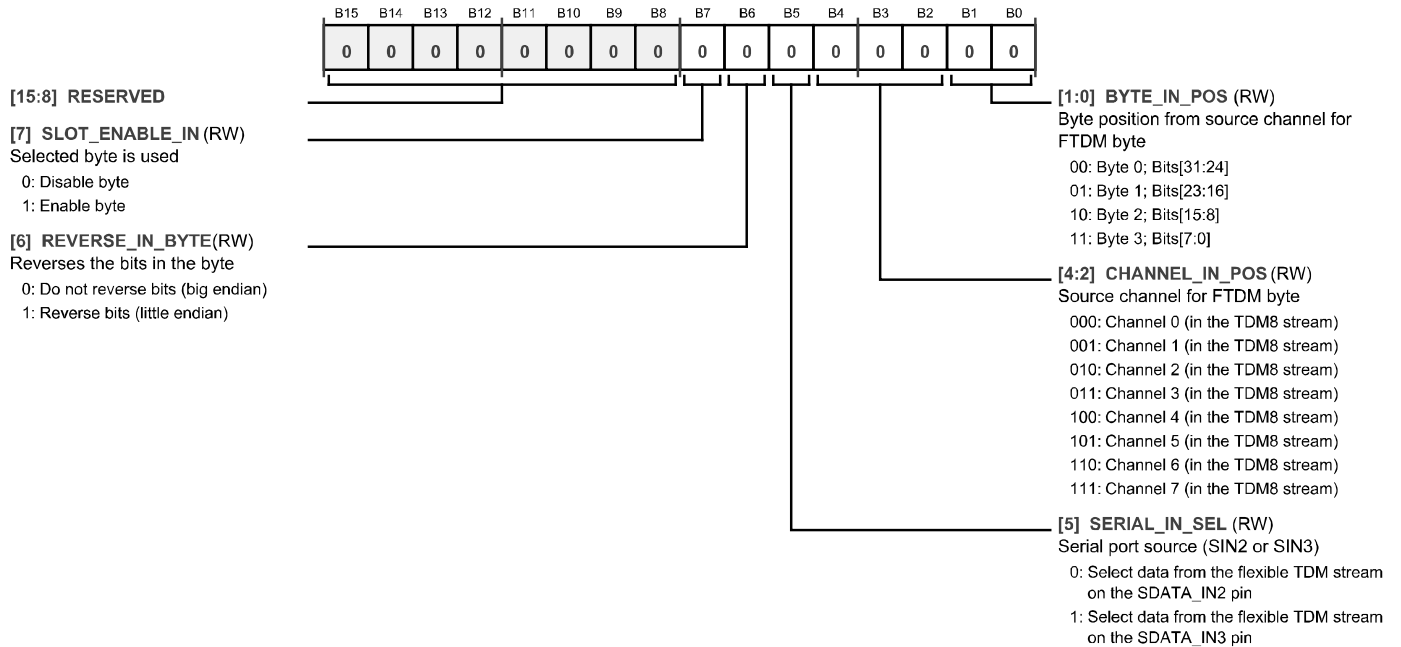

**Table 82. Bit Descriptions for FTDM\_INx**

| Bits   | Bit Name        | Settings | Description   | Reset | Access |
|--------|-----------------|----------|---|-------|--------|
| [15:8] | RESERVED        |          |   | 0x0   | RW     |
| 7      | SLOT_ENABLE_IN  | 0<br>1   | Enables the corresponding input byte. This bit determines whether or not the slot is active. If active, valid data is input from the corresponding data slot on the selected channel of the selected input pin. If disabled, input data from the corresponding data slot on the selected channel of the selected input pin is ignored.<br>0 Disable byte<br>1 Enable byte   | 0x0   | RW     |
| 6      | REVERSE_IN_BYTE | 0<br>1   | Reverses the order of bits in the byte (big endian or little endian). This bit changes the endianness of the data bits within the byte by optionally reversing the order of the bits from MSB to LSB.<br>0 Do not reverse bits (big endian)<br>1 Reverse bits (little endian)   | 0x0   | RW     |
| 5      | SERIAL_IN_SEL   | 0<br>1   | Serial input pin selector (SDATA_IN2 or SDATA_IN3). If this bit = 0b0, the slot is mapped to Audio Channel 32 to Audio Channel 39. If this bit = 0b1, the slot is mapped to Audio Channel 40 to Audio Channel 47. The exact channel assignment is determined by Bits[4:2] (CHANNEL_IN_POS).<br>0 Select data from the flexible TDM stream on the SDATA_IN2 pin<br>1 Select data from the flexible TDM stream on the SDATA_IN3 pin | 0x0   | RW     |

| Bits  | Bit Name       | Settings   | Description   | Reset | Access |
|-------|----------------|--|---|-------|--------|
| [4:2] | CHANNEL_IN_POS | 000<br>001<br>010<br>011<br>100<br>101<br>110<br>111 | Source channel selector. These bits map the slot to an audio input channel. If Bit 5 (SERIAL_IN_SEL) = 0b0, Position 0 maps to Channel 32, Position 1 maps to Channel 33, and so on. If Bit 5 (SERIAL_IN_SEL) = 0b1, Position 0 maps to Channel 40, Position 1 maps to Channel 41, and so on.<br><br>Channel 0 (in the TDM8 stream)<br>Channel 1 (in the TDM8 stream)<br>Channel 2 (in the TDM8 stream)<br>Channel 3 (in the TDM8 stream)<br>Channel 4 (in the TDM8 stream)<br>Channel 5 (in the TDM8 stream)<br>Channel 6 (in the TDM8 stream)<br>Channel 7 (in the TDM8 stream) | 0x0   | RW     |
| [1:0] | BYTE_IN_POS    | 00<br>01<br>10<br>11                                 | Byte selector for source channel. These bits determine which byte the slot fills in the channel selected by Bit 5 (SERIAL_IN_SEL) and Bits[4:2] (CHANNEL_IN_POS). Each channel consists of four bytes that are selectable by the four options available in this bit field.<br><br>Byte 0; Bits[31:24]<br>Byte 1; Bits[23:16]<br>Byte 2; Bits[15:8]<br>Byte 3; Bits[7:0]   | 0x0   | RW     |

**FTDM Mapping for the Serial Outputs Register**

Address: 0xF380 to 0xF3BF (Increments of 0x1), Reset: 0x0000, Name: FTDM\_OUTx

These 64 registers correspond to the 64 data slots for the flexible TDM output modes on the SDATA\_OUT2 and SDATA\_OUT3 pins. Slot 0 to Slot 31 are available for use on SDATA\_OUT2, and Slot 32 to Slot 63 are available for use on SDATA\_OUT3. Each slot can potentially hold one byte of data. Slots are mapped to corresponding audio channels in the serial ports by Bits[5:0] in these registers.

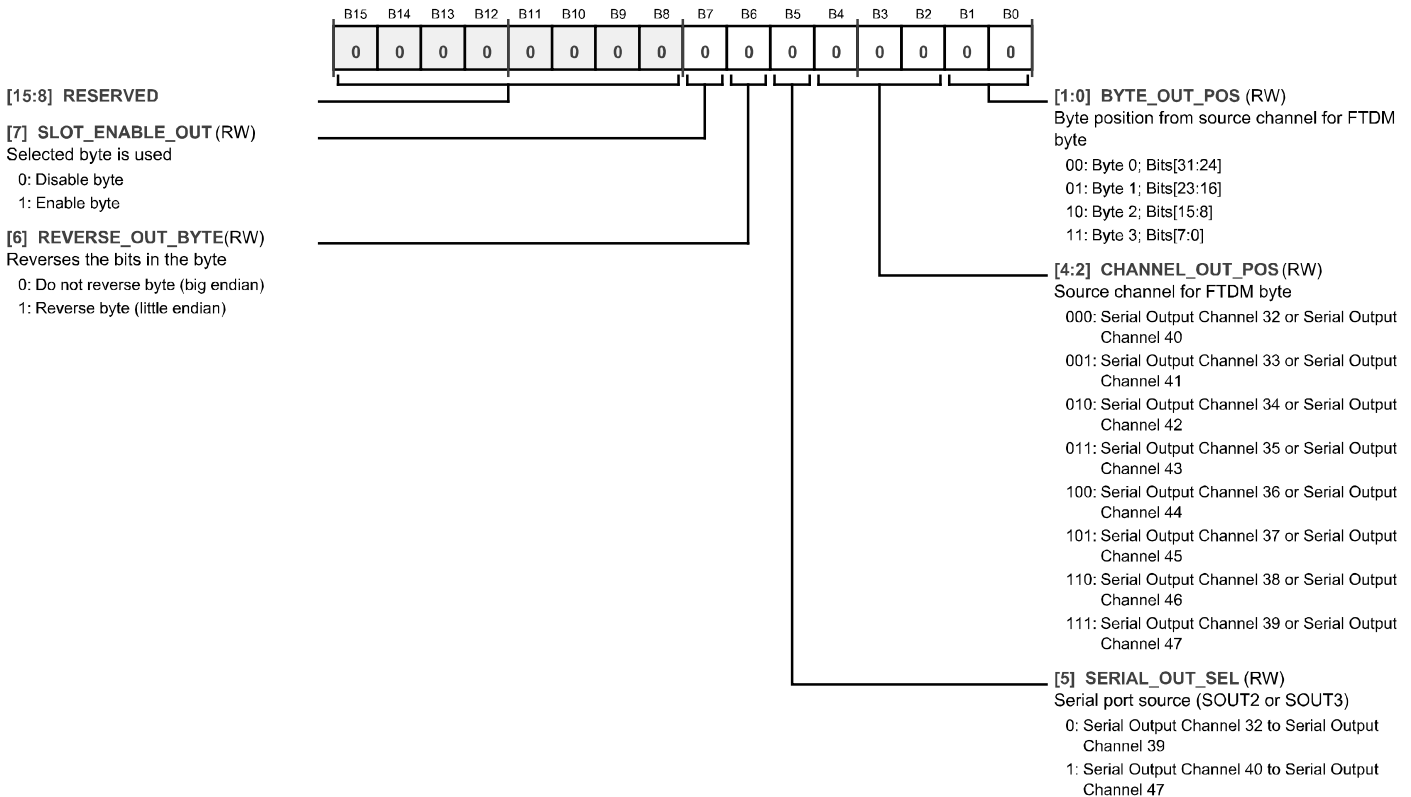


Table 83. Bit Descriptions for FTDM\_OUTx


| Bits   | Bit Name         | Settings   | Description  | Reset | Access |
|--------|------------------|--|--|-------|--------|
| [15:8] | RESERVED         |  |  | 0x0   | RW     |
| 7      | SLOT_ENABLE_OUT  | 0<br>1   | Enables the corresponding output byte. This bit determines whether or not the slot is active. If Bit 7 (SLOT_ENABLE_OUT) = 0b0 and Bit 5 (TRISTATE) of the corresponding serial output port = 0b1, the corresponding output pin is high impedance during the period in which the corresponding flexible TDM slot is output. If Bit 7 (SLOT_ENABLE_OUT) = 0b0, and Bit 5 (TRISTATE) of the corresponding serial output port = 0b0, the corresponding output pin drives logic low during the period in which the corresponding flexible TDM slot is output. If Bit 7 (SLOT_ENABLE_OUT) = 0b1, the corresponding serial output pin outputs valid data during the period in which the corresponding flexible TDM slot is output. | 0x0   | RW     |
| 6      | REVERSE_OUT_BYTE | 0<br>1   | Reverses the bits in the byte (big endian or little endian). This bit changes the endianness of the data bits within the corresponding flexible TDM slot by optionally reversing the order of the bits from MSB to LSB.  | 0x0   | RW     |
| 5      | SERIAL_OUT_SEL   | 0<br>1   | Source serial output channel group. This bit, together with Bits[4:2] (CHANNEL_OUT_POS), selects which serial output channel is the source of data for the corresponding flexible TDM output slot.   | 0x0   | RW     |
| [4:2]  | CHANNEL_OUT_POS  | 000<br>001<br>010<br>011<br>100<br>101<br>110<br>111 | Source serial output channel. These bits, along with Bit 5 (SERIAL_OUT_SEL), select which serial output channel is the source of data for the corresponding flexible TDM output slot. If Bit 5 (SERIAL_OUT_SEL) = 0b0, Bits[4:2] (CHANNEL_OUT_POS) select serial output channels between Serial Output Channel 32 and Serial Output Channel 39. If Bit 5 (SERIAL_OUT_SEL) = 0b1, Bits[4:2] (CHANNEL_OUT_POS) selects serial output channels between Serial Output Channel 40 and Serial Output Channel 47.   | 0x0   | RW     |
| [1:0]  | BYTE_OUT_POS     | 00<br>01<br>10<br>11                                 | Source data byte. These bits determine which data byte is used from the corresponding serial output channel (selected by setting Bit 5 (SERIAL_OUT_SEL) and Bits[4:2] (CHANNEL_OUT_POS)). Because there can be up to 32 bits in the data-word, four bytes are available.   | 0x0   | RW     |

**DSP CORE CONTROL REGISTERS**

***Hibernate Setting Register***

Address: 0xF400, Reset: 0x0000, Name: HIBERNATE

When hibernation mode is activated, the DSP core continues processing the current audio sample or block, and then enters a low power hibernation state. If Bit 0 (HIBERNATE) is set to 0b1 when the DSP core is processing audio, wait at least the duration of one sample before attempting to modify any other control registers. If Bit 0 (HIBERNATE) is set to 0b1 when the DSP core is processing audio, and block processing is used in the signal flow, wait at least the duration of one block plus the duration of one sample before attempting to modify any other control registers. During hibernation, interrupts to the core are disabled. This prevents audio from flowing into or out of the DSP core. Because DSP processing ceases when hibernation is active, there is a significant drop in the current consumption on the DVDD supply.

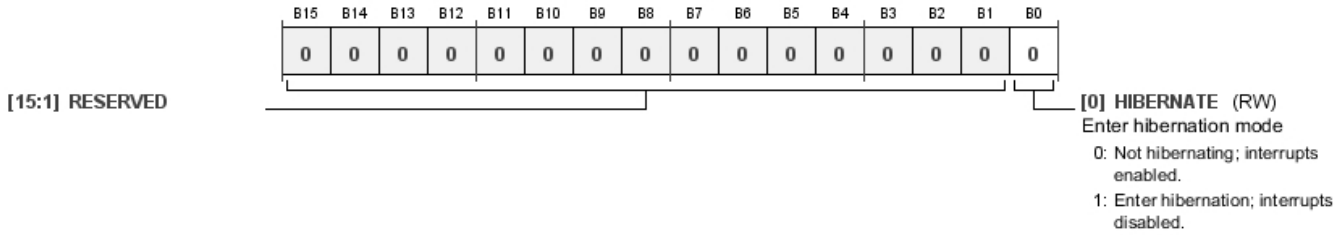

**Table 84. Bit Descriptions for Hibernate**


| Bits   | Bit Name  | Settings  | Description   | Reset | Access |
|--------|-----------|---|---|-------|--------|
| [15:1] | RESERVED  |   |   | 0x0   | RW     |
| 0      | HIBERNATE | 0 Not hibernating; interrupts enabled.<br>1 Enter hibernation; interrupts disabled. | Enter hibernation mode. This bit disables incoming interrupts and tells the DSP core to go to a low power sleep mode after the next audio sample or block has finished processing. It causes the DSP to enter hibernation mode by masking all interrupts. | 0x0   | RW     |



**Start Pulse Selection Register**

Address: 0xF401, Reset: 0x0002, Name: START\_PULSE

This register selects the start pulse that marks the beginning of each audio frame in the DSP core. This effectively sets the sample rate of the audio going through the DSP. This start pulse can originate from either an internally generated pulse (from Clock Generator 1 or Clock Generator 2) or from an external clock that is received on one of the LRCLK pins of one of the serial ports. Any audio input or output from the DSP core that is asynchronous to this DSP start pulse rate must go through an ASRC. If asynchronous audio signals (that is, signals that are not synchronized to whatever start pulse is selected) are input to the DSP without first going through an ASRC, samples are skipped or doubled, leading to distortion and audible artifacts in the audio signal.

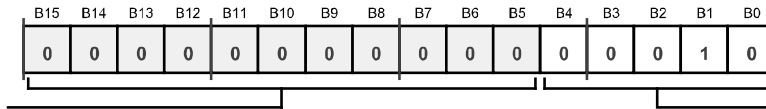

[15:5] RESERVED

[4:0] START\_PULSE (RW)

Start pulse selection

- 00000: Base sample rate + 4 (12 kHz for 48 kHz base sample rate) (1/4 output of Clock Generator 1)
- 00001: Base sample rate + 2 (24 kHz for 48 kHz base sample rate) (1/2 output of Clock Generator 1)
- 00010: Base sample rate (48 kHz for 48 kHz base sample rate) (×1 output of Clock Generator 1)
- 00011: Base sample rate × 2 (96 kHz for 48 kHz base sample rate) (×2 output of Clock Generator 1)
- 00100: Base sample rate × 4 (192 kHz for 48 kHz base sample rate) (×4 output of Clock Generator 1)
- 00101: Base sample rate + 6 (8 kHz for 48 kHz base sample rate) (1/4 output of Clock Generator 2)
- 00110: Base sample rate + 3 (16 kHz for 48 kHz base sample rate) (1/2 output of Clock Generator 2)
- 00111: 2× base sample rate + 3 (32 kHz for 48 kHz base sample rate) (×1 output of Clock Generator 2)
- 01000: Serial Input Port 0 sample rate (Register 0xF201 (SERIAL\_BYTE\_0\_1), Bits[4:0])
- 01001: Serial Input Port 1 sample rate (Register 0xF205 (SERIAL\_BYTE\_1\_1), Bits[4:0])
- 01010: Serial Input Port 2 sample rate (Register 0xF209 (SERIAL\_BYTE\_2\_1), Bits[4:0])
- 01011: Serial Input Port 3 sample rate (Register 0xF20D (SERIAL\_BYTE\_3\_1), Bits[4:0])
- 01100: Serial Output Port 0 sample rate (Register 0xF211 (SERIAL\_BYTE\_4\_1), Bits[4:0])
- 01101: Serial Output Port 1 sample rate (Register 0xF215 (SERIAL\_BYTE\_5\_1), Bits[4:0])
- 01110: Serial Output Port 2 sample rate (Register 0xF219 (SERIAL\_BYTE\_6\_1), Bits[4:0])
- 01111: Serial Output Port 3 sample rate (Register 0xF21D (SERIAL\_BYTE\_7\_1), Bits[4:0])
- 10000: S/PDIF receiver sample rate (derived from the S/PDIF input stream)


Table 85. Bit Descriptions for START\_PULSE

| Bits   | Bit Name    | Settings | Description   | Reset | Access |
|--------|-------------|----------|---|-------|--------|
| [15:5] | RESERVED    |          |   | 0x0   | RW     |
| [4:0]  | START_PULSE |          | Start pulse selection.  | 0x02  | RW     |
|        |             | 00000    | Base sample rate ÷ 4 (12 kHz for 48 kHz base sample rate) (1/4 output of Clock Generator 1)   |       |        |
|        |             | 00001    | Base sample rate ÷ 2 (24 kHz for 48 kHz base sample rate) (1/2 output of Clock Generator 1)   |       |        |
|        |             | 00010    | Base sample rate (48 kHz for 48 kHz base sample rate) (×1 output of Clock Generator 1)        |       |        |
|        |             | 00011    | Base sample rate × 2 (96 kHz for 48 kHz base sample rate) (×2 output of Clock Generator 1)    |       |        |
|        |             | 00100    | Base sample rate × 4 (192 kHz for 48 kHz base sample rate) (×4 output of Clock Generator 1)   |       |        |
|        |             | 00101    | Base sample rate ÷ 6 (8 kHz for 48 kHz base sample rate) (1/4 output of Clock Generator 2)    |       |        |
|        |             | 00110    | Base sample rate ÷ 3 (16 kHz for 48 kHz base sample rate) (1/2 output of Clock Generator 2)   |       |        |
|        |             | 00111    | 2× base sample rate ÷ 3 (32 kHz for 48 kHz base sample rate) (×1 output of Clock Generator 2) |       |        |
|        |             | 01000    | Serial Input Port 0 sample rate (Register 0xF201 (SERIAL_BYTE_0_1), Bits[4:0])                |       |        |
|        |             | 01001    | Serial Input Port 1 sample rate (Register 0xF205 (SERIAL_BYTE_1_1), Bits[4:0])                |       |        |
|        |             | 01010    | Serial Input Port 2 sample rate (Register 0xF209 (SERIAL_BYTE_2_1), Bits[4:0])                |       |        |
|        |             | 01011    | Serial Input Port 3 sample rate (Register 0xF20D (SERIAL_BYTE_3_1), Bits[4:0])                |       |        |
|        |             | 01100    | Serial Output Port 0 sample rate (Register 0xF211 (SERIAL_BYTE_4_1), Bits[4:0])               |       |        |
|        |             | 01101    | Serial Output Port 1 sample rate (Register 0xF215 (SERIAL_BYTE_5_1), Bits[4:0])               |       |        |
|        |             | 01110    | Serial Output Port 2 sample rate (Register 0xF219 (SERIAL_BYTE_6_1), Bits[4:0])               |       |        |
|        |             | 01111    | Serial Output Port 3 sample rate (Register 0xF21D (SERIAL_BYTE_7_1), Bits[4:0])               |       |        |
|        |             | 10000    | S/PDIF receiver sample rate (derived from the S/PDIF input stream)                            |       |        |

**Instruction to Start the Core Register**

Address: 0xF402, Reset: 0x0000, Name: START\_CORE

Enables the DSP core and initiates the program counter, which then begins incrementing through the program memory and executing instruction codes. This register is edge triggered, meaning that a rising edge on Bit 0 (START\_CORE), that is, a transition from 0b0 to 0b1, initiates the program counter. A falling edge on Bit 0 (START\_CORE), that is, a transition from 0b1 to 0b0, has no effect. To stop the DSP core, use Register 0xF400 (HIBERNATE), Bit 0 (HIBERNATE).



[15:1] RESERVED

[0] START\_CORE (RW)

Start DSP core

0: A transition from 0b0 to 0b1 enables the DSP core to start program execution

1: A transition from 0b1 to 0b0 does not affect the DSP core

Table 86. Bit Descriptions for START\_CORE

| Bits   | Bit Name   | Settings | Description  | Reset | Access |
|--------|------------|----------|--|-------|--------|
| [15:1] | RESERVED   |          |  | 0x0   | RW     |
| 0      | START_CORE |          | A transition of this bit from 0b0 to 0b1 enables the DSP core to start executing its program. A transition from 0b1 to 0b0 does not affect the DSP core. | 0x0   | RW     |
|        |            | 0        | A transition from 0b0 to 0b1 enables the DSP core to start program execution   |       |        |
|        |            | 1        | A transition from 0b1 to 0b0 does not affect the DSP core  |       |        |

**Instruction to Stop the Core Register**

Address: 0xF403, Reset: 0x0000, Name: KILL\_CORE

Bit 0 (KILL\_CORE) halts the DSP core immediately, even when it is in an undefined state. Because halting the DSP core immediately can lead to memory corruption, and it must be used only in debugging situations. This register is edge triggered, meaning that a rising edge on Bit 0 (KILL\_CORE), that is, a transition from 0b0 to 0b1, halts the core. A falling edge on Bit 0 (KILL\_CORE), that is, a transition from 0b1 to 0b0, has no effect. To stop the DSP core after the next audio frame or block, use Register 0xF400 (HIBERNATE), Bit 0 (HIBERNATE).

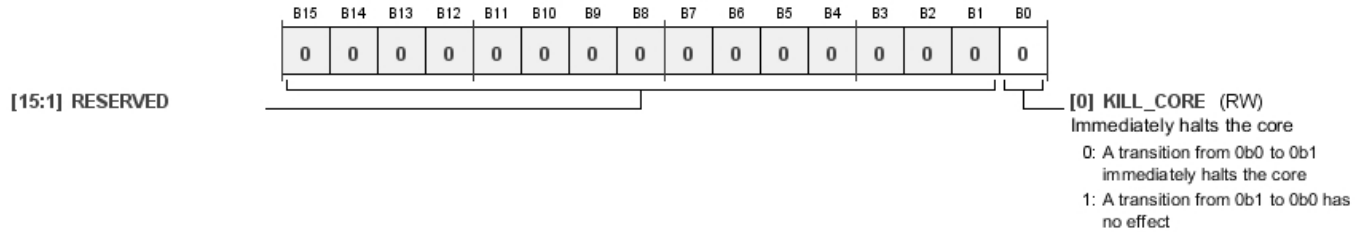


Table 87. Bit Descriptions for KILL\_CORE

| Bits   | Bit Name  | Settings | Description   | Reset | Access |
|--------|-----------|----------|---|-------|--------|
| [15:1] | RESERVED  |          |   | 0x0   | RW     |
| 0      | KILL_CORE | 0<br>1   | Immediately halts the core. When this bit transitions from 0b0 to 0b1, the core immediately halts. This can bring about undesired effects and, therefore, must be used only in debugging. To stop the core while it is running, use Register 0xF400 (HIBERNATE) to halt the core in a controlled manner.<br>A transition from 0b0 to 0b1 immediately halts the core<br>A transition from 0b1 to 0b0 has no effect | 0x0   | RW     |

**Start Address of the Program Register**

Address: 0xF404, Reset: 0x0000, Name: START\_ADDRESS

This register sets the program address where the program counter begins after the DSP core is enabled, using Register 0xF402, Bit 0 (START\_CORE). The SigmaStudio compiler automatically sets the program start address; therefore, the user is not required to manually modify the value of this register.

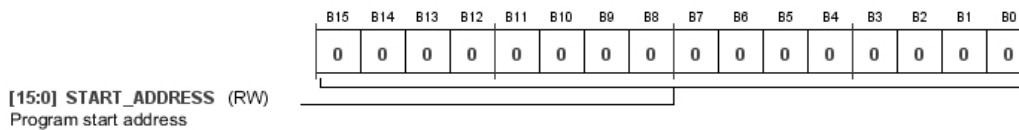



Table 88. Bit Descriptions for START\_ADDRESS

| Bits   | Bit Name      | Settings | Description            | Reset  | Access |
|--------|---------------|----------|------------------------|--------|--------|
| [15:0] | START_ADDRESS |          | Program start address. | 0x0000 | RW     |

**Core Status Register**

Address: 0xF405, Reset: 0x0000, Name: CORE\_STATUS

This read only register allows the user to check the status of the DSP core. To manually modify the core status, use Register 0xF400 (HIBERNATE), Register 0xF402 (START\_CORE), and Register 0xF403 (KILL\_CORE).



[15:3] RESERVED

[2:0] CORE\_STATUS (RW1C)  
DSP core status

- 000: Core is not running. This is the default state when the device boots. When the core is manually stopped using Register 0xF403 (KILL\_CORE), the core returns to this state.
- 001: Core is running normally
- 010: Core is paused. The clock signal is cut off from the core, preserving its state until the clock resumes. This state occurs only if a pause instruction is explicitly defined in the DSP program.
- 011: Core is in sleep mode (the core may be actively running a program, but it has finished executing instructions and is waiting in an idle state for the next audio sample to arrive). This state occurs only if a sleep instruction is explicitly called in the DSP program.
- 100: Core is stalled. This occurs when the DSP core is attempting to service more than one request, and it must stop execution for a few cycles to do so in a timely manner. The core continues execution immediately after the requests are serviced.

**Table 89. Bit Descriptions for CORE\_STATUS**


| Bits   | Bit Name    | Settings | Description  | Reset | Access |
|--------|-------------|----------|--|-------|--------|
| [15:3] | RESERVED    |          |  | 0x0   | RW     |
| [2:0]  | CORE_STATUS |          | DSP core status. These bits display the status of the DSP core at the moment the value is read.  | 0x0   | RW     |
|        |             | 000      | Core is not running. This is the default state when the device boots. When the core is manually stopped using Register 0xF403 (KILL_CORE), the core returns to this state.   |       |        |
|        |             | 001      | Core is running normally.  |       |        |
|        |             | 010      | Core is paused. The clock signal is cut off from the core, preserving its state until the clock resumes. This state occurs only if a pause instruction is explicitly defined in the DSP program.   |       |        |
|        |             | 011      | Core is in sleep mode (the core may be actively running a program, but it has finished executing instructions and is waiting in an idle state for the next audio sample to arrive). This state occurs only if a sleep instruction is explicitly called in the DSP program. |       |        |
|        |             | 100      | Core is stalled. This occurs when the DSP core is attempting to service more than one request, and it must stop execution for a few cycles to do so in a timely manner. The core continues execution immediately after the requests are serviced.                          |       |        |

**DEBUG AND RELIABILITY REGISTERS**

**Clear the Panic Manager Register**

Address: 0xF421, Reset: 0x0000, Name: PANIC\_CLEAR

When Register 0xF427 (PANIC\_FLAG) signals that an error has occurred, use Register 0xF421 (PANIC\_CLEAR) to reset it. Toggle Bit 0 (PANIC\_CLEAR) of this register from 0b0 to 0b1 and then back to 0b0 again to clear the flag and reset the state of the panic manager.

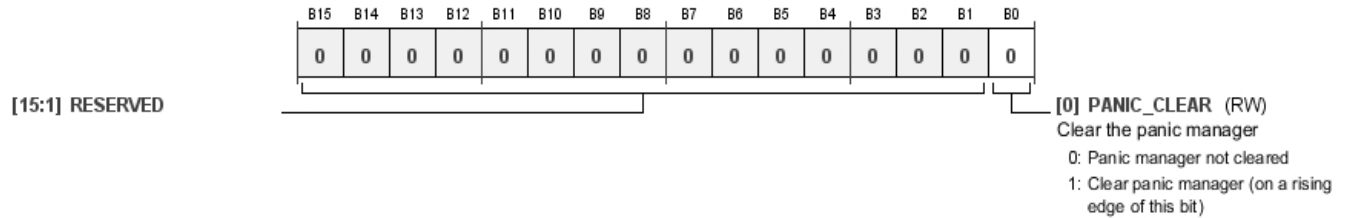


**Table 90. Bit Descriptions for PANIC\_CLEAR**

| Bits   | Bit Name    | Settings | Description   | Reset | Access |
|--------|-------------|----------|---|-------|--------|
| [15:1] | RESERVED    |          |   | 0x0   | RW     |
| 0      | PANIC_CLEAR | 0<br>1   | Clear the panic manager. To reset the PANIC_FLAG register, toggle this bit on and then off again.<br>Panic manager is not cleared<br>Clear panic manager (on a rising edge of this bit) | 0x0   | RW     |

**Panic Parity Register**

Address: 0xF422, Reset: 0x0003, Name: PANIC\_PARITY\_MASK

The panic manager checks and reports memory parity mask errors. Register 0xF422 (PANIC\_PARITY\_MASK) allows the user to configure which memories, if any, are subject to error reporting.

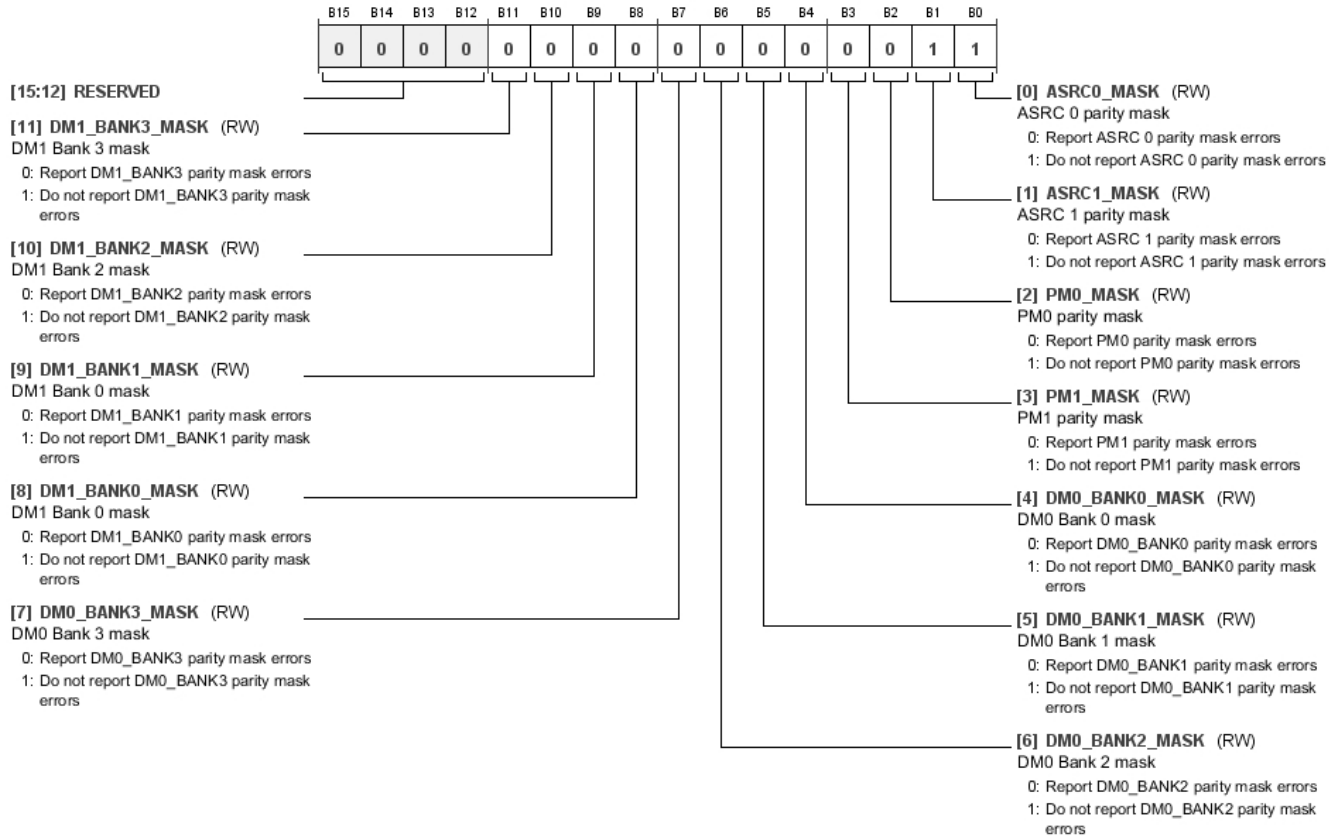

**Table 91. Bit Descriptions for PANIC\_PARITY\_MASK**

| Bits    | Bit Name       | Settings | Description   | Reset | Access |
|---------|----------------|----------|---|-------|--------|
| [15:12] | RESERVED       |          |   | 0x0   | RW     |
| 11      | DM1_BANK3_MASK | 0<br>1   | DM1 Bank 3 mask.<br>Report DM1_BANK3 parity mask errors<br>Do not report DM1_BANK3 parity mask errors | 0x0   | RW     |
| 10      | DM1_BANK2_MASK | 0<br>1   | DM1 Bank 2 mask.<br>Report DM1_BANK2 parity mask errors<br>Do not report DM1_BANK2 parity mask errors | 0x0   | RW     |
| 9       | DM1_BANK1_MASK | 0<br>1   | DM1 Bank 1 mask.<br>Report DM1_BANK1 parity mask errors<br>Do not report DM1_BANK1 parity mask errors | 0x0   | RW     |
| 8       | DM1_BANK0_MASK | 0<br>1   | DM1 Bank 0 mask.<br>Report DM1_BANK0 parity mask errors<br>Do not report DM1_BANK0 parity mask errors | 0x0   | RW     |
| 7       | DM0_BANK3_MASK | 0<br>1   | DM0 Bank 3 mask.<br>Report DM0_BANK3 parity mask errors<br>Do not report DM0_BANK3 parity mask errors | 0x0   | RW     |
| 6       | DM0_BANK2_MASK | 0<br>1   | DM0 Bank 2 mask.<br>Report DM0_BANK2 parity mask errors<br>Do not report DM0_BANK2 parity mask errors | 0x0   | RW     |

| Bits | Bit Name       | Settings | Description   | Reset | Access |
|------|----------------|----------|---|-------|--------|
| 5    | DM0_BANK1_MASK | 0<br>1   | DM0 Bank 1 mask.<br>0 Report DM0_BANK1 parity mask errors<br>1 Do not report DM0_BANK1 parity mask errors | 0x0   | RW     |
| 4    | DM0_BANK0_MASK | 0<br>1   | DM0 Bank 0 mask.<br>0 Report DM0_BANK0 parity mask errors<br>1 Do not report DM0_BANK0 parity mask errors | 0x0   | RW     |
| 3    | PM1_MASK       | 0<br>1   | PM1 parity mask.<br>0 Report PM1 parity mask errors<br>1 Do not report PM1 parity mask errors             | 0x0   | RW     |
| 2    | PM0_MASK       | 0<br>1   | PM0 parity mask.<br>0 Report PM0 parity mask errors<br>1 Do not report PM0 parity mask errors             | 0x0   | RW     |
| 1    | ASRC1_MASK     | 0<br>1   | ASRC 1 parity mask.<br>0 Report ASRC 1 parity mask errors<br>1 Do not report ASRC 1 parity mask errors    | 0x1   | RW     |
| 0    | ASRC0_MASK     | 0<br>1   | ASRC 0 parity mask.<br>0 Report ASRC 0 parity mask errors<br>1 Do not report ASRC 0 parity mask errors    | 0x1   | RW     |

**Panic Mask 0 Register**

Address: 0xF423, Reset: 0x0000, Name: PANIC\_SOFTWARE\_MASK

The panic manager checks and reports software errors. Register 0xF423 (PANIC\_SOFTWARE\_MASK) allows the user to configure whether software errors are reported to the panic manager or ignored.

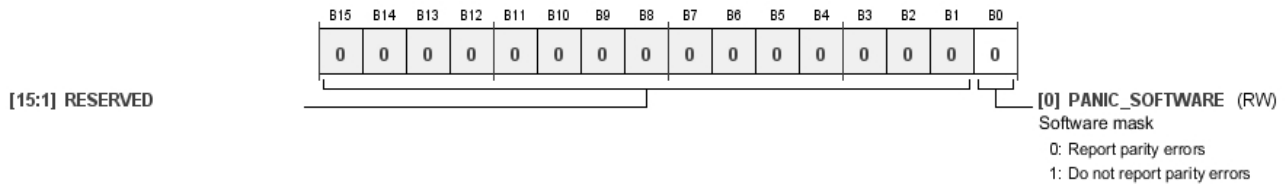


Table 92. Bit Descriptions for PANIC\_SOFTWARE\_MASK

| Bits   | Bit Name       | Settings | Description   | Reset | Access |
|--------|----------------|----------|---|-------|--------|
| [15:1] | RESERVED       |          |   | 0x0   | RW     |
| 0      | PANIC_SOFTWARE | 0<br>1   | Software mask.<br>0 Report parity errors<br>1 Do not report parity errors | 0x0   | RW     |

**Panic Mask 1 Register**

Address: 0xF424, Reset: 0x0000, Name: PANIC\_WD\_MASK

The panic manager checks and reports watchdog errors. Register 0xF424 (PANIC\_WD\_MASK) allows the user to configure whether watchdog errors are reported to the panic manager or ignored.

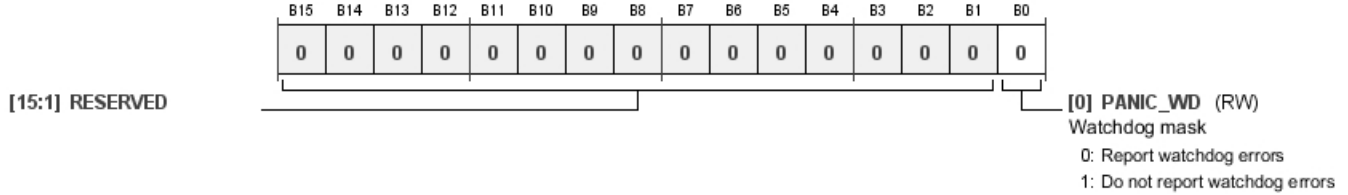


Table 93. Bit Descriptions for PANIC\_WD\_MASK

| Bits   | Bit Name | Settings | Description   | Reset | Access |
|--------|----------|----------|---|-------|--------|
| [15:1] | RESERVED |          |   | 0x0   | RW     |
| 0      | PANIC_WD | 0<br>1   | Watchdog mask.<br>0 Report watchdog errors<br>1 Do not report watchdog errors | 0x0   | RW     |

**Panic Mask 2 Register**

Address: 0xF425, Reset: 0x0000, Name: PANIC\_STACK\_MASK

The panic manager checks and reports stack errors. Register 0xF425 (PANIC\_STACK\_MASK) allows the user to configure whether stack errors are reported to the panic manager or ignored.

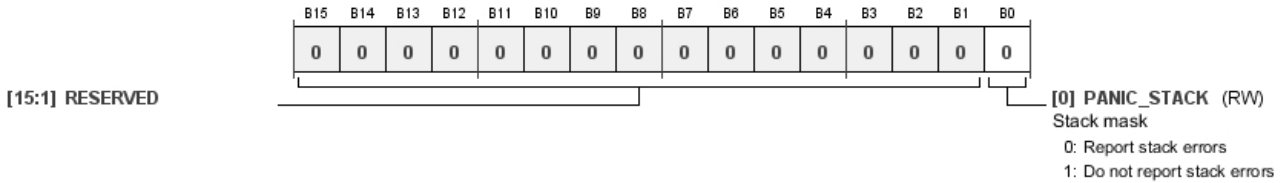


Table 94. Bit Descriptions for PANIC\_STACK\_MASK

| Bits   | Bit Name    | Settings | Description  | Reset | Access |
|--------|-------------|----------|--|-------|--------|
| [15:1] | RESERVED    |          |  | 0x0   | RW     |
| 0      | PANIC_STACK | 0<br>1   | Stack mask.<br>0 Report stack errors<br>1 Do not report stack errors | 0x0   | RW     |



**Panic Mask 3 Register**

Address: 0xF426, Reset: 0x0000, Name: PANIC\_LOOP\_MASK

The panic manager checks and reports software errors related to looping code sections. Register 0xF426 (PANIC\_LOOP\_MASK) allows the user to configure whether loop errors are reported to the panic manager or ignored.

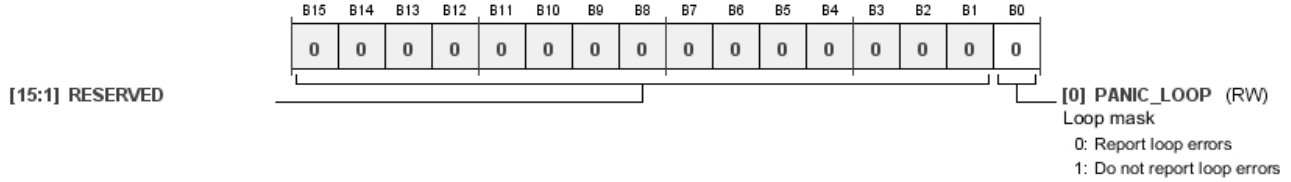


Table 95. Bit Descriptions for PANIC\_LOOP\_MASK

| Bits   | Bit Name   | Settings | Description   | Reset | Access |
|--------|------------|----------|---|-------|--------|
| [15:1] | RESERVED   |          |   | 0x0   | RW     |
| 0      | PANIC_LOOP | 0<br>1   | Loop mask.<br>Report loop errors<br>Do not report loop errors | 0x0   | RW     |

**Panic Flag Register**

Address: 0xF427, Reset: 0x0000, Name: PANIC\_FLAG

This register acts as the master error flag for the panic manager. If any error is encountered in any functional block whose panic manager mask is disabled, this register logs that an error has occurred. Individual functional block masks are configured using Register 0xF422 (PANIC\_PARITY\_MASK), Register 0xF423 (PANIC\_SOFTWARE\_MASK), Register 0xF424 (PANIC\_WD\_MASK), Register 0xF425 (PANIC\_STACK\_MASK), and Register 0xF426 (PANIC\_LOOP\_MASK).

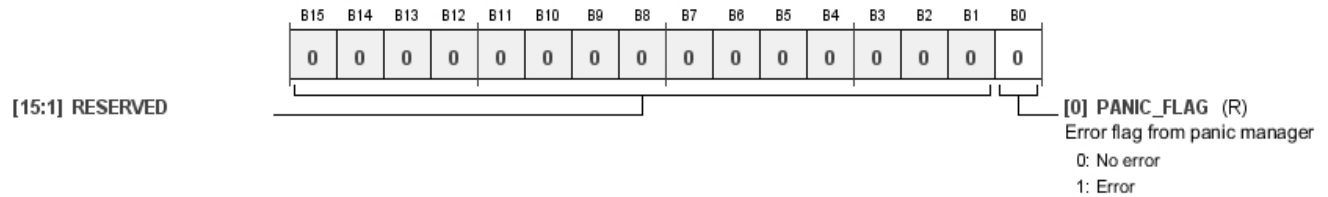



Table 96. Bit Descriptions for PANIC\_FLAG

| Bits   | Bit Name   | Settings | Description   | Reset | Access |
|--------|------------|----------|---|-------|--------|
| [15:1] | RESERVED   |          |   | 0x0   | RW     |
| 0      | PANIC_FLAG | 0<br>1   | Error flag from panic manager. This error flag bit is sticky. When an error is reported, this bit goes high, and it stays high until the user resets it using Register 0xF421 (PANIC_CLEAR).<br>No error<br>Error | 0x0   | R      |

**Panic Code Register**

Address: 0xF428, Reset: 0x0000, Name: PANIC\_CODE

When Register 0xF427 (PANIC\_FLAG) indicates that an error has occurred, this register provides details revealing which subsystem is reporting an error. If several errors occur, this register reports only the first error that occurs. Subsequent errors are ignored until the register is cleared by toggling Register 0xF421 (PANIC\_CLEAR).

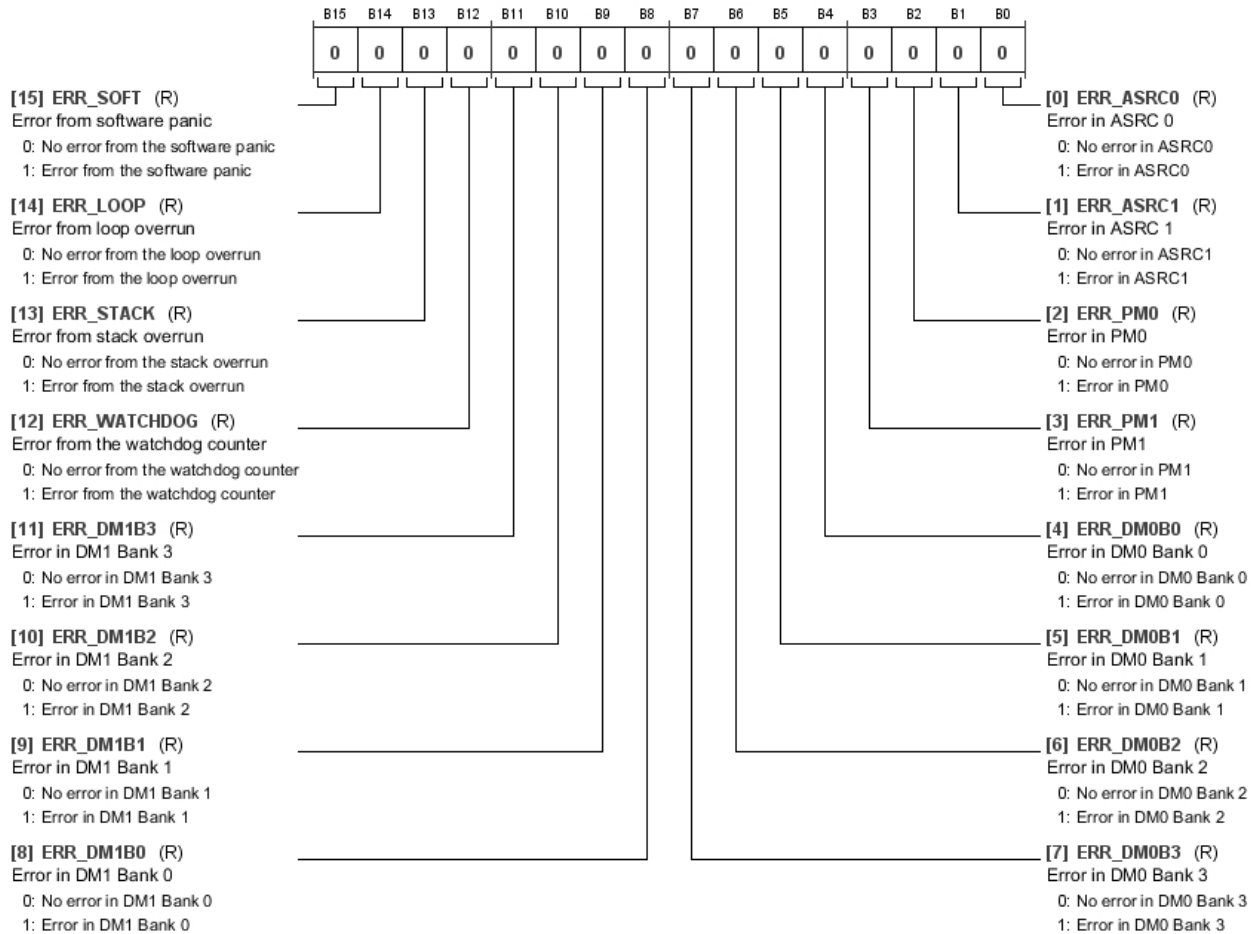

**Table 97. Bit Descriptions for PANIC\_CODE**


| Bits | Bit Name     | Settings | Description   | Reset | Access |
|------|--------------|----------|---|-------|--------|
| 15   | ERR_SOFT     | 0<br>1   | Error from software panic.<br>No error from the software panic<br>Error from the software panic           | 0x0   | R      |
| 14   | ERR_LOOP     | 0<br>1   | Error from loop overrun.<br>No error from the loop overrun<br>Error from the loop overrun                 | 0x0   | R      |
| 13   | ERR_STACK    | 0<br>1   | Error from stack overrun.<br>No error from the stack overrun<br>Error from the stack overrun              | 0x0   | R      |
| 12   | ERR_WATCHDOG | 0<br>1   | Error from the watchdog counter.<br>No error from the watchdog counter<br>Error from the watchdog counter | 0x0   | R      |
| 11   | ERR_DM1B3    | 0<br>1   | Error in DM1 Bank 3.<br>No error in DM1 Bank 3<br>Error in DM1 Bank 3                                     | 0x0   | R      |

| Bits | Bit Name  | Settings | Description   | Reset | Access |
|------|-----------|----------|---|-------|--------|
| 10   | ERR_DM1B2 | 0<br>1   | Error in DM1 Bank 2.<br>No error in DM1 Bank 2<br>Error in DM1 Bank 2 | 0x0   | R      |
| 9    | ERR_DM1B1 | 0<br>1   | Error in DM1 Bank 1.<br>No error in DM1 Bank 1<br>Error in DM1 Bank 1 | 0x0   | R      |
| 8    | ERR_DM1B0 | 0<br>1   | Error in DM1 Bank 0.<br>No error in DM1 Bank 0<br>Error in DM1 Bank 0 | 0x0   | R      |
| 7    | ERR_DM0B3 | 0<br>1   | Error in DM0 Bank 3.<br>No error in DM0 Bank 3<br>Error in DM0 Bank 3 | 0x0   | R      |
| 6    | ERR_DM0B2 | 0<br>1   | Error in DM0 Bank 2.<br>No error in DM0 Bank 2<br>Error in DM0 Bank 2 | 0x0   | R      |
| 5    | ERR_DM0B1 | 0<br>1   | Error in DM0 Bank 1.<br>No error in DM0 Bank 1<br>Error in DM0 Bank 1 | 0x0   | R      |
| 4    | ERR_DM0B0 | 0<br>1   | Error in DM0 Bank 0.<br>No error in DM0 Bank 0<br>Error in DM0 Bank 0 | 0x0   | R      |
| 3    | ERR_PM1   | 0<br>1   | Error in PM1.<br>No error in PM1<br>Error in PM1                      | 0x0   | R      |
| 2    | ERR_PM0   | 0<br>1   | Error in PM0.<br>No error in PM0<br>Error in PM0                      | 0x0   | R      |
| 1    | ERR_ASRC1 | 0<br>1   | Error in ASRC 1.<br>No error in ASRC 1<br>Error in ASRC 1             | 0x0   | R      |
| 0    | ERR_ASRC0 | 0<br>1   | Error in ASRC 0.<br>No error in ASRC 0<br>Error in ASRC 0             | 0x0   | R      |

### Execute Stage Error Program Count Register

Address: 0xF432, Reset: 0x0000, Name: EXECUTE\_COUNT

When a software error occurs, this register logs the program instruction count at the time when the error occurred for software debugging purposes.



[15:0] EXECUTE\_COUNT (RW)

Program count in the execute stage when the error occurred


Table 98. Bit Descriptions for EXECUTE\_COUNT

| Bits   | Bit Name      | Settings | Description   | Reset  | Access |
|--------|---------------|----------|---|--------|--------|
| [15:0] | EXECUTE_COUNT |          | Program count in the execute stage when the error occurred. | 0x0000 | RW     |

**SOFTWARE PANIC VALUE 0 REGISTER**

Address: 0xF433, Reset: 0x0000, Name: SOFTWARE\_VALUE\_0

When a software error occurs, this register the lower 16 bits of the instruction at the time when the error occurred for software debugging purposes.



[15:0] SOFTWARE\_VALUE\_0 (RW)  
Software panic value 0


**Table 99. Bit Descriptions for SOFTWARE\_VALUE\_0**

| Bits   | Bit Name         | Settings | Description             | Reset  | Access |
|--------|------------------|----------|-------------------------|--------|--------|
| [15:0] | SOFTWARE_VALUE_0 |          | Software panic value 0. | 0x0000 | RW     |

**SOFTWARE PANIC VALUE 1 REGISTER**

Address: 0xF434, Reset: 0x0000, Name: SOFTWARE\_VALUE\_1

When a software error occurs, this register the upper 16 bits of the instruction at the time when the error occurred for software debugging purposes.




[15:0] SOFTWARE\_VALUE\_1 (RW)  
Software panic value 1

**Table 100. Bit Descriptions for SOFTWARE\_VALUE\_1**

| Bits   | Bit Name         | Settings | Description             | Reset  | Access |
|--------|------------------|----------|-------------------------|--------|--------|
| [15:0] | SOFTWARE_VALUE_1 |          | Software panic value 1. | 0x0000 | RW     |

**Watchdog Maximum Count Register****Address: 0xF443, Reset: 0x0000, Name: WATCHDOG\_MAXCOUNT**

This register is designed to start counting at a specified number and decrement by 1 for each clock cycle of the system clock in the core. The counter is reset to the maximum value each time the program counter jumps to the beginning of the program to begin processing another audio frame (this is implemented in the DSP program code generated by [SigmaStudio](#)). If the counter reaches 0, a watchdog error flag is raised in the panic manager. The watchdog is typically set to begin counting from a number slightly larger than the maximum number of instructions expected to execute in the program, such that an error occurs if the program does not finish in time for the next incoming sample.



[15:13] RESERVED

[12:0] WD\_MAXCOUNT (RW)  
Value from which the watchdog counter begins counting down**Table 101. Bit Descriptions for WATCHDOG\_MAXCOUNT**

| Bits    | Bit Name    | Settings | Description   | Reset  | Access |
|---------|-------------|----------|---|--------|--------|
| [15:13] | RESERVED    |          |   | 0x0    | RW     |
| [12:0]  | WD_MAXCOUNT |          | Value from which the watchdog counter begins counting down. | 0x0000 | RW     |

**Watchdog Prescale Register**

Address: 0xF444, Reset: 0x0000, Name: WATCHDOG\_PRESCALE

The watchdog prescaler is a number that is multiplied by the setting in Register 0xF443 (WATCHDOG\_MAXCOUNT) to achieve very large counts for the watchdog, if necessary. Using the largest prescale factor of 128 × 1024 and the largest watchdog maximum count of 64 × 1024, a very large watchdog counter, on the order of 8.5 billion clock cycles, can be achieved.

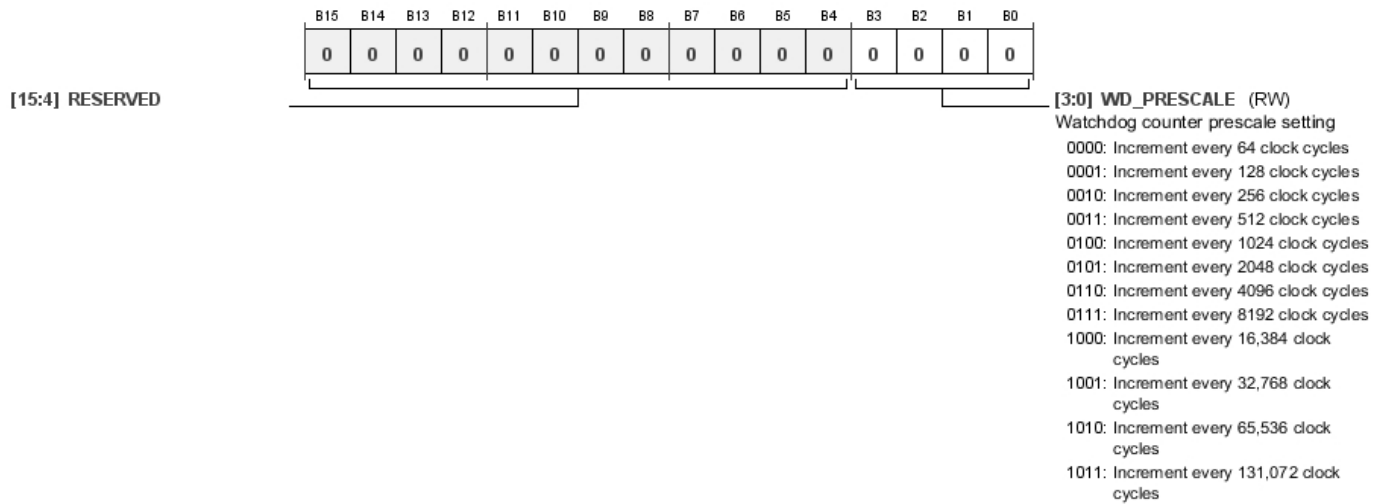


Table 102. Bit Descriptions for WATCHDOG\_PRESCALE

| Bits   | Bit Name    | Settings   | Description  | Reset | Access |
|--------|-------------|--|--|-------|--------|
| [15:4] | RESERVED    |  |  | 0x0   | RW     |
| [3:0]  | WD_PRESCALE | 0000<br>0001<br>0010<br>0011<br>0100<br>0101<br>0110<br>0111<br>1000<br>1001<br>1010<br>1011 | Watchdog counter prescale setting.<br>Increment every 64 clock cycles<br>Increment every 128 clock cycles<br>Increment every 256 clock cycles<br>Increment every 512 clock cycles<br>Increment every 1024 clock cycles<br>Increment every 2048 clock cycles<br>Increment every 4096 clock cycles<br>Increment every 8192 clock cycles<br>Increment every 16,384 clock cycles<br>Increment every 32,768 clock cycles<br>Increment every 65,536 clock cycles<br>Increment every 131,072 clock cycles | 0x0   | RW     |

**DSP PROGRAM EXECUTION REGISTERS**

**Enable Block Interrupts Register**

Address: 0xF450, Reset: 0x0000, Name: BLOCKINT\_EN

This register enables block interrupts, which are necessary when frequency domain processing is required in the audio processing program. If block processing algorithms are used in SigmaStudio, SigmaStudio automatically sets this register accordingly. The user does not need to manually change the value of this register after SigmaStudio has configured it.

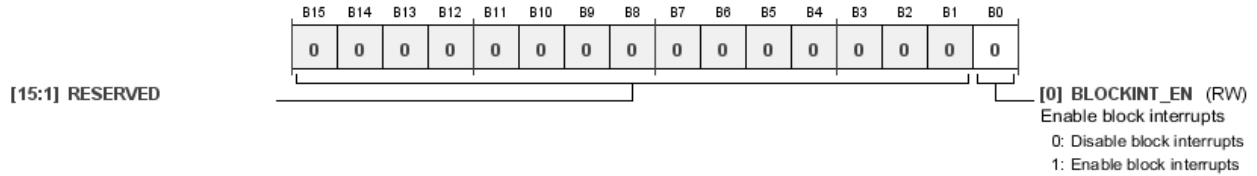


Table 103. Bit Descriptions for BLOCKINT\_EN

| Bits   | Bit Name    | Settings | Description   | Reset | Access |
|--------|-------------|----------|---|-------|--------|
| [15:1] | RESERVED    |          |   | 0x0   | RW     |
| 0      | BLOCKINT_EN | 0<br>1   | Enable block interrupts.<br>Disable block interrupts<br>Enable block interrupts | 0x0   | RW     |

**Value for the Block Interrupt Counter Register**

Address: 0xF451, Reset: 0x0000, Name: BLOCKINT\_VALUE

This 16-bit register controls the duration in audio frames of a block. A counter increments each time a new frame start pulse is received by the DSP core. When the counter reaches the value determined by this register, a block interrupt is generated and the counter is reset. If block processing algorithms are used in SigmaStudio, SigmaStudio automatically sets this register accordingly. The user does not need to manually change the value of this register after SigmaStudio has configured it.

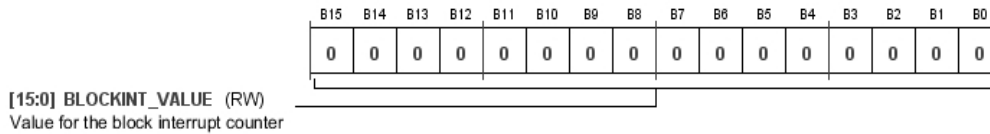


Table 104. Bit Descriptions for BLOCKINT\_VALUE

| Bits   | Bit Name       | Settings | Description                            | Reset  | Access |
|--------|----------------|----------|--|--------|--------|
| [15:0] | BLOCKINT_VALUE |          | Value for the block interrupt counter. | 0x0000 | RW     |

**Program Counter, Bits[23:16] Register**

Address: 0xF460, Reset: 0x0000, Name: PROG\_CNTR0

This register, in combination with Register 0xF461 (PROG\_CNTR1), stores the current value of the program counter.

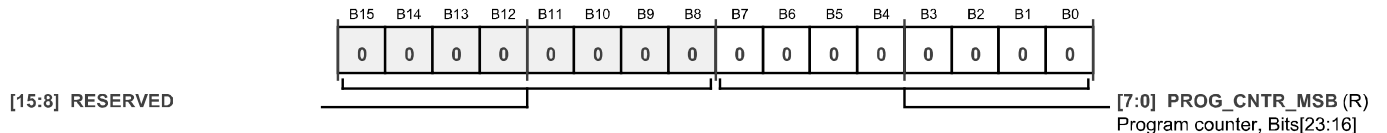



Table 105. Bit Descriptions for PROG\_CNTR0

| Bits   | Bit Name      | Settings | Description                   | Reset | Access |
|--------|---------------|----------|-------------------------------|-------|--------|
| [15:8] | RESERVED      |          |                               | 0x0   | RW     |
| [7:0]  | PROG_CNTR_MSB |          | Program counter, Bits[23:16]. | 0x00  | R      |

**Program Counter, Bits[15:0] Register**

Address: 0xF461, Reset: 0x0000, Name: PROG\_CNTR1

This register, in combination with Register 0xF460 (PROG\_CNTR0), stores the current value of the program counter.



[15:0] PROG\_CNTR\_LSB (R)  
Program counter, Bits [15:0]


Table 106. Bit Descriptions for PROG\_CNTR1

| Bits   | Bit Name      | Settings | Description                  | Reset  | Access |
|--------|---------------|----------|------------------------------|--------|--------|
| [15:0] | PROG_CNTR_LSB |          | Program counter, Bits[15:0]. | 0x0000 | R      |

**Program Counter Clear Register**

Address: 0xF462, Reset: 0x0000, Name: PROG\_CNTR\_CLEAR

Enabling and disabling Bit 0 (PROG\_CNTR\_CLEAR) resets Register 0xF465 (PROG\_CNTR\_MAXLENGTH0) and Register 0xF466 (PROG\_CNTR\_MAXLENGTH1).

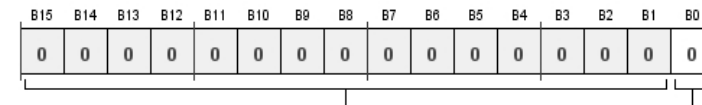

[15:1] RESERVED

[0] PROG\_CNTR\_CLEAR (RW)  
Clears the program counter  
0: Allow the program counter to update itself  
1: Clear the program counter and disable it from updating itself


Table 107. Bit Descriptions for PROG\_CNTR\_CLEAR

| Bits   | Bit Name        | Settings | Description  | Reset | Access |
|--------|-----------------|----------|--|-------|--------|
| [15:1] | RESERVED        |          |  | 0x0   | RW     |
| 0      | PROG_CNTR_CLEAR | 0<br>1   | Clears the program counter.<br>Allow the program counter to update itself<br>Clear the program counter and disable it from updating itself | 0x0   | RW     |

**Program Counter Length, Bits[23:16] Register**

Address: 0xF463, Reset: 0x0000, Name: PROG\_CNTR\_LENGTH0

This register, in combination with Register 0xF464 (PROG\_CNTR\_LENGTH1), keeps track of the peak value reached by the program counter during the last audio frame or block. It can be cleared using Register 0xF462 (PROG\_CNTR\_CLEAR).



[15:8] RESERVED

[7:0] PROG\_LENGTH\_MSB(R)  
Program counter length, Bits[23:16]

Table 108. Bit Descriptions for PROG\_CNTR\_LENGTH0

| Bits   | Bit Name        | Settings | Description                         | Reset | Access |
|--------|-----------------|----------|-------------------------------------|-------|--------|
| [15:8] | RESERVED        |          |                                     | 0x0   | RW     |
| [7:0]  | PROG_LENGTH_MSB |          | Program counter length, Bits[23:16] | 0x00  | R      |



**Program Counter Length, Bits[15:0] Register**

Address: 0xF464, Reset: 0x0000, Name: PROG\_CNTR\_LENGTH1

This register, in combination with Register 0xF463 (PROG\_CNTR\_LENGTH0), keeps track of the peak value reached by the program counter during the last audio frame or block. It can be cleared using Register 0xF462 (PROG\_CNTR\_CLEAR).

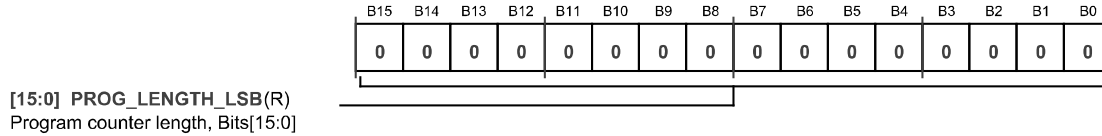


Table 109. Bit Descriptions for PROG\_CNTR\_LENGTH1

| Bits   | Bit Name        | Settings | Description                        | Reset  | Access |
|--------|-----------------|----------|------------------------------------|--------|--------|
| [15:0] | PROG_LENGTH_LSB |          | Program counter length, Bits[15:0] | 0x0000 | R      |

**Program Counter Maximum Length, Bits[23:16] Register**

Address: 0xF465, Reset: 0x0000, Name: PROG\_CNTR\_MAXLENGTH0

This register, in combination with Register 0xF466 (PROG\_CNTR\_MAXLENGTH1), keeps track of the highest peak value reached by the program counter since the DSP core started. It can be cleared using Register 0xF462 (PROG\_CNTR\_CLEAR).

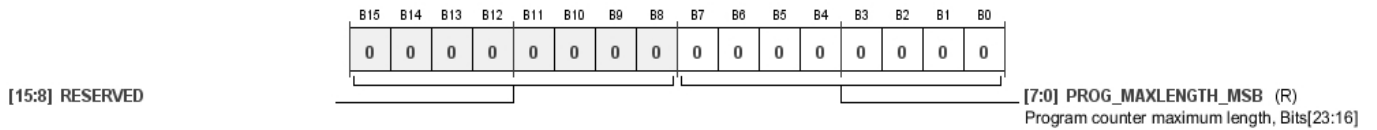


Table 110. Bit Descriptions for PROG\_CNTR\_MAXLENGTH0

| Bits   | Bit Name           | Settings | Description                                 | Reset | Access |
|--------|--------------------|----------|---|-------|--------|
| [15:8] | RESERVED           |          |   | 0x0   | RW     |
| [7:0]  | PROG_MAXLENGTH_MSB |          | Program counter maximum length, Bits[23:16] | 0x00  | R      |

**Program Counter Maximum Length, Bits[15:0] Register**

Address: 0xF466, Reset: 0x0000, Name: PROG\_CNTR\_MAXLENGTH1

This register, in combination with Register 0xF465 (PROG\_CNTR\_MAXLENGTH0), keeps track of the highest peak value reached by the program counter since the DSP core started. It can be cleared using Register 0xF462 (PROG\_CNTR\_CLEAR).

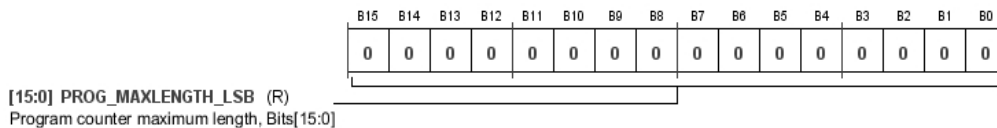



Table 111. Bit Descriptions for PROG\_CNTR\_MAXLENGTH1

| Bits   | Bit Name           | Settings | Description                                | Reset  | Access |
|--------|--------------------|----------|--|--------|--------|
| [15:0] | PROG_MAXLENGTH_LSB |          | Program counter maximum length, Bits[15:0] | 0x0000 | R      |

**PANIC MASK REGISTERS**

**Panic Mask Parity DM0 Bank [1:0] Register**

Address: 0xF467, Reset: 0x0000, Name: PANIC\_PARITY\_MASK1

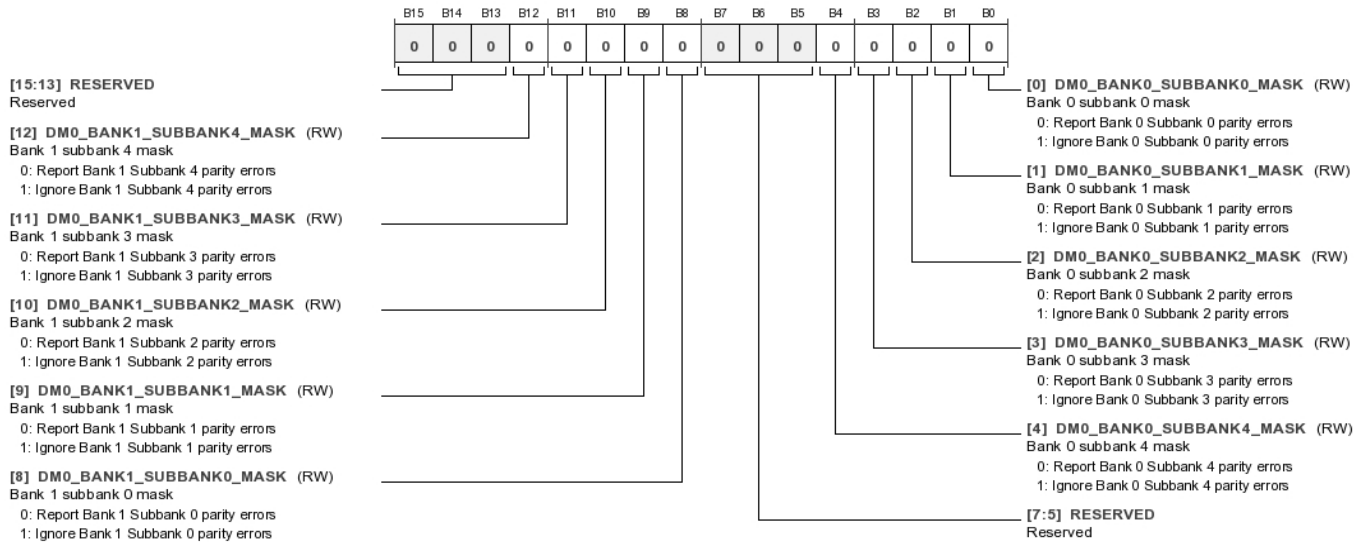

**Table 112. Bit Descriptions for PANIC\_PARITY\_MASK1**

| Bits    | Bit Name                | Settings | Description  | Reset | Access |
|---------|-------------------------|----------|--|-------|--------|
| [15:13] | RESERVED                |          | Reserved.  | 0x0   | RW     |
| 12      | DM0_BANK1_SUBBANK4_MASK | 0<br>1   | Bank 1 Subbank 4 mask.<br>0 Report Bank 1 Subbank 4 parity errors<br>1 Ignore Bank 1 Subbank 4 parity errors | 0x0   | RW     |
| 11      | DM0_BANK1_SUBBANK3_MASK | 0<br>1   | Bank 1 Subbank 3 mask.<br>0 Report Bank 1 Subbank 3 parity errors<br>1 Ignore Bank 1 Subbank 3 parity errors | 0x0   | RW     |
| 10      | DM0_BANK1_SUBBANK2_MASK | 0<br>1   | Bank 1 Subbank 2 mask.<br>0 Report Bank 1 Subbank 2 parity errors<br>1 Ignore Bank 1 Subbank 2 parity errors | 0x0   | RW     |
| 9       | DM0_BANK1_SUBBANK1_MASK | 0<br>1   | Bank 1 Subbank 1 mask.<br>0 Report Bank 1 Subbank 1 parity errors<br>1 Ignore Bank 1 Subbank 1 parity errors | 0x0   | RW     |
| 8       | DM0_BANK1_SUBBANK0_MASK | 0<br>1   | Bank 1 Subbank 0 mask.<br>0 Report Bank 1 Subbank 0 parity errors<br>1 Ignore Bank 1 Subbank 0 parity errors | 0x0   | RW     |
| [7:5]   | RESERVED                |          | Reserved.  | 0x0   | RW     |
| 4       | DM0_BANK0_SUBBANK4_MASK | 0<br>1   | Bank 0 Subbank 4 mask.<br>0 Report Bank 0 Subbank 4 parity errors<br>1 Ignore Bank 0 Subbank 4 parity errors | 0x0   | RW     |
| 3       | DM0_BANK0_SUBBANK3_MASK | 0<br>1   | Bank 0 Subbank 3 mask.<br>0 Report Bank 0 Subbank 3 parity errors<br>1 Ignore Bank 0 Subbank 3 parity errors | 0x0   | RW     |
| 2       | DM0_BANK0_SUBBANK2_MASK | 0<br>1   | Bank 0 Subbank 2 mask.<br>0 Report Bank 0 Subbank 2 parity errors<br>1 Ignore Bank 0 Subbank 2 parity errors | 0x0   | RW     |
| 1       | DM0_BANK0_SUBBANK1_MASK | 0<br>1   | Bank 0 Subbank 1 mask.<br>0 Report Bank 0 Subbank 1 parity errors<br>1 Ignore Bank 0 Subbank 1 parity errors | 0x0   | RW     |

| Bits | Bit Name                | Settings | Description  | Reset | Access |
|------|-------------------------|----------|--|-------|--------|
| 0    | DM0_BANK0_SUBBANK0_MASK | 0<br>1   | Bank 0 Subbank 0 mask.<br>0 Report Bank 0 Subbank 0 parity errors<br>1 Ignore Bank 0 Subbank 0 parity errors | 0x0   | RW     |

**Panic Mask Parity DM0 Bank [3:2] Register**

Address: 0xF468, Reset: 0x0000, Name: PANIC\_PARITY\_MASK2

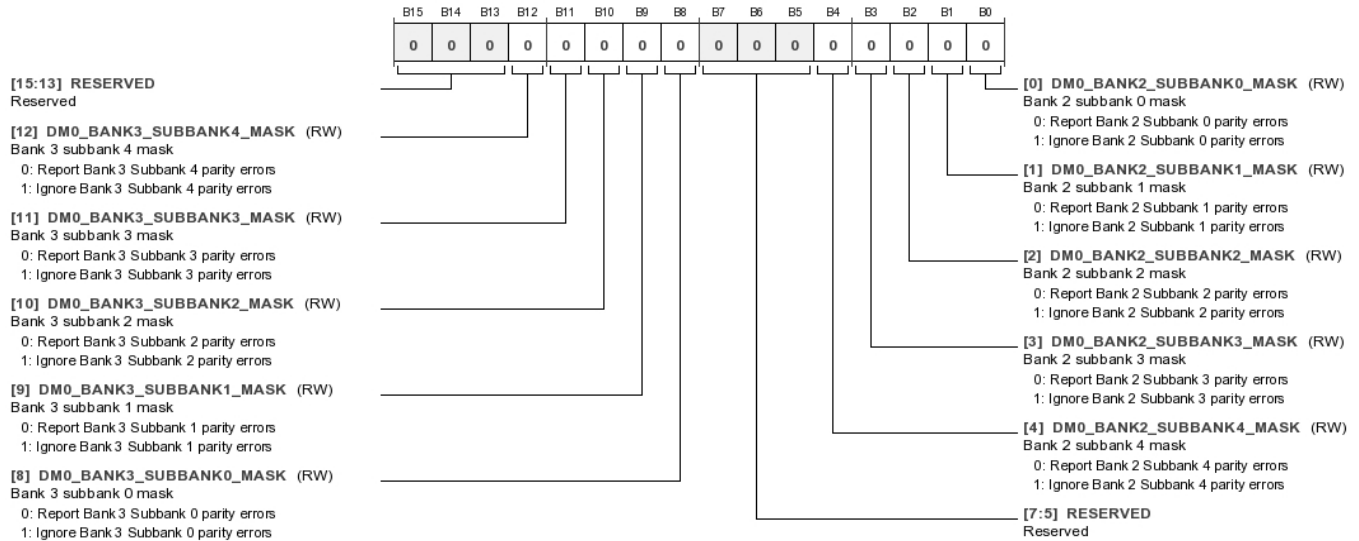


Table 113. Bit Descriptions for PANIC\_PARITY\_MASK2

| Bits    | Bit Name                | Settings | Description  | Reset | Access |
|---------|-------------------------|----------|--|-------|--------|
| [15:13] | RESERVED                |          | Reserved.  | 0x0   | RW     |
| 12      | DM0_BANK3_SUBBANK4_MASK | 0<br>1   | Bank 3 Subbank 4 mask.<br>0 Report Bank 3 Subbank 4 parity errors<br>1 Ignore Bank 3 Subbank 4 parity errors | 0x0   | RW     |
| 11      | DM0_BANK3_SUBBANK3_MASK | 0<br>1   | Bank 3 Subbank 3 mask.<br>0 Report Bank 3 Subbank 3 parity errors<br>1 Ignore Bank 3 Subbank 3 parity errors | 0x0   | RW     |
| 10      | DM0_BANK3_SUBBANK2_MASK | 0<br>1   | Bank 3 subbank 2 mask.<br>0 Report Bank 3 Subbank 2 parity errors<br>1 Ignore Bank 3 Subbank 2 parity errors | 0x0   | RW     |
| 9       | DM0_BANK3_SUBBANK1_MASK | 0<br>1   | Bank 3 Subbank 1 mask.<br>0 Report Bank 3 Subbank 1 parity errors<br>1 Ignore Bank 3 Subbank 1 parity errors | 0x0   | RW     |
| 8       | DM0_BANK3_SUBBANK0_MASK | 0<br>1   | Bank 3 Subbank 0 mask.<br>0 Report Bank 3 Subbank 0 parity errors<br>1 Ignore Bank 3 Subbank 0 parity errors | 0x0   | RW     |
| [7:5]   | RESERVED                |          | Reserved.  | 0x0   | RW     |
| 4       | DM0_BANK2_SUBBANK4_MASK | 0<br>1   | Bank 2 Subbank 4 mask.<br>0 Report Bank 2 Subbank 4 parity errors<br>1 Ignore Bank 2 Subbank 4 parity errors | 0x0   | RW     |
| 3       | DM0_BANK2_SUBBANK3_MASK | 0<br>1   | Bank 2 Subbank 3 mask.<br>0 Report Bank 2 Subbank 3 parity errors<br>1 Ignore Bank 2 Subbank 3 parity errors | 0x0   | RW     |

| Bits | Bit Name                | Settings | Description  | Reset | Access |
|------|-------------------------|----------|--|-------|--------|
| 2    | DM0_BANK2_SUBBANK2_MASK | 0<br>1   | Bank 2 Subbank 2 mask.<br>Report Bank 2 Subbank 2 parity errors<br>Ignore Bank 2 Subbank 2 parity errors | 0x0   | RW     |
| 1    | DM0_BANK2_SUBBANK1_MASK | 0<br>1   | Bank 2 Subbank 1 mask.<br>Report Bank 2 Subbank 1 parity errors<br>Ignore Bank 2 Subbank 1 parity errors | 0x0   | RW     |
| 0    | DM0_BANK2_SUBBANK0_MASK | 0<br>1   | Bank 2 Subbank 0 mask.<br>Report Bank 2 Subbank 0 parity errors<br>Ignore Bank 2 Subbank 0 parity errors | 0x0   | RW     |

**Panic Mask Parity DM1 Bank [1:0] Register**

Address: 0xF469, Reset: 0x0000, Name: PANIC\_PARITY\_MASK3

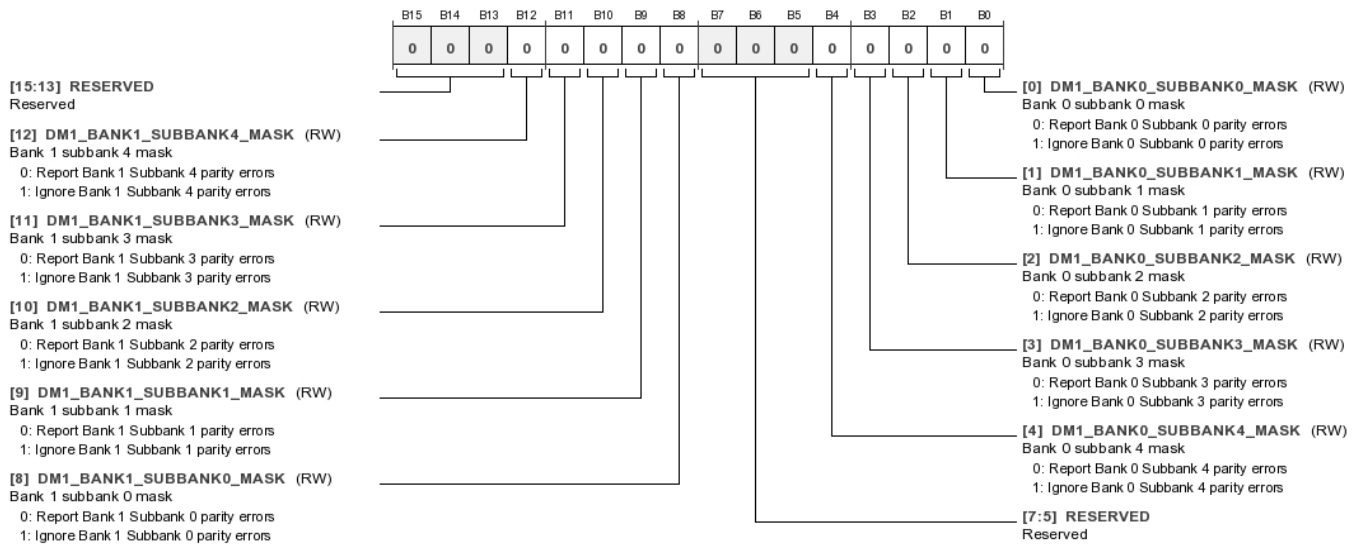


Table 114. Bit Descriptions for PANIC\_PARITY\_MASK3

| Bits    | Bit Name                | Settings | Description  | Reset | Access |
|---------|-------------------------|----------|--|-------|--------|
| [15:13] | RESERVED                |          | Reserved.  | 0x0   | RW     |
| 12      | DM1_BANK1_SUBBANK4_MASK | 0<br>1   | Bank 1 Subbank 4 mask.<br>Report Bank 1 Subbank 4 parity errors<br>Ignore Bank 1 Subbank 4 parity errors | 0x0   | RW     |
| 11      | DM1_BANK1_SUBBANK3_MASK | 0<br>1   | Bank 1 Subbank 3 mask.<br>Report Bank 1 Subbank 3 parity errors<br>Ignore Bank 1 Subbank 3 parity errors | 0x0   | RW     |
| 10      | DM1_BANK1_SUBBANK2_MASK | 0<br>1   | Bank 1 Subbank 2 mask.<br>Report Bank 1 Subbank 2 parity errors<br>Ignore Bank 1 Subbank 2 parity errors | 0x0   | RW     |
| 9       | DM1_BANK1_SUBBANK1_MASK | 0<br>1   | Bank 1 Subbank 1 mask.<br>Report Bank 1 Subbank 1 parity errors<br>Ignore Bank 1 Subbank 1 parity errors | 0x0   | RW     |
| 8       | DM1_BANK1_SUBBANK0_MASK | 0<br>1   | Bank 1 Subbank 0 mask.<br>Report Bank 1 Subbank 0 parity errors<br>Ignore Bank 1 Subbank 0 parity errors | 0x0   | RW     |
| [7:5]   | RESERVED                |          | Reserved.  | 0x0   | RW     |

| Bits | Bit Name                | Settings | Description  | Reset | Access |
|------|-------------------------|----------|--|-------|--------|
| 4    | DM1_BANK0_SUBBANK4_MASK | 0<br>1   | Bank 0 Subbank 4 mask.<br>Report Bank 0 Subbank 4 parity errors<br>Ignore Bank 0 Subbank 4 parity errors | 0x0   | RW     |
| 3    | DM1_BANK0_SUBBANK3_MASK | 0<br>1   | Bank 0 Subbank 3 mask.<br>Report Bank 0 Subbank 3 parity errors<br>Ignore Bank 0 Subbank 3 parity errors | 0x0   | RW     |
| 2    | DM1_BANK0_SUBBANK2_MASK | 0<br>1   | Bank 0 Subbank 2 mask.<br>Report Bank 0 Subbank 2 parity errors<br>Ignore Bank 0 Subbank 2 parity errors | 0x0   | RW     |
| 1    | DM1_BANK0_SUBBANK1_MASK | 0<br>1   | Bank 0 Subbank 1 mask.<br>Report Bank 0 Subbank 1 parity errors<br>Ignore Bank 0 Subbank 1 parity errors | 0x0   | RW     |
| 0    | DM1_BANK0_SUBBANK0_MASK | 0<br>1   | Bank 0 Subbank 0 mask.<br>Report Bank 0 Subbank 0 parity errors<br>Ignore Bank 0 Subbank 0 parity errors | 0x0   | RW     |

**Panic Mask Parity DM1 Bank [3:2] Register**

Address: 0xF46A, Reset: 0x0000, Name: PANIC\_PARITY\_MASK4

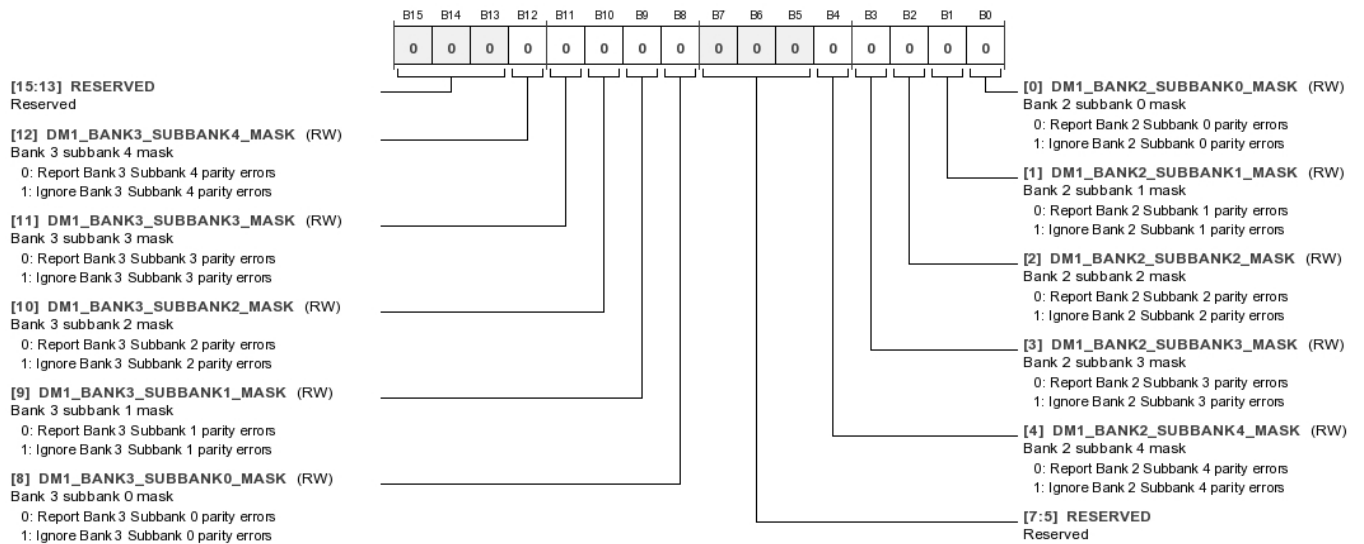


Table 115. Bit Descriptions for PANIC\_PARITY\_MASK4

| Bits    | Bit Name                | Settings | Description  | Reset | Access |
|---------|-------------------------|----------|--|-------|--------|
| [15:13] | RESERVED                |          | Reserved.  | 0x0   | RW     |
| 12      | DM1_BANK3_SUBBANK4_MASK | 0<br>1   | Bank 3 Subbank 4 mask.<br>Report Bank 3 Subbank 4 parity errors<br>Ignore Bank 3 Subbank 4 parity errors | 0x0   | RW     |
| 11      | DM1_BANK3_SUBBANK3_MASK | 0<br>1   | Bank 3 Subbank 3 mask.<br>Report Bank 3 Subbank 3 parity errors<br>Ignore Bank 3 Subbank 3 parity errors | 0x0   | RW     |
| 10      | DM1_BANK3_SUBBANK2_MASK | 0<br>1   | Bank 3 Subbank 2 mask.<br>Report Bank 3 Subbank 2 parity errors<br>Ignore Bank 3 Subbank 2 parity errors | 0x0   | RW     |
| 9       | DM1_BANK3_SUBBANK1_MASK | 0<br>1   | Bank 3 Subbank 1 mask.<br>Report Bank 3 Subbank 1 parity errors<br>Ignore Bank 3 Subbank 1 parity errors | 0x0   | RW     |

| Bits  | Bit Name                | Settings | Description  | Reset | Access |
|-------|-------------------------|----------|--|-------|--------|
| 8     | DM1_BANK3_SUBBANK0_MASK | 0<br>1   | Bank 3 Subbank 0 mask.<br>Report Bank 3 Subbank 0 parity errors<br>Ignore Bank 3 Subbank 0 parity errors | 0x0   | RW     |
| [7:5] | RESERVED                |          | Reserved.  | 0x0   | RW     |
| 4     | DM1_BANK2_SUBBANK4_MASK | 0<br>1   | Bank 2 Subbank 4 mask.<br>Report Bank 2 Subbank 4 parity errors<br>Ignore Bank 2 Subbank 4 parity errors | 0x0   | RW     |
| 3     | DM1_BANK2_SUBBANK3_MASK | 0<br>1   | Bank 2 Subbank 3 mask.<br>Report Bank 2 Subbank 3 parity errors<br>Ignore Bank 2 Subbank 3 parity errors | 0x0   | RW     |
| 2     | DM1_BANK2_SUBBANK2_MASK | 0<br>1   | Bank 2 Subbank 2 mask.<br>Report Bank 2 Subbank 2 parity errors<br>Ignore Bank 2 Subbank 2 parity errors | 0x0   | RW     |
| 1     | DM1_BANK2_SUBBANK1_MASK | 0<br>1   | Bank 2 Subbank 1 mask.<br>Report Bank 2 Subbank 1 parity errors<br>Ignore Bank 2 Subbank 1 parity errors | 0x0   | RW     |
| 0     | DM1_BANK2_SUBBANK0_MASK | 0<br>1   | Bank 2 Subbank 0 mask.<br>Report Bank 2 Subbank 0 parity errors<br>Ignore Bank 2 Subbank 0 parity errors | 0x0   | RW     |

**Panic Mask Parity PM Bank [1:0] Register**

Address: 0xF46B, Reset: 0x0000, Name: PANIC\_PARITY\_MASK5

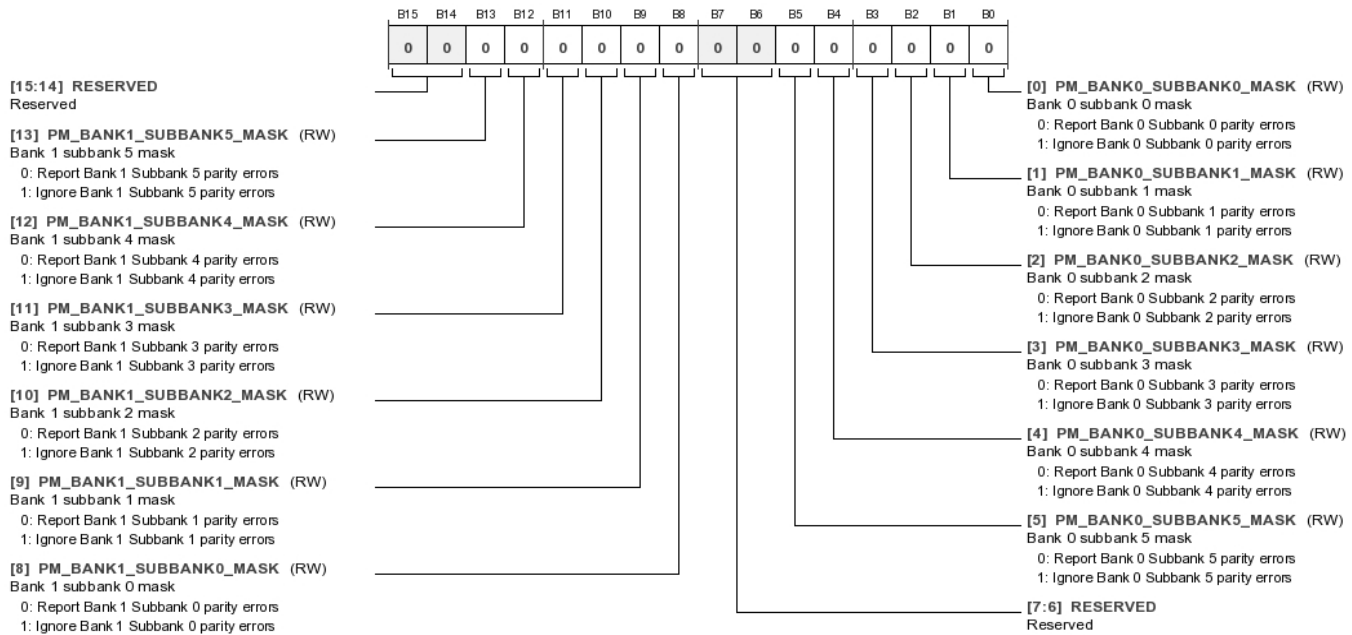


Table 116. Bit Descriptions for PANIC\_PARITY\_MASK5

| Bits    | Bit Name               | Settings | Description  | Reset | Access |
|---------|------------------------|----------|--|-------|--------|
| [15:14] | RESERVED               |          | Reserved.  | 0x0   | RW     |
| 13      | PM_BANK1_SUBBANK5_MASK | 0<br>1   | Bank 1 Subbank 5 mask.<br>Report Bank 1 Subbank 5 parity errors<br>Ignore Bank 1 Subbank 5 parity errors | 0x0   | RW     |
| 12      | PM_BANK1_SUBBANK4_MASK | 0<br>1   | Bank 1 Subbank 4 mask.<br>Report Bank 1 Subbank 4 parity errors<br>Ignore Bank 1 Subbank 4 parity errors | 0x0   | RW     |

| Bits  | Bit Name               | Settings | Description  | Reset | Access |
|-------|------------------------|----------|--|-------|--------|
| 11    | PM_BANK1_SUBBANK3_MASK | 0<br>1   | Bank 1 Subbank 3 mask.<br>Report Bank 1 Subbank 3 parity errors<br>Ignore Bank 1 Subbank 3 parity errors | 0x0   | RW     |
| 10    | PM_BANK1_SUBBANK2_MASK | 0<br>1   | Bank 1 Subbank 2 mask.<br>Report Bank 1 Subbank 2 parity errors<br>Ignore Bank 1 Subbank 2 parity errors | 0x0   | RW     |
| 9     | PM_BANK1_SUBBANK1_MASK | 0<br>1   | Bank 1 Subbank 1 mask.<br>Report Bank 1 Subbank 1 parity errors<br>Ignore Bank 1 Subbank 1 parity errors | 0x0   | RW     |
| 8     | PM_BANK1_SUBBANK0_MASK | 0<br>1   | Bank 1 Subbank 0 mask.<br>Report Bank 1 Subbank 0 parity errors<br>Ignore Bank 1 Subbank 0 parity errors | 0x0   | RW     |
| [7:6] | RESERVED               |          | Reserved.  | 0x0   | RW     |
| 5     | PM_BANK0_SUBBANK5_MASK | 0<br>1   | Bank 0 Subbank 5 mask.<br>Report Bank 0 Subbank 5 parity errors<br>Ignore Bank 0 Subbank 5 parity errors | 0x0   | RW     |
| 4     | PM_BANK0_SUBBANK4_MASK | 0<br>1   | Bank 0 Subbank 4 mask.<br>Report Bank 0 Subbank 4 parity errors<br>Ignore Bank 0 Subbank 4 parity errors | 0x0   | RW     |
| 3     | PM_BANK0_SUBBANK3_MASK | 0<br>1   | Bank 0 Subbank 3 mask.<br>Report Bank 0 Subbank 3 parity errors<br>Ignore Bank 0 Subbank 3 parity errors | 0x0   | RW     |
| 2     | PM_BANK0_SUBBANK2_MASK | 0<br>1   | Bank 0 Subbank 2 mask.<br>Report Bank 0 Subbank 2 parity errors<br>Ignore Bank 0 Subbank 2 parity errors | 0x0   | RW     |
| 1     | PM_BANK0_SUBBANK1_MASK | 0<br>1   | Bank 0 Subbank 1 mask.<br>Report Bank 0 Subbank 1 parity errors<br>Ignore Bank 0 Subbank 1 parity errors | 0x0   | RW     |
| 0     | PM_BANK0_SUBBANK0_MASK | 0<br>1   | Bank 0 Subbank 0 mask.<br>Report Bank 0 Subbank 0 parity errors<br>Ignore Bank 0 Subbank 0 parity errors | 0x0   | RW     |



**Panic Parity Error DM0 Bank [1:0] Register**

Address: 0xF46C, Reset: 0x0000, Name: PANIC\_CODE1

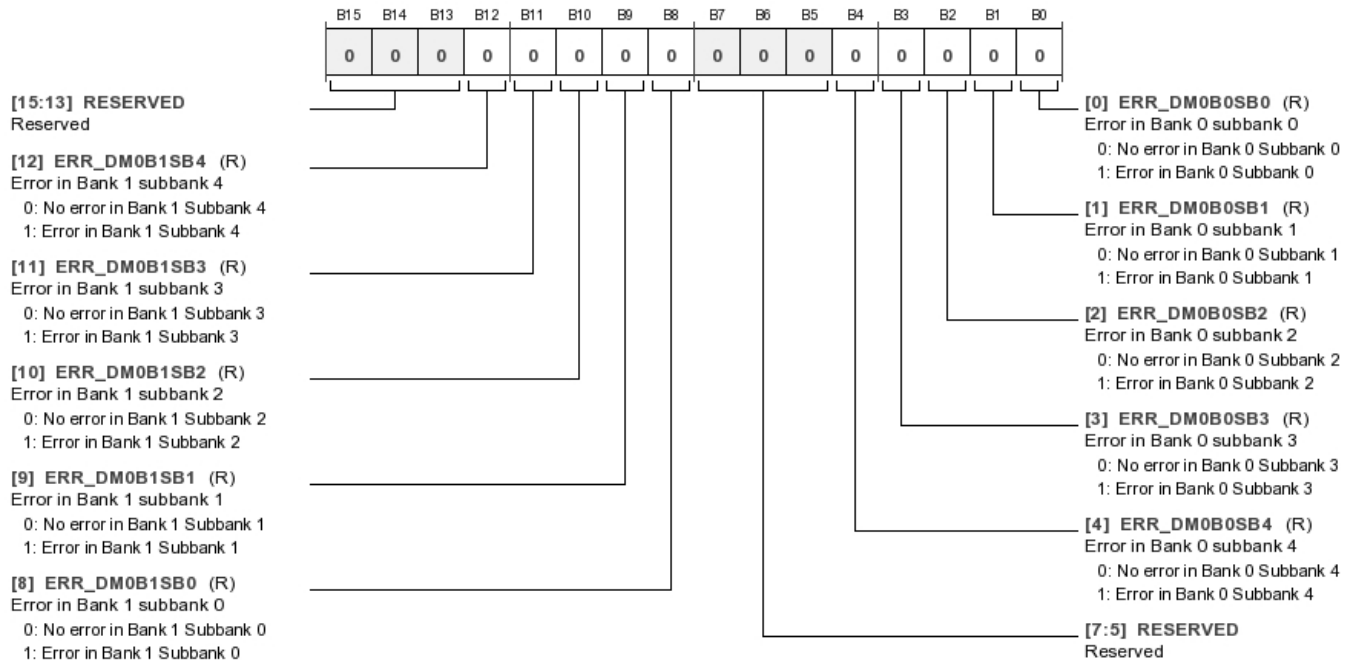


Table 117. Bit Descriptions for PANIC\_CODE1

| Bits    | Bit Name     | Settings | Description   | Reset | Access |
|---------|--------------|----------|---|-------|--------|
| [15:13] | RESERVED     |          | Reserved.   | 0x0   | RW     |
| 12      | ERR_DM0B1SB4 | 0<br>1   | Error in Bank 1 Subbank 4.<br>No error in Bank 1 Subbank 4<br>Error in Bank 1 Subbank 4 | 0x0   | R      |
| 11      | ERR_DM0B1SB3 | 0<br>1   | Error in Bank 1 Subbank 3.<br>No error in Bank 1 Subbank 3<br>Error in Bank 1 Subbank 3 | 0x0   | R      |
| 10      | ERR_DM0B1SB2 | 0<br>1   | Error in Bank 1 subbank 2.<br>No error in Bank 1 Subbank 2<br>Error in Bank 1 Subbank 2 | 0x0   | R      |
| 9       | ERR_DM0B1SB1 | 0<br>1   | Error in Bank 1 Subbank 1.<br>No error in Bank 1 Subbank 1<br>Error in Bank 1 Subbank 1 | 0x0   | R      |
| 8       | ERR_DM0B1SB0 | 0<br>1   | Error in Bank 1 Subbank 0.<br>No error in Bank 1 Subbank 0<br>Error in Bank 1 Subbank 0 | 0x0   | R      |
| [7:5]   | RESERVED     |          | Reserved.   | 0x0   | RW     |
| 4       | ERR_DM0B0SB4 | 0<br>1   | Error in Bank 0 Subbank 4.<br>No error in Bank 0 Subbank 4<br>Error in Bank 0 Subbank 4 | 0x0   | R      |
| 3       | ERR_DM0B0SB3 | 0<br>1   | Error in Bank 0 Subbank 3.<br>No error in Bank 0 Subbank 3<br>Error in Bank 0 Subbank 3 | 0x0   | R      |
| 2       | ERR_DM0B0SB2 | 0<br>1   | Error in Bank 0 Subbank 2.<br>No error in Bank 0 Subbank 2<br>Error in Bank 0 Subbank 2 | 0x0   | R      |



| Bits | Bit Name     | Settings | Description   | Reset | Access |
|------|--------------|----------|---|-------|--------|
| 1    | ERR_DM0B0SB1 | 0<br>1   | Error in Bank 0 Subbank 1.<br>No error in Bank 0 Subbank 1<br>Error in Bank 0 Subbank 1 | 0x0   | R      |
| 0    | ERR_DM0B0SB0 | 0<br>1   | Error in Bank 0 Subbank 0.<br>No error in Bank 0 Subbank 0<br>Error in Bank 0 Subbank 0 | 0x0   | R      |

**Panic Parity Error DM0 Bank [3:2] Register**

Address: 0xF46D, Reset: 0x0000, Name: PANIC\_CODE2

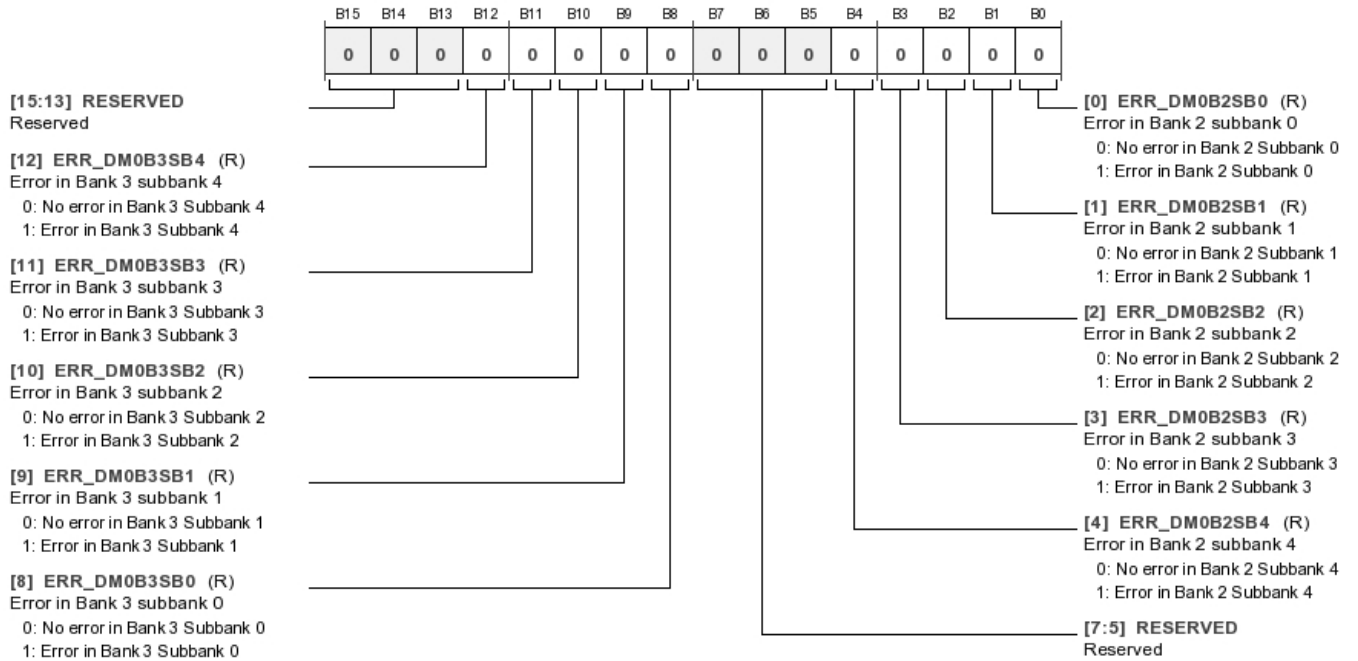


Table 118. Bit Descriptions for PANIC\_CODE2

| Bits    | Bit Name     | Settings | Description   | Reset | Access |
|---------|--------------|----------|---|-------|--------|
| [15:13] | RESERVED     |          | Reserved.   | 0x0   | RW     |
| 12      | ERR_DM0B3SB4 | 0<br>1   | Error in Bank 3 Subbank 4.<br>No error in Bank 3 Subbank 4<br>Error in Bank 3 Subbank 4 | 0x0   | R      |
| 11      | ERR_DM0B3SB3 | 0<br>1   | Error in Bank 3 Subbank 3.<br>No error in Bank 3 Subbank 3<br>Error in Bank 3 Subbank 3 | 0x0   | R      |
| 10      | ERR_DM0B3SB2 | 0<br>1   | Error in Bank 3 Subbank 2.<br>No error in Bank 3 Subbank 2<br>Error in Bank 3 Subbank 2 | 0x0   | R      |
| 9       | ERR_DM0B3SB1 | 0<br>1   | Error in Bank 3 Subbank 1.<br>No error in Bank 3 Subbank 1<br>Error in Bank 3 Subbank 1 | 0x0   | R      |
| 8       | ERR_DM0B3SB0 | 0<br>1   | Error in Bank 3 Subbank 0.<br>No error in Bank 3 Subbank 0<br>Error in Bank 3 Subbank 0 | 0x0   | R      |
| [7:5]   | RESERVED     |          | Reserved.   | 0x0   | RW     |

| Bits | Bit Name     | Settings | Description   | Reset | Access |
|------|--------------|----------|---|-------|--------|
| 4    | ERR_DM0B2SB4 | 0<br>1   | Error in Bank 2 Subbank 4.<br>No error in Bank 2 Subbank 4<br>Error in Bank 2 Subbank 4 | 0x0   | R      |
| 3    | ERR_DM0B2SB3 | 0<br>1   | Error in Bank 2 Subbank 3.<br>No error in Bank 2 Subbank 3<br>Error in Bank 2 Subbank 3 | 0x0   | R      |
| 2    | ERR_DM0B2SB2 | 0<br>1   | Error in Bank 2 Subbank 2.<br>No error in Bank 2 Subbank 2<br>Error in Bank 2 Subbank 2 | 0x0   | R      |
| 1    | ERR_DM0B2SB1 | 0<br>1   | Error in Bank 2 Subbank 1.<br>No error in Bank 2 Subbank 1<br>Error in Bank 2 Subbank 1 | 0x0   | R      |
| 0    | ERR_DM0B2SB0 | 0<br>1   | Error in Bank 2 Subbank 0.<br>No error in Bank 2 Subbank 0<br>Error in Bank 2 Subbank 0 | 0x0   | R      |

**Panic Parity Error DM1 Bank [1:0] Register**

Address: 0xF46E, Reset: 0x0000, Name: PANIC\_CODE3

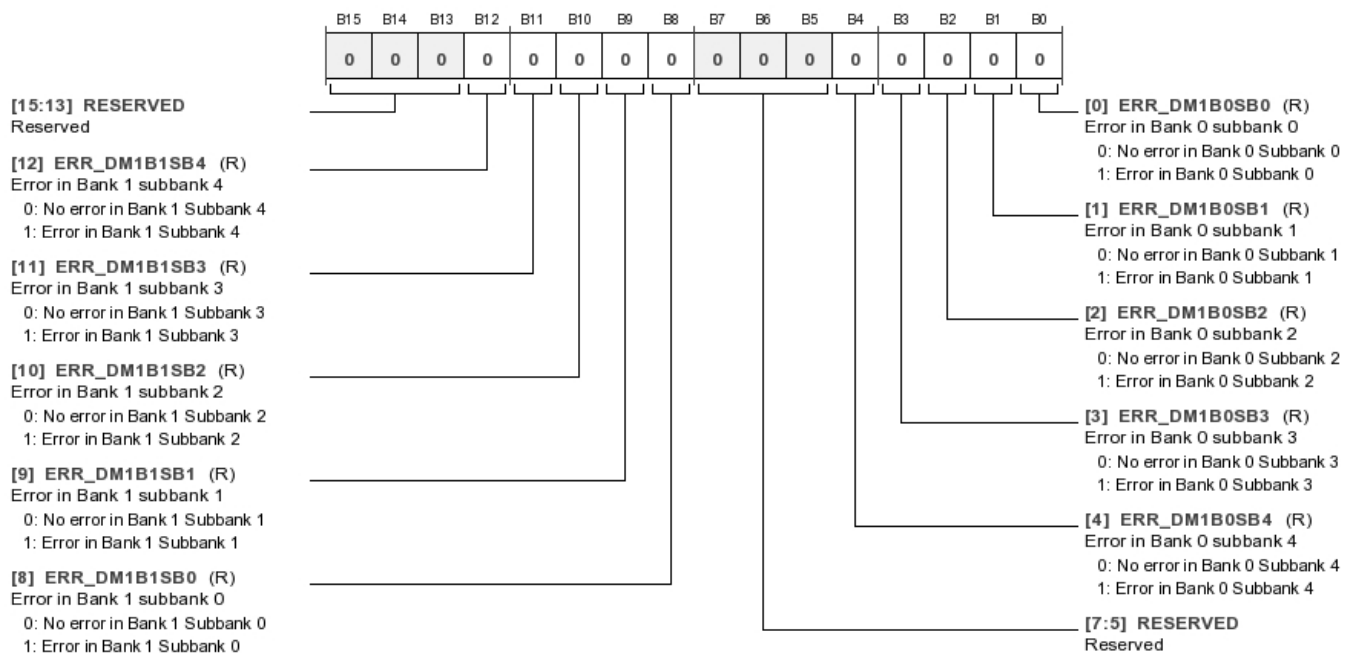


Table 119. Bit Descriptions for PANIC\_CODE3

| Bits    | Bit Name     | Settings | Description   | Reset | Access |
|---------|--------------|----------|---|-------|--------|
| [15:13] | RESERVED     |          | Reserved.   | 0x0   | RW     |
| 12      | ERR_DM1B1SB4 | 0<br>1   | Error in Bank 1 Subbank 4.<br>No error in Bank 1 Subbank 4<br>Error in Bank 1 Subbank 4 | 0x0   | R      |
| 11      | ERR_DM1B1SB3 | 0<br>1   | Error in Bank 1 Subbank 3.<br>No error in Bank 1 Subbank 3<br>Error in Bank 1 Subbank 3 | 0x0   | R      |
| 10      | ERR_DM1B1SB2 | 0<br>1   | Error in Bank 1 Subbank 2.<br>No error in Bank 1 Subbank 2<br>Error in Bank 1 Subbank 2 | 0x0   | R      |

| Bits  | Bit Name     | Settings | Description   | Reset | Access |
|-------|--------------|----------|---|-------|--------|
| 9     | ERR_DM1B1SB1 | 0<br>1   | Error in Bank 1 Subbank 1.<br>No error in Bank 1 Subbank 1<br>Error in Bank 1 Subbank 1 | 0x0   | R      |
| 8     | ERR_DM1B1SB0 | 0<br>1   | Error in Bank 1 Subbank 0.<br>No error in Bank 1 Subbank 0<br>Error in Bank 1 Subbank 0 | 0x0   | R      |
| [7:5] | RESERVED     |          | Reserved.   | 0x0   | RW     |
| 4     | ERR_DM1B0SB4 | 0<br>1   | Error in Bank 0 Subbank 4.<br>No error in Bank 0 Subbank 4<br>Error in Bank 0 Subbank 4 | 0x0   | R      |
| 3     | ERR_DM1B0SB3 | 0<br>1   | Error in Bank 0 Subbank 3.<br>No error in Bank 0 Subbank 3<br>Error in Bank 0 Subbank 3 | 0x0   | R      |
| 2     | ERR_DM1B0SB2 | 0<br>1   | Error in Bank 0 Subbank 2.<br>No error in Bank 0 Subbank 2<br>Error in Bank 0 Subbank 2 | 0x0   | R      |
| 1     | ERR_DM1B0SB1 | 0<br>1   | Error in Bank 0 Subbank 1.<br>No error in Bank 0 Subbank 1<br>Error in Bank 0 Subbank 1 | 0x0   | R      |
| 0     | ERR_DM1B0SB0 | 0<br>1   | Error in Bank 0 Subbank 0.<br>No error in Bank 0 Subbank 0<br>Error in Bank 0 Subbank 0 | 0x0   | R      |

**Panic Parity Error DM1 Bank [3:2] Register**

Address: 0xF46E, Reset: 0x0000, Name: PANIC\_CODE4


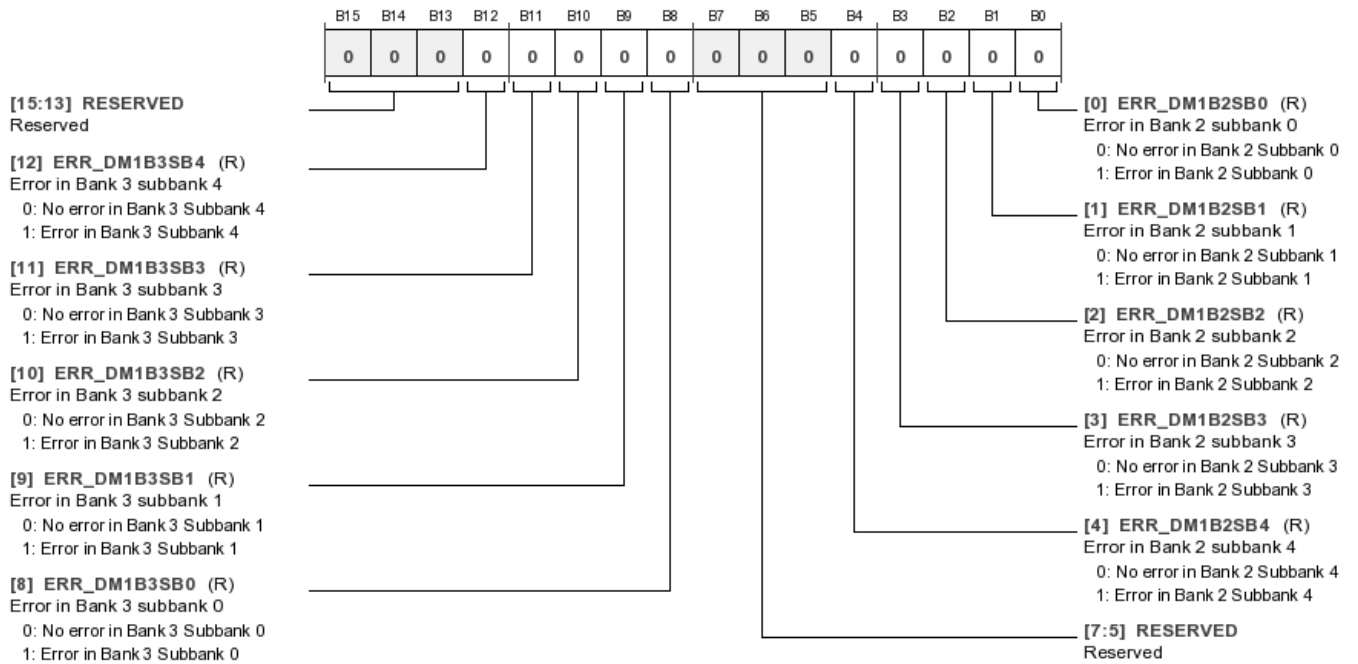


Table 120. Bit Descriptions for PANIC\_CODE4

| Bits    | Bit Name     | Settings | Description   | Reset | Access |
|---------|--------------|----------|---|-------|--------|
| [15:13] | RESERVED     |          | Reserved.   | 0x0   | RW     |
| 12      | ERR_DM1B3SB4 | 0<br>1   | Error in Bank 3 Subbank 4.<br>No error in Bank 3 Subbank 4<br>Error in Bank 3 Subbank 4 | 0x0   | R      |
| 11      | ERR_DM1B3SB3 | 0<br>1   | Error in Bank 3 Subbank 3.<br>No error in Bank 3 Subbank 3<br>Error in Bank 3 Subbank 3 | 0x0   | R      |
| 10      | ERR_DM1B3SB2 | 0<br>1   | Error in Bank 3 Subbank 2.<br>No error in Bank 3 Subbank 2<br>Error in Bank 3 Subbank 2 | 0x0   | R      |
| 9       | ERR_DM1B3SB1 | 0<br>1   | Error in Bank 3 Subbank 1.<br>No error in Bank 3 Subbank 1<br>Error in Bank 3 Subbank 1 | 0x0   | R      |
| 8       | ERR_DM1B3SB0 | 0<br>1   | Error in Bank 3 Subbank 0.<br>No error in Bank 3 Subbank 0<br>Error in Bank 3 Subbank 0 | 0x0   | R      |
| [7:5]   | RESERVED     |          | Reserved.   | 0x0   | RW     |
| 4       | ERR_DM1B2SB4 | 0<br>1   | Error in Bank 2 Subbank 4.<br>No error in Bank 2 Subbank 4<br>Error in Bank 2 Subbank 4 | 0x0   | R      |
| 3       | ERR_DM1B2SB3 | 0<br>1   | Error in Bank 2 Subbank 3.<br>No error in Bank 2 Subbank 3<br>Error in Bank 2 Subbank 3 | 0x0   | R      |
| 2       | ERR_DM1B2SB2 | 0<br>1   | Error in Bank 2 Subbank 2.<br>No error in Bank 2 Subbank 2<br>Error in Bank 2 Subbank 2 | 0x0   | R      |
| 1       | ERR_DM1B2SB1 | 0<br>1   | Error in Bank 2 Subbank 1.<br>No error in Bank 2 Subbank 1<br>Error in Bank 2 Subbank 1 | 0x0   | R      |
| 0       | ERR_DM1B2SB0 | 0<br>1   | Error in Bank 2 Subbank 0.<br>No error in Bank 2 Subbank 0<br>Error in Bank 2 Subbank 0 | 0x0   | R      |

**Panic Parity Error PM Bank [1:0] Register**

Address: 0xF470, Reset: 0x0000, Name: PANIC\_CODE5

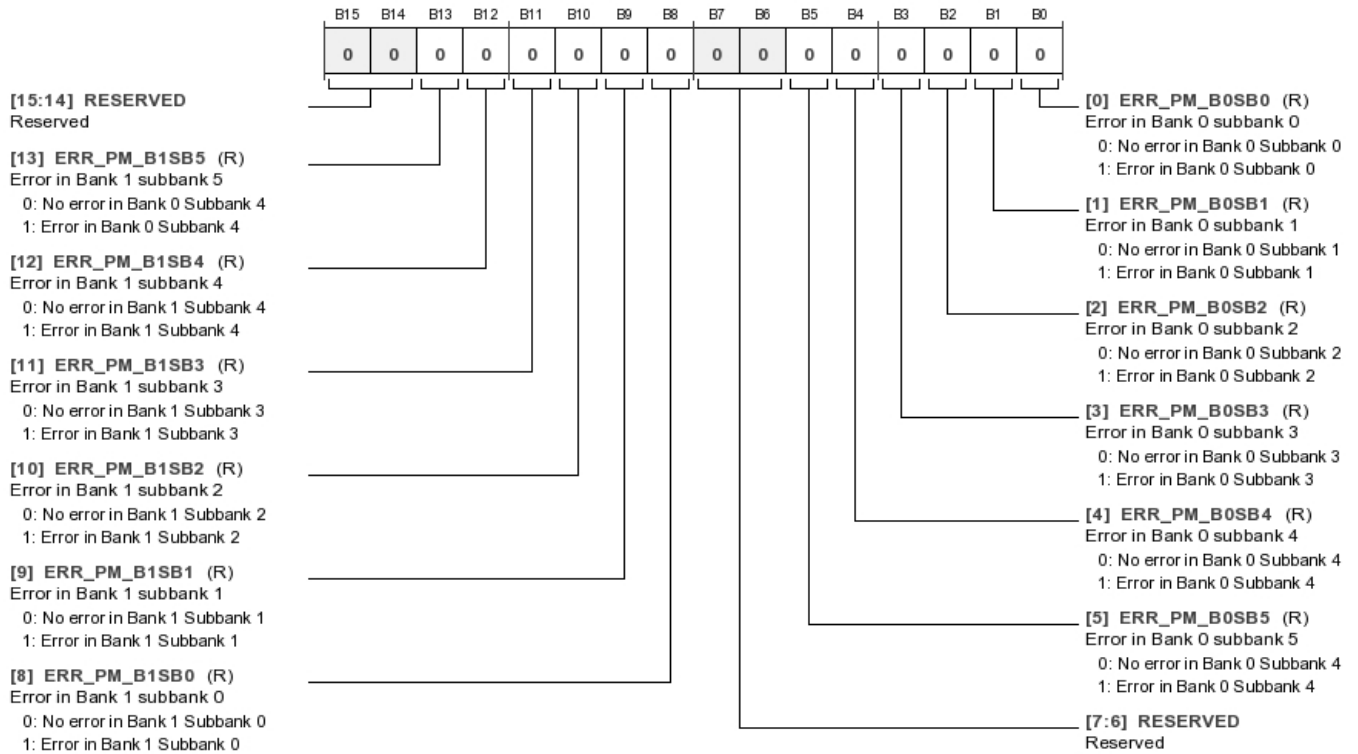

**Table 121. Bit Descriptions for PANIC\_CODE5**

| Bits    | Bit Name     | Settings | Description   | Reset | Access |
|---------|--------------|----------|---|-------|--------|
| [15:14] | RESERVED     |          | Reserved.   | 0x0   | RW     |
| 13      | ERR_PM_B1SB5 | 0<br>1   | Error in Bank 1 Subbank 5.<br>No error in Bank 0 Subbank 4<br>Error in Bank 0 Subbank 4 | 0x0   | R      |
| 12      | ERR_PM_B1SB4 | 0<br>1   | Error in Bank 1 Subbank 4.<br>No error in Bank 1 Subbank 4<br>Error in Bank 1 Subbank 4 | 0x0   | R      |
| 11      | ERR_PM_B1SB3 | 0<br>1   | Error in Bank 1 Subbank 3.<br>No error in Bank 1 Subbank 3<br>Error in Bank 1 Subbank 3 | 0x0   | R      |
| 10      | ERR_PM_B1SB2 | 0<br>1   | Error in Bank 1 Subbank 2.<br>No error in Bank 1 Subbank 2<br>Error in Bank 1 Subbank 2 | 0x0   | R      |
| 9       | ERR_PM_B1SB1 | 0<br>1   | Error in Bank 1 Subbank 1.<br>No error in Bank 1 Subbank 1<br>Error in Bank 1 Subbank 1 | 0x0   | R      |
| 8       | ERR_PM_B1SB0 | 0<br>1   | Error in Bank 1 Subbank 0.<br>No error in Bank 1 Subbank 0<br>Error in Bank 1 Subbank 0 | 0x0   | R      |
| [7:6]   | RESERVED     |          | Reserved.   | 0x0   | RW     |
| 5       | ERR_PM_B0SB5 | 0<br>1   | Error in Bank 0 Subbank 5.<br>No error in Bank 0 Subbank 4<br>Error in Bank 0 Subbank 4 | 0x0   | R      |

| <b>Bits</b> | <b>Bit Name</b> | <b>Settings</b> | <b>Description</b>           | <b>Reset</b> | <b>Access</b> |
|-------------|-----------------|-----------------|------------------------------|--------------|---------------|
| 4           | ERR_PM_B0SB4    |                 | Error in Bank 0 Subbank 4.   | 0x0          | R             |
|             |                 | 0               | No error in Bank 0 Subbank 4 |              |               |
|             |                 | 1               | Error in Bank 0 Subbank 4    |              |               |
| 3           | ERR_PM_B0SB3    |                 | Error in Bank 0 Subbank 3.   | 0x0          | R             |
|             |                 | 0               | No error in Bank 0 Subbank 3 |              |               |
|             |                 | 1               | Error in Bank 0 Subbank 3    |              |               |
| 2           | ERR_PM_B0SB2    |                 | Error in Bank 0 Subbank 2.   | 0x0          | R             |
|             |                 | 0               | No error in Bank 0 Subbank 2 |              |               |
|             |                 | 1               | Error in Bank 0 Subbank 2    |              |               |
| 1           | ERR_PM_B0SB1    |                 | Error in Bank 0 Subbank 1.   | 0x0          | R             |
|             |                 | 0               | No error in Bank 0 Subbank 1 |              |               |
|             |                 | 1               | Error in Bank 0 Subbank 1    |              |               |
| 0           | ERR_PM_B0SB0    |                 | Error in Bank 0 Subbank 0.   | 0x0          | R             |
|             |                 | 0               | No error in Bank 0 Subbank 0 |              |               |
|             |                 | 1               | Error in Bank 0 Subbank 0    |              |               |

**MULTIPURPOSE PIN CONFIGURATION REGISTERS**

**Multipurpose Pin Mode Register**

Address: 0xF510 to 0xF51D (Increments of 0x1), Reset: 0x0000, Name: MPx\_MODE

These 14 registers configure the multipurpose pins. Certain multipurpose pins can function as audio clock pins, control bus pins, or GPIO pins.

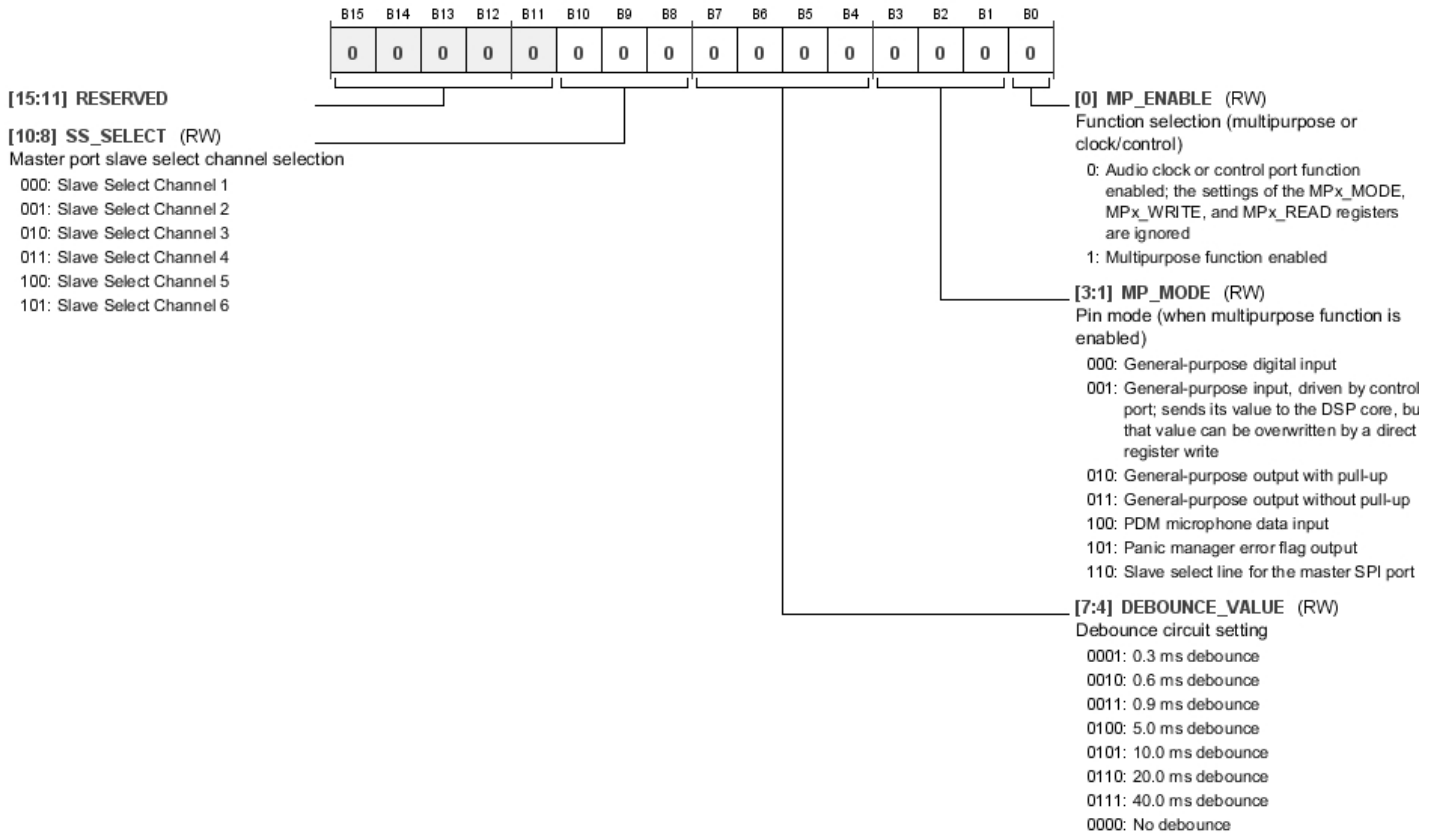


Table 122. Bit Descriptions for MPx\_MODE

| Bits    | Bit Name  | Settings                               | Description  | Reset | Access |
|---------|-----------|--|--|-------|--------|
| [15:11] | RESERVED  |  |  | 0x0   | RW     |
| [10:8]  | SS_SELECT | 000<br>001<br>010<br>011<br>100<br>101 | Master port slave select channel selection. If the pin is configured as a slave select line (Bits[3:1] (MP_MODE) = 0b110), these bits configure which slave select channel the pin corresponds to. This allows multiple slave devices to be connected to the SPI master port, all using different slave select lines. The first slave select signal (Slave Select 0) is always routed to the SS_M/MP0 pin. The remaining six slave select lines can be routed to any multipurpose pin that has been configured as a slave select output. | 0x0   | RW     |

| Bits  | Bit Name       | Settings  | Description  | Reset | Access |
|-------|----------------|---|--|-------|--------|
| [7:4] | DEBOUNCE_VALUE | 0001 0.3 ms debounce<br>0010 0.6 ms debounce<br>0011 0.9 ms debounce<br>0100 5.0 ms debounce<br>0101 10.0 ms debounce<br>0110 20.0 ms debounce<br>0111 40.0 ms debounce<br>0000 No debounce   | Debounce circuit setting. These bits configure the duration of the debounce circuitry when the corresponding pin is configured as an input (Bits[3:1] (MP_MODE) = 0b000).  | 0x0   | RW     |
| [3:1] | MP_MODE        | 000 General-purpose digital input<br>001 General-purpose input, driven by control port; sends its value to the DSP core, but that value can be overwritten by a direct register write<br>010 General-purpose output with pull-up<br>011 General-purpose output without pull-up<br>100 PDM microphone data input<br>101 Panic manager error flag output<br>110 Slave select line for the master SPI port | Pin mode (when multipurpose function is enabled). These bits select the function of the corresponding pin if it is enabled in multipurpose mode (Bit 0 (MP_ENABLE) = 0b1).   | 0x0   | RW     |
| 0     | MP_ENABLE      | 0 Audio clock or control port function enabled; the settings of the MPx_MODE, MPx_WRITE, and MPx_READ registers are ignored<br>1 Multipurpose function enabled  | Function selection (multipurpose or clock/control). This bit selects whether the corresponding pin is used as a multipurpose pin or as its primary function (which could be either an audio clock or control bus pin). | 0x0   | RW     |



**Multipurpose Pin Write Value Register**

Address: 0xF520 to 0xF52D (Increments of 0x1), Reset: 0x0000, Name: MPx\_WRITE

If a multipurpose pin is configured as an output driven by the control port (the corresponding Bits[3:1] (MP\_MODE) = 0b001), the value that is output from the DSP core can be configured by directly writing to these registers.

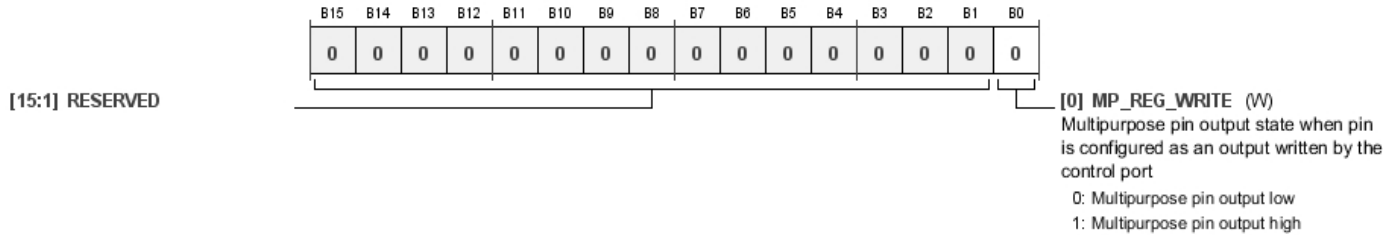


Table 123. Bit Descriptions for MPx\_WRITE

| Bits   | Bit Name     | Settings | Description  | Reset | Access |
|--------|--------------|----------|--|-------|--------|
| [15:1] | RESERVED     |          |  | 0x0   | W      |
| 0      | MP_REG_WRITE | 0<br>1   | Multipurpose pin output state when pin is configured as an output written by the control port. This register configures the value seen by the DSP core for the corresponding multipurpose pin input. The pin can have two states: logic low (off) or logic high (on).<br>Multipurpose pin output low<br>Multipurpose pin output high | 0x0   | W      |

**Multipurpose Pin Read Value Registers**

Address: 0xF530 to 0xF53D (Increments of 0x1), Reset: 0x0000, Name: MPx\_READ

These registers log the current state of the multipurpose pins when they are configured as inputs. The pins can have two states: logic low (off) or logic high (on).

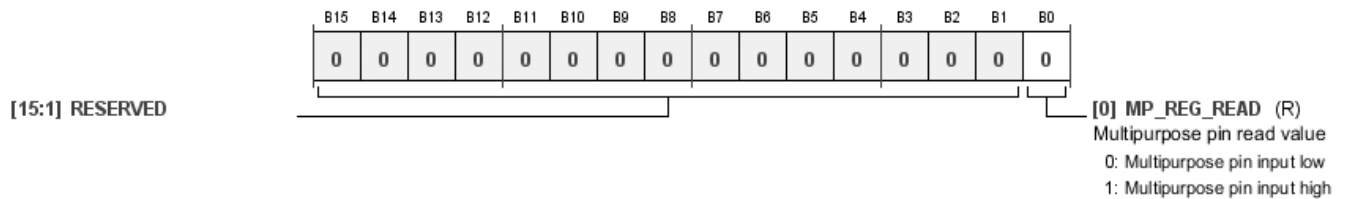



Table 124. Bit Descriptions for MPx\_READ

| Bits   | Bit Name    | Settings | Description   | Reset | Access |
|--------|-------------|----------|---|-------|--------|
| [15:1] | RESERVED    |          |   | 0x0   | R      |
| 0      | MP_REG_READ | 0<br>1   | Multipurpose pin read value.<br>Multipurpose pin input low<br>Multipurpose pin input high | 0x0   | R      |

**Digital PDM Microphone Control Register**

Address: 0xF560 to 0xF561 (Increments of 0x1), Reset: 0x4000, Name: DMIC\_CTRLx

These registers configure the digital PDM microphone interface. Two registers are used to control up to four PDM microphones: Register 0xF560 (DMIC\_CTRL0) configures PDM Microphone Channel 0 and PDM Microphone Channel 1, and Register 0xF561 (DMIC\_CTRL1) configures PDM Microphone Channel 2 and PDM Microphone Channel 3.

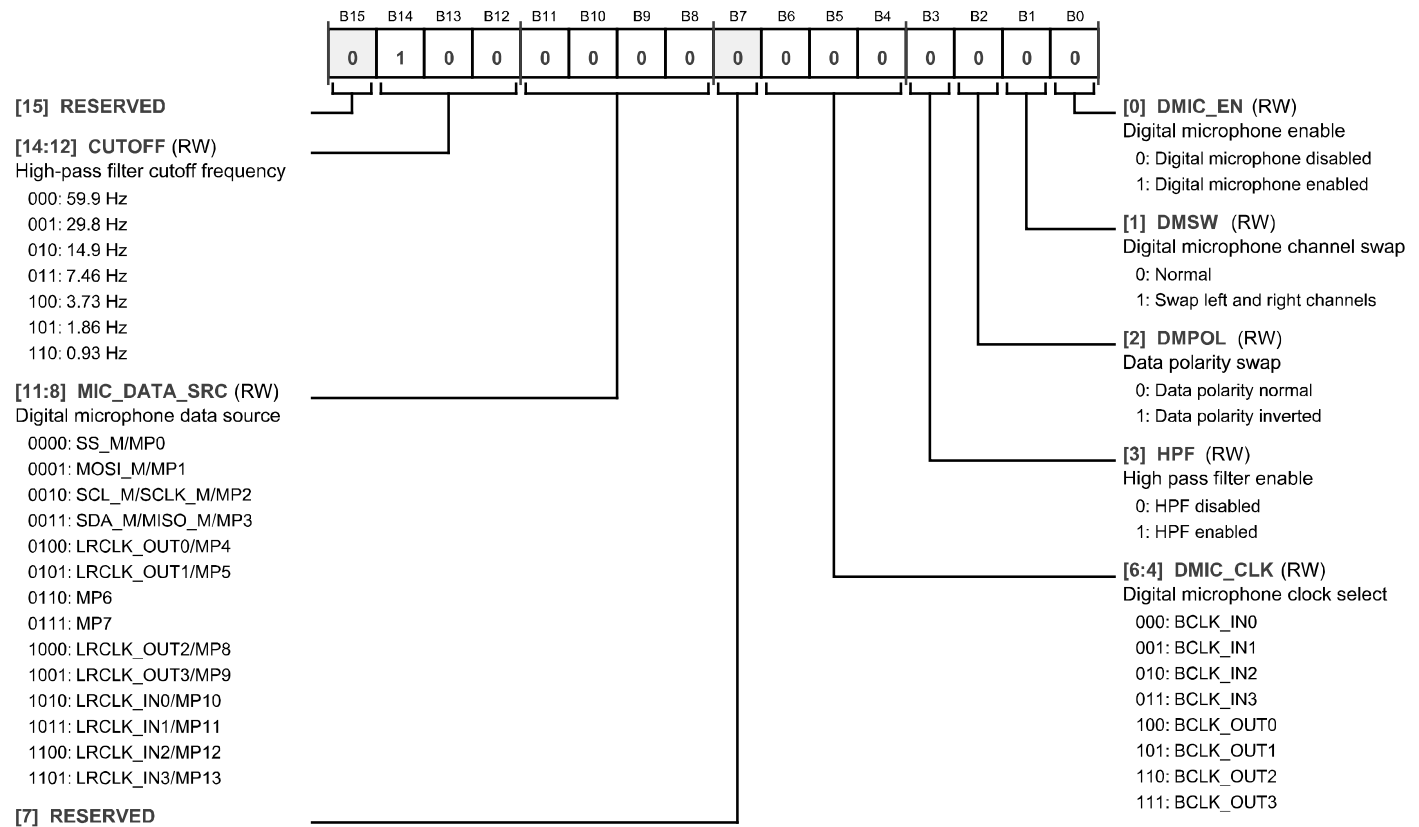

**Table 125. Bit Descriptions for DMIC\_CTRLx**

| Bits    | Bit Name | Settings | Description  | Reset | Access |
|---------|----------|----------|--|-------|--------|
| 15      | RESERVED |          |  | 0x0   | RW     |
| [14:12] | CUTOFF   |          | High-pass filter cutoff frequency. These bits configure the cutoff frequency of an optional high-pass filter designed to remove dc components from the microphone data signal(s). To use these bits, Bit 3 (HPF), must be enabled. | 0x4   | RW     |
|         |          | 000      | 59.9 Hz  |       |        |
|         |          | 001      | 29.8 Hz  |       |        |
|         |          | 010      | 14.9 Hz  |       |        |
|         |          | 011      | 7.46 Hz  |       |        |
|         |          | 100      | 3.73 Hz  |       |        |
|         |          | 101      | 1.86 Hz  |       |        |
|         |          | 110      | 0.93 Hz  |       |        |


| Bits   | Bit Name     | Settings   | Description  | Reset | Access |
|--------|--------------|--|--|-------|--------|
| [11:8] | MIC_DATA_SRC | 0000 SS_M/MP0<br>0001 MOSI_M/MP1<br>0010 SCL_M/SCLK_M/MP2<br>0011 SDA_M/MISO_M/MP3<br>0100 LRCLK_OUT0/MP4<br>0101 LRCLK_OUT1/MP5<br>0110 MP6<br>0111 MP7<br>1000 LRCLK_OUT2/MP8<br>1001 LRCLK_OUT3/MP9<br>1010 LRCLK_IN0/MP10<br>1011 LRCLK_IN1/MP11<br>1100 LRCLK_IN2/MP12<br>1101 LRCLK_IN3/MP13 | Digital PDM microphone data source pin. These bits configure which hardware pin acts as a data input from the PDM microphone(s). Up to two microphones can be connected to a single pin.   | 0x0   | RW     |
| 7      | RESERVED     |  |  | 0x0   | RW     |
| [6:4]  | DMIC_CLK     | 000 BCLK_IN0<br>001 BCLK_IN1<br>010 BCLK_IN2<br>011 BCLK_IN3<br>100 BCLK_OUT0<br>101 BCLK_OUT1<br>110 BCLK_OUT2<br>111 BCLK_OUT3   | Digital PDM microphone clock select. A valid bit clock signal must be assigned to the PDM microphones. Any of the four BCLK_INPUTx or four BCLK_OUTPUTx signals can be used. A trace must connect the selected pin to the clock input pin on the corresponding PDM microphone(s). If the corresponding BCLK_x pin is not configured in master mode, use an external clock source, with the BCLK_x pin and the PDM microphone acting as slaves. | 0x0   | RW     |
| 3      | HPF          | 0 HPF disabled<br>1 HPF enabled  | High-pass filter enable. This bit enables or disables a high-pass filter to remove dc components from the microphone data signals. The cutoff of the filter is controlled by Bits[14:12] (CUTOFF).   | 0x0   | RW     |
| 2      | DMPOL        | 0 Data polarity normal<br>1 Data polarity inverted   | Data polarity swap. When this bit is set to 0b0, a logic high data input is treated as logic high, and a logic low data input is treated as logic low. When this bit is set to 0b1, the opposite is true: a logic high data input is treated as a logic low, and a logic low data input is treated as logic high. This effectively inverts the amplitude of the incoming audio data.   | 0x0   | RW     |
| 1      | DMSW         | 0 Normal<br>1 Swap left and right channels   | Digital PDM microphone channel swap. In DMIC_CTRL0, this bit swaps PDM Microphone Channel 0 and PDM Microphone Channel 1. In the DMIC_CTRL1 register, this bit swaps PDM Microphone Channel 2 and PDM Microphone Channel 3.  | 0x0   | RW     |
| 0      | DMIC_EN      | 0 Digital PDM microphone disabled<br>1 Digital PDM microphone enabled  | Digital PDM microphone enable. This bit enables or disables the data input from the PDM microphones.   | 0x0   | RW     |

**ASRC STATUS AND CONTROL REGISTERS**

**ASRC Lock Status Register**

Address: 0xF580, Reset: 0x0000, Name: ASRC\_LOCK

This register contains eight bits that represent the lock status of each ASRC stereo pair on the ADAU1466 and ADAU1462. Lock status requires three conditions: the output target rate is set, the input rate is steady and has been detected, and the ratio between input and output rates has been calculated. If all of these conditions are true for a given stereo ASRC, the corresponding lock bit is low. If any of these conditions is not true, the corresponding lock bit is high.

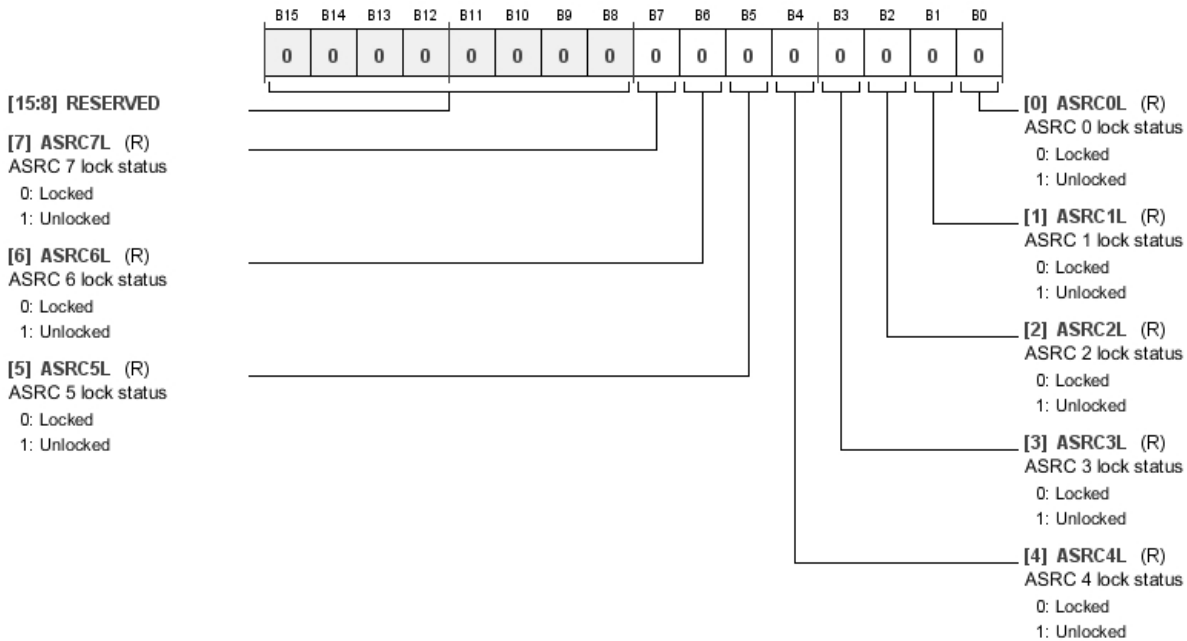


**Table 126. Bit Descriptions for ASRC\_LOCK**

| Bits   | Bit Name | Settings | Description                               | Reset | Access |
|--------|----------|----------|---|-------|--------|
| [15:8] | RESERVED |          |   | 0x0   | RW     |
| 7      | ASRC7L   | 0<br>1   | ASRC 7 lock status.<br>Locked<br>Unlocked | 0x0   | R      |
| 6      | ASRC6L   | 0<br>1   | ASRC 6 lock status.<br>Locked<br>Unlocked | 0x0   | R      |
| 5      | ASRC5L   | 0<br>1   | ASRC 5 lock status.<br>Locked<br>Unlocked | 0x0   | R      |
| 4      | ASRC4L   | 0<br>1   | ASRC 4 lock status.<br>Locked<br>Unlocked | 0x0   | R      |
| 3      | ASRC3L   | 0<br>1   | ASRC 3 lock status.<br>Locked<br>Unlocked | 0x0   | R      |
| 2      | ASRC2L   | 0<br>1   | ASRC 2 lock status.<br>Locked<br>Unlocked | 0x0   | R      |
| 1      | ASRC1L   | 0<br>1   | ASRC 1 lock status.<br>Locked<br>Unlocked | 0x0   | R      |
| 0      | ASRC0L   | 0<br>1   | ASRC 0 lock status.<br>Locked<br>Unlocked | 0x0   | R      |

**ASRC Mute Register**

**Address: 0xF581, Reset: 0x0000, Name: ASRC\_MUTE**

This register contains controls related to the muting of audio on ASRC channels. Bits[7:0] (ASRCxM) are individual mute controls for each stereo ASRC on the ADAU1466 and ADAU1462. Bit 8 (ASRC\_RAMP0) and Bit 9 (ASRC\_RAMP1) enable or disable an optional volume ramp-up and ramp-down to smoothly transition between muted and unmuted states. The mute and unmute ramps are linear. The duration of the ramp is determined by the sample rate of the DSP core, which is set by Register 0xF401 (START\_PULSE). The ramp takes exactly 2048 input samples to complete. For example, if the sample rate of audio entering an ASRC channel is 48 kHz, the duration of the ramp is 2048/48,000 = 42.7 ms. If the sample rate of audio entering an ASRC channel is 6 kHz, the duration of the ramp is 2048/6000 = 341.3 ms. Bit 10 (LOCKMUTE) allows the ASRCs to automatically mute themselves in the event that lock status is lost or not attained.

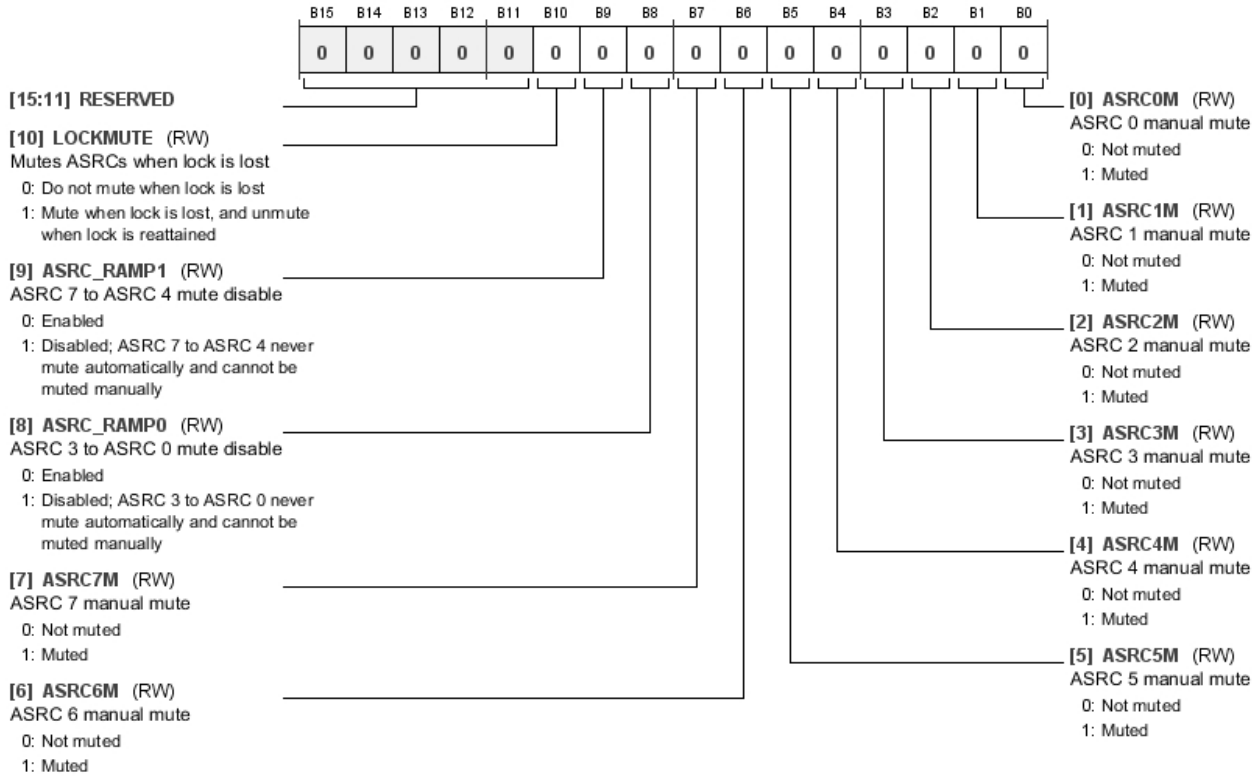

**Table 127. Bit Descriptions for ASRC\_MUTE**


| Bits    | Bit Name | Settings | Description   | Reset | Access |
|---------|----------|----------|---|-------|--------|
| [15:11] | RESERVED |          |   | 0x0   | RW     |
| 10      | LOCKMUTE |          | Mutes ASRCs when lock is lost. When this bit is enabled, individual stereo ASRCs automatically mute on the event that lock status is lost (for example, if the sample rate of the input suddenly changes and the ASRC needs to regain lock), provided that the corresponding ASRC_RAMPx bit is set to 0b0 (enabled). This automatic mute uses a volume ramp instead of an instantaneous mute to avoid click and pop noises on the output. When lock status is attained again (and the corresponding ASRC_RAMPx and ASRCxM bits are set to 0b0 (enabled) and 0b0 (unmuted), respectively), the ASRC automatically unmutes using a volume ramp. However, because there is a period of uncertainty when the ASRC is regaining lock, there still may be noise on the ASRC outputs when the input signal returns. Measures must be taken in the DSP program to delay the unmuting of the ASRC output signals if this noise is not desired. The individual ASRCxM mute bits override the automatic LOCKMUTE behavior. | 0x0   | RW     |
|         |          | 0        | Do not mute when lock is lost   |       |        |
|         |          | 1        | Mute when lock is lost, and unmute when lock is regained  |       |        |

| Bits | Bit Name   | Settings | Description  | Reset | Access |
|------|------------|----------|--|-------|--------|
| 9    | ASRC_RAMP1 | 0<br>1   | ASRC 7 to ASRC 4 mute disable. ASRC 7 to ASRC 4 (Channel 15 to Channel 8) are defined as ASRC Block 1. This bit enables or disables mute ramping for all ASRCs in Block 1. If this bit is 0b1, Bit 7 (ASRC7M), Bit 6 (ASRC6M), Bit 5 (ASRC5M), and Bit 4 (ASRC4M) are ignored, and the outputs of ASRC 7 to ASRC 4 are active at all times.<br>0 Enabled<br>1 Disabled; ASRC 7 to ASRC 4 never mute automatically and cannot be muted manually | 0x0   | RW     |
| 8    | ASRC_RAMPO | 0<br>1   | ASRC 3 to ASRC 0 mute disable. ASRC 3 to ASRC 0 (Channel 7 to Channel 0) are defined as ASRC Block 0. This bit enables or disables mute ramping for all ASRCs in Block 0. If this bit is 0b1, Bit 3 (ASRC3M), Bit 2 (ASRC2M), Bit 1 (ASRC1M), and Bit 0 (ASRC0M) are ignored, and the outputs of ASRC 3 to ASRC 0 are active at all times.<br>0 Enabled<br>1 Disabled; ASRC 3 to ASRC 0 never mute automatically and cannot be muted manually  | 0x0   | RW     |
| 7    | ASRC7M     | 0<br>1   | ASRC 7 manual mute.<br>0 Not muted<br>1 Muted  | 0x0   | RW     |
| 6    | ASRC6M     | 0<br>1   | ASRC 6 manual mute.<br>0 Not muted<br>1 Muted  | 0x0   | RW     |
| 5    | ASRC5M     | 0<br>1   | ASRC 5 manual mute.<br>0 Not muted<br>1 Muted  | 0x0   | RW     |
| 4    | ASRC4M     | 0<br>1   | ASRC 4 manual mute.<br>0 Not muted<br>1 Muted  | 0x0   | RW     |
| 3    | ASRC3M     | 0<br>1   | ASRC 3 manual mute.<br>0 Not muted<br>1 Muted  | 0x0   | RW     |
| 2    | ASRC2M     | 0<br>1   | ASRC 2 manual mute.<br>0 Not muted<br>1 Muted  | 0x0   | RW     |
| 1    | ASRC1M     | 0<br>1   | ASRC 1 manual mute.<br>0 Not muted<br>1 Muted  | 0x0   | RW     |
| 0    | ASRC0M     | 0<br>1   | ASRC 0 manual mute.<br>0 Not muted<br>1 Muted  | 0x0   | RW     |

**ASRC Ratio Registers**

Address: 0xF582 to 0xF589 (Increments of 0x1), Reset: 0x0000, Name: ASRCx\_RATIO

These eight read only registers contain the sample rate conversion ratio of the corresponding ASRC on the ADAU1466 and ADAU1462, which is calculated as the ratio between the detected input rate and the selected target output rate. The format of the value stored in these registers is 4.12 format. For example, a ratio of 1 is shown as 0b0001000000000000 (0x1000). A ratio of 2 is shown as 0b0010000000000000 (0x2000). A ratio of 0.5 is shown as 0b0000100000000000 (0x0800).




[15:0] ASRC\_RATIO (RW)  
Output rate of the ASRC in 4.12 format

Table 128. Bit Descriptions for ASRCx\_RATIO

| Bits   | Bit Name   | Settings | Description  | Reset  | Access |
|--------|------------|----------|--|--------|--------|
| [15:0] | ASRC_RATIO |          | Output rate of the ASRC in 4.12 format. The value of this register represents the input to output rate of the corresponding ASRC. It is stored in 4.12 format. | 0x0000 | RW     |

**RAMPMAX Override Register**

Address: 0xF590, Reset: 0x07FE, Name: ASRC\_RAMPMAX\_OVR

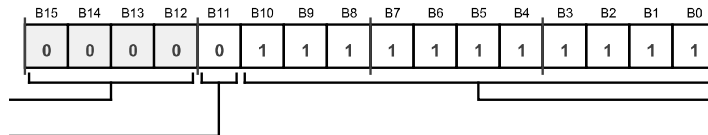

[15:12] RESERVED  
[11] OVERRIDE (RW)  
RAMPMAX override enable  
0: Disable RAMPMAX override  
1: Enable RAMPMAX override


[10:0] OVR\_RAMPMAX\_VALUE (RW)  
RAMPMAX override value

Table 129. Bit Descriptions for ASRC\_RAMPMAX\_OVR

| Bits   | Bit Name          | Settings | Description   | Reset | Access |
|--------|-------------------|----------|---|-------|--------|
| 11     | OVERRIDE          | 0<br>1   | RAMPMAX override enable.<br>Disable RAMPMAX override<br>Enable RAMPMAX override | 0x0   | RW     |
| [10:0] | OVR_RAMPMAX_VALUE |          | RAMPMAX override value.   | 0x7FF | RW     |

**ASRCx RAMPMAX Register**

Address: 0xF591 to 0xF598 (Increments of 0x1), Reset: 0x07FF, Name: ASRCx\_RAMPMAX



[15:11] RESERVED

[10:0] RAMPMAX\_VALUE (RW)  
RAMPMAX value (per channel)

Table 130. Bit Descriptions for ASRCx\_RAMPMAX


| Bits   | Bit Name      | Settings | Description                  | Reset | Access |
|--------|---------------|----------|------------------------------|-------|--------|
| [10:0] | RAMPMAX_VALUE |          | RAMPMAX value (per channel). | 0x7FF | RW     |

**AUXILIARY ADC REGISTERS**

**Auxiliary ADC Read Value Register**

Address: 0xF5A0 to 0xF5A5 (Increments of 0x1), Reset: 0x0000, Name: ADC\_READx

These six register contains the output data of the auxiliary ADC for the corresponding channel. Each of the six channels of the ADC are updated once per audio frame. The format for the value in this register is 6.10 format, but the top six bits are always zero, meaning that the effective format is 0.10 format. If, for example, the input to the corresponding auxiliary ADC channel is equal to AVDD (the full-scale analog input voltage), this register reads its maximum value of 0b0000001111111111 (0x3FF). If the input to the auxiliary ADC channel is AVDD/2, this register reads 0b0000001000000000 (0x200). If the input to the auxiliary ADC channel is AVDD/4, this register reads 0b0000000100000000 (0x100).



[15:0] ADC\_VALUE (RW)  
 ADC input value in 0.10 format, as a proportion of AVDD

Table 131. Bit Descriptions for ADC\_READx

| Bits   | Bit Name  | Settings | Description  | Reset  | Access |
|--------|-----------|----------|--|--------|--------|
| [15:0] | ADC_VALUE |          | ADC input value in 0.10 format, as a proportion of AVDD. Instantaneous value of the sampled data on the ADC input. The top six bits are not used, and the least significant 10 bits contain the value of the ADC input. The minimum value of 0 maps to 0 V, and the maximum value of 1023 maps to 3.3 V ± 10% (equal to the AVDD supply). Values between 0 and 1023 are linearly mapped to dc voltages between 0 V and AVDD. | 0x0000 | RW     |



**S/PDIF INTERFACE REGISTERS**

**S/PDIF Receiver Lock Bit Detection Register**

Address: 0xF600, Reset: 0x0000, Name: SPDIF\_LOCK\_DET

This register contains a flag that monitors the S/PDIF receiver and provides a way to check the validity of the input signal.

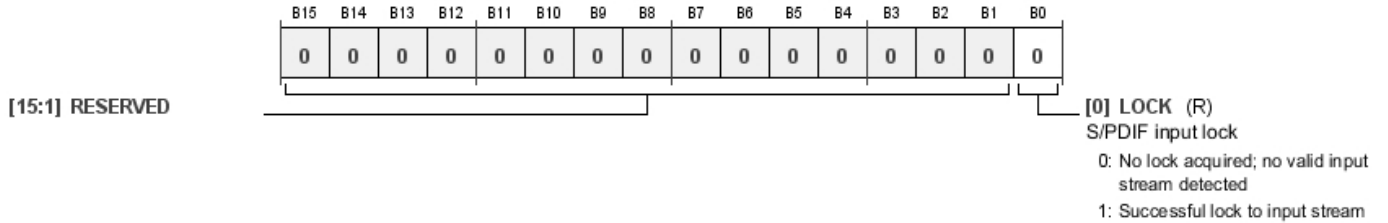


Table 132. Bit Descriptions for SPDIF\_LOCK\_DET

| Bits   | Bit Name | Settings | Description   | Reset | Access |
|--------|----------|----------|---|-------|--------|
| [15:1] | RESERVED |          |   | 0x0   | RW     |
| 0      | LOCK     | 0<br>1   | S/PDIF input lock.<br>0 No lock acquired; no valid input stream detected<br>1 Successful lock to input stream | 0x0   | R      |

**S/PDIF Receiver Control Register**

Address: 0xF601, Reset: 0x0000, Name: SPDIF\_RX\_CTRL

This register provides controls that govern the behavior of the S/PDIF receiver on the ADAU1466 and ADAU1462.

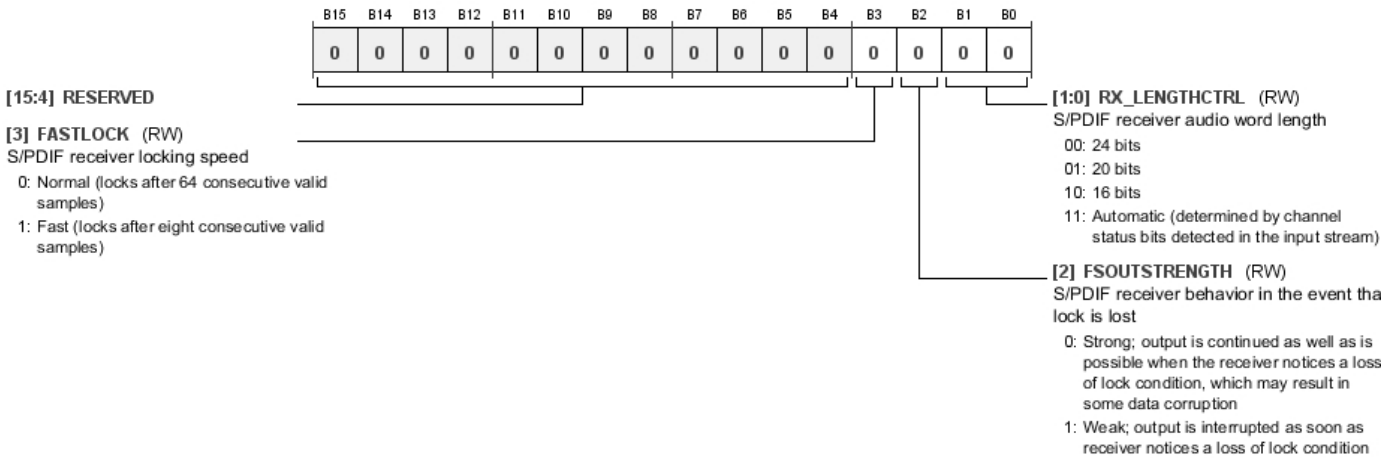



Table 133. Bit Descriptions for SPDIF\_RX\_CTRL

| Bits   | Bit Name      | Settings             | Description  | Reset | Access |
|--------|---------------|----------------------|--|-------|--------|
| [15:4] | RESERVED      |                      |  | 0x0   | RW     |
| 3      | FASTLOCK      | 0<br>1               | S/PDIF receiver locking speed.<br>0 Normal (locks after 64 consecutive valid samples)<br>1 Fast (locks after eight consecutive valid samples)  | 0x0   | RW     |
| 2      | FSOUTSTRENGTH | 0<br>1               | S/PDIF receiver behavior in the event that lock is lost. FSOUTSTRENGTH applies to the output of the recovered frame clock from the S/PDIF receiver.<br>0 Strong; output is continued as well as is possible when the receiver notices a loss of lock condition, which may result in some data corruption<br>1 Weak; output is interrupted as soon as receiver notices a loss of lock condition | 0x0   | RW     |
| [1:0]  | RX_LENGTHCTRL | 00<br>01<br>10<br>11 | S/PDIF receiver audio word length.<br>00 24 bits<br>01 20 bits<br>10 16 bits<br>11 Automatic (determined by channel status bits detected in the input stream)  | 0x0   | RW     |

**Decoded Signals From the S/PDIF Receiver Register**

Address: 0xF602, Reset: 0x0000, Name: SPDIF\_RX\_DECODE

This register monitors the embedded nonaudio data bits in the incoming S/PDIF stream on the ADAU1466 and ADAU1462 and decodes them, providing insight into the data format of the S/PDIF input stream.

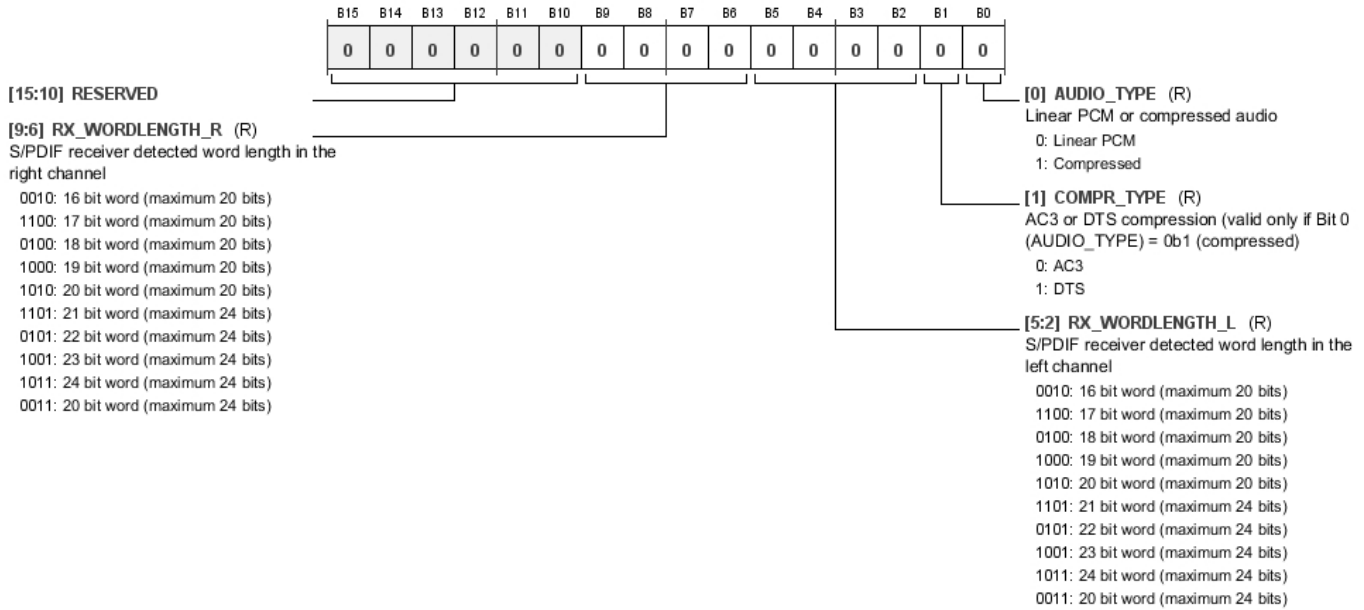

**Table 134. Bit Descriptions for SPDIF\_RX\_DECODE**


| Bits    | Bit Name        | Settings   | Description  | Reset | Access |
|---------|-----------------|--|--|-------|--------|
| [15:10] | RESERVED        |  |  | 0x0   | RW     |
| [9:6]   | RX_WORDLENGTH_R | 0010 16 bit word (maximum 20 bits)<br>1100 17 bit word (maximum 20 bits)<br>0100 18 bit word (maximum 20 bits)<br>1000 19 bit word (maximum 20 bits)<br>1010 20 bit word (maximum 20 bits)<br>1101 21 bit word (maximum 24 bits)<br>0101 22 bit word (maximum 24 bits)<br>1001 23 bit word (maximum 24 bits)<br>1011 24 bit word (maximum 24 bits)<br>0011 20 bit word (maximum 24 bits) | S/PDIF receiver detected word length in the right channel.                   | 0x0   | R      |
| [5:2]   | RX_WORDLENGTH_L | 0010 16 bit word (maximum 20 bits)<br>1100 17 bit word (maximum 20 bits)<br>0100 18 bit word (maximum 20 bits)<br>1000 19 bit word (maximum 20 bits)<br>1010 20 bit word (maximum 20 bits)<br>1101 21 bit word (maximum 24 bits)<br>0101 22 bit word (maximum 24 bits)<br>1001 23 bit word (maximum 24 bits)<br>1011 24 bit word (maximum 24 bits)<br>0011 20 bit word (maximum 24 bits) | S/PDIF receiver detected word length in the left channel.                    | 0x0   | R      |
| 1       | COMPR_TYPE      | 0 AC3<br>1 DTS   | AC3 or DTS compression (valid only if Bit 0 (AUDIO_TYPE) = 0b1 (compressed). | 0x0   | R      |

| Bits | Bit Name   | Settings | Description   | Reset | Access |
|------|------------|----------|---|-------|--------|
| 0    | AUDIO_TYPE | 0<br>1   | Linear PCM or compressed audio.<br>Linear PCM<br>Compressed | 0x0   | R      |

**Compression Mode From the S/PDIF Receiver Register**

Address: 0xF603, Reset: 0x0000, Name: SPDIF\_RX\_COMPRMODE

If the incoming S/PDIF data on the ADAU1466 and ADAU1462 has been encoded using a compression algorithm, this register displays the 16-bit code that represents the type of compression being used.



[15:0] COMPR\_MODE (R)  
Compression mode detected by the S/PDIF receiver


Table 135. Bit Descriptions for SPDIF\_RX\_COMPRMODE

| Bits   | Bit Name   | Settings | Description                                       | Reset  | Access |
|--------|------------|----------|---|--------|--------|
| [15:0] | COMPR_MODE |          | Compression mode detected by the S/PDIF receiver. | 0x0000 | R      |

**Automatically Resume S/PDIF Receiver Audio Input Register**

Address: 0xF604, Reset: 0x0000, Name: SPDIF\_RESTART

When the S/PDIF receiver on the ADAU1466 and ADAU1462 loses lock on the incoming S/PDIF signal, which can occur due to issues with signal integrity, the receiver automatically mutes itself. This register determines whether the S/PDIF receiver then automatically resumes outputting data if the S/PDIF receiver subsequently begins to receive valid data and a lock condition is reattained. By default, the S/PDIF receiver does not automatically resume audio when lock is lost (Register 0xF604 (SPDIF\_RESTART), Bit 0 (RESTART\_AUDIO) = 0b0); and, therefore, the user must manually reset the S/PDIF receiver by toggling Register 0xF604 (SPDIF\_RESTART), Bit 0 (RESTART\_AUDIO), from 0b0 to 0b1 and then back to 0b0 again. To ensure that the S/PDIF receiver always begins outputting data when a valid input signal is detected, set Register 0xF604 (SPDIF\_RESTART), Bit 0 (RESTART\_AUDIO), to 0b1 at all times.



[15:1] RESERVED

[0] RESTART\_AUDIO (RW)  
Allows the S/PDIF receiver to automatically resume outputting audio when it successfully recovers from a loss of lock  
0: Do not automatically restart the audio when a relock occurs  
1: Restarts the audio automatically when a relock occurs, and resets Register 0xF605 (SPDIF\_LOSS\_OF\_LOCK), Bit 0 (LOSS\_OF\_LOCK)


Table 136. Bit Descriptions for SPDIF\_RESTART

| Bits   | Bit Name      | Settings | Description   | Reset | Access |
|--------|---------------|----------|---|-------|--------|
| [15:1] | RESERVED      |          |   | 0x0   | RW     |
| 0      | RESTART_AUDIO | 0<br>1   | Allows the S/PDIF receiver to automatically resume outputting audio when it successfully recovers from a loss of lock.<br>Do not automatically restart the audio when a relock occurs<br>Restarts the audio automatically when a relock occurs, and resets Register 0xF605 (SPDIF_LOSS_OF_LOCK), Bit 0 (LOSS_OF_LOCK) | 0x0   | RW     |

**S/PDIF Receiver Loss of Lock Detection Register**

**Address: 0xF605, Reset: 0x0000, Name: SPDIF\_LOSS\_OF\_LOCK**

This bit monitors the S/PDIF lock status and checks to see if the lock is lost during operation of the S/PDIF receiver on the ADAU1466 and ADAU1462. This condition can arise when, for example, a valid S/PDIF input signal was present for an extended period of time, but signal integrity worsened for a brief period, causing the receiver to then lose its lock to the input signal. In this case, Bit 0 (LOSS\_OF\_LOCK) transitions from 0b0 to 0b1 and remains set at 0b1 indefinitely. This indicates that, at some point during the operation of the device, lock to the input stream was lost. Bit 0 (LOSS\_OF\_LOCK) stays high at 0b1 until Register 0xF604 (SPDIF\_RESTART), Bit 0 (RESTART\_AUDIO), is set to 0b1, which clears Bit 0 (LOSS\_OF\_LOCK) back to 0b0. At that point, Register 0xF604 (SPDIF\_RESTART), Bit 0 (RESTART\_AUDIO), can be reset to 0b0 if required.

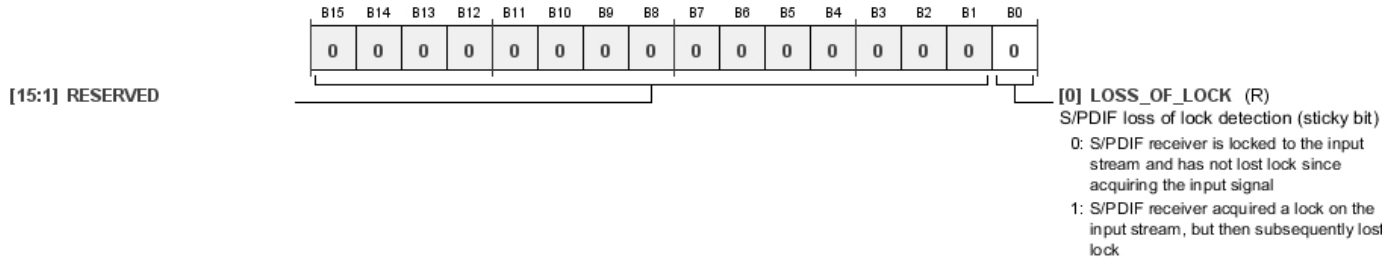

**Table 137. Bit Descriptions for SPDIF\_LOSS\_OF\_LOCK**

| Bits   | Bit Name     | Settings | Description  | Reset | Access |
|--------|--------------|----------|--|-------|--------|
| [15:1] | RESERVED     |          |  | 0x0   | RW     |
| 0      | LOSS_OF_LOCK | 0<br>1   | S/PDIF loss of lock detection (sticky bit).<br>0 S/PDIF receiver is locked to the input stream and has not lost lock since acquiring the input signal<br>1 S/PDIF receiver acquired a lock on the input stream but then subsequently lost lock | 0x0   | R      |

**S/PDIF Receiver Auxiliary Outputs Enable Register**

Address: 0xF608, Reset: 0x0000, Name: SPDIF\_AUX\_EN

The S/PDIF receiver on the ADAU1466 and ADAU1462 decodes embedded nonaudio data bits on the incoming data stream, including channel status, user data, validity bits, and parity bits. This information, together with the decoded audio data, can optionally be output on one of the SDATA\_OUTx pins using Register 0xF608 (SPDIF\_AUX\_EN). The serial output port selected by Bits[3:0] (TDMOUT) outputs an 8-channel TDM stream containing this decoded information.

Channel 0 in the TDM8 stream contains the 24 audio bits from the left S/PDIF input channel, followed by eight zero bits.

Channel 1 in the TDM8 stream contains 20 zero bits, the parity bit, validity bit, user data bit, and the channel status bit from the left S/PDIF input channel, followed by eight zero bits.

Channel 2 in the TDM8 stream contains 22 zero bits, followed by the compression type bit (0b0 represents AC3 and 0b1 represents DTS) and the audio type bit (0b0 represents PCM and 0b1 represents compressed), followed by eight zero bits.

Channel 3 in the TDM8 stream contains 32 zero bits.

Channel 4 in the TDM8 stream contains the 24 audio bits from the right S/PDIF input channel, followed by eight zero bits.

Channel 5 in the TDM8 stream contains 20 zero bits followed by the parity bit, validity bit, user data bit, and channel status bit from the right S/PDIF input channel, followed by eight zero bits.

Channel 6 in the TDM8 stream contains 32 zero bits.

Channel 7 in the TDM8 stream contains 23 zero bits, the block start bit, and eight zero bits.

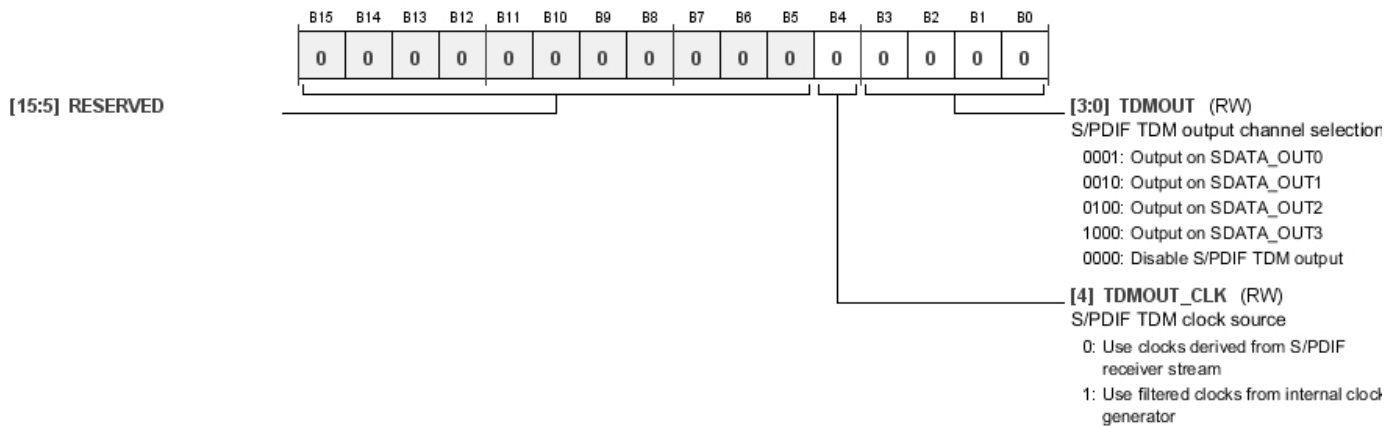



Table 138. Bit Descriptions for SPDIF\_AUX\_EN

| Bits   | Bit Name   | Settings                             | Description   | Reset | Access |
|--------|------------|--------------------------------------|---|-------|--------|
| [15:5] | RESERVED   |                                      |   | 0x0   | RW     |
| 4      | TDMOUT_CLK | 0<br>1                               | S/PDIF TDM clock source. When Bits[3:0] (TDMOUT) are configured to output S/PDIF receiver data on one of the SDATA_OUTx pins, the corresponding serial port must be set in master mode; and Bit 4 (TDMOUT_CLK) configures which clock signals are used on the corresponding BCLK_OUTx and LRCLK_OUTx pins. If Bit 4 (TDMOUT_CLK) = 0b0, the clock signals recovered from the S/PDIF input signal are used to clock the serial output. If Bit 4 (TDMOUT_CLK) = 0b1, the output of Clock Generator 3 is used to clock serial output; and Register 0xF026 (CLK_GEN3_SRC), Bits[3:0] (FREF_PIN), must be 0b1110, and Register 0xF026 (CLK_GEN3_SRC), Bit 4 (CLK_GEN3_SRC), must be 0b1. | 0x0   | RW     |
| [3:0]  | TDMOUT     | 0001<br>0010<br>0100<br>1000<br>0000 | S/PDIF TDM output channel selection.<br>Output on SDATA_OUT0<br>Output on SDATA_OUT1<br>Output on SDATA_OUT2<br>Output on SDATA_OUT3<br>Disable S/PDIF TDM output   | 0x0   | RW     |

**S/PDIF Receiver Auxiliary Bits Ready Flag Register**

Address: 0xF60F, Reset: 0x0000, Name: SPDIF\_RX\_AUXBIT\_READY

The decoded channel status, user data, validity, and parity bits are recovered from the input signal one frame at a time until a full block of 192 frames is received on the ADAU1466 and ADAU1462. When all of the 192 frames are received and decoded, Bit 0 (AUXBITS\_READY), changes state from 0b0 to 0b1, indicating that the full block of data has been recovered and is available to be read from the corresponding registers.

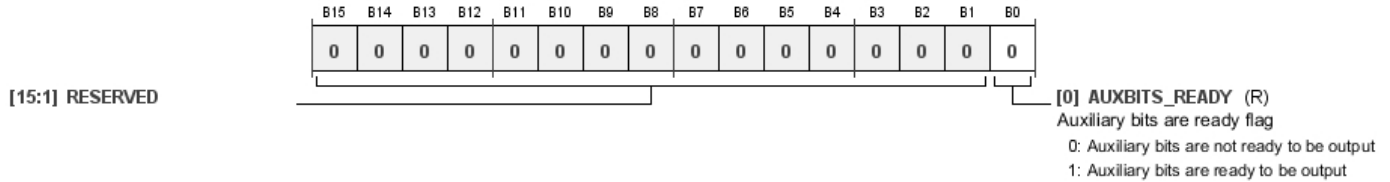


**Table 139. Bit Descriptions for SPDIF\_RX\_AUXBIT\_READY**

| Bits   | Bit Name      | Settings | Description  | Reset | Access |
|--------|---------------|----------|--|-------|--------|
| [15:1] | RESERVED      |          |  | 0x0   | RW     |
| 0      | AUXBITS_READY | 0<br>1   | Auxiliary bits are ready flag.<br>Auxiliary bits are not ready to be output<br>Auxiliary bits are ready to be output | 0x0   | R      |

**S/PDIF Receiver Channel Status Bits (Left) Register**

Address: 0xF610 to 0xF61B (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_RX\_CS\_LEFT\_x

These 12 registers store the 192 channel status bits decoded from the left channel of the S/PDIF input stream on the ADAU1466 and ADAU1462.

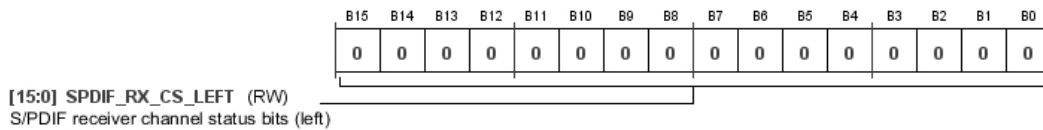


**Table 140. Bit Descriptions for SPDIF\_RX\_CS\_LEFT\_x**

| Bits   | Bit Name         | Settings | Description                                 | Reset  | Access |
|--------|------------------|----------|---|--------|--------|
| [15:0] | SPDIF_RX_CS_LEFT |          | S/PDIF receiver channel status bits (left). | 0x0000 | R      |

**S/PDIF Receiver Channel Status Bits (Right) Register**

Address: 0xF620 to 0xF62B (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_RX\_CS\_RIGHT\_x

These 12 registers store the 192 channel status bits decoded from the right channel of the S/PDIF input stream on the ADAU1466 and ADAU1462.

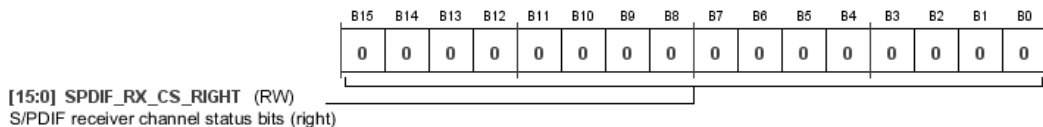

**Table 141. Bit Descriptions for SPDIF\_RX\_CS\_RIGHT\_x**

| Bits   | Bit Name          | Settings | Description                                  | Reset  | Access |
|--------|-------------------|----------|--|--------|--------|
| [15:0] | SPDIF_RX_CS_RIGHT |          | S/PDIF receiver channel status bits (right). | 0x0000 | R      |

**S/PDIF Receiver User Data Bits (Left) Register**

Address: 0xF630 to 0xF63B (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_RX\_UD\_LEFT\_x

These 12 registers store the 192 user data bits decoded from the left channel of the S/PDIF input stream on the ADAU1466 and ADAU1462.

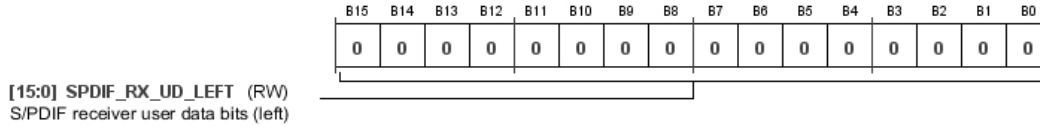


Table 142. Bit Descriptions for SPDIF\_RX\_UD\_LEFT\_x

| Bits   | Bit Name         | Settings | Description                            | Reset  | Access |
|--------|------------------|----------|--|--------|--------|
| [15:0] | SPDIF_RX_UD_LEFT |          | S/PDIF receiver user data bits (left). | 0x0000 | R      |

**S/PDIF Receiver User Data Bits (Right) Register**

Address: 0xF640 to 0xF64B (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_RX\_UD\_RIGHT\_x

These 12 registers store the 192 user data bits decoded from the right channel of the S/PDIF input stream on the ADAU1466 and ADAU1462.

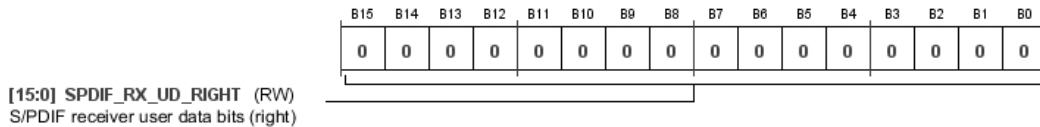


Table 143. Bit Descriptions for SPDIF\_RX\_UD\_RIGHT\_x

| Bits   | Bit Name          | Settings | Description                             | Reset  | Access |
|--------|-------------------|----------|---|--------|--------|
| [15:0] | SPDIF_RX_UD_RIGHT |          | S/PDIF receiver user data bits (right). | 0x0000 | R      |

**S/PDIF Receiver Validity Bits (Left) Register**

Address: 0xF650 to 0xF65B (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_RX\_VB\_LEFT\_x

These 12 registers store the 192 validity bits decoded from the left channel of the S/PDIF input stream on the ADAU1466 and ADAU1462.

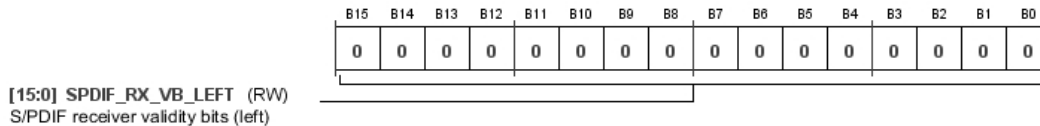


Table 144. Bit Descriptions for SPDIF\_RX\_VB\_LEFT\_x

| Bits   | Bit Name         | Settings | Description                           | Reset  | Access |
|--------|------------------|----------|---------------------------------------|--------|--------|
| [15:0] | SPDIF_RX_VB_LEFT |          | S/PDIF receiver validity bits (left). | 0x0000 | R      |

**S/PDIF Receiver Validity Bits (Right) Register**

Address: 0xF660 to 0xF66B (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_RX\_VB\_RIGHT\_x

These 12 registers store the 192 validity bits decoded from the left channel of the S/PDIF input stream on the ADAU1466 and ADAU1462.

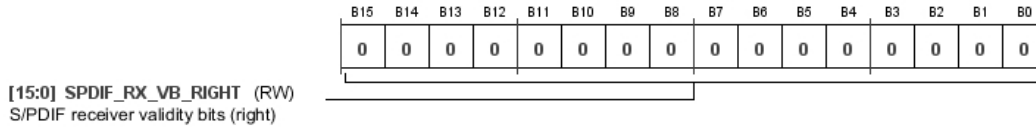


Table 145. Bit Descriptions for SPDIF\_RX\_VB\_RIGHT\_x

| Bits   | Bit Name          | Settings | Description                            | Reset  | Access |
|--------|-------------------|----------|--|--------|--------|
| [15:0] | SPDIF_RX_VB_RIGHT |          | S/PDIF receiver validity bits (right). | 0x0000 | R      |

**S/PDIF Receiver Parity Bits (Left) Register**

Address: 0xF670 to 0xF67B (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_RX\_PB\_LEFT\_x

These 12 registers store the 192 parity bits decoded from the left channel of the S/PDIF input stream on the ADAU1466 and ADAU1462.

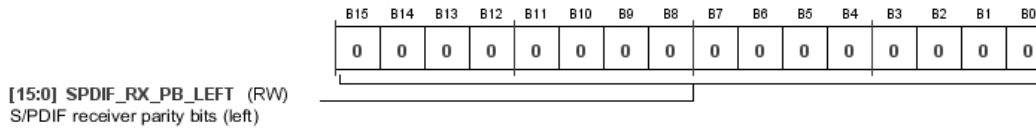


Table 146. Bit Descriptions for SPDIF\_RX\_PB\_LEFT\_x

| Bits   | Bit Name         | Settings | Description                         | Reset  | Access |
|--------|------------------|----------|-------------------------------------|--------|--------|
| [15:0] | SPDIF_RX_PB_LEFT |          | S/PDIF receiver parity bits (left). | 0x0000 | R      |

**S/PDIF Receiver Parity Bits (Right) Register**

Address: 0xF680 to 0xF68B (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_RX\_PB\_RIGHT\_x

These 12 registers store the 192 parity bits decoded from the right channel of the S/PDIF input stream on the ADAU1466 and ADAU1462.

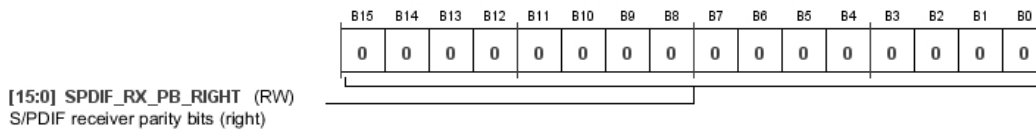



Table 147. Bit Descriptions for SPDIF\_RX\_PB\_RIGHT\_x

| Bits   | Bit Name          | Settings | Description                          | Reset  | Access |
|--------|-------------------|----------|--------------------------------------|--------|--------|
| [15:0] | SPDIF_RX_PB_RIGHT |          | S/PDIF receiver parity bits (right). | 0x0000 | R      |



**S/PDIF Transmitter Enable Register****Address: 0xF690, Reset: 0x0000, Name: SPDIF\_TX\_EN**


This register enables or disables the S/PDIF transmitter on the ADAU1466 and ADAU1462. When the transmitter is disabled, it outputs a constant stream of zero data. When the S/PDIF transmitter is disabled, it still consumes power. To power down the S/PDIF transmitter for the purpose of power savings, set Register 0xF051 (POWER\_ENABLE1), Bit 2 (TX\_PWR) = 0b0.

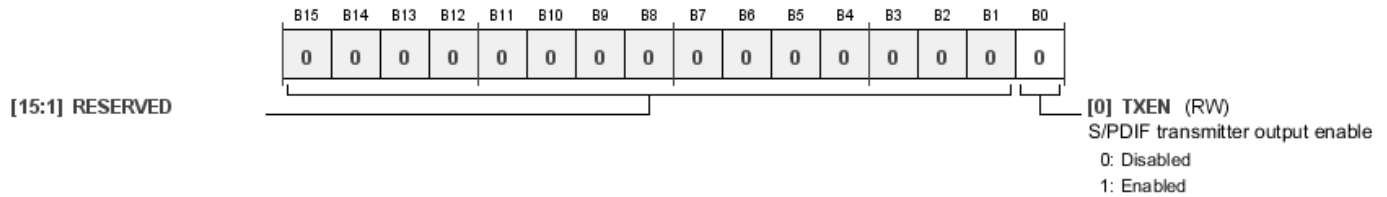**Table 148. Bit Descriptions for SPDIF\_TX\_EN**

| Bits   | Bit Name | Settings | Description  | Reset | Access |
|--------|----------|----------|--|-------|--------|
| [15:1] | RESERVED |          |  | 0x0   | RW     |
| 0      | TXEN     | 0<br>1   | S/PDIF transmitter output enable.<br>Disabled<br>Enabled | 0x0   | RW     |

**S/PDIF Transmitter Control Register****Address: 0xF691, Reset: 0x0000, Name: SPDIF\_TX\_CTRL**

This register controls the length of the audio data-words output by the S/PDIF transmitter on the ADAU1466 and ADAU1462. The maximum word length is 24 bits. If a shorter word length is selected using Bits[1:0] (TX\_LENGTHCTRL), the extraneous bits are truncated, starting with the least significant bit. If Bits[1:0] (TX\_LENGTHCTRL) = 0b11, the decoded channel status bits on the input stream of the S/PDIF receiver automatically set the word length on the S/PDIF transmitter.

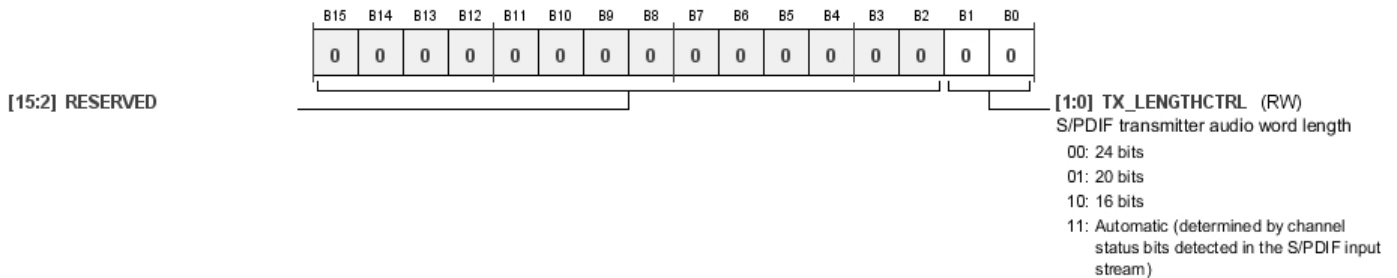**Table 149. Bit Descriptions for SPDIF\_TX\_CTRL**

| Bits   | Bit Name      | Settings             | Description   | Reset | Access |
|--------|---------------|----------------------|---|-------|--------|
| [15:2] | RESERVED      |                      |   | 0x0   | RW     |
| [1:0]  | TX_LENGTHCTRL | 00<br>01<br>10<br>11 | S/PDIF transmitter audio word length.<br>24 bits<br>20 bits<br>16 bits<br>Automatic (determined by channel status bits detected in the S/PDIF input stream) | 0x0   | RW     |

**S/PDIF Transmitter Auxiliary Bits Source Select Register**

Address: 0xF69F, Reset: 0x0000, Name: SPDIF\_TX\_AUXBIT\_SOURCE

This register configures whether the encoded nonaudio data bits in the output data stream of the S/PDIF transmitter on the ADAU1466 and ADAU1462 are copied directly from the S/PDIF receiver or set manually using the corresponding control registers. If the data is configured manually, all channel status, parity, user data, and validity bits can be manually set using the following registers: SPDIF\_TX\_CS\_LEFT\_x, SPDIF\_TX\_CS\_RIGHT\_x, SPDIF\_TX\_UD\_LEFT\_x, SPDIF\_TX\_UD\_RIGHT\_x, SPDIF\_TX\_VB\_LEFT\_x, SPDIF\_TX\_VB\_RIGHT\_x, SPDIF\_TX\_PB\_LEFT\_x, and SPDIF\_TX\_PB\_RIGHT\_x.

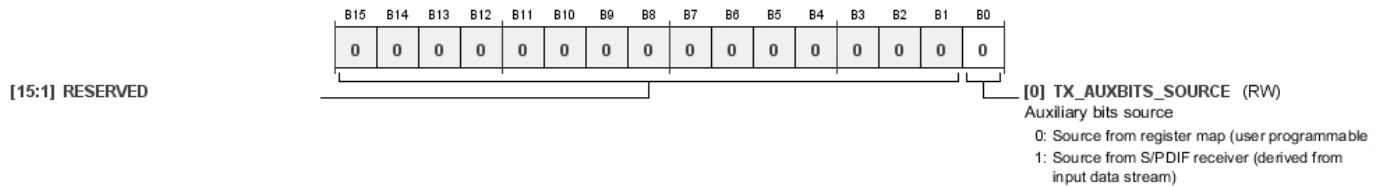


Table 150. Bit Descriptions for SPDIF\_TX\_AUXBIT\_SOURCE

| Bits   | Bit Name          | Settings | Description  | Reset | Access |
|--------|-------------------|----------|--|-------|--------|
| [15:1] | RESERVED          |          |  | 0x0   | RW     |
| 0      | TX_AUXBITS_SOURCE | 0<br>1   | Auxiliary bits source.<br>0 Source from register map (user programmable)<br>1 Source from S/PDIF receiver (derived from input data stream) | 0x0   | RW     |

**S/PDIF Transmitter Channel Status Bits (Left) Register**

Address: 0xF6A0 to 0xF6AB (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_TX\_CS\_LEFT\_x

These 12 registers allow the 192 channel status bits encoded on the left channel of the output data stream of the S/PDIF transmitter on the ADAU1466 and ADAU1462 to be manually configured. For these bits to be output properly on the S/PDIF transmitter, Register 0xF69F (SPDIF\_TX\_AUXBIT\_SOURCE), Bit 0 (TX\_AUXBITS\_SOURCE), must be set to 0b0.

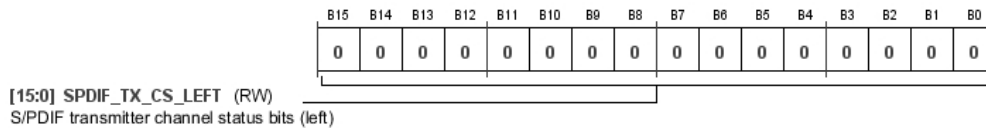



Table 151. Bit Descriptions for SPDIF\_TX\_CS\_LEFT\_x

| Bits   | Bit Name         | Settings | Description                                    | Reset  | Access |
|--------|------------------|----------|--|--------|--------|
| [15:0] | SPDIF_TX_CS_LEFT |          | S/PDIF transmitter channel status bits (left). | 0x0000 | RW     |

**S/PDIF Transmitter Channel Status Bits (Right) Register**

Address: 0xF6B0 to 0xF6BB (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_TX\_CS\_RIGHT\_x

These 12 registers allow the 192 channel status bits encoded on the right channel of the output data stream of the S/PDIF transmitter on the ADAU1466 and ADAU1462 to be manually configured. For these bits to be output properly on the S/PDIF transmitter, Register 0xF69F (SPDIF\_TX\_AUXBIT\_SOURCE), Bit 0 (TX\_AUXBITS\_SOURCE), must be set to 0b0.



[15:0] SPDIF\_TX\_CS\_RIGHT (RW)  
S/PDIF receiver channel status bits (right)


**Table 152. Bit Descriptions for SPDIF\_TX\_CS\_RIGHT\_x**

| Bits   | Bit Name          | Settings | Description                                  | Reset  | Access |
|--------|-------------------|----------|--|--------|--------|
| [15:0] | SPDIF_TX_CS_RIGHT |          | S/PDIF receiver channel status bits (right). | 0x0000 | RW     |

**S/PDIF Transmitter User Data Bits (Left) Register**

Address: 0xF6C0 to 0xF6CB (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_TX\_UD\_LEFT\_x

These 12 registers allow the 192 user data bits encoded on the left channel of the output data stream of the S/PDIF transmitter on the ADAU1466 and ADAU1462 to be manually configured. For these bits to be output properly on the S/PDIF transmitter, Register 0xF69F (SPDIF\_TX\_AUXBIT\_SOURCE), Bit 0 (TX\_AUXBITS\_SOURCE), must be set to 0b0.



[15:0] SPDIF\_TX\_UD\_LEFT (RW)  
S/PDIF transmitter user data bits (left)


**Table 153. Bit Descriptions for SPDIF\_TX\_UD\_LEFT\_x**

| Bits   | Bit Name         | Settings | Description                               | Reset  | Access |
|--------|------------------|----------|---|--------|--------|
| [15:0] | SPDIF_TX_UD_LEFT |          | S/PDIF transmitter user data bits (left). | 0x0000 | RW     |

**S/PDIF Transmitter User Data Bits (Right) Register**

Address: 0xF6D0 to 0xF6DB (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_TX\_UD\_RIGHT\_x

These 12 registers allow the 192 user data bits encoded on the right channel of the output data stream of the S/PDIF transmitter on the ADAU1466 and ADAU1462 to be manually configured. For these bits to be output properly on the S/PDIF transmitter, Register 0xF69F (SPDIF\_TX\_AUXBIT\_SOURCE), Bit 0 (TX\_AUXBITS\_SOURCE), must be set to 0b0.



[15:0] SPDIF\_TX\_UD\_RIGHT (RW)  
S/PDIF transmitter user data bits (right)

**Table 154. Bit Descriptions for SPDIF\_TX\_UD\_RIGHT\_x**

| Bits   | Bit Name          | Settings | Description                                | Reset  | Access |
|--------|-------------------|----------|--|--------|--------|
| [15:0] | SPDIF_TX_UD_RIGHT |          | S/PDIF transmitter user data bits (right). | 0x0000 | RW     |

**S/PDIF Transmitter Validity Bits (Left) Register**

Address: 0xF6E0 to 0xF6EB (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_TX\_VB\_LEFT\_x

These 12 registers allow the 192 validity bits encoded on the left channel of the output data stream of the S/PDIF transmitter on the ADAU1466 and ADAU1462 to be manually configured. For these bits to be output properly on the S/PDIF transmitter, Register 0xF69F (SPDIF\_TX\_AUXBIT\_SOURCE), Bit 0 (TX\_AUXBITS\_SOURCE), must be set to 0b0.



[15:0] SPDIF\_TX\_VB\_LEFT (RW)  
S/PDIF transmitter validity bits (left)


**Table 155. Bit Descriptions for SPDIF\_TX\_VB\_LEFT\_x**

| Bits   | Bit Name         | Settings | Description                              | Reset  | Access |
|--------|------------------|----------|--|--------|--------|
| [15:0] | SPDIF_TX_VB_LEFT |          | S/PDIF transmitter validity bits (left). | 0x0000 | RW     |

**S/PDIF Transmitter Validity Bits (Right) Register**

Address: 0xF6F0 to 0xF6FB (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_TX\_VB\_RIGHT\_x

These 12 registers allow the 192 validity bits encoded on the right channel of the output data stream of the S/PDIF transmitter on the ADAU1466 and ADAU1462 to be manually configured. For these bits to be output properly on the S/PDIF transmitter, Register 0xF69F (SPDIF\_TX\_AUXBIT\_SOURCE), Bit 0 (TX\_AUXBITS\_SOURCE), must be set to 0b0.



[15:0] SPDIF\_TX\_VB\_RIGHT (RW)  
S/PDIF transmitter validity bits (right)


**Table 156. Bit Descriptions for SPDIF\_TX\_VB\_RIGHT\_x**

| Bits   | Bit Name          | Settings | Description                               | Reset  | Access |
|--------|-------------------|----------|---|--------|--------|
| [15:0] | SPDIF_TX_VB_RIGHT |          | S/PDIF transmitter validity bits (right). | 0x0000 | RW     |

**S/PDIF Transmitter Parity Bits (Left) Register**

Address: 0xF700 to Address 0xF70B (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_TX\_PB\_LEFT\_x

These 12 registers allow the 192 parity bits encoded on the left channel of the output data stream of the S/PDIF transmitter on the ADAU1466 and ADAU1462 to be manually configured. For these bits to be output properly on the S/PDIF transmitter, Register 0xF69F (SPDIF\_TX\_AUXBIT\_SOURCE), Bit 0 (TX\_AUXBITS\_SOURCE), must be set to 0b0.



[15:0] SPDIF\_TX\_PB\_LEFT (RW)  
S/PDIF transmitter parity bits (left)


**Table 157. Bit Descriptions for SPDIF\_TX\_PB\_LEFT\_x**

| Bits   | Bit Name         | Settings | Description                            | Reset  | Access |
|--------|------------------|----------|--|--------|--------|
| [15:0] | SPDIF_TX_PB_LEFT |          | S/PDIF transmitter parity bits (left). | 0x0000 | RW     |

**S/PDIF Transmitter Parity Bits (Right) Register**

Address: 0xF710 to Address 0xF71B (Increments of 0x1), Reset: 0x0000, Name: SPDIF\_TX\_PB\_RIGHT\_x

These 12 registers allow the 192 parity bits encoded on the right channel of the output data stream of the S/PDIF transmitter on the ADAU1466 and ADAU1462 to be manually configured. For these bits to be output properly on the S/PDIF transmitter, Register 0xF69F (SPDIF\_TX\_AUXBIT\_SOURCE), Bit 0 (TX\_AUXBITS\_SOURCE), must be set to 0b0.



[15:0] SPDIF\_TX\_PB\_RIGHT (RW)  
S/PDIF transmitter parity bits (right)

**Table 158. Bit Descriptions for SPDIF\_TX\_PB\_RIGHT\_x**


| Bits   | Bit Name          | Settings | Description                             | Reset  | Access |
|--------|-------------------|----------|---|--------|--------|
| [15:0] | SPDIF_TX_PB_RIGHT |          | S/PDIF transmitter parity bits (right). | 0x0000 | RW     |

**HARDWARE INTERFACING REGISTERS**

**BCLK Input Pins Drive Strength and Slew Rate Register**

Address: 0xF780 to 0xF783 (Increments of 0x1), Reset: 0x0018, Name: BCLK\_INx\_PIN

These registers configure the drive strength, slew rate, and pull resistors for the BCLK\_INx pins. Register 0xF780 corresponds to BCLK\_IN0, Register 0xF781 corresponds to BCLK\_IN1, Register 0xF782 corresponds to BCLK\_IN2, and Register 0xF783 corresponds to BCLK\_IN3.

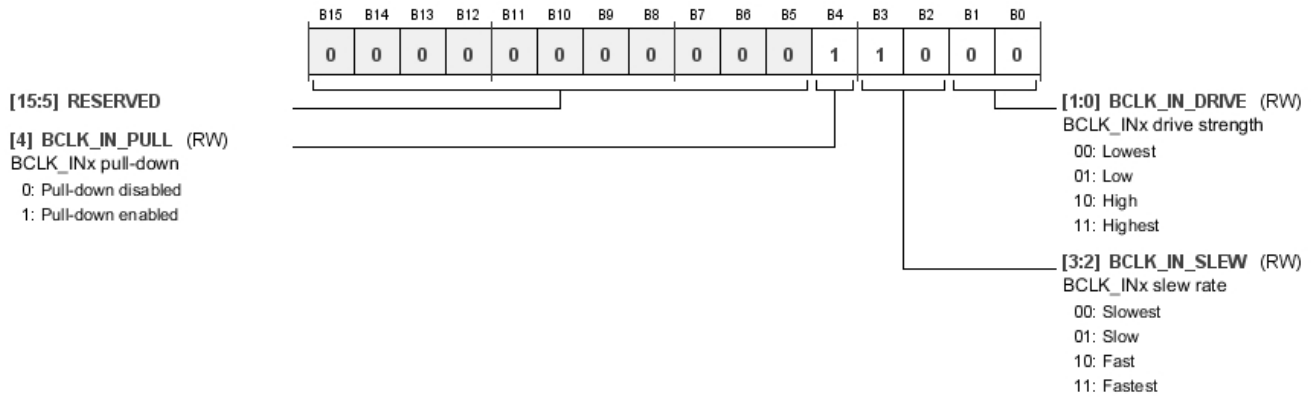


**Table 159. Bit Descriptions for BCLK\_INx\_PIN**

| Bits   | Bit Name      | Settings             | Description  | Reset | Access |
|--------|---------------|----------------------|--|-------|--------|
| [15:5] | RESERVED      |                      |  | 0x0   | RW     |
| 4      | BCLK_IN_PULL  | 0<br>1               | BCLK_INx pull-down.<br>Pull-down disabled<br>Pull-down enabled | 0x1   | RW     |
| [3:2]  | BCLK_IN_SLEW  | 00<br>01<br>10<br>11 | BCLK_INx slew rate.<br>Slowest<br>Slow<br>Fast<br>Fastest      | 0x2   | RW     |
| [1:0]  | BCLK_IN_DRIVE | 00<br>01<br>10<br>11 | BCLK_INx drive strength.<br>Lowest<br>Low<br>High<br>Highest   | 0x0   | RW     |

**BCLK Output Pins Drive Strength and Slew Rate Register**

Address: 0xF784 to 0xF787 (Increments of 0x1), Reset: 0x0018, Name: BCLK\_OUTx\_PIN

These registers configure the drive strength, slew rate, and pull resistors for the BCLK\_OUTx pins. Register 0xF784 corresponds to BCLK\_OUT0, Register 0xF785 corresponds to BCLK\_OUT1, Register 0xF786 corresponds to BCLK\_OUT2, and Register 0xF787 corresponds to BCLK\_OUT3.

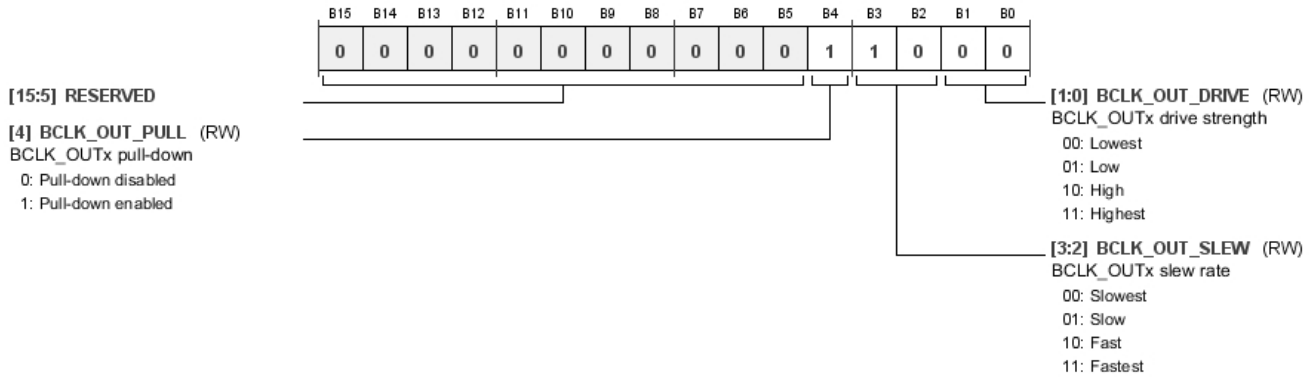


**Table 160. Bit Descriptions for BCLK\_OUTx\_PIN**

| Bits   | Bit Name       | Settings             | Description   | Reset | Access |
|--------|----------------|----------------------|---|-------|--------|
| [15:5] | RESERVED       |                      |   | 0x0   | RW     |
| 4      | BCLK_OUT_PULL  | 0<br>1               | BCLK_OUTx pull-down.<br>0 Pull-down disabled<br>1 Pull-down enabled       | 0x1   | RW     |
| [3:2]  | BCLK_OUT_SLEW  | 00<br>01<br>10<br>11 | BCLK_OUTx slew rate.<br>00 Slowest<br>01 Slow<br>10 Fast<br>11 Fastest    | 0x2   | RW     |
| [1:0]  | BCLK_OUT_DRIVE | 00<br>01<br>10<br>11 | BCLK_OUTx drive strength.<br>00 Lowest<br>01 Low<br>10 High<br>11 Highest | 0x0   | RW     |

**LRCLK Input Pins Drive Strength and Slew Rate Register**

Address: 0xF788 to 0xF78B (Increments of 0x1), Reset: 0x0018, Name: LRCLK\_INx\_PIN

These registers configure the drive strength, slew rate, and pull resistors for the LRCLK\_INx pins. Register 0xF788 corresponds to LRCLK\_IN0/MP10, Register 0xF789 corresponds to LRCLK\_IN1/MP11, Register 0xF78A corresponds to LRCLK\_IN2/MP12, and Register 0xF78B corresponds to LRCLK\_IN3/MP13.

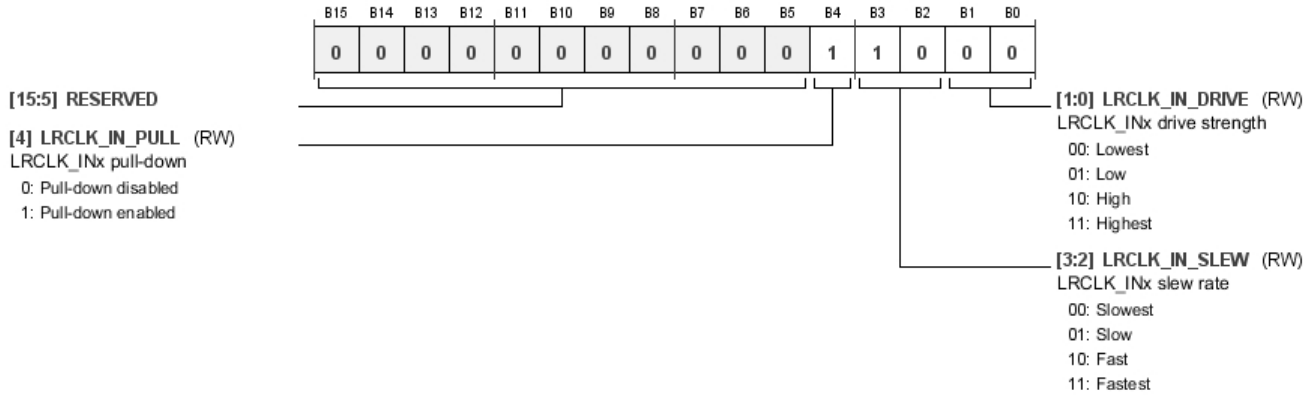

**Table 161. Bit Descriptions for LRCLK\_INx\_PIN**


| Bits   | Bit Name       | Settings             | Description   | Reset | Access |
|--------|----------------|----------------------|---|-------|--------|
| [15:5] | RESERVED       |                      |   | 0x0   | RW     |
| 4      | LRCLK_IN_PULL  | 0<br>1               | LRCLK_INx pull-down.<br>0 Pull-down disabled<br>1 Pull-down enabled       | 0x1   | RW     |
| [3:2]  | LRCLK_IN_SLEW  | 00<br>01<br>10<br>11 | LRCLK_INx slew rate.<br>00 Slowest<br>01 Slow<br>10 Fast<br>11 Fastest    | 0x2   | RW     |
| [1:0]  | LRCLK_IN_DRIVE | 00<br>01<br>10<br>11 | LRCLK_INx drive strength.<br>00 Lowest<br>01 Low<br>10 High<br>11 Highest | 0x0   | RW     |



**LRCLK Output Pins Drive Strength and Slew Rate Register**

Address: 0xF78C to 0xF78F (Increments of 0x1), Reset: 0x0018, Name: LRCLK\_OUTx\_PIN

These registers configure the drive strength, slew rate, and pull resistors for the LRCLK\_OUTx pins. Register 0xF78C corresponds to LRCLK\_OUT0/MP4, Register 0xF78D corresponds to LRCLK\_OUT1/MP5, Register 0xF78E corresponds to LRCLK\_OUT2/MP8, and Register 0xF78F corresponds to LRCLK\_OUT3/MP9.

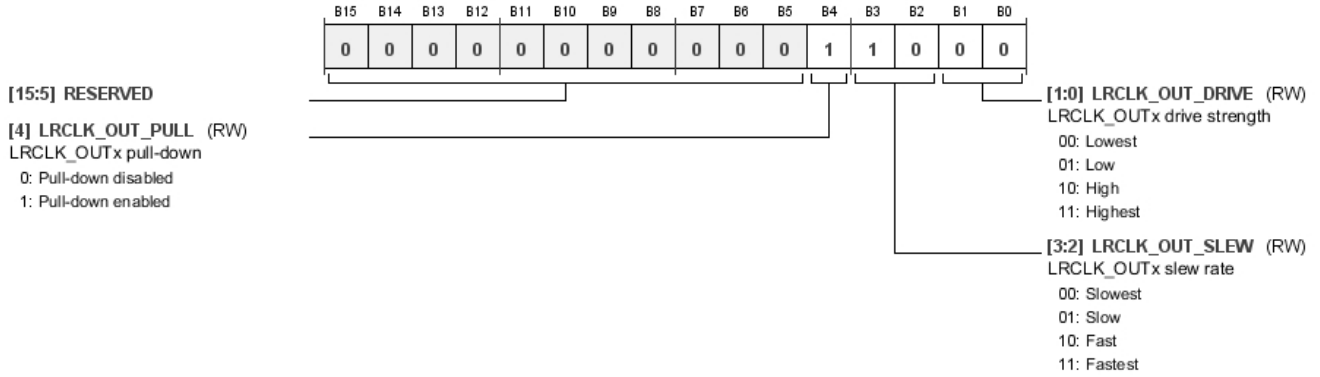


**Table 162. Bit Descriptions for LRCLK\_OUTx\_PIN**

| Bits   | Bit Name        | Settings             | Description  | Reset | Access |
|--------|-----------------|----------------------|--|-------|--------|
| [15:5] | RESERVED        |                      |  | 0x0   | RW     |
| 4      | LRCLK_OUT_PULL  | 0<br>1               | LRCLK_OUTx pull-down.<br>Pull-down disabled<br>Pull-down enabled | 0x1   | RW     |
| [3:2]  | LRCLK_OUT_SLEW  | 00<br>01<br>10<br>11 | LRCLK_OUTx slew rate.<br>Slowest<br>Slow<br>Fast<br>Fastest      | 0x2   | RW     |
| [1:0]  | LRCLK_OUT_DRIVE | 00<br>01<br>10<br>11 | LRCLK_OUTx drive strength.<br>Lowest<br>Low<br>High<br>Highest   | 0x0   | RW     |

**SDATA Input Pins Drive Strength and Slew Rate Register**

Address: 0xF790 to 0xF793 (Increments of 0x1), Reset: 0x0018, Name: SDATA\_INx\_PIN

These registers configure the drive strength, slew rate, and pull resistors for the SDATA\_INx pins. Register 0xF790 corresponds to SDATA\_IN0, Register 0xF791 corresponds to SDATA\_IN1, Register 0xF792 corresponds to SDATA\_IN2, and Register 0xF793 corresponds to SDATA\_IN3.

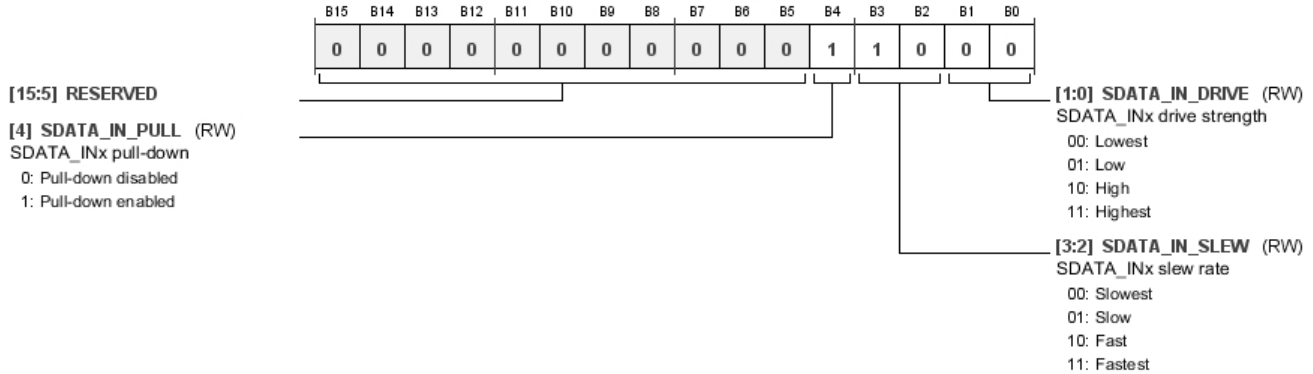


**Table 163. Bit Descriptions for SDATA\_INx\_PIN**

| Bits   | Bit Name       | Settings             | Description   | Reset | Access |
|--------|----------------|----------------------|---|-------|--------|
| [15:5] | RESERVED       |                      |   | 0x0   | RW     |
| 4      | SDATA_IN_PULL  | 0<br>1               | SDATA_INx pull-down.<br>Pull-down disabled<br>Pull-down enabled | 0x1   | RW     |
| [3:2]  | SDATA_IN_SLEW  | 00<br>01<br>10<br>11 | SDATA_INx slew rate.<br>Slowest<br>Slow<br>Fast<br>Fastest      | 0x2   | RW     |
| [1:0]  | SDATA_IN_DRIVE | 00<br>01<br>10<br>11 | SDATA_INx drive strength.<br>Lowest<br>Low<br>High<br>Highest   | 0x0   | RW     |

**SDATA Output Pins Drive Strength and Slew Rate Register**

Address: 0xF794 to 0xF797 (Increments of 0x1), Reset: 0x0008, Name: SDATA\_OUTx\_PIN

These registers configure the drive strength, slew rate, and pull resistors for the SDATA\_OUTx pins. Register 0xF794 corresponds to SDATA\_OUT0, Register 0xF795 corresponds to SDATA\_OUT1, Register 0xF796 corresponds to SDATA\_OUT2, and Register 0xF797 corresponds to SDATA\_OUT3.

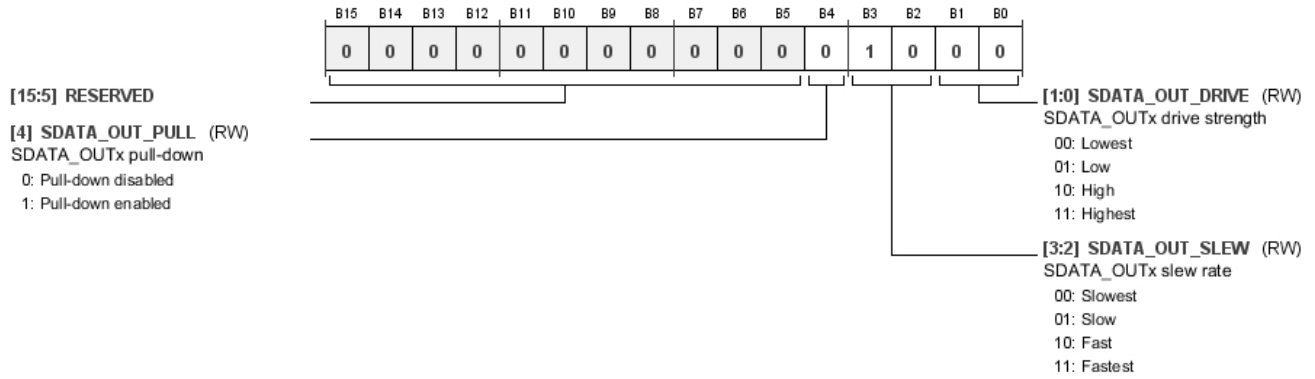

**Table 164. Bit Descriptions for SDATA\_OUTx\_PIN**

| Bits   | Bit Name        | Settings             | Description  | Reset | Access |
|--------|-----------------|----------------------|--|-------|--------|
| [15:5] | RESERVED        |                      |  | 0x0   | RW     |
| 4      | SDATA_OUT_PULL  | 0<br>1               | SDATA_OUTx pull-down.<br>Pull-down disabled<br>Pull-down enabled | 0x0   | RW     |
| [3:2]  | SDATA_OUT_SLEW  | 00<br>01<br>10<br>11 | SDATA_OUTx slew rate.<br>Slowest<br>Slow<br>Fast<br>Fastest      | 0x2   | RW     |
| [1:0]  | SDATA_OUT_DRIVE | 00<br>01<br>10<br>11 | SDATA_OUTx drive strength.<br>Lowest<br>Low<br>High<br>Highest   | 0x0   | RW     |

**S/PDIF Transmitter Pin Drive Strength and Slew Rate Register**

Address: 0xF798, Reset: 0x0008, Name: SPDIF\_TX\_PIN

This register configures the drive strength, slew rate, and pull resistors for the SPDIFOUT pin on the ADAU1466 and ADAU1462.

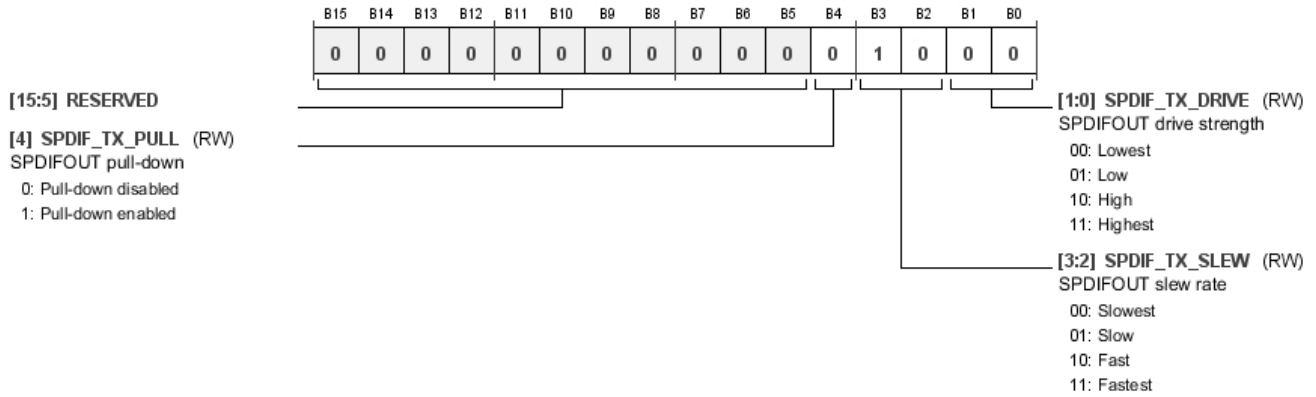



Table 165. Bit Descriptions for SPDIF\_TX\_PIN

| Bits   | Bit Name       | Settings             | Description  | Reset | Access |
|--------|----------------|----------------------|--|-------|--------|
| [15:5] | RESERVED       |                      |  | 0x0   | RW     |
| 4      | SPDIF_TX_PULL  | 0<br>1               | SPDIFOUT pull-down.<br>Pull-down disabled<br>Pull-down enabled | 0x0   | RW     |
| [3:2]  | SPDIF_TX_SLEW  | 00<br>01<br>10<br>11 | SPDIFOUT slew rate.<br>Slowest<br>Slow<br>Fast<br>Fastest      | 0x2   | RW     |
| [1:0]  | SPDIF_TX_DRIVE | 00<br>01<br>10<br>11 | SPDIFOUT drive strength.<br>Lowest<br>Low<br>High<br>Highest   | 0x0   | RW     |

**SCLK/SCL Pin Drive Strength and Slew Rate Register**

Address: 0xF799, Reset: 0x0008, Name: SCLK\_SCL\_PIN

This register configures the drive strength, slew rate, and pull resistors for the SCLK/SCL pin.

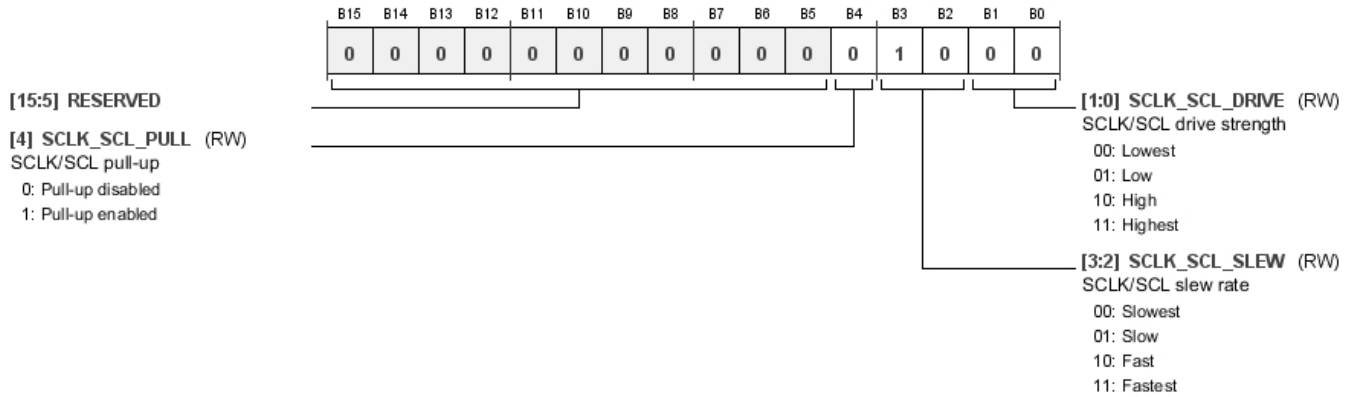

**Table 166. Bit Descriptions for SCLK\_SCL\_PIN**

| Bits   | Bit Name       | Settings             | Description  | Reset | Access |
|--------|----------------|----------------------|--|-------|--------|
| [15:5] | RESERVED       |                      |  | 0x0   | RW     |
| 4      | SCLK_SCL_PULL  | 0<br>1               | SCLK/SCL pull-up.<br>Pull-up disabled<br>Pull-up enabled     | 0x0   | RW     |
| [3:2]  | SCLK_SCL_SLEW  | 00<br>01<br>10<br>11 | SCLK/SCL slew rate.<br>Slowest<br>Slow<br>Fast<br>Fastest    | 0x2   | RW     |
| [1:0]  | SCLK_SCL_DRIVE | 00<br>01<br>10<br>11 | SCLK/SCL drive strength.<br>Lowest<br>Low<br>High<br>Highest | 0x0   | RW     |

**MISO/SDA Pin Drive Strength and Slew Rate Register**

Address: 0xF79A, Reset: 0x0008, Name: MISO\_SDA\_PIN

This register configures the drive strength, slew rate, and pull resistors for the MISO/SDA pin.

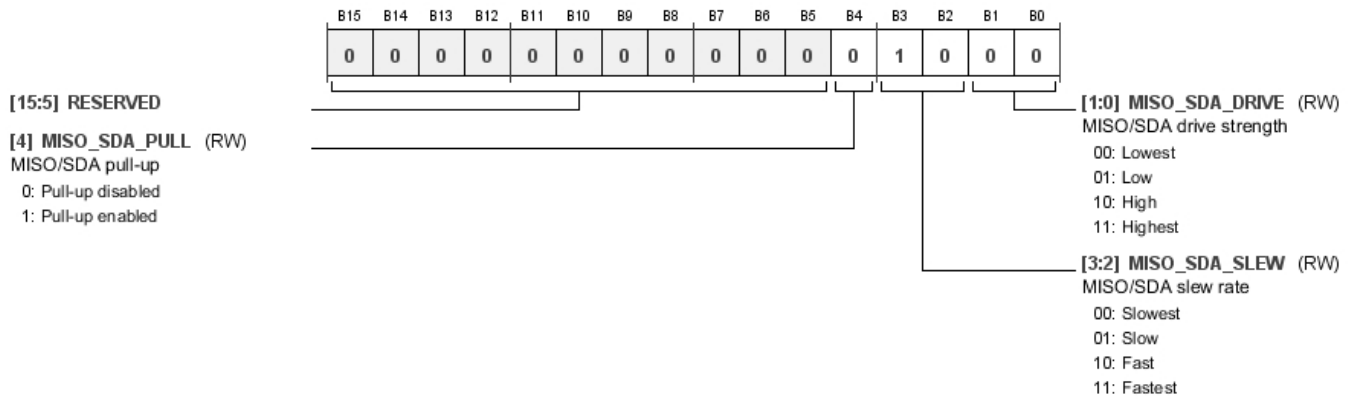



Table 167. Bit Descriptions for MISO\_SDA\_PIN

| Bits   | Bit Name       | Settings             | Description  | Reset | Access |
|--------|----------------|----------------------|--|-------|--------|
| [15:5] | RESERVED       |                      |  | 0x0   | RW     |
| 4      | MISO_SDA_PULL  | 0<br>1               | MISO/SDA pull-up.<br>0 Pull-up disabled<br>1 Pull-up enabled             | 0x0   | RW     |
| [3:2]  | MISO_SDA_SLEW  | 00<br>01<br>10<br>11 | MISO/SDA slew rate.<br>00 Slowest<br>01 Slow<br>10 Fast<br>11 Fastest    | 0x2   | RW     |
| [1:0]  | MISO_SDA_DRIVE | 00<br>01<br>10<br>11 | MISO/SDA drive strength.<br>00 Lowest<br>01 Low<br>10 High<br>11 Highest | 0x0   | RW     |

**SS/ADDR0 Pin Drive Strength and Slew Rate Register**

Address: 0xF79B, Reset: 0x0018, Name: SS\_PIN

This register configures the drive strength, slew rate, and pull resistors for the SS/ADDR0 pin.

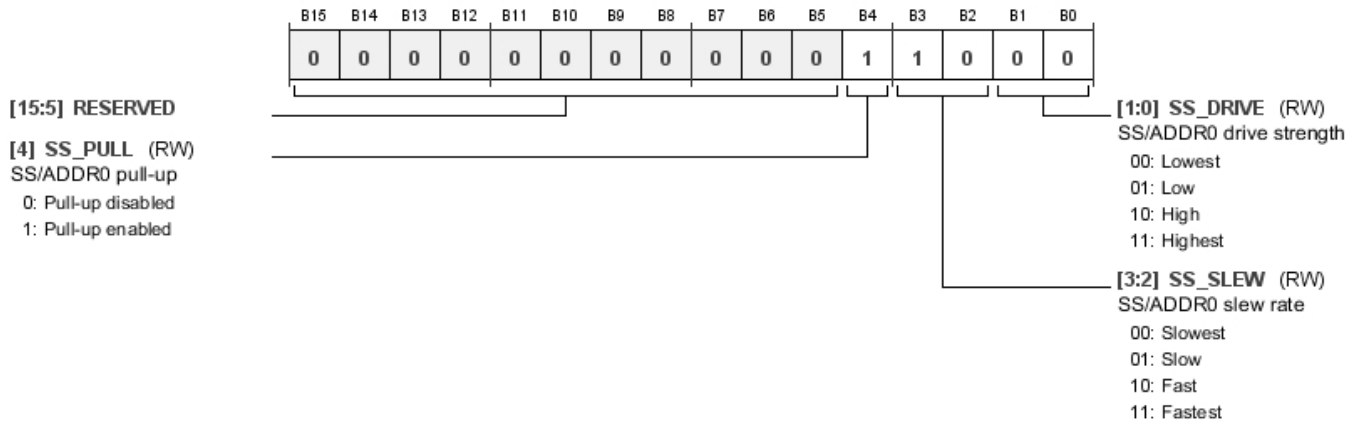


**Table 168. Bit Descriptions for SS\_PIN**

| Bits   | Bit Name | Settings             | Description  | Reset | Access |
|--------|----------|----------------------|--|-------|--------|
| [15:5] | RESERVED |                      |  | 0x0   | RW     |
| 4      | SS_PULL  | 0<br>1               | SS/ADDR0 pull-up.<br>Pull-up disabled<br>Pull-up enabled     | 0x1   | RW     |
| [3:2]  | SS_SLEW  | 00<br>01<br>10<br>11 | SS/ADDR0 slew rate.<br>Slowest<br>Slow<br>Fast<br>Fastest    | 0x2   | RW     |
| [1:0]  | SS_DRIVE | 00<br>01<br>10<br>11 | SS/ADDR0 drive strength.<br>Lowest<br>Low<br>High<br>Highest | 0x0   | RW     |

**MOSI/ADDR1 Pin Drive Strength and Slew Rate Register**

Address: 0xF79C, Reset: 0x0018, Name: MOSI\_ADDR1\_PIN

This register configures the drive strength, slew rate, and pull resistors for the MOSI/ADDR1 pin.

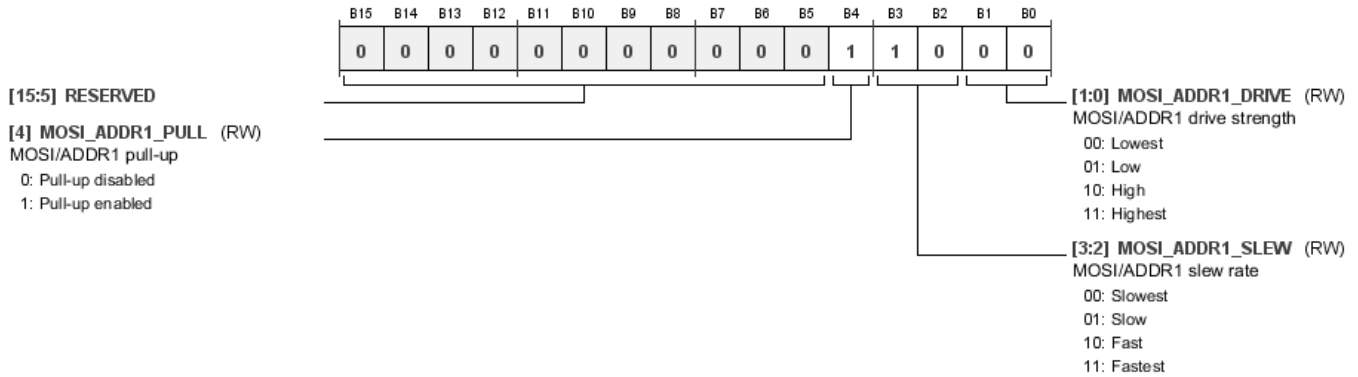

**Table 169. Bit Descriptions for MOSI\_ADDR1\_PIN**


| Bits   | Bit Name         | Settings             | Description  | Reset | Access |
|--------|------------------|----------------------|--|-------|--------|
| [15:5] | RESERVED         |                      |  | 0x0   | RW     |
| 4      | MOSI_ADDR1_PULL  | 0<br>1               | MOSI/ADDR1 pull-up.<br>Pull-up disabled<br>Pull-up enabled     | 0x1   | RW     |
| [3:2]  | MOSI_ADDR1_SLEW  | 00<br>01<br>10<br>11 | MOSI/ADDR1 slew rate.<br>Slowest<br>Slow<br>Fast<br>Fastest    | 0x2   | RW     |
| [1:0]  | MOSI_ADDR1_DRIVE | 00<br>01<br>10<br>11 | MOSI/ADDR1 drive strength.<br>Lowest<br>Low<br>High<br>Highest | 0x0   | RW     |



**SCL\_M/SCLK\_M/MP2 Pin Drive Strength and Slew Rate Register**

Address: 0xF79D, Reset: 0x0008, Name: SCLK\_SCL\_M\_PIN

This register configures the drive strength, slew rate, and pull resistors for the SCL\_M/SCLK\_M/MP2 pin.

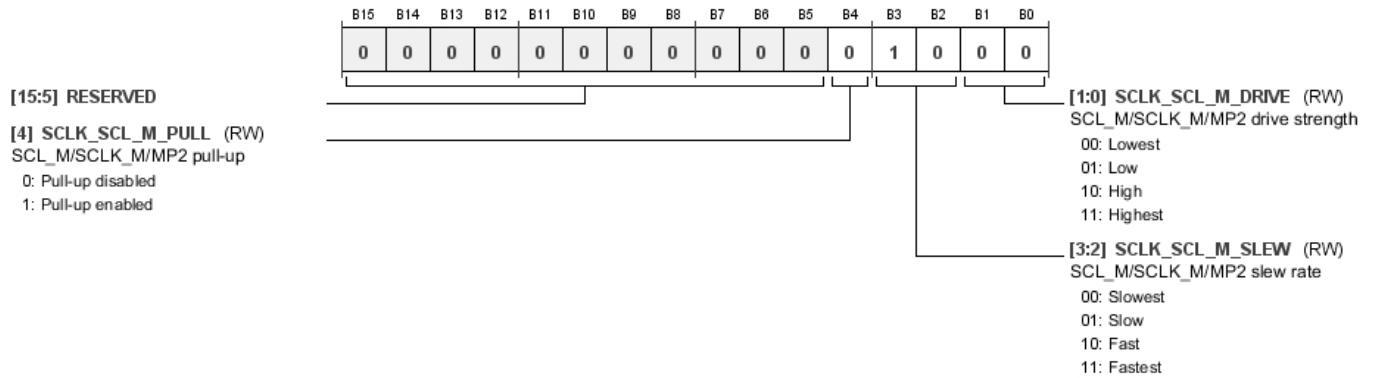


**Table 170. Bit Descriptions for SCLK\_SCL\_M\_PIN**

| Bits   | Bit Name         | Settings             | Description  | Reset | Access |
|--------|------------------|----------------------|--|-------|--------|
| [15:5] | RESERVED         |                      |  | 0x0   | RW     |
| 4      | SCLK_SCL_M_PULL  | 0<br>1               | SCL_M/SCLK_M/MP2 pull-up.<br>Pull-up disabled<br>Pull-up enabled     | 0x0   | RW     |
| [3:2]  | SCLK_SCL_M_SLEW  | 00<br>01<br>10<br>11 | SCL_M/SCLK_M/MP2 slew rate.<br>Slowest<br>Slow<br>Fast<br>Fastest    | 0x2   | RW     |
| [1:0]  | SCLK_SCL_M_DRIVE | 00<br>01<br>10<br>11 | SCL_M/SCLK_M/MP2 drive strength.<br>Lowest<br>Low<br>High<br>Highest | 0x0   | RW     |

**SDA\_M/MISO\_M/MP3 Pin Drive Strength and Slew Rate Register**

Address: 0xF79E, Reset: 0x0008, Name: MISO\_SDA\_M\_PIN

This register configures the drive strength, slew rate, and pull resistors for the SDA\_M/MISO\_M/MP3 pin.

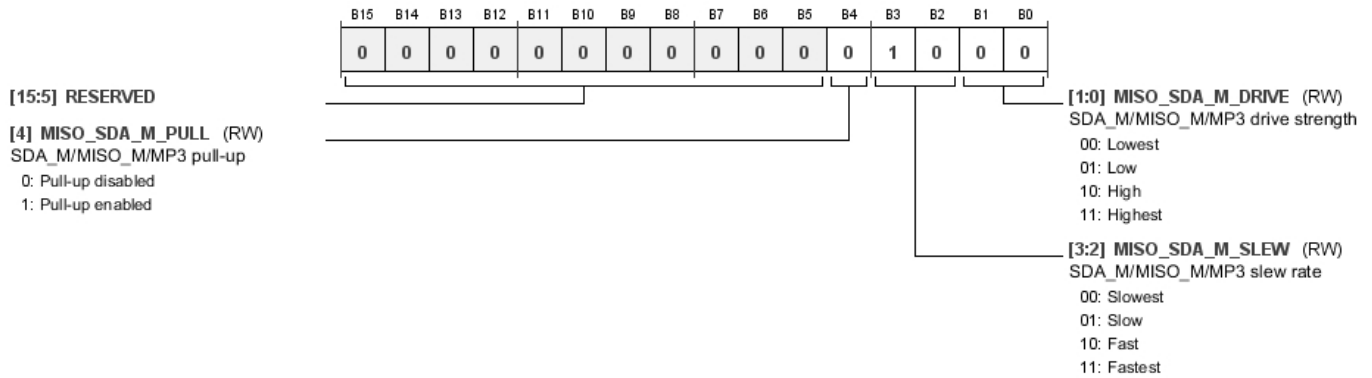

**Table 171. Bit Descriptions for MISO\_SDA\_M\_PIN**

| Bits   | Bit Name         | Settings             | Description  | Reset | Access |
|--------|------------------|----------------------|--|-------|--------|
| [15:5] | RESERVED         |                      |  | 0x0   | RW     |
| 4      | MISO_SDA_M_PULL  | 0<br>1               | SDA_M/MISO_M/MP3 pull-up.<br>Pull-up disabled<br>Pull-up enabled     | 0x0   | RW     |
| [3:2]  | MISO_SDA_M_SLEW  | 00<br>01<br>10<br>11 | SDA_M/MISO_M/MP3 slew rate.<br>Slowest<br>Slow<br>Fast<br>Fastest    | 0x2   | RW     |
| [1:0]  | MISO_SDA_M_DRIVE | 00<br>01<br>10<br>11 | SDA_M/MISO_M/MP3 drive strength.<br>Lowest<br>Low<br>High<br>Highest | 0x0   | RW     |

**SS\_M/MP0 Pin Drive Strength and Slew Rate Register**

Address: 0xF79F, Reset: 0x0018, Name: SS\_M\_PIN

This register configures the drive strength, slew rate, and pull resistors for the SS\_M/MP0 pin.

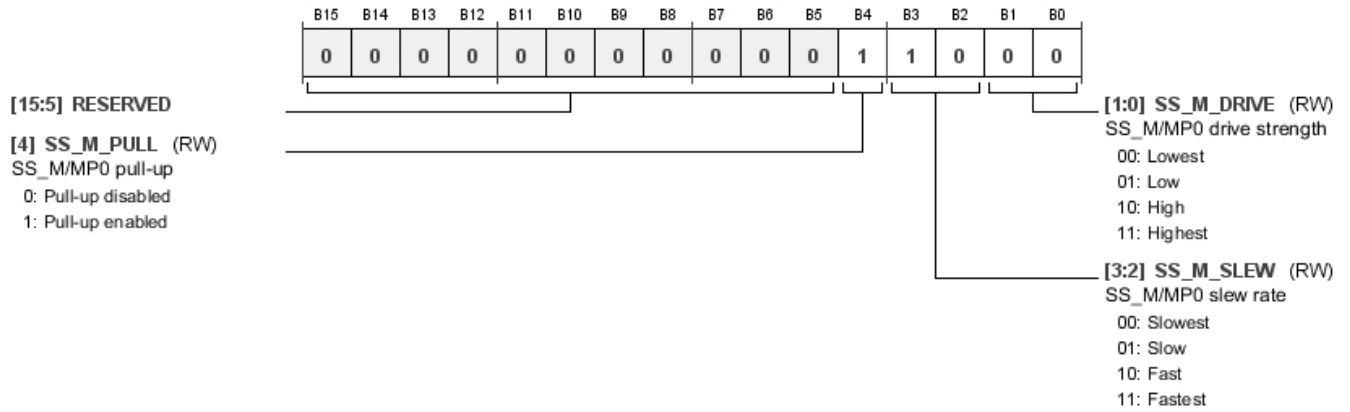


Table 172. Bit Descriptions for SS\_M\_PIN

| Bits   | Bit Name   | Settings             | Description  | Reset | Access |
|--------|------------|----------------------|--|-------|--------|
| [15:5] | RESERVED   |                      |  | 0x0   | RW     |
| 4      | SS_M_PULL  | 0<br>1               | SS_M/MP0 pull-up.<br>Pull-up disabled<br>Pull-up enabled     | 0x1   | RW     |
| [3:2]  | SS_M_SLEW  | 00<br>01<br>10<br>11 | SS_M/MP0 slew rate.<br>Slowest<br>Slow<br>Fast<br>Fastest    | 0x2   | RW     |
| [1:0]  | SS_M_DRIVE | 00<br>01<br>10<br>11 | SS_M/MP0 drive strength.<br>Lowest<br>Low<br>High<br>Highest | 0x0   | RW     |

**MOSI\_M/MP1 Pin Drive Strength and Slew Rate Register**

Address: 0xF7A0, Reset: 0x0018, Name: MOSI\_M\_PIN

This register configures the drive strength, slew rate, and pull resistors for the MOSI\_M/MP1 pin.

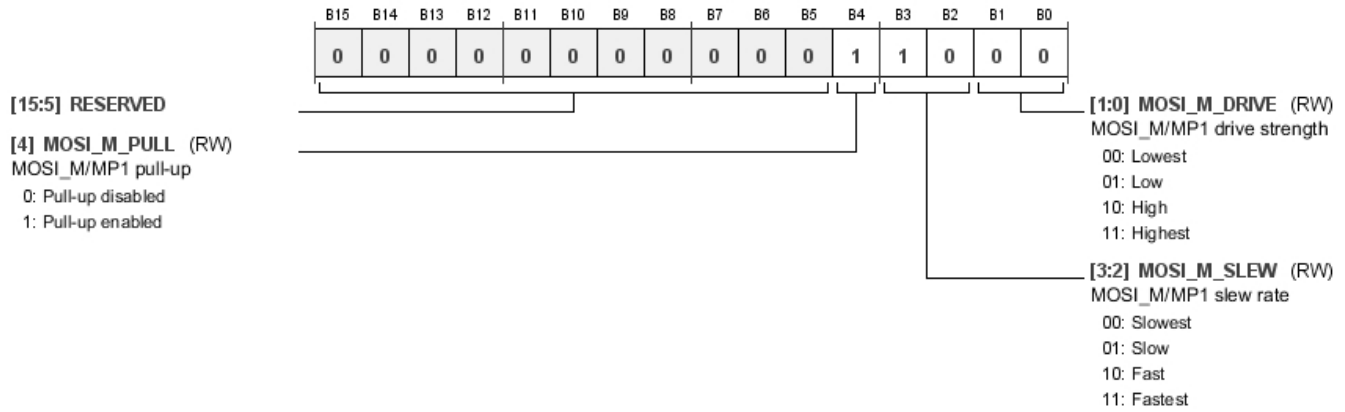



Table 173. Bit Descriptions for MOSI\_M\_PIN

| Bits   | Bit Name     | Settings             | Description  | Reset | Access |
|--------|--------------|----------------------|--|-------|--------|
| [15:5] | RESERVED     |                      |  | 0x0   | RW     |
| 4      | MOSI_M_PULL  | 0<br>1               | MOSI_M/MP1 pull-up.<br>Pull-up disabled<br>Pull-up enabled     | 0x1   | RW     |
| [3:2]  | MOSI_M_SLEW  | 00<br>01<br>10<br>11 | MOSI_M/MP1 slew rate.<br>Slowest<br>Slow<br>Fast<br>Fastest    | 0x2   | RW     |
| [1:0]  | MOSI_M_DRIVE | 00<br>01<br>10<br>11 | MOSI_M/MP1 drive strength.<br>Lowest<br>Low<br>High<br>Highest | 0x0   | RW     |

**MP6 Pin Drive Strength and Slew Rate Register**

Address: 0xF7A1, Reset: 0x0018, Name: MP6\_PIN

This register configures the drive strength, slew rate, and pull resistors for the MP6 pin.

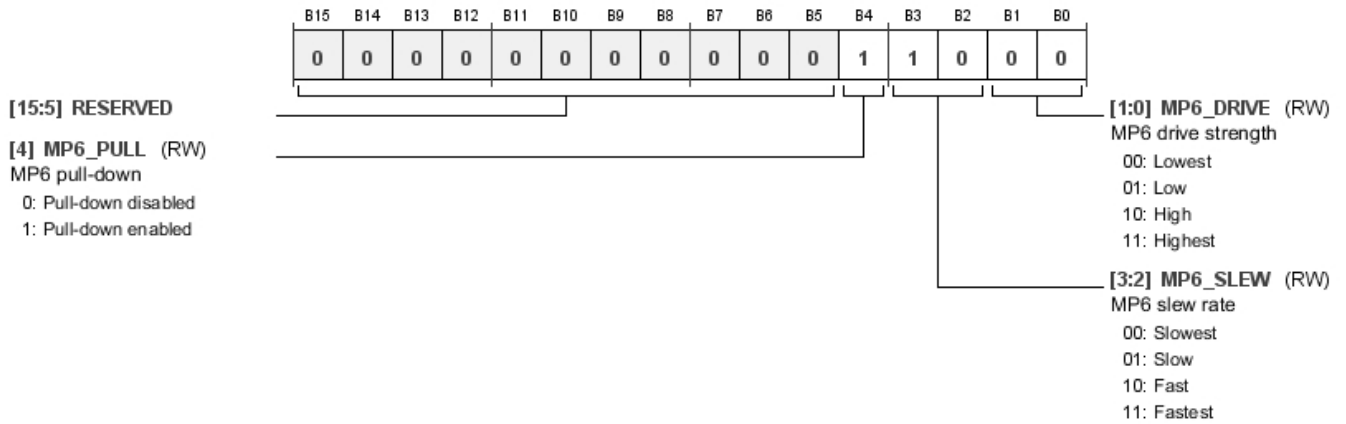


**Table 174. Bit Descriptions for MP6\_PIN**

| Bits   | Bit Name  | Settings             | Description   | Reset | Access |
|--------|-----------|----------------------|---|-------|--------|
| [15:5] | RESERVED  |                      |   | 0x0   | RW     |
| 4      | MP6_PULL  | 0<br>1               | MP6 pull-down.<br>0 Pull-down disabled<br>1 Pull-down enabled       | 0x1   | RW     |
| [3:2]  | MP6_SLEW  | 00<br>01<br>10<br>11 | MP6 slew rate.<br>00 Slowest<br>01 Slow<br>10 Fast<br>11 Fastest    | 0x2   | RW     |
| [1:0]  | MP6_DRIVE | 00<br>01<br>10<br>11 | MP6 drive strength.<br>00 Lowest<br>01 Low<br>10 High<br>11 Highest | 0x0   | RW     |

**MP7 Pin Drive Strength and Slew Rate Register**

Address: 0xF7A2, Reset: 0x0018, Name: MP7\_PIN

This register configures the drive strength, slew rate, and pull resistors for the MP7 pin.

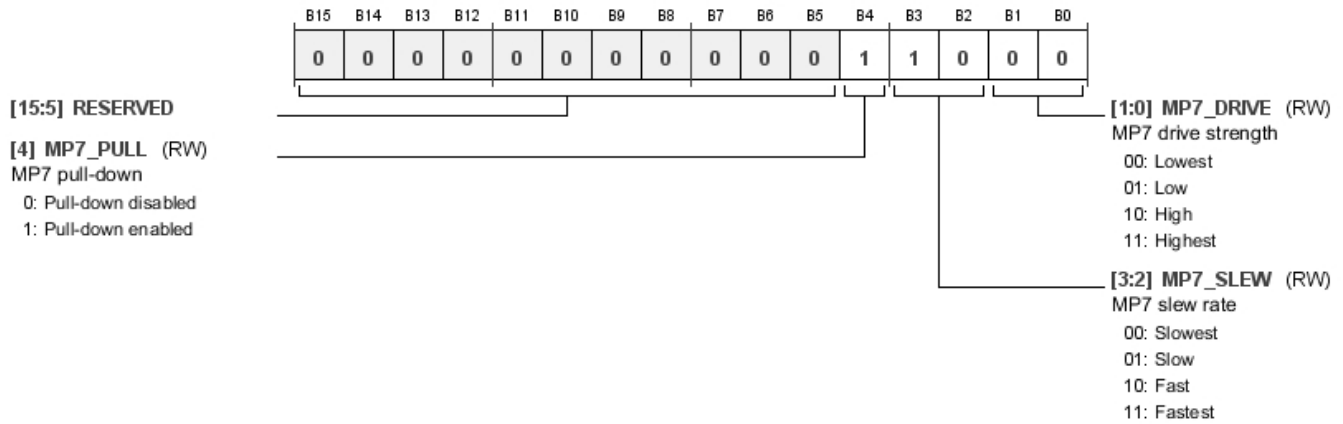


**Table 175. Bit Descriptions for MP7\_PIN**

| Bits   | Bit Name  | Settings             | Description   | Reset | Access |
|--------|-----------|----------------------|---|-------|--------|
| [15:5] | RESERVED  |                      |   | 0x0   | RW     |
| 4      | MP7_PULL  | 0<br>1               | MP7 pull-down.<br>Pull-down disabled<br>Pull-down enabled | 0x1   | RW     |
| [3:2]  | MP7_SLEW  | 00<br>01<br>10<br>11 | MP7 slew rate.<br>Slowest<br>Slow<br>Fast<br>Fastest      | 0x2   | RW     |
| [1:0]  | MP7_DRIVE | 00<br>01<br>10<br>11 | MP7 drive strength.<br>Lowest<br>Low<br>High<br>Highest   | 0x0   | RW     |

**CLKOUT Pin Drive Strength and Slew Rate Register**

Address: 0xF7A3, Reset: 0x0008, Name: CLKOUT\_PIN

This register configures the drive strength, slew rate, and pull resistors for the CLKOUT pin.

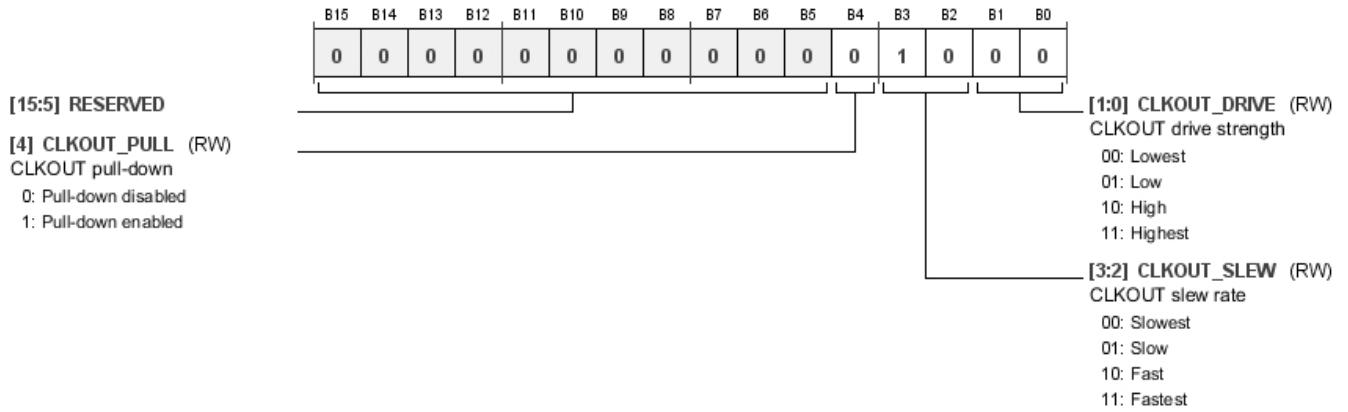

**Table 176. Bit Descriptions for CLKOUT\_PIN**

| Bits   | Bit Name     | Settings             | Description  | Reset | Access |
|--------|--------------|----------------------|--|-------|--------|
| [15:5] | RESERVED     |                      |  | 0x0   | RW     |
| 4      | CLKOUT_PULL  | 0<br>1               | CLKOUT pull-down.<br>Pull-down disabled<br>Pull-down enabled | 0x0   | RW     |
| [3:2]  | CLKOUT_SLEW  | 00<br>01<br>10<br>11 | CLKOUT slew rate.<br>Slowest<br>Slow<br>Fast<br>Fastest      | 0x2   | RW     |
| [1:0]  | CLKOUT_DRIVE | 00<br>01<br>10<br>11 | CLKOUT drive strength.<br>Lowest<br>Low<br>High<br>Highest   | 0x0   | RW     |

**SOFT RESET REGISTER**

Address: 0xF890, Reset: 0x0001, Name: SOFT\_RESET

SOFT\_RESET provides the capability to reset all control registers in the device or put it into a state similar to a hardware reset, where the RESET pin is pulled low to ground. All control registers are reset to their default values, except for the PLL registers: Register 0xF000 (PLL\_CTRL0), Register 0xF001 (PLL\_CTRL1), Register 0xF002 (PLL\_CLK\_SRC), Register 0xF003 (PLL\_ENABLE), Register 0xF004 (PLL\_LOCK), Register 0xF005 (MCLK\_OUT), and Register 0xF006 (PLL\_WATCHDOG), as well as registers related to the panic manager. The I<sup>2</sup>C and SPI slave ports remain operational, and the user can write new values to the PLL registers while the soft reset is active. If SPI slave mode is enabled, the device remains in SPI slave mode during and after the soft reset state. To reset the device to I<sup>2</sup>C slave mode, the device must undergo a hardware reset by pulling the RESET pin low to ground. Bit 0 (SOFT\_RESET) is active low, meaning that setting it to 0b1 enables normal operation and setting it to 0b0 enables the soft reset state.

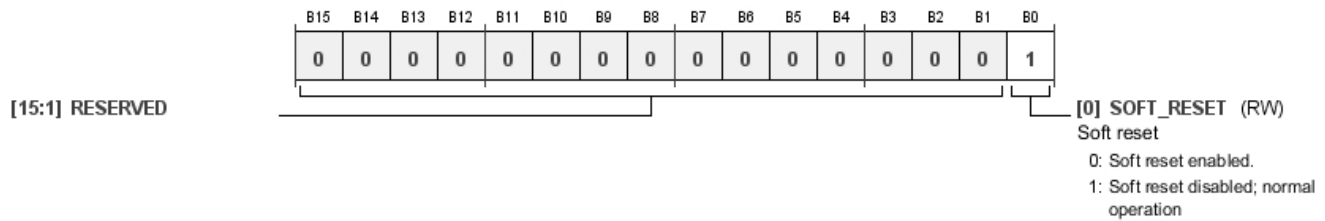


Table 177. Bit Descriptions for SOFT\_RESET

| Bits   | Bit Name   | Settings | Description  | Reset | Access |
|--------|------------|----------|--|-------|--------|
| [15:1] | RESERVED   |          |  | 0x0   | RW     |
| 0      | SOFT_RESET | 0<br>1   | Soft reset.<br>Soft reset enabled<br>Soft reset disabled; normal operation | 0x1   | RW     |



## APPLICATIONS INFORMATION

### PCB DESIGN CONSIDERATIONS

A solid ground plane is necessary for maintaining signal integrity and minimizing EMI radiation. If the PCB has two ground planes, they can be stitched together using vias that are spread evenly throughout the board.

#### Power Supply Bypass Capacitors

Bypass each power supply pin to its nearest appropriate ground pin with a single 100 nF capacitor and, optionally, with an additional 10 nF capacitor in parallel. Make the connections to each side of the capacitor as short as possible, and keep the trace on a single layer with no vias. For maximum effectiveness, place the capacitor either equidistant from the power and ground pins or, when equidistant placement is not possible, slightly nearer to the power pin (see Figure 84). Establish the thermal connections to the planes on the far side of the capacitor.




Figure 84. Recommended Power Supply Bypass Capacitor Layout

Typically, a single 100 nF capacitor for each power ground pin pair is sufficient. However, if there is excessive high frequency noise in the system, use an additional 10 nF capacitor in parallel (see Figure 85). Place the 10 nF capacitor between the devices and the 100 nF capacitor, and establish the thermal connections on the far side of the 100 nF capacitor.

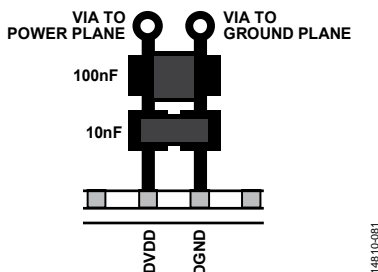


Figure 85. Layout for Multiple Power Supply Bypass Capacitors

To provide a current reservoir in case of sudden current spikes, use a 10  $\mu$ F capacitor for each named supply (DVDD, AVDD, PVDD, and IOVDD) as shown in Figure 86.

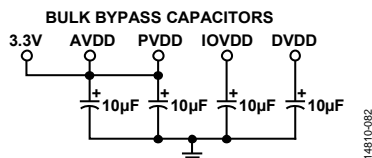


Figure 86. Bulk Bypass Capacitor Schematic

#### Component Placement

Place all 100 nF bypass capacitors, which are recommended for every analog, digital, and PLL power ground pair, as near as possible to the ADAU1462/ADAU1466. Bypass each of the AVDD, DVDD, PVDD, and IOVDD supply signals on the board with an additional single bulk capacitor (10  $\mu$ F to 47  $\mu$ F).

Keep all traces in the crystal resonator circuit (see Figure 14) as short as possible to minimize stray capacitance. Do not connect any long board traces to the crystal oscillator circuit components because such traces may affect crystal startup and operation.

#### Grounding

Use a single ground plane in the application layout. Place all components in an analog signal path away from digital signals.

#### Exposed Pad PCB Design

The device package includes an exposed pad for improved heat dissipation. When designing a board for such a package, consider the following:

- Place a copper layer, equal in size to the exposed pad, on all layers of the board, from top to bottom. Connect the copper layers to a dedicated copper board layer (see Figure 87).

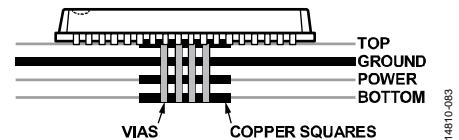


Figure 87. Exposed Pad Layout Example—Side View

- Place vias such that all layers of copper are connected, allowing for efficient heat and energy conductivity. For an example, see Figure 88, which shows 49 vias arranged in a 7  $\times$  7 grid in the pad area.




Figure 88. Exposed Pad Layout Example—Top View

For detailed information, see the [AN-772 Application Note, A Design and Manufacturing Guide for the Lead Frame Chip Scale Package \(LFCSP\)](#).

#### PLL Filter

To minimize jitter, connect the single resistor and two capacitors in the PLL filter to the PLLFILT and PVDD pins with short traces.

**Power Supply Isolation with Ferrite Beads**

Ferrite beads can be used for supply isolation. When using ferrite beads, always place the beads outside the local high frequency decoupling capacitors, as shown in Figure 89. If the ferrite beads are placed between the supply pin and the decoupling capacitor, high frequency noise is reflected back into the IC because there is no suitable return path to ground. As a result, EMI increases, creating noisy supplies.

**EOS/ESD Protection**

Although the ADAU1462/ADAU1466 have robust internal protection circuitry against overvoltages and electrostatic discharge, an external transient voltage suppressor (TVS) is recommended for all systems to prevent damage to the IC. For examples, see the [AN-311 Application Note](#).

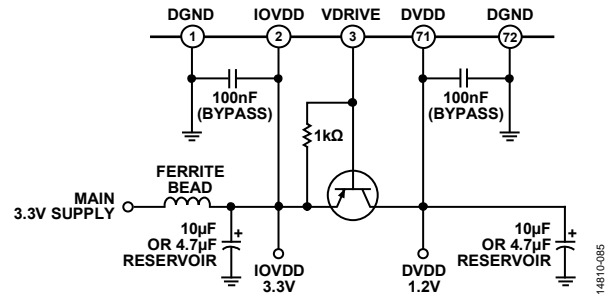


Figure 89. Ferrite Bead Power Supply Isolation Circuit Example

TYPICAL APPLICATIONS BLOCK DIAGRAM

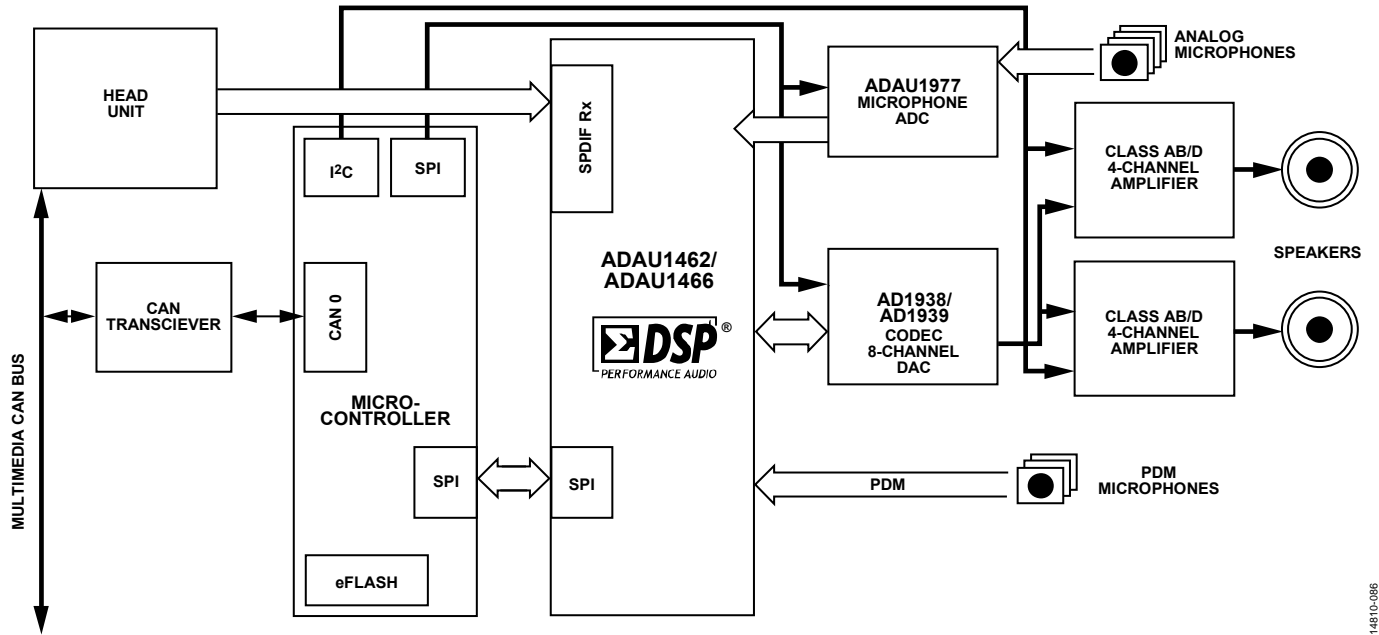


Figure 90. Automotive Infotainment Amplifier Block Diagram

14810-086

**EXAMPLE PCB LAYOUT**

Several external components, such as capacitors, resistors, and a transistor, are required for proper operation of the device. An example of the connection and layout of these components is shown in Figure 91. Thick black lines represent traces, gray rectangles represent components, and white circles with a thick black ring represent thermal via connections to power or ground planes. If a 1.2 V supply is available in the system, the transistor circuit (including the associated 1 kΩ resistor) can be removed, and 1.2 V can be connected directly to the DVDD power net, with the VDRIVE pin left floating.

The analog (AVDD), PLL (PVDD), and interface (IOVDD) supply pins each have local 100 nF bypass capacitors to provide high frequency return currents with a short path to ground.

The digital (DVDD) supply pins each have up to three local bypass capacitors, as follows:

- The 10 nF bypass capacitor, placed closest to the pin, acts as a return path for very high frequency currents resulting from the nominal 294.912 MHz operating frequency of the DSP core.
- The 100 nF bypass capacitor acts as a return path for high frequency currents from the DSP and other digital circuitry.
- The 1 μF bypass capacitor is required to provide a local current supply for sudden spikes in current that occur at the beginning of each audio frame when the DSP core switches from idle mode to operating mode.

Of these three bypass capacitors, the most important is the 100 nF bypass capacitor, which is required for proper power supply bypassing. The 10 nF and 1 μF capacitors can optionally be used to improve the EMI/EMC performance of the system.

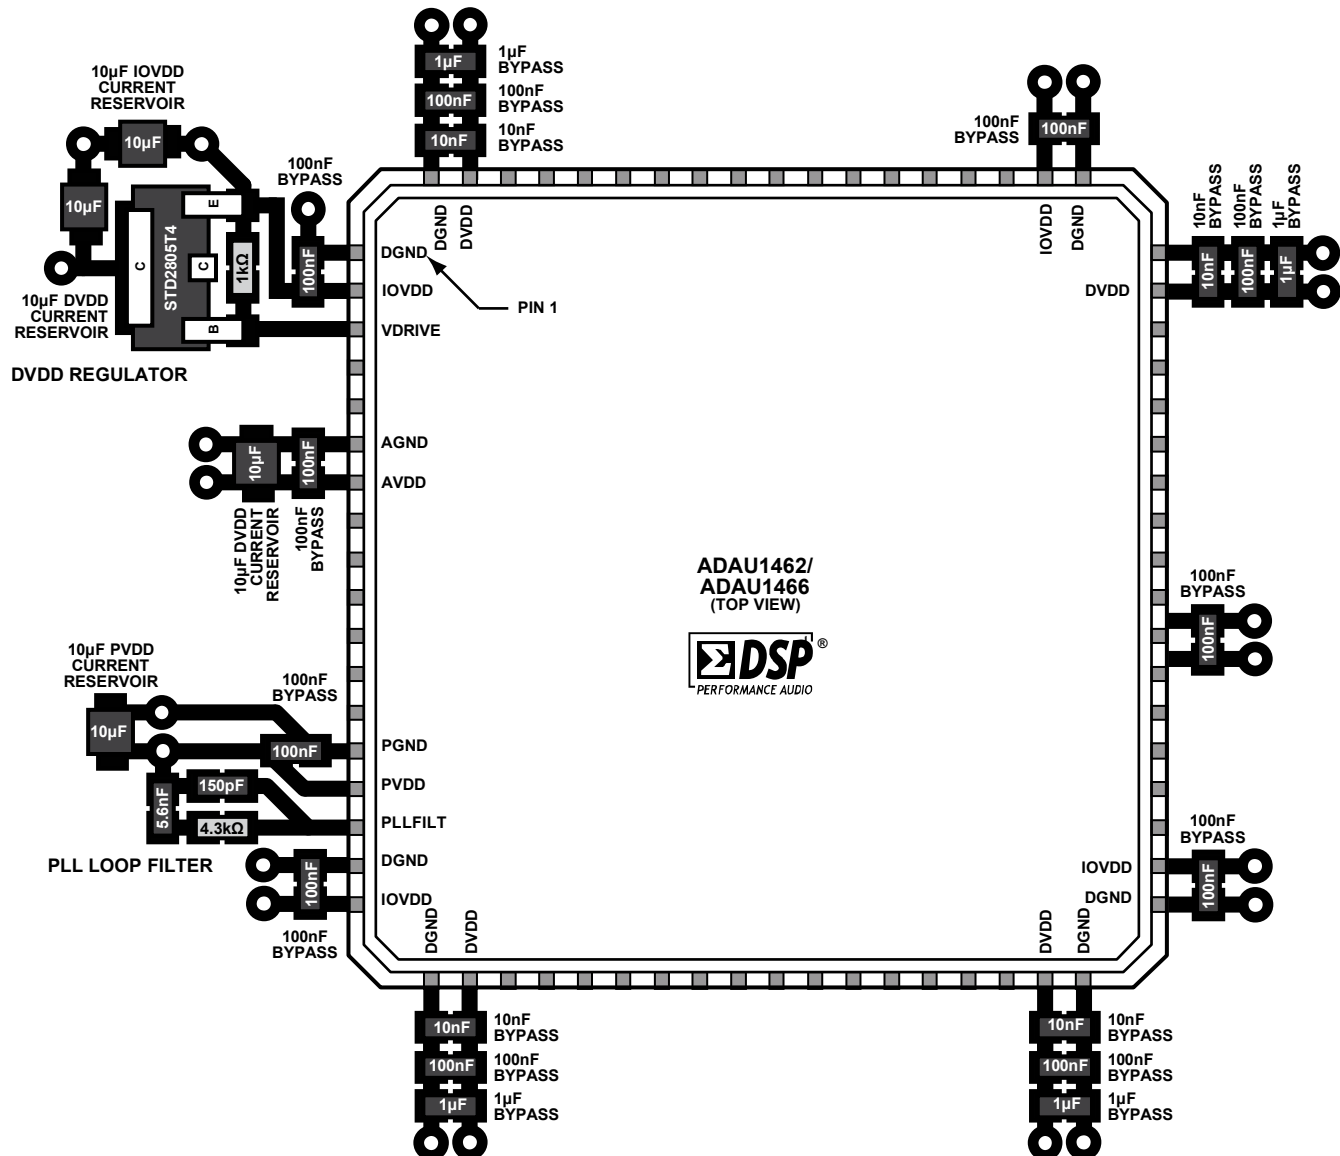


Figure 91. Supporting Component Placement and Layout

**PCB MANUFACTURING GUIDELINES**

The soldering profile in Figure 92 is recommended for the LFCSP package. See the [AN-772 Application Note](#) for more information about PCB manufacturing guidelines.

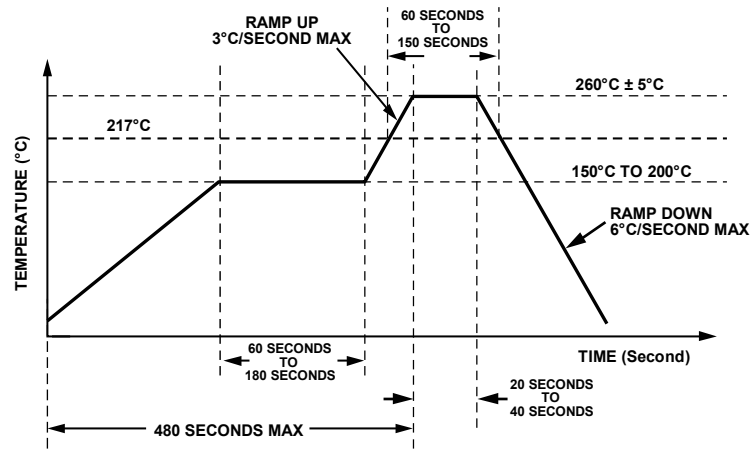


Figure 92. Soldering Profile


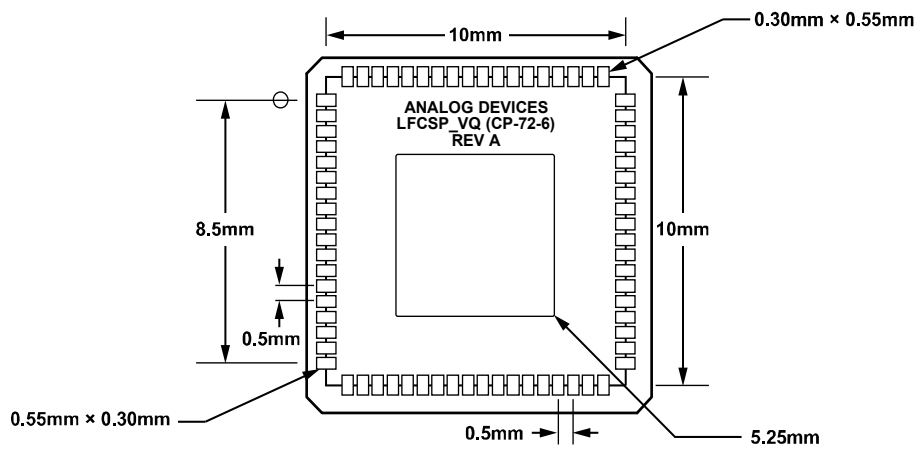


Figure 93. PCB Decal Dimensions

OUTLINE DIMENSIONS

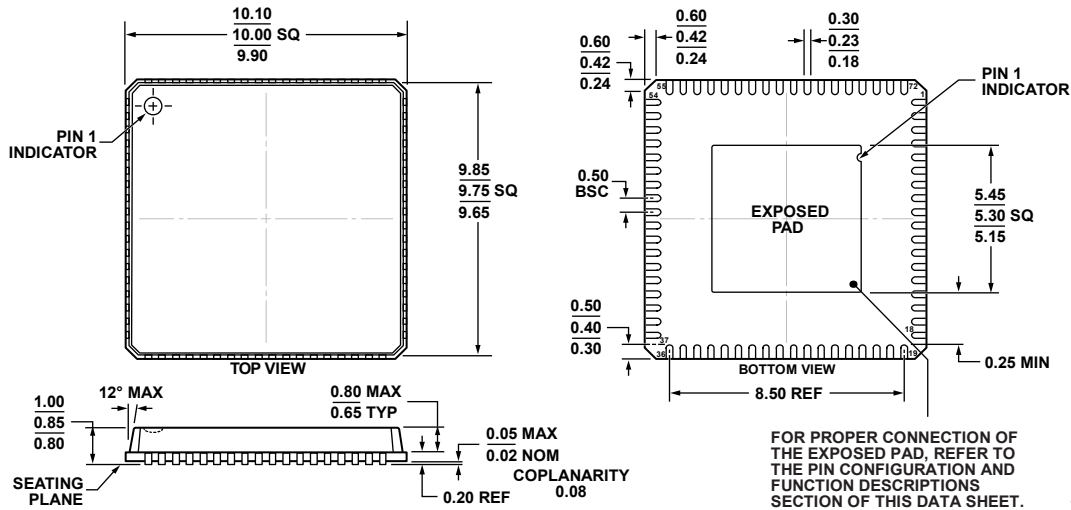

COMPLIANT TO JEDEC STANDARDS MO-220-VNND-4

Figure 94. 72-Lead Lead Frame Chip Scale Package [LFCSP]  
10 mm × 10 mm Body and 0.85 mm Package Height  
(CP-72-6)

Dimensions shown in millimeters

06-25-2012.C

ORDERING GUIDE

| Model <sup>1,2</sup> | Temperature Range | Package Description                           | Package Option |
|----------------------|-------------------|---|----------------|
| ADAU1462WBCPZ150     | -40°C to +105°C   | 72-Lead Lead Frame Chip Scale Package [LFCSP] | CP-72-6        |
| ADAU1462WBCPZ150RL   | -40°C to +105°C   | 72-Lead Lead Frame Chip Scale Package [LFCSP] | CP-72-6        |
| ADAU1462WBCPZ300     | -40°C to +105°C   | 72-Lead Lead Frame Chip Scale Package [LFCSP] | CP-72-6        |
| ADAU1462WBCPZ300RL   | -40°C to +105°C   | 72-Lead Lead Frame Chip Scale Package [LFCSP] | CP-72-6        |
| ADAU1466WBCPZ300     | -40°C to +105°C   | 72-Lead Lead Frame Chip Scale Package [LFCSP] | CP-72-6        |
| ADAU1466WBCPZ300RL   | -40°C to +105°C   | 72-Lead Lead Frame Chip Scale Package [LFCSP] | CP-72-6        |
| EVAL-ADAU1466Z       |                   | Evaluation Board                              |                |

<sup>1</sup> Z = RoHS Compliant Part.

<sup>2</sup> The EVAL-ADAU1466Z can be used to evaluate both the ADAU1462 and the ADAU1466.

AUTOMOTIVE PRODUCTS

The ADAU1462W/ADAU1466W models are available with controlled manufacturing to support the quality and reliability requirements of automotive applications. Note that these automotive models may have specifications that differ from the commercial models; therefore, designers should review the Specifications section of this data sheet carefully. Only the automotive grade products shown are available for use in automotive applications. Contact your local Analog Devices account representative for specific product ordering information and to obtain the specific Automotive Reliability reports for these models.

<sup>l</sup>2C refers to a communications protocol originally developed by Philips Semiconductors (now NXP Semiconductors).

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)