



## Main

|                                              |                                    |
|----------------------------------------------|------------------------------------|
| Range of product                             | Zelio Relay                        |
| Series name                                  | Power                              |
| Product or component type                    | Plug-in relay                      |
| Device short name                            | RPM                                |
| Contacts type and composition                | 2 C/O                              |
| [Uc] control circuit voltage                 | 230 V AC                           |
| [Ithe] conventional enclosed thermal current | 15 A at -40...131 °F (-40...55 °C) |
| Status LED                                   | Without                            |
| Control type                                 | Lockable test button               |
| Utilisation coefficient                      | 20 %                               |

## Complementary

|                                        |                                                                                                                                                                                                                                                   |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shape of pin                           | Flat                                                                                                                                                                                                                                              |
| [Ui] rated insulation voltage          | 250 V conforming to IEC<br>300 V conforming to UL<br>300 V conforming to CSA                                                                                                                                                                      |
| [Uimp] rated impulse withstand voltage | 4 kV 1.2/50 µs                                                                                                                                                                                                                                    |
| Contacts material                      | AgNi                                                                                                                                                                                                                                              |
| [Ie] rated operational current         | 15 A at 277 V AC conforming to UL<br>7.5 A at 28 V DC (NC) conforming to IEC<br>15 A at 250 V AC (NO) conforming to IEC<br>7.5 A at 250 V AC (NC) conforming to IEC<br>15 A at 28 V DC (NO) conforming to IEC<br>15 A at 28 V DC conforming to UL |
| Maximum switching voltage              | 250 V conforming to IEC                                                                                                                                                                                                                           |
| Load current                           | 15 A at 250 V AC<br>15 A at 28 V DC                                                                                                                                                                                                               |
| Maximum switching capacity             | 3750 VA<br>420 W                                                                                                                                                                                                                                  |
| Minimum switching capacity             | 170 mW at 10 mA, 17 V                                                                                                                                                                                                                             |
| Operating rate                         | <= 18000 cycles/hour no-load<br><= 1200 cycles/hour under load                                                                                                                                                                                    |
| Mechanical durability                  | 10000000 cycles                                                                                                                                                                                                                                   |
| Electrical durability                  | 100000 cycles resistive load                                                                                                                                                                                                                      |
| Average coil consumption in VA         | 1.1 at 60 Hz                                                                                                                                                                                                                                      |
| Drop-out voltage threshold             | >= 0.15 Uc AC                                                                                                                                                                                                                                     |
| Operating time                         | 20 ms at nominal voltage                                                                                                                                                                                                                          |
| Reset time                             | 20 ms at nominal voltage                                                                                                                                                                                                                          |
| Average resistance                     | 16270 Ohm +/- 15 % at 20 °C                                                                                                                                                                                                                       |
| Rated operational voltage limits       | 184...253 V AC                                                                                                                                                                                                                                    |
| Protection category                    | RT I                                                                                                                                                                                                                                              |
| Operating position                     | Any position                                                                                                                                                                                                                                      |
| Safety reliability data                | B10d = 100000                                                                                                                                                                                                                                     |
| Product weight                         | 0.08 lb(US) (0.036 kg)                                                                                                                                                                                                                            |
| Device presentation                    | Complete product                                                                                                                                                                                                                                  |

## Environment

|                     |                                                                                                                                                                                  |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| dielectric strength | 2000 V AC between coil and contact with reinforced insulation<br>2000 V AC between poles with basic insulation<br>1500 V AC between contacts with micro disconnection insulation |
| standards           | EN/IEC 61810-1                                                                                                                                                                   |

UL 508  
CSA C22.2 No 14

|                                       |                                                                                                                                                 |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| product certifications                | CSA<br>RoHS<br>UL<br>REACH<br>EAC                                                                                                               |
| ambient air temperature for storage   | -40...185 °F (-40...85 °C)                                                                                                                      |
| ambient air temperature for operation | -40...131 °F (-40...55 °C)                                                                                                                      |
| vibration resistance                  | 3 gn (f = 10...150 Hz), amplitude +/- 1 mm (on 5 cycles in operation)<br>5 gn (f = 10...150 Hz), amplitude +/- 1 mm (on 5 cycles not operating) |
| IP degree of protection               | IP40 conforming to EN/IEC 60529                                                                                                                 |
| shock resistance                      | 30 gn not operating<br>15 gn in operation                                                                                                       |
| pollution degree                      | 3                                                                                                                                               |


Offer Sustainability

|                                                                                                                            |                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| WARNING: This product can expose you to chemicals including:                                                               | WARNING: This product can expose you to chemicals including:                                                               |
| Nickel compounds, which is known to the State of California to cause cancer, and                                           | Nickel compounds, which is known to the State of California to cause cancer, and                                           |
| Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              |



Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Dimensions

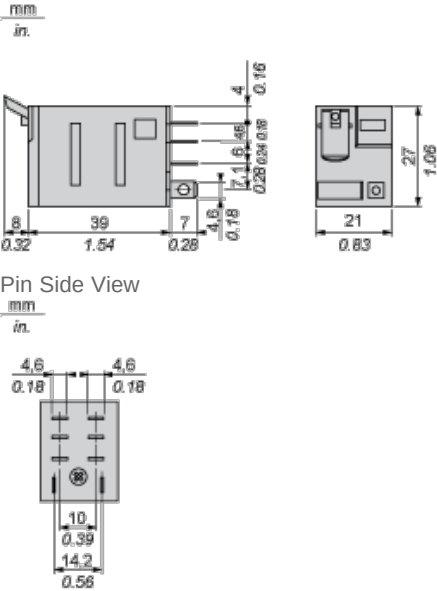

Wiring Diagram




Symbols shown in blue correspond to Nema marking.

## Electrical Durability of Contacts

**Durability (inductive load) = durability (resistive load) x reduction coefficient.**


Resistive AC load



X Switching capacity (kVA)


Y Durability (Number of operating cycles)

Reduction coefficient for inductive AC load (depending on power factor  $\cos \phi$ )



Y Reduction coefficient (A)

Maximum switching capacity on resistive DC load



X Voltage DC

Y Current DC

**Note :** These are typical curves, actual durability depends on load, environment, duty cycle, etc.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)