


# Ultra High Precision Z-Foil Surface Mount 4 Resistor Network Dual-In-Line Package with TCR Tracking of 0.1 ppm/°C, PCR Tracking of 5 ppm at Rated Power, and Tolerance Match of 0.01 %

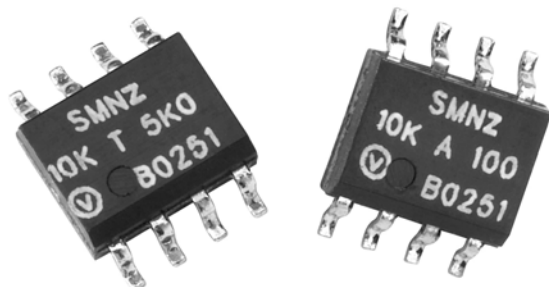

Any value and any ratio available within resistance range

## INTRODUCTION

The Z-Foil technology provides a significant reduction of the resistive components' sensitivity to ambient temperature variations (TCR) and applied power changes (PCR). 0.05 ppm/°C Absolute TCR removes errors due to temperature gradients.

Model SMNZ offers extremely low TCR (absolute and tracking), excellent load life stability, tight tolerance (absolute and matching), excellent ratio stability, low current noise, low voltage coefficient and non sensitivity to ESD - **all in the same resistor**.


The SMNZ surface mount network is made up of 4 independent Bulk Metal® Z-Foil resistors in a small standard molded epoxy package with 50 MIL lead pitch (JEDEC MS-012 package).

The electrical specification of this integrated construction offers improved performance and better real estate utilization over discrete resistors and matched sets. The resistor may be used independently or as divider pairs.

Our application engineering department is available to advise and make recommendations. For non-standard technical requirements and special applications, please contact us.

## APPLICATIONS

- Instrumentation amplifiers
- Bridge networks
- Differential amplifiers
- Ratio arms in bridge circuits
- Medical and test equipment
- Military
- Airborne etc




## FEATURES

- Temperature coefficient of resistance (TCR):  
absolute:  $\pm 0.05$  ppm/°C typical (0 °C to + 60 °C)  
 $\pm 0.2$  ppm/°C typical (-55 °C to + 125 °C,  
+ 25 °C Ref.) (see table 1)  
Tracking: 0.1 ppm/°C typical (see table 1)
- Tolerance match: 0.01 %
- Power coefficient tracking - "R2 -R1 due to self heating":  
5 ppm at rated power
- Power rating: at 70 °C  
Entire package: 0.4 W  
Each resistor: 0.1 W
- Ratio stability: 0.005 % (0.1 W at 70 °C, 2000 h)
- Large variety of resistance ratios
- Electrostatic discharge (ESD) above 25 000 V
- Short time overload  $\leq 0.0025$  %
- Non-inductive, non-capacitive design
- Rise time: 1 ns without ringing
- Current noise: < - 40 dB
- Voltage coefficient < 0.1 ppm/V
- Non-inductive: < 0.08  $\mu$ H
- Non hot spot design
- Terminal Finishes available: lead (Pb)-free  
tin/lead alloy
- For better performances please contact us
- Any value available within resistance range (e.g. 1K2345)
- Prototype samples available from 48 h. For more information, please contact [foil@vishaypg.com](mailto:foil@vishaypg.com)




RoHS\*  
COMPLIANT

## FIGURE 1 - SCHEMATICS



OPTION 1  
FOUR RESISTORS, SAME OHMIC VALUE  
SAME ABSOLUTE TOLERANCE



OPTION 2  
TWO RESISTOR PAIRS  
R1/R2; R2/R1

### Note

1. Different schematics are available (R1, R2, R3, R4)






TABLE 1 - MODEL SMNZ SPECIFICATIONS

| MODEL | RESISTANCE VALUES <sup>1)</sup>                               | ABSOLUTE TCR<br>(- 55 °C TO + 125 °C, + 25 °C REF.)<br>(TYPICAL + MAX. SPREAD) | RESISTANCE RATIO                                          | TCR TRACKING                           | TOLERANCE                                   |                            |
|-------|---------------------------------------------------------------|--------------------------------------------------------------------------------|-----------------------------------------------------------|----------------------------------------|---------------------------------------------|----------------------------|
|       |                                                               |                                                                                |                                                           | MAX.                                   | ABSOLUTE                                    | MATCH                      |
| SMNZ  | 100 $\Omega$ to 1 k $\Omega$<br>1 k $\Omega$ to 10 k $\Omega$ | $\pm 0.2$ $\pm 2.8$<br>$\pm 0.2$ $\pm 1.8$                                     | R1/R2 = 1<br>1 < R1/R2 $\leq$ 10<br>10 < R1/R2 $\leq$ 100 | 0.5 ppm/°C<br>1.0 ppm/°C<br>2.0 ppm/°C | $\pm 0.02$ %<br>$\pm 0.05$ %<br>$\pm 0.1$ % | 0.01 %<br>0.02 %<br>0.05 % |

### Note


1. SMN (Classic Foil) available with values up to 20 k $\Omega$

\* Pb containing terminations are not RoHS compliant, exemptions may apply

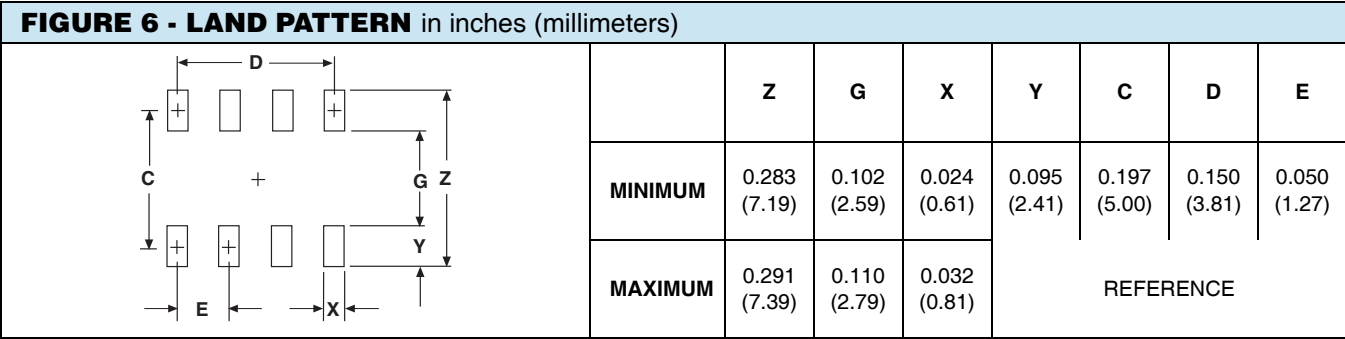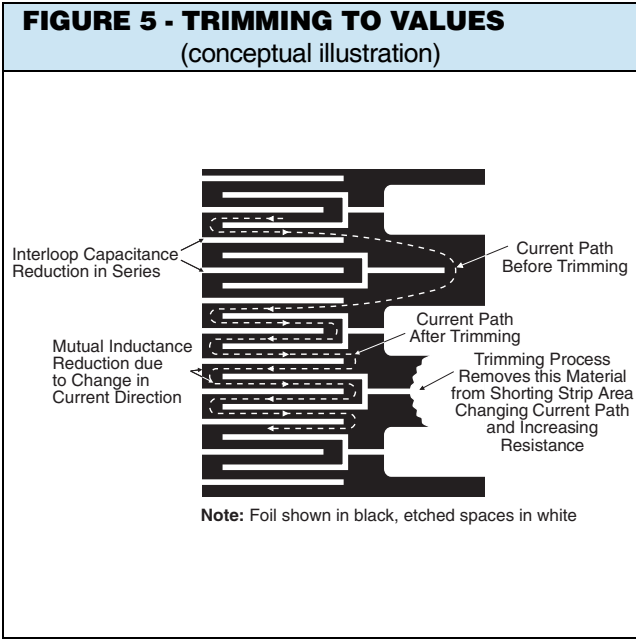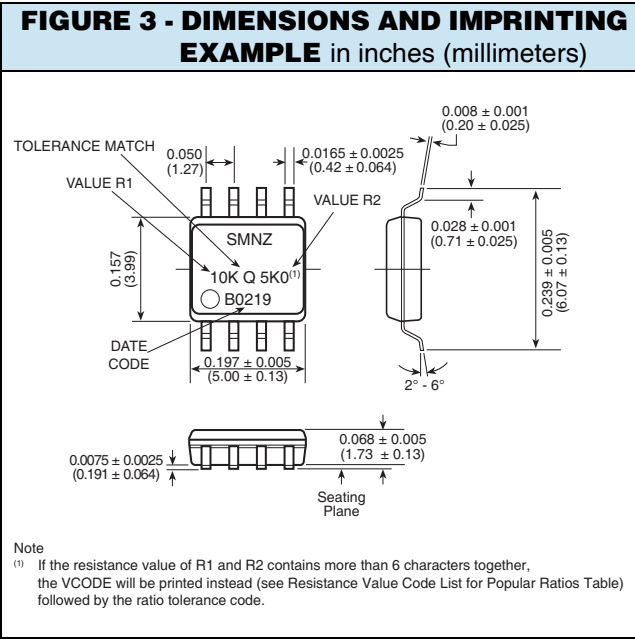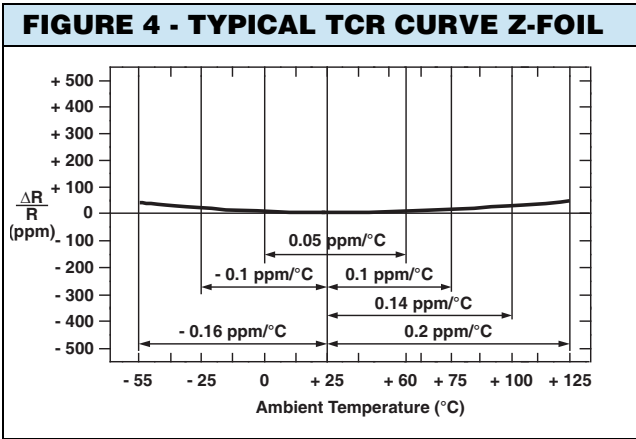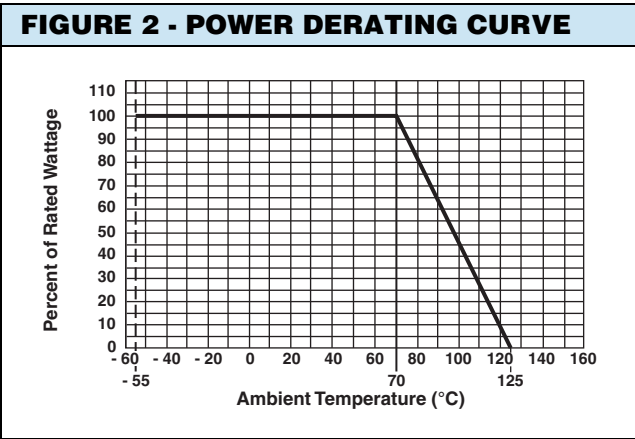

**TABLE 2 - PERFORMANCE SPECIFICATIONS** (per MIL-PRF 914 test methods)

| SPECIFICATIONS                                                                                                  | TYPICAL LIMITS                                                                               |
|-----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| <b>Power Rating</b> at + 70 °C                                                                                  | Each resistor: 0.1 W<br>Entire package: 0.4 W                                                |
| <b>Maximum Working Voltage</b> (each resistor)                                                                  | $(P \times R)^{1/2}$                                                                         |
| <b>Thermal Shock</b><br>25 x (- 65 °C to + 125 °C)                                                              | $\Delta R = 0.01 \% (100 \text{ ppm})$<br>$\Delta \text{Ratio} = 0.01 \% (100 \text{ ppm})$  |
| <b>Thermal Shock</b> 5 x (- 65 °C to + 125 °C) and<br><b>Power Conditioning</b> 1.5 rated power at 25 °C, 100 h | $\Delta R = 0.02 \% (200 \text{ ppm})$<br>$\Delta \text{Ratio} = 0.015 \% (150 \text{ ppm})$ |
| <b>DWV Atm. Pressure</b> 200 V (A.C), 1 min                                                                     | Successfully passed                                                                          |
| <b>Insulation Resistance</b> 100 V (D.C), 1 min                                                                 | $> 10^4 \text{ M}\Omega$                                                                     |
| <b>Resistance to Soldering Heat</b>                                                                             | $\Delta R = 0.01 \% (100 \text{ ppm})$<br>$\Delta \text{Ratio} = 0.005 \% (50 \text{ ppm})$  |
| <b>Moisture Resistance</b><br>+ 65 °C to - 10 °C; 90 % to 98 % RH; 0.1 x rated power; 240 h                     | $\Delta R = 0.02 \% (200 \text{ ppm})$<br>$\Delta \text{Ratio} = 0.005 \% (50 \text{ ppm})$  |
| <b>Shock (Specified Pulse)</b><br>100G                                                                          | $\Delta R = 0.01 \% (100 \text{ ppm})$<br>$\Delta \text{Ratio} = 0.01 \% (100 \text{ ppm})$  |
| <b>Vibration, High Frequency</b><br>(10 Hz to 2000 Hz), 20G                                                     | $\Delta R = 0.005 \% (50 \text{ ppm})$<br>$\Delta \text{Ratio} = 0.005 \% (50 \text{ ppm})$  |
| <b>High Temperature Exposure</b><br>100 h at 125 °C                                                             | $\Delta R = 0.01 \% (100 \text{ ppm})$<br>$\Delta \text{Ratio} = 0.005 \% (50 \text{ ppm})$  |
| <b>Low Temperature Storage</b><br>24 h at - 65 °C                                                               | $\Delta R = 0.005 \% (50 \text{ ppm})$<br>$\Delta \text{Ratio} = 0.005 \% (50 \text{ ppm})$  |
| <b>Load Life Stability</b><br>at 70 °C; 0.1 W per resistor, 2000 h                                              | $\Delta R = 0.005 \% (50 \text{ ppm})$<br>$\Delta \text{Ratio} = 0.005 \% (50 \text{ ppm})$  |
| <b>Short Time Overload</b><br>6.25 x rated power; 5 s                                                           | $\Delta R = 0.005 \% (50 \text{ ppm})$<br>$\Delta \text{Ratio} = 0.0025 \% (25 \text{ ppm})$ |
| <b>Weight</b>                                                                                                   | 0.08 g                                                                                       |

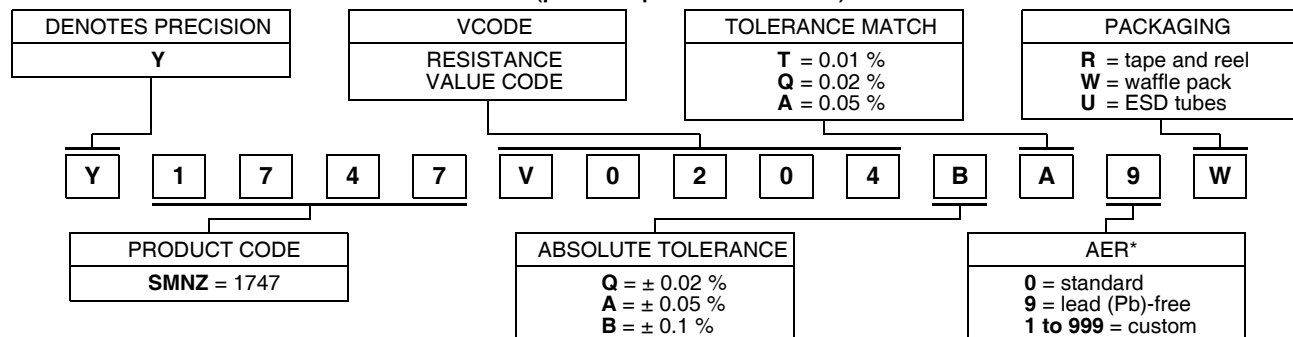**TABLE 3 - GLOBAL PART NUMBER INFORMATION**
**NEW GLOBAL PART NUMBER: Y1747V0204BA9W (preferred part number format)**


FOR EXAMPLE: ABOVE GLOBAL ORDER Y1747 V0204 B A 9 W:

 TYPE: SMNZ  
 VALUES: 10K/500R  
 ABSOLUTE TOLERANCE: ± 0.1 %  
 TOLERANCE MATCH: 0.05 %  
 TERMINATION: Lead (Pb)-free  
 PACKAGING: Waffle Pack

**HISTORICAL PART NUMBER: SMNZ 10K/500R TCR0.2 B A S W (will continue to be used)**

| SMNZ  | 10K/500R                                         | TCR0.2       | B                                           | A                                      | S                                  | W                                                     |
|-------|--------------------------------------------------|--------------|---------------------------------------------|----------------------------------------|------------------------------------|-------------------------------------------------------|
| MODEL | RESISTANCE<br>VALUE                              | ABSOLUTE TCR | ABSOLUTE<br>TOLERANCE                       | TOLERANCE<br>MATCH                     | TERMINATION                        | PACKAGING                                             |
| SMNZ  | R <sub>1</sub> = 10 kΩ<br>R <sub>2</sub> = 500 Ω | TCR0.2       | Q = ± 0.02 %<br>A = ± 0.05 %<br>B = ± 0.1 % | T = 0.01 %<br>Q = 0.02 %<br>A = 0.05 % | S = lead (Pb)-free<br>B = tin/lead | T = tape and reel<br>W = waffle pack<br>U = ESD tubes |

**Note**

\* For non-standard requests, please contact Application Engineering.

**TABLE 4 - RESISTANCE VALUE CODE LIST FOR POPULAR RATIOS**

(other values available upon request)

| VCODES | R1/R2<br>RATIO | R1   | R2   | VCODES | R1/R2<br>RATIO | R1   | R2   |
|--------|----------------|------|------|--------|----------------|------|------|
| V0201  | 100            | 10K  | 100R | V0189  | 2.5            | 1K   | 400R |
| V0202  | 50             | 10K  | 200R | V0185  |                | 500R | 200R |
| V0197  |                | 5K   | 100R | V0207  |                | 10K  | 5K   |
| V0203  | 25             | 10K  | 400R | V0175  |                | 2K   | 1K   |
| V0198  |                | 5K   | 200R | V0190  | 2              | 1K   | 500R |
| V0204  | 20             | 10K  | 500R | V0182  |                | 400R | 200R |
| V0193  |                | 2K   | 100R | V0179  |                | 200R | 100R |
| V0205  |                | 10K  | 1K   | V0186  | 1.25           | 500R | 400R |
| V0194  | 10             | 2K   | 200R | V0178  |                | 100R | 100R |
| V0187  |                | 1K   | 100R | V0180  |                | 200R | 200R |
| V0200  |                | 5K   | 1K   | V0183  |                | 400R | 400R |
| V0195  | 5              | 2K   | 400R | V0023  | 1              | 500R | 500R |
| V0188  |                | 1K   | 200R | V0191  |                | 1K   | 1K   |
| V0184  |                | 500R | 100R | V0176  |                | 2K   | 2K   |
| V0196  | 4              | 2K   | 500R | V0019  |                | 5K   | 5K   |
| V0181  |                | 400R | 100R | V0008  |                | 10K  | 10K  |

## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)