

# NB7L1008M

## 2.5V / 3.3V 1:8 CML Fanout

### Multi-Level Inputs w/ Internal Termination

#### Description

The NB7L1008M is a high performance differential 1:8 Clock/Data fanout buffer. The NB7L1008M produces eight identical output copies of Clock or Data operating up to 6 GHz or 10.7 Gb/s, respectively. As such, the NB7L1008M is ideal for SONET, GigE, Fiber Channel, Backplane and other Clock/Data distribution applications. The differential inputs incorporate internal 50  $\Omega$  termination resistors that are accessed through the VT pin. This feature allows the NB7L1008M to accept various logic standards, such as LVPECL, CML, LVDS, LVCMOS or LVTTL logic levels. The  $V_{REFAC}$  reference output can be used to rebias capacitor-coupled differential or single-ended input signals. The 1:8 fanout design was optimized for low output skew applications. The NB7L1008M is a member of the GigaComm™ family of high performance clock products.


#### Features

- Input Data Rate > 12 Gb/s Typical
- Data Dependent Jitter < 20 ps
- Maximum Input Clock Frequency > 8 GHz Typical
- Random Clock Jitter < 0.8 ps RMS
- Low Skew 1:8 CML Outputs, < 25 ps max
- Multi-Level Inputs, accepts LVPECL, CML, LVDS
- 160 ps Typical Propagation Delay
- 45 ps Typical Rise and Fall Times
- Differential CML Outputs, 400 mV Peak-to-Peak, Typical
- Operating Range:  $V_{CC} = 2.375$  V to 3.6 V, GND = 0 V
- Internal Input Termination Resistors, 50  $\Omega$
- $V_{REFAC}$  Reference Output
- QFN-32 Package, 5 mm x 5 mm
- -40°C to +85°C Ambient Operating Temperature
- These are Pb-Free Devices




ON Semiconductor®

<http://onsemi.com>



**QFN32**  
**MN SUFFIX**  
**CASE 488AM**


#### MARKING DIAGRAM



- A = Assembly Location
- WL = Wafer Lot
- YY = Year
- WW = Work Week
- = Pb-Free Package

(Note: Microdot may be in either location)

#### SIMPLIFIED LOGIC DIAGRAM

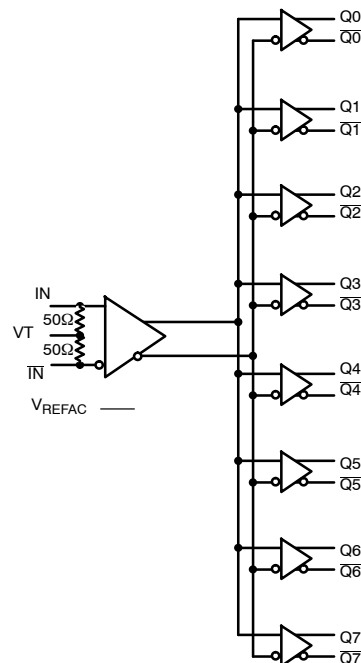

#### ORDERING INFORMATION

See detailed ordering and shipping information on page 9 of this data sheet.

# NB7L1008M

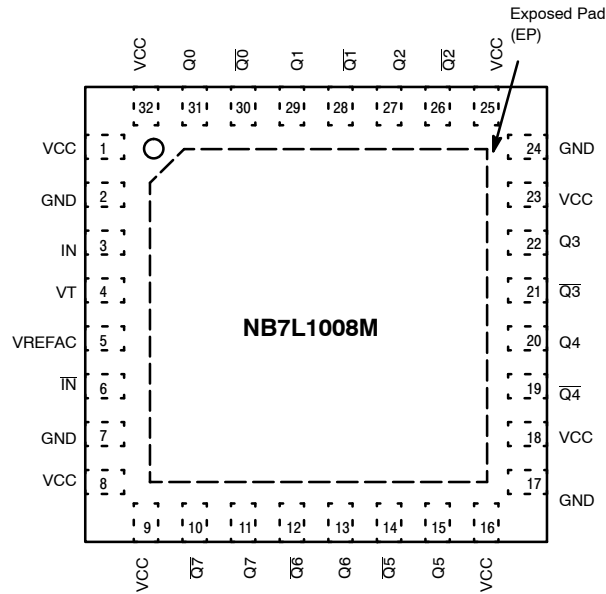


Figure 1. 32-Lead QFN Pinout (Top View)

Table 1. PIN DESCRIPTION

| Pin                                                            | Name                                                                                                                                                                                                                                  | I/O                     | Description                                                                                                                                                                                                                                                                                                 |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3, 6                                                           | IN, $\overline{\text{IN}}$                                                                                                                                                                                                            | LVPECL, CML, LVDS Input | Non-inverted / Inverted Differential Clock/Data Input. Note 1                                                                                                                                                                                                                                               |
| 4                                                              | VT                                                                                                                                                                                                                                    |                         | Internal 50 $\Omega$ Termination Pin for IN and $\overline{\text{IN}}$                                                                                                                                                                                                                                      |
| 2, 7 17,24                                                     | GND                                                                                                                                                                                                                                   |                         | Negative Supply Voltage, Note 2                                                                                                                                                                                                                                                                             |
| 1, 8, 9, 16, 18, 23, 25, 32                                    | V <sub>CC</sub>                                                                                                                                                                                                                       |                         | Positive Supply Voltage, Note 2                                                                                                                                                                                                                                                                             |
| 31, 30, 29, 28, 27, 26, 22, 21, 20, 19, 15, 14, 13, 12, 11, 10 | Q0, $\overline{\text{Q0}}$ , Q1, $\overline{\text{Q1}}$ , Q2, $\overline{\text{Q2}}$ , Q3, $\overline{\text{Q3}}$ , Q4, $\overline{\text{Q4}}$ , Q5, $\overline{\text{Q5}}$ , Q6, $\overline{\text{Q6}}$ , Q7, $\overline{\text{Q7}}$ | CML                     | Non-inverted / Inverted Differential Output. Note 1                                                                                                                                                                                                                                                         |
| 5                                                              | VREFAC                                                                                                                                                                                                                                |                         | Output Voltage Reference for Capacitor-Coupled Inputs, only                                                                                                                                                                                                                                                 |
| -                                                              | EP                                                                                                                                                                                                                                    | -                       | The Exposed Pad (EP) on the QFN-24 package bottom is thermally connected to the die for improved heat transfer out of package. The exposed pad must be attached to a heat-sinking conduit. The pad is electrically connected to GND and is recommended to be electrically connected to GND on the PC board. |

1. In the differential configuration when the input termination pin ( $V_T$ ) is connected to a common termination voltage or left open, and if no signal is applied on IN/ $\overline{\text{IN}}$ , then the device will be susceptible to self-oscillation. Qn/ $\overline{\text{Qn}}$  outputs have internal 50  $\Omega$  source termination resistors.
2. All V<sub>CC</sub> and GND pins must be externally connected to the same power supply voltage to guarantee proper device operation.

# NB7L1008M

**Table 2. ATTRIBUTES**

| Characteristics                                                        | Value                |
|------------------------------------------------------------------------|----------------------|
| ESD Protection Human Body Model<br>Machine Model                       | > 2 kV<br>> 200 V    |
| Moisture Sensitivity (Note 3) Indefinite Time of the Drypack<br>QFN-32 | Level 1              |
| Flammability Rating Oxygen Index: 28 to 34                             | UL 94 V-0 @ 0.125 in |
| Transistor Count                                                       | 263                  |
| Meets or exceeds JEDEC Spec EIA/JESD78 IC Latchup Test                 |                      |

3. For additional information, refer to Application Note AND8003/D.

**Table 3. MAXIMUM RATINGS**

| Symbol               | Parameter                                                                                                            | Condition 1         | Condition 2      | Rating                  | Unit         |
|----------------------|----------------------------------------------------------------------------------------------------------------------|---------------------|------------------|-------------------------|--------------|
| V <sub>CC</sub>      | Positive Power Supply                                                                                                | GND = 0 V           |                  | 4.0                     | V            |
| V <sub>IN</sub>      | Input Voltage                                                                                                        | GND = 0 V           |                  | -0.5 to V <sub>CC</sub> | V            |
| V <sub>INPP</sub>    | Differential Input Voltage  I <sub>N</sub> - I <sub>N</sub>                                                          |                     |                  | 1.89                    | V            |
| I <sub>IN</sub>      | Input Current Through R <sub>T</sub> (50 Ω Resistor)                                                                 |                     |                  | ± 40                    | mA           |
| I <sub>out</sub>     | Output Current                                                                                                       | Continuous<br>Surge |                  | 34<br>40                | mA           |
| I <sub>VFREFAC</sub> | V <sub>REFAC</sub> Sink/Source Current                                                                               |                     |                  | ± 1.5                   | mA           |
| T <sub>A</sub>       | Operating Temperature Range                                                                                          |                     |                  | -40 to +85              | °C           |
| T <sub>stg</sub>     | Storage Temperature Range                                                                                            |                     |                  | -65 to +150             | °C           |
| θ <sub>JA</sub>      | Thermal Resistance (Junction-to-Ambient) (Note 4)<br>TGSD 51-6 (2S2P Multilayer Test Board) with Filled Thermal Vias | 0 lfpm<br>500 lfpm  | QFN-32<br>QFN-32 | 31<br>27                | °C/W<br>°C/W |
| θ <sub>JC</sub>      | Thermal Resistance (Junction-to-Case)                                                                                | Standard<br>Board   | QFN-32           | 12                      | °C/W         |
| T <sub>sol</sub>     | Wave Solder Pb-Free                                                                                                  |                     |                  | 265                     | °C           |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

4. JEDEC standard multilayer board – 2S2P (2 signal, 2 power) with 8 filled thermal vias under exposed pad.

# NB7L1008M

**Table 4. DC CHARACTERISTICS – CML OUTPUT**  $V_{CC} = 2.375\text{ V to }3.6\text{ V}$ ;  $GND = 0\text{V}$   $T_A = -40^\circ\text{C to }85^\circ\text{C}$  (Note 6)

| Symbol | Characteristic | Min | Typ | Max | Unit |
|--------|----------------|-----|-----|-----|------|
|--------|----------------|-----|-----|-----|------|

**POWER SUPPLY**

|          |                      |                                                    |              |            |              |   |
|----------|----------------------|----------------------------------------------------|--------------|------------|--------------|---|
| $V_{CC}$ | Power Supply Voltage | $V_{CC} = 3.3\text{ V}$<br>$V_{CC} = 2.5\text{ V}$ | 3.0<br>2.375 | 3.3<br>2.5 | 3.6<br>2.625 | V |
|----------|----------------------|----------------------------------------------------|--------------|------------|--------------|---|

**POWER SUPPLY CURRENT**

|          |                                               |  |  |     |     |    |
|----------|-----------------------------------------------|--|--|-----|-----|----|
| $I_{CC}$ | Power Supply Current, Inputs and Outputs Open |  |  | 265 | 315 | mA |
|----------|-----------------------------------------------|--|--|-----|-----|----|

**CML OUTPUTS** (Note 5, Figures 10 and 11)

|          |                     |                                                  |                                |                                |                                |    |
|----------|---------------------|--------------------------------------------------|--------------------------------|--------------------------------|--------------------------------|----|
| $V_{OH}$ | Output HIGH Voltage | $V_{CC} = 3.3\text{V}$<br>$V_{CC} = 2.5\text{V}$ | $V_{CC} - 30$<br>3270<br>2470  | $V_{CC} - 10$<br>3290<br>2490  | $V_{CC}$<br>3300<br>2500       | mV |
| $V_{OL}$ | Output LOW Voltage  | $V_{CC} = 3.3\text{V}$<br>$V_{CC} = 2.5\text{V}$ | $V_{CC} - 600$<br>2700<br>1900 | $V_{CC} - 400$<br>2900<br>2100 | $V_{CC} - 350$<br>2950<br>2150 | mV |

**DIFFERENTIAL INPUTS DRIVEN SINGLE-ENDED** (Notes 7 and 8) (Figures 6 and 8)

|           |                                                  |  |                |  |                |    |
|-----------|--------------------------------------------------|--|----------------|--|----------------|----|
| $V_{IH}$  | Single-Ended Input HIGH Voltage                  |  | $V_{th} + 100$ |  | $V_{CC}$       | mV |
| $V_{IL}$  | Single-Ended Input LOW Voltage                   |  | GND            |  | $V_{th} - 100$ | mV |
| $V_{th}$  | Input Threshold Reference Voltage Range          |  | 1100           |  | $V_{CC} - 100$ | mV |
| $V_{ISE}$ | Single-Ended Input Voltage ( $V_{IH} - V_{IL}$ ) |  | 200            |  | 1200           | mV |

**$V_{REFAC}$**

|             |                                                                                   |                                                    |                                    |                                    |                                    |    |
|-------------|-----------------------------------------------------------------------------------|----------------------------------------------------|------------------------------------|------------------------------------|------------------------------------|----|
| $V_{REFAC}$ | Output Reference Voltage @ 100 $\mu\text{A}$ for Capacitor – Coupled Inputs, Only | $V_{CC} = 3.3\text{ V}$<br>$V_{CC} = 2.5\text{ V}$ | $V_{CC} - 1375$<br>$V_{CC} - 1325$ | $V_{CC} - 1200$<br>$V_{CC} - 1200$ | $V_{CC} - 1100$<br>$V_{CC} - 1075$ | mV |
|-------------|-----------------------------------------------------------------------------------|----------------------------------------------------|------------------------------------|------------------------------------|------------------------------------|----|

**DIFFERENTIAL INPUTS DRIVEN DIFFERENTIALLY ( $I_N$ ,  $\bar{I}_N$ )** (Note 9) (Figures 4 and 7)

|           |                                                    |  |      |    |                 |               |
|-----------|----------------------------------------------------|--|------|----|-----------------|---------------|
| $V_{IHD}$ | Differential Input HIGH Voltage                    |  | 1100 |    | $V_{CC}$        | mV            |
| $V_{ILD}$ | Differential Input LOW Voltage                     |  | GND  |    | $V_{IHD} - 100$ | mV            |
| $V_{ID}$  | Differential Input Voltage ( $V_{IHD} - V_{ILD}$ ) |  | 100  |    | 1200            | mV            |
| $I_{IH}$  | Input HIGH Current                                 |  | -150 | 40 | +150            | $\mu\text{A}$ |
| $I_{IL}$  | Input LOW Current                                  |  | -150 | 5  | +150            | $\mu\text{A}$ |

**TERMINATION RESISTORS**

|            |                                      |  |    |    |    |          |
|------------|--------------------------------------|--|----|----|----|----------|
| $R_{TIN}$  | Internal Input Termination Resistor  |  | 45 | 50 | 55 | $\Omega$ |
| $R_{TOUT}$ | Internal Output Termination Resistor |  | 45 | 50 | 55 | $\Omega$ |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

5. CML outputs loaded with 50  $\Omega$  to  $V_{CC}$  for proper operation.
6. Input and output parameters vary 1:1 with  $V_{CC}$ .
7.  $V_{th}$ ,  $V_{IH}$ ,  $V_{IL}$ , and  $V_{ISE}$  parameters must be complied with simultaneously.
8.  $V_{th}$  is applied to the complementary input when operating in single-ended mode.
9.  $V_{IHD}$ ,  $V_{ILD}$ ,  $V_{ID}$  and  $V_{CMR}$  parameters must be complied with simultaneously.


# NB7L1008M

**Table 5. AC CHARACTERISTICS**  $V_{CC} = 2.375\text{ V to }3.6\text{ V}$ ;  $GND = 0\text{ V}$   $T_A = -40^\circ\text{C to }85^\circ\text{C}$  (Note 10)


| Symbol                           | Characteristic                                                                                                                           | Min        | Typ             | Max                  | Unit                 |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------|----------------------|----------------------|
| $f_{\text{DATA}}$                | Maximum Operating Input Data Rate                                                                                                        | 10         | 12              |                      | Gb/s                 |
| $f_{\text{INCLK}}$               | Maximum Input Clock Frequency, $V_{\text{OUTPP}} \geq 200\text{ mV}$                                                                     | 6          | 8               |                      | GHz                  |
| $V_{\text{OUTPP}}$               | Output Voltage Amplitude (see Figures 2 and 5, Note 11)<br>$f_{\text{in}} \leq 4\text{ GHz}$<br>$f_{\text{in}} \leq 6\text{ GHz}$        | 200<br>200 | 400<br>350      |                      | mV                   |
| $V_{\text{CMR}}$                 | Input Common Mode Range (Differential Configuration, Note 12, Figure 9)                                                                  | 1050       |                 | $V_{\text{CC}} - 50$ | mV                   |
| $t_{\text{PLH}}, t_{\text{PHL}}$ | Propagation Delay to Output Differential, $\text{IN}/\overline{\text{IN}}$ to $\text{Qn}/\overline{\text{Qn}}$                           | 100        | 160             | 250                  | ps                   |
| $t_{\text{PLH TC}}$              | Propagation Delay Temperature Coefficient $-40^\circ\text{C to }+85^\circ\text{C}$                                                       |            | 35              |                      | fs/ $^\circ\text{C}$ |
| $t_{\text{DC}}$                  | Output Clock Duty Cycle $f_{\text{in}} \leq 6\text{ GHz}$                                                                                | 45         | 49/51           | 55                   | %                    |
| $t_{\text{SKEW}}$                | Duty Cycle Skew (Note 13)<br>Within Device Skew (Note 14)<br>Device to Device Skew (Note 15)                                             |            | 0.15<br>7<br>25 | 1<br>25<br>70        | ps                   |
| $t_{\text{JITTER}}$              | Clock Jitter RMS, 1000 Cycles (Note 16) $f_{\text{in}} \leq 6\text{ GHz}$<br>Data Dependent Jitter (DDJ) (Note 17) $\leq 10\text{ Gb/s}$ |            | 0.2<br>3        | 0.8<br>20            | ps                   |
| $V_{\text{INPP}}$                | Input Voltage Swing (Differential Configuration) (Note 18)<br>(Figure 5)                                                                 | 100        |                 | 1200                 | mV                   |
| $t_{\text{r}}, t_{\text{f}}$     | Output Rise/Fall Times (20% – 80%) $\text{Qn}, \overline{\text{Qn}}$                                                                     | 20         | 45              | 70                   | ps                   |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

10. Measured using a 400 mV source, 50% duty cycle 1 GHz clock source. All outputs must be loaded with external 50  $\Omega$  to  $V_{\text{CC}}$ . Input edge rates 40 ps (20% – 80%).
11. Output voltage swing is a single-ended measurement operating in differential mode.
12.  $V_{\text{CMR}}$  min varies 1:1 with GND,  $V_{\text{IHCMR}}$  max varies 1:1 with  $V_{\text{CC}}$ . The  $V_{\text{IHCMR}}$  range is referenced to the most positive side of the differential input signal.
13. Duty cycle skew is measured between differential outputs using the deviations of the sum of  $T_{\text{pw-}}$  and  $T_{\text{pw+}}$  @ 1 GHz.
14. Within device skew compares coincident edges.
15. Device to device skew is measured between outputs under identical transition
16. Additive CLOCK jitter with 50% duty cycle clock signal.
17. Additive Peak-to-Peak jitter with input NRZ data at PRBS23.
18. Input voltage swing is a single-ended measurement operating in differential mode.

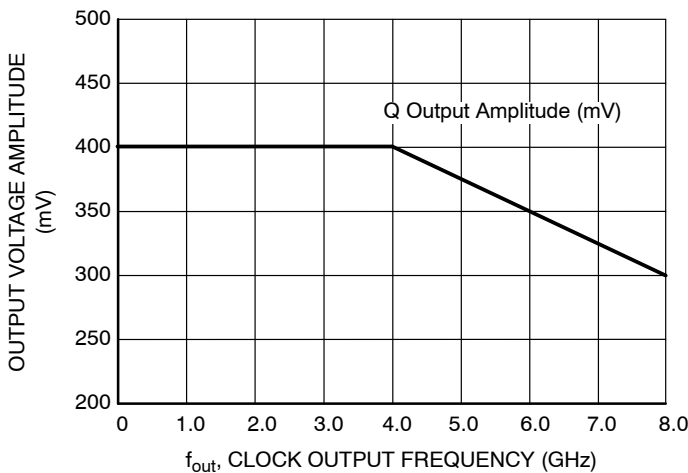

**Figure 2. Output Voltage Amplitude ( $V_{\text{OUTPP}}$ ) vs. Input Frequency ( $f_{\text{in}}$ ) at Ambient Temperature (Typical)**

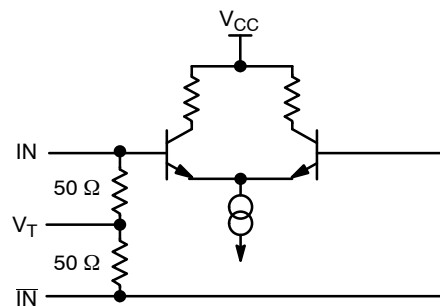

**Figure 3. Input Structure**




Figure 4. Differential Inputs Driven Differentially

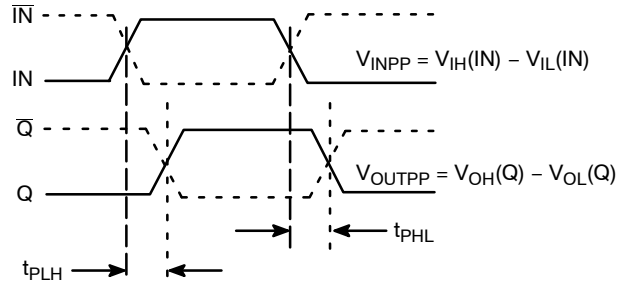


Figure 5. AC Reference Measurement

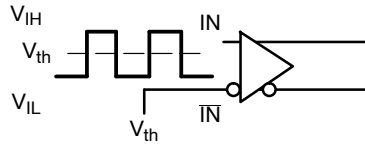


Figure 6. Differential Input Driven Single-Ended




Figure 7. Differential Inputs Driven Differentially

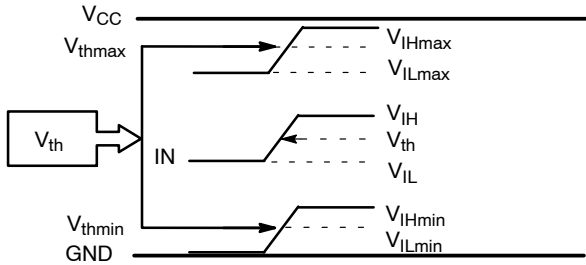


Figure 8.  $V_{th}$  Diagram



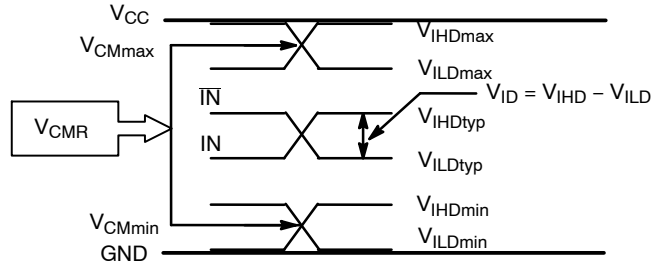


Figure 9.  $V_{CM}$  Diagram

# NB7L1008M

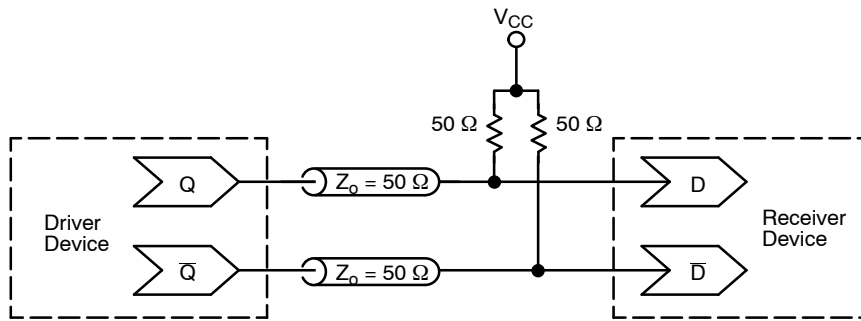

**Figure 10. Typical Termination for Output Driver and Device Evaluation**  
(See Application Note AND8173/D)

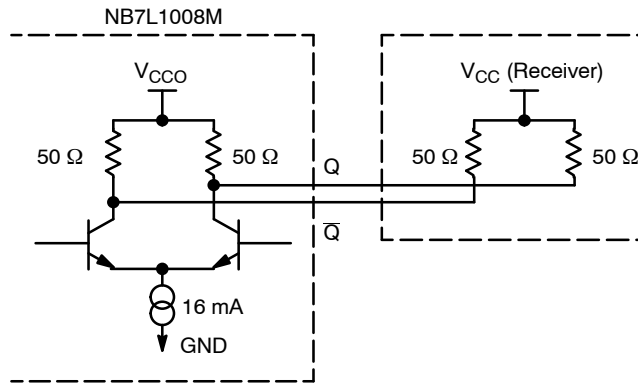

**Figure 11. Typical CML Output Structure and Termination**

# NB7L1008M

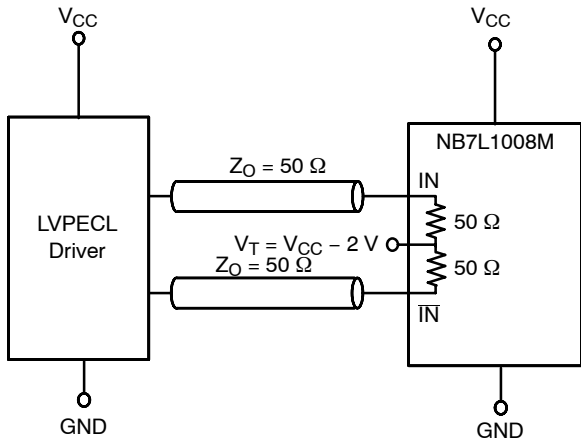


Figure 12. LVPECL Interface

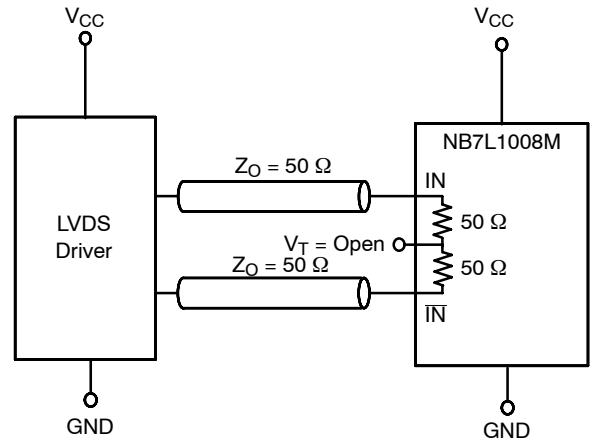


Figure 13. LVDS Interface

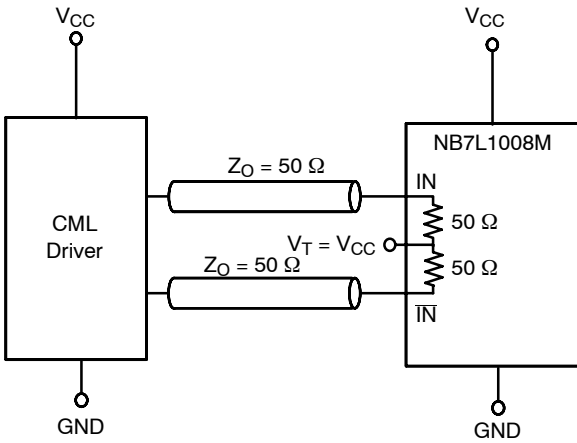


Figure 14. Standard 50 Ω Load CML Interface

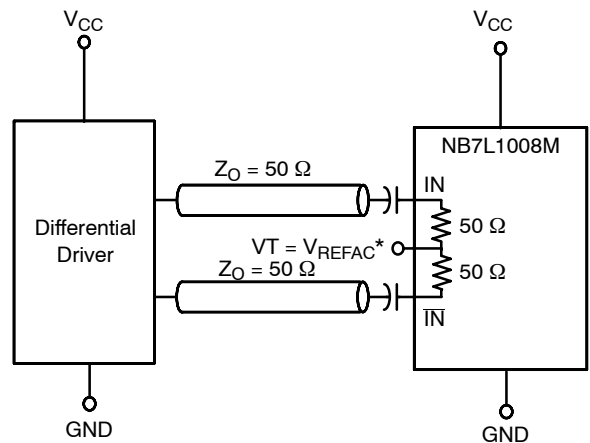


Figure 15. Capacitor-Coupled Differential Interface  
( $V_T$  Connected to  $V_{REFAC}$ )

\* $V_{REFAC}$  bypassed to ground with a 0.01  $\mu$ F capacitor

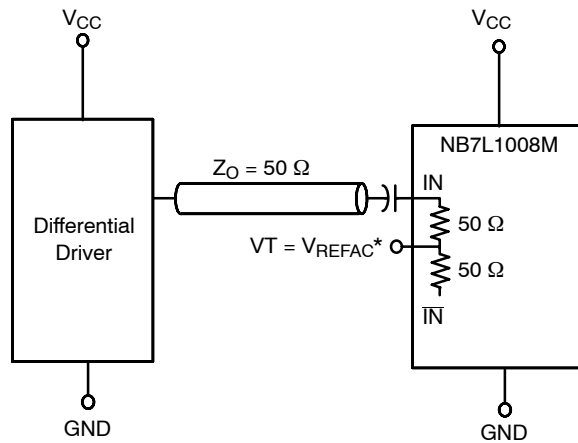


Figure 16. Capacitor-Coupled Single-Ended Interface  
( $V_T$  Connected to  $V_{REFAC}$ )



# NB7L1008M

## ORDERING INFORMATION


| Device         | Package            | Shipping           |
|----------------|--------------------|--------------------|
| NB7L1008MMNG   | QFN32<br>(Pb-Free) | 74 Units / Rail    |
| NB7L1008MMNR4G | QFN32<br>(Pb-Free) | 1000 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# NB7L1008M

## PACKAGE DIMENSIONS

QFN32 5\*5\*1 0.5 P  
CASE 488AM-01  
ISSUE O

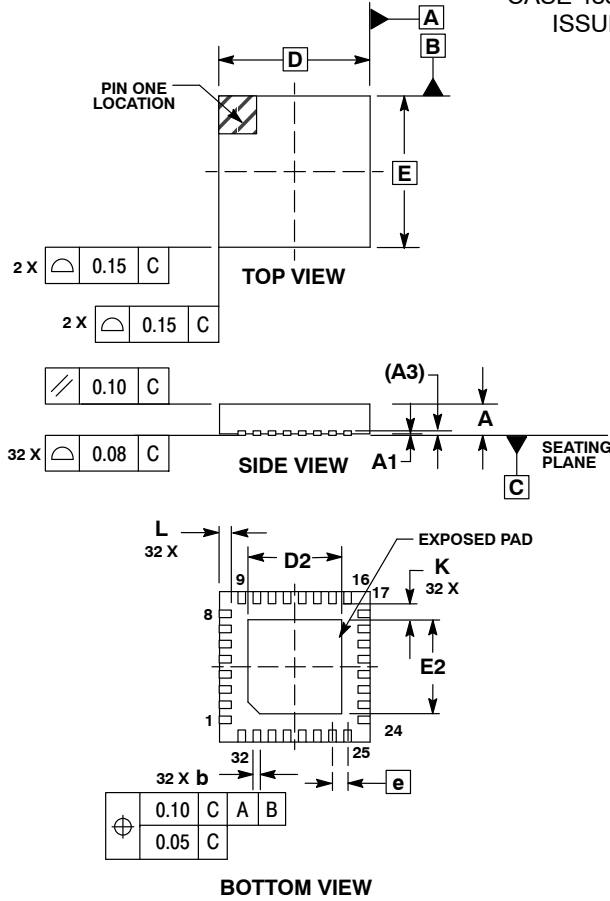


### NOTES:

1. DIMENSIONS AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.25 AND 0.30 MM TERMINAL
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

| DIM | MILLIMETERS |       |       |
|-----|-------------|-------|-------|
|     | MIN         | NOM   | MAX   |
| A   | 0.800       | 0.900 | 1.000 |
| A1  | 0.000       | 0.025 | 0.050 |
| A3  | 0.200 REF   |       |       |
| b   | 0.180       | 0.250 | 0.300 |
| D   | 5.00 BSC    |       |       |
| D2  | 2.950       | 3.100 | 3.250 |
| E   | 5.00 BSC    |       |       |
| E2  | 2.950       | 3.100 | 3.250 |
| e   | 0.500 BSC   |       |       |
| K   | 0.200       | ---   | ---   |
| L   | 0.300       | 0.400 | 0.500 |

### SOLDERING FOOTPRINT\*

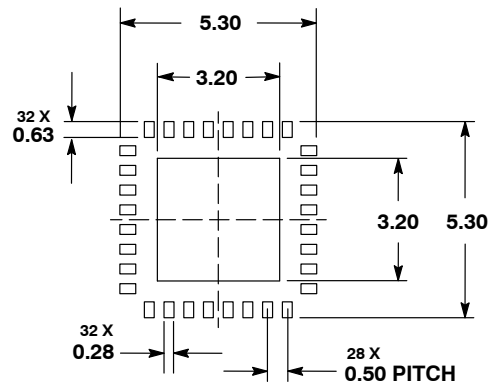

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

GigaComm is a trademark of Semiconductor Components Industries, LLC (SCILLC).

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5773-3850

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local Sales Representative

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)