CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS

Upgrade!

NPCAP™-PSF Series

- Super low ESR, high ripple current capability
- ESR 5mΩ max. (2 & 2.5Vdc)
- Longer life (5,000 hours at 105℃)
- ESR after endurance is specified within the initial spec (2 & 2.5Vdc)
- Rated voltage range : 2 to 16Vdc
- **RoHS Compliant**
- **Halogen Free**



◆SPECIFICATIONS

Items	Characteristics
Category Temperature Range	−55 to +105℃
Rated Voltage Range	2 to 16Vdc
Capacitance Tolerance	±20% (M) (at 20℃, 120Hz)
Surge Voltage	Rated voltage(V)×1.15 (at 105℃)
Leakage Current *Note	I=0.2CV or 500μA, whichever is greater Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20℃ after 2 minutes)
Dissipation Factor (tanδ)	0.10 max. (at 20℃, 120Hz)
Low Temperature Characteristics (Max.Impedance Ratio)	Z(−25℃)/Z(+20℃)≦1.15 Z(−55℃)/Z(+20℃)≦1.25 (at 100kHz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage is applied for 5,000 hours at 105℃.
	Appearance : No significant damage
	Capacitance change : ≦±20% of the initial value
	D.F. (tanδ) : ≦The initial specified value
	ESR : 2 & 2.5Vdc : ≦The initial specified value
	16Vdc : ≦150% of the initial specified value
	Leakage current : ≦The initial specified value
Bias Humidity Test	The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjecting them to DC voltage at 60℃, 90 to 95% RH for 1,000 hours.
	Appearance : No significant damage
	Capacitance change : ≦±20% of the initial value
	D.F. (tanδ) : ≦The initial specified value
	ESR : 2 & 2.5Vdc : ≦The initial specified value
	16Vdc : ≦150% of the initial specified value
	Leakage current : ≦The initial specified value
Surge Voltage Test	The capacitors shall be subjected to 1,000 cycles each consisting of charge with the surge voltage specified at 105℃ for 30 seconds through a protective resistor(R=1kΩ) and discharge for 5 minutes 30 seconds.
	Appearance : No significant damage
	Capacitance change : ≦±20% of the initial value
	D.F. (tanδ) : ≦The initial specified value
	ESR : 2 & 2.5Vdc : ≦The initial specified value
	16Vdc : ≦150% of the initial specified value
	Leakage current : ≦The initial specified value
Failure Rate	0.5% per 1,000 hours maximum (Confidence level 60% at 105℃)

*Note : If any doubt arises, measure the leakage current after the following voltage treatment.
Voltage treatment : DC rated voltage is applied to the capacitors for 120 minutes at 105℃.

◆DIMENSIONS [mm]

- Terminal Code : E

F05, F08, H08 Coated Case

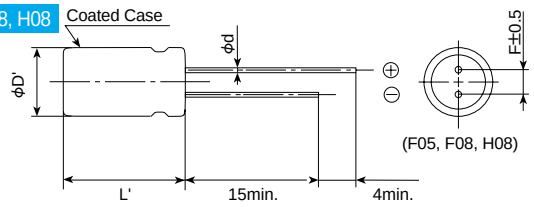

FA5, HB5, JB5 Coated Case

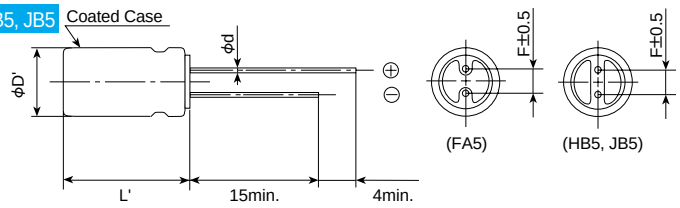

Size code	F05	F08	FA5	H08	HB5	JB5
φD	6.3			8.0		10.0
φd	0.45	0.6	0.5	0.6		
F	2.5			3.5		5.0
φD'	φD+0.5max.					
L'	L+1.0max.		L+0.3max.	L+1.0max.	L+1.5max.	

◆MARKING

EX) 2.5V560μF



Upgrade!
NPCAP™-PSF Series

◆PART NUMBERING SYSTEM

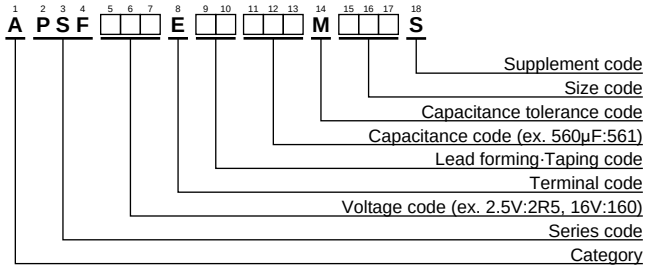

Please refer to "Product code guide (conductive polymer type)"

◆STANDARD RATINGS

WV(Vdc)	Cap(μF)	Case size φD×L(mm)	ESR (mΩ max./20℃, 100k to 300kHz)	Rated ripple current (mArms/105℃, 100kHz)	Part No.
2	1,000	6.3×8	5	5,900	APSF2R0E□□102MF08S
2.5	330	6.3×8	5	5,900	APSF2R5E□□331MF08S
	470	6.3×8	5	5,900	APSF2R5E□□471MF08S
	560	6.3×8	5	5,900	APSF2R5E□□561MF08S
	820	6.3×8	5	5,900	APSF2R5E□□821MF08S
	1,600	8×8	5	6,100	APSF2R5E□□162MH08S
16	100	6.3×5	24	2,490	APSF160E□□101MF05S
	100	6.3×10.5	25	2,820	APSF160E□□101MFA5S
	270	8×8	10	5,000	APSF160E□□271MH08S
	270	8×11.5	11	5,080	APSF160E□□271MHB5S
	330	8×8	13	4,700	APSF160E□□331MH08S
	470	8×11.5	11	5,400	APSF160E□□471MHB5S
	470	10×11.5	10	6,100	APSF160E□□471MJB5S

□□ : Enter the appropriate lead forming or taping code.

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru