



(1.50 MAX)  
(WITH MAXIMUM CARD)

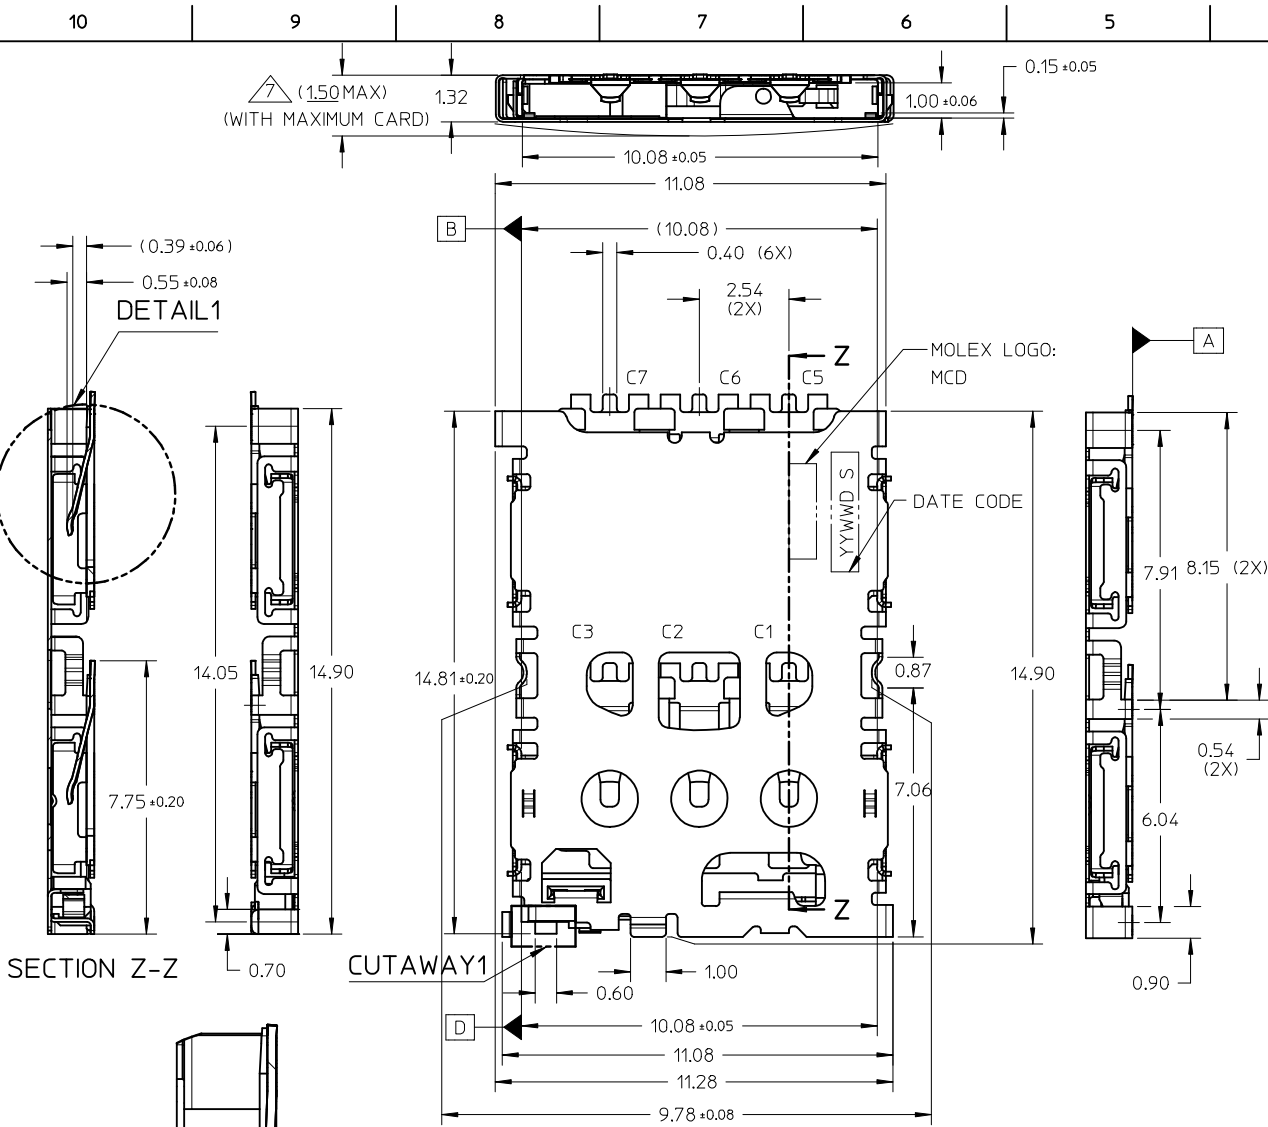

NOTES:

1. MATERIALS:
    - 1.1 CONNECTOR:-
      - INSERT MOLD HOUSING: LCP, GLASS FILLED, UL94V-0, COLOUR BLACK.
      - TERMINAL: TITANIUM COPPER, THICKNESS: 0.12MM
      - DETECT PIN: TITANIUM COPPER, THICKNESS: 0.12MM
      - SHELL: STAINLESS STEEL, THICKNESS: 0.10MM
    - 2. PLATING FINISHES:
      - 2.1 TERMINAL:-
        - CONTACT: 0.38um MIN. GOLD ON CONTACT AREA OVER 2.00um MIN. NICKEL UNDERPLATE.
        - SOLDERTAIL: 0.025um MIN. GOLD FLASH OVER 2.00um MIN. NICKEL UNDERPLATE.
      - 2.2 SHELL:-
        - CONTACT: 0.05um MIN. GOLD ON CONTACT AREA OVER 2.00um MIN. NICKEL UNDERPLATE.
        - SOLDERTAIL: 0.025um MIN. GOLD FLASH OVER 2.00um MIN. NICKEL UNDERPLATE.
      - 2.3 DETECT PIN:-
        - CONTACT: 0.127um MIN. GOLD ON CONTACT AREA OVER 2.00um MIN. NICKEL UNDERPLATE.
        - SOLDERTAIL: 1.27um MIN. MATTE TIN OVER 2.00um MIN. NICKEL UNDERPLATE.
    - 3. PRODUCT SPECIFICATION: PS-151073-0001
    - 4. PACKAGING SPECIFICATION: PK-151073-0001
    - 5. OVERALL (SOLDERTAIL & SOLDERTAB) COPLANARITY 0.08MM MAX. BEFORE REFLOW.
    - 6. CONNECTOR TO BE USED TOGETHER WITH MOLEX NANO SIM CARD TRAY ONLY.
- △ DIMENSION INCLUSIVE OF BULGE


THIS DESIGN IS BASED ON DESIGN OBJECTIVES AND IS STRICTLY TENTATIVE. IT MAY CHANGE BASED ON RESULTS OF ADDITIONAL DESIGN REVIEWS & VERIFICATIONS.

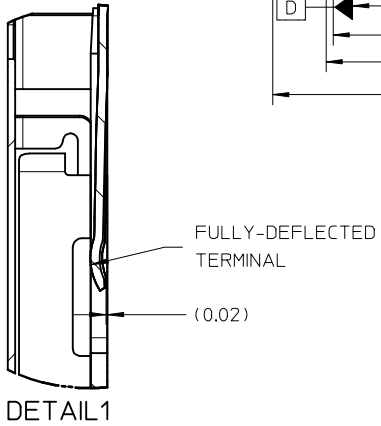


ADD TOL TO CONTACT TIP EC NO: S2015-0916 DRWN: SCHEONG CHKD: GMENARLY APPR: KHL IM	2015/03/03 2015/03/10 2015/03/12	DESCRIPTION QUALITY SYMBOLS $F_A = 0$ $F_C = 0$ $F_P = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION				
					MM ONLY		NTS	METRIC					
				mm	INCH	DRAWN BY	DATE	TITLE					
				± ---	± ---	SCHEONG	2014/07/16	NANO SIM CONNECTOR 1.32MM HEIGHT WITH TRAY AND DETECT PIN <b>molex</b>					
	± ---	± ---	GMENARLY	2015/03/10									
	± 0.10	± ---	APPROVED BY		DATE	MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
	± ---	± ---	KHL IM		2015/03/12	SEE TABLE		SD-151073-0001		1 OF 3			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
12			A3										

10 9 8 7 6 5 4 3 2 1

CENTRELINES OF TRAY AND CONNECTOR OPENING ARE THE SAME

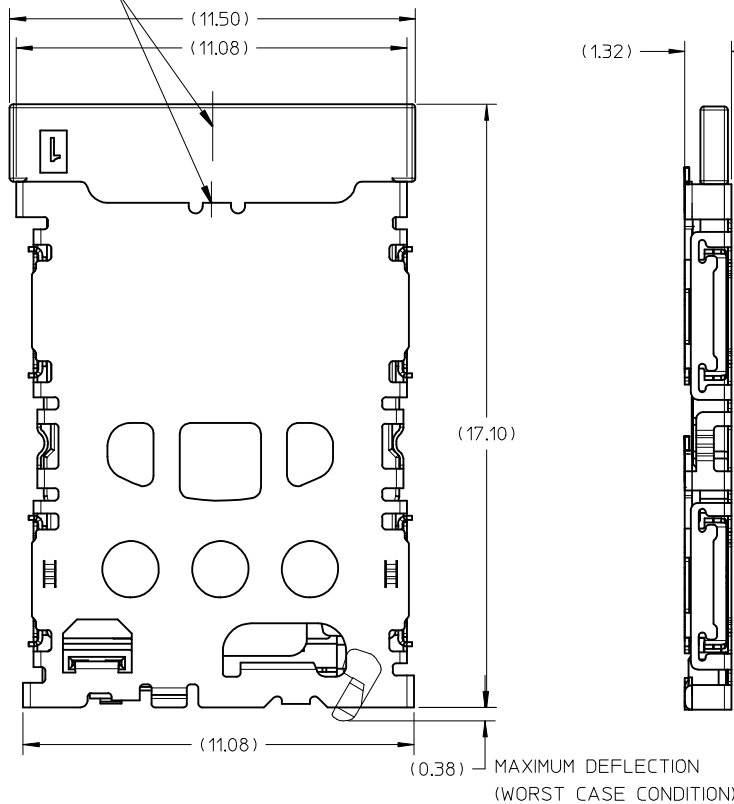

CONNECTOR WITH TRAY

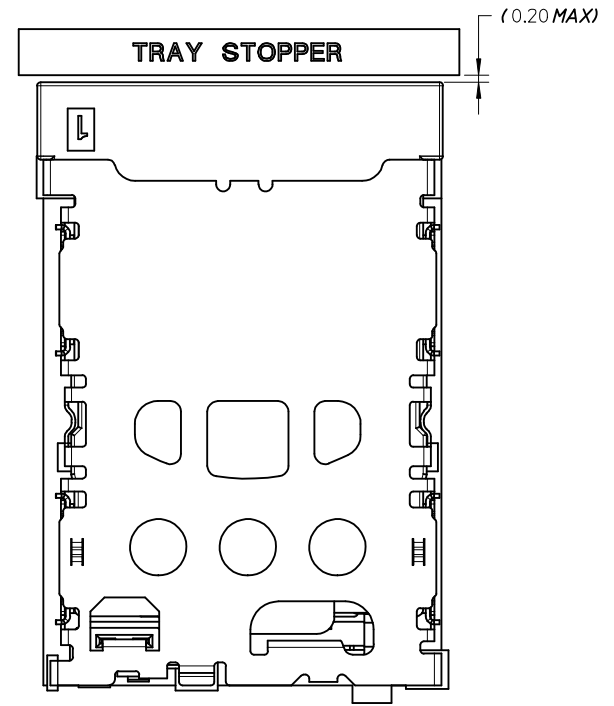

SYSTEM LEVEL

DESCRIPTION	PART NUMBER
CONNECTOR	151073-1000
NANO SIM CARD TRAY	151073-0011


CARD INSERTION STATE	DETECT SWITCH CIRCUIT STATE	SCHEMATIC
CARD MATED	OPENED	
CARD UNMATED	CLOSED	

ADD TOL TO CONTACT TIP	DESCRIPTION
EC NO: S2015-0916	
DRWN:SCHEONG	2015/03/03
CHKD:GMENARLY	2015/03/10
APPR:KHL IM	2015/03/12
12	


QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)
$F_{\Delta} = 0$	mm INCH
$F_{\sigma} = 0$	4 PLACES ± --- ± ---
$F_{\rho} = 0$	3 PLACES ± --- ± ---
	2 PLACES ± 0.10 ± ---
	1 PLACE ± --- ± ---
	0 PLACE ± --- ± ---
	ANGULAR ± 3 °
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
MM ONLY		NTS	METRIC	
DRAWN BY	DATE	TITLE		
SCHEONG	2014/07/16	NANO SIM CONNECTOR		
CHECKED BY	DATE	1.32MM HEIGHT WITH TRAY		
GMENARLY	2015/03/10	AND DETECT PIN		
APPROVED BY	DATE	<b>molex</b>		
KHL IM	2015/03/12	DOCUMENT NO. SD-151073-0001		
MATERIAL NO.	SEE TABLE	SHEET NO. 2 OF 3		
SIZE	A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

9 8 7 6 5 4 3 2 1

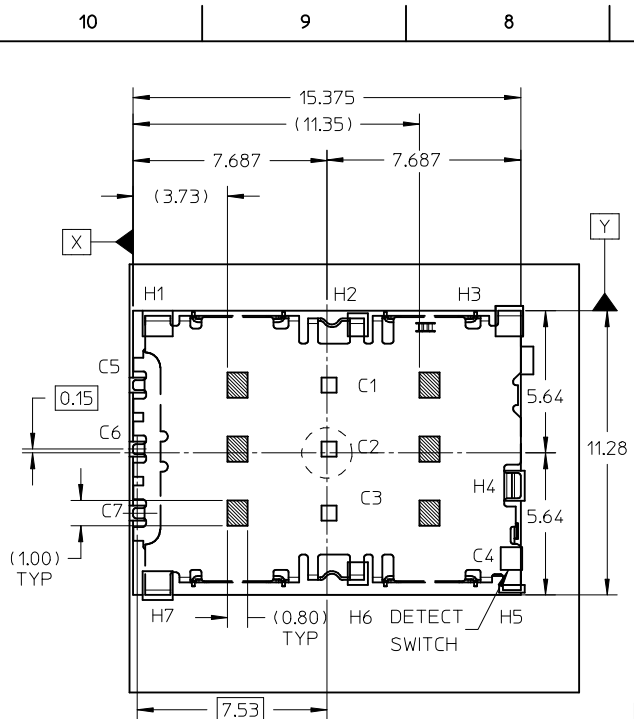

TOP VIEW  
CONNECTOR KEEPOUT ZONE  
WITH PART CENTER LOCATION OF  
CONNECTOR RELATIVE TO PCB  
KEEP-OUT AREA FOR WIRING

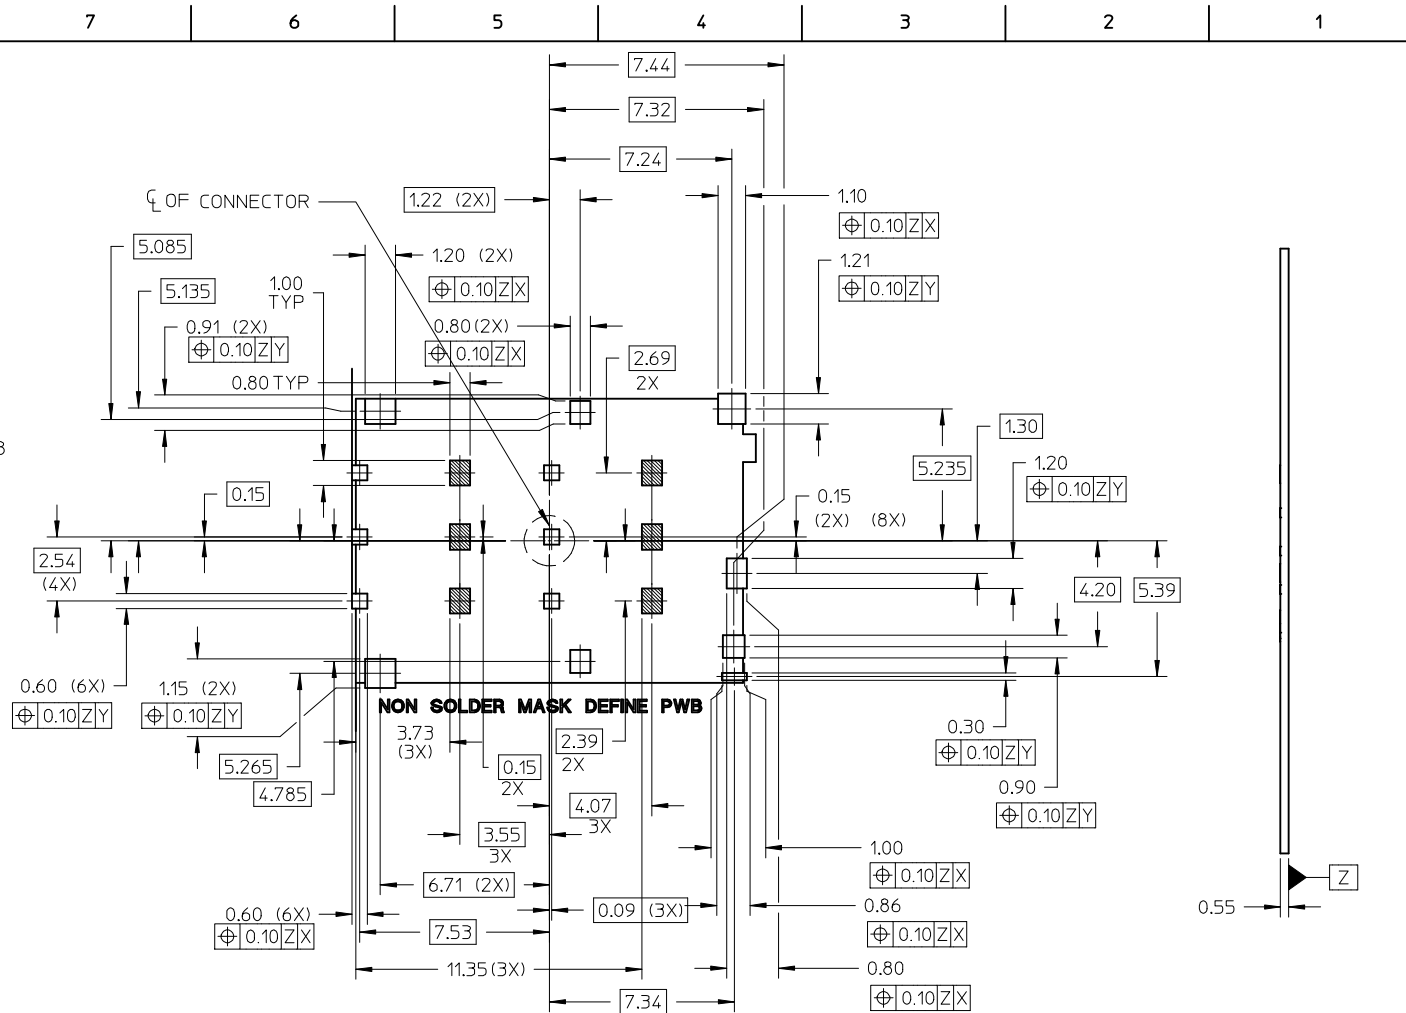



TOP VIEW  
RECOMMENDED PWB LAYOUT  
(NON SOLDER MASK DEFINE PWB)  
PWB TOLERANCE: ±0.05MM

PIN NO	ASSIGNMENT
C1	Vcc (SUPPLY VOLTAGE)
C2	RST (RESET SIGNAL)
C3	CLK (CLOCK SIGNAL)
C4	DETECT SWITCH
C5	GND
C6	Vpp (VARIABLE SUPPLY VOLTAGE)
C7	I/O (DATA INPUT/OUTPUT)
H1	GND
H2	GND
H3	GND
H5	GND
H6	GND
H7	GND


ADD TOL TO CONTACT TIP EC NO: S2015-0916 DRWN: SCHEONG CHKD: GMENARLY APPR: KHL IM	REV 12	DESCRIPTION	QUALITY SYMBOLS F <sub>A</sub> =0 F <sub>C</sub> =0 F <sub>P</sub> =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY SCHEONG	DATE 2014/07/16	TITLE		
				4 PLACES	± ---	± ---				<b>NANO SIM CONNECTOR 1.32MM HEIGHT WITH TRAY AND DETECT PIN</b>  <b>molex</b>  MATERIAL NO. SD-151073-0001 DOCUMENT NO. SD-151073-0001 SHEET NO. 3 OF 3
				3 PLACES	± ---	± ---				
				2 PLACES	± 0.10	± ---				
				1 PLACE	± ---	± ---				
				0 PLACE	± ---	± ---				
				ANGULAR ± 3 °		SEE TABLE				
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

10 9 8 7 6 5 4 3 2 1

△ (1.50 MAX)  
(WITH MAXIMUM CARD)

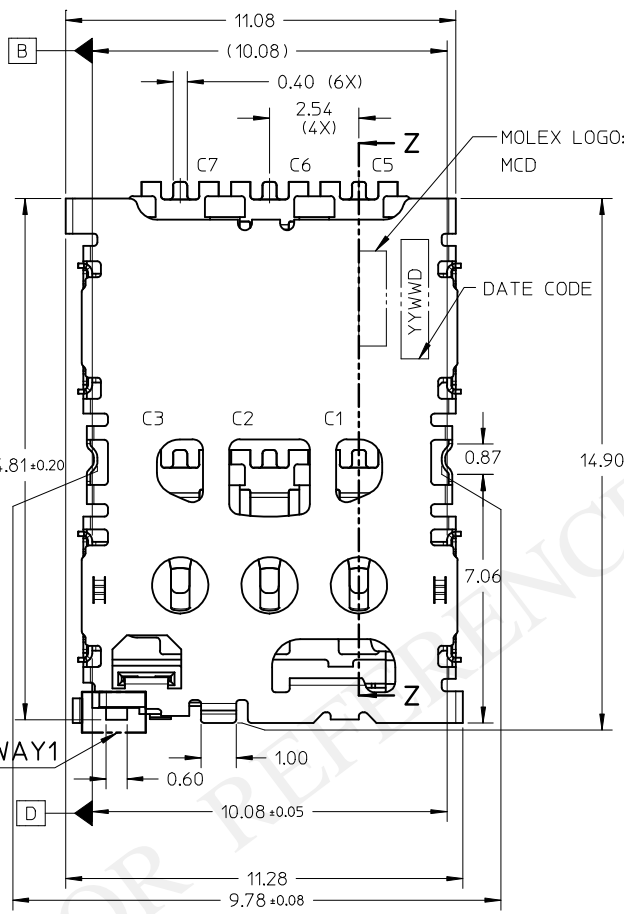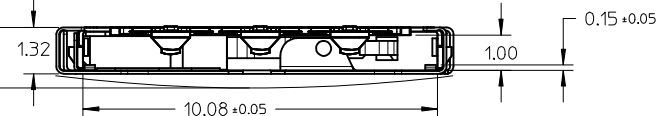


DETAIL 1

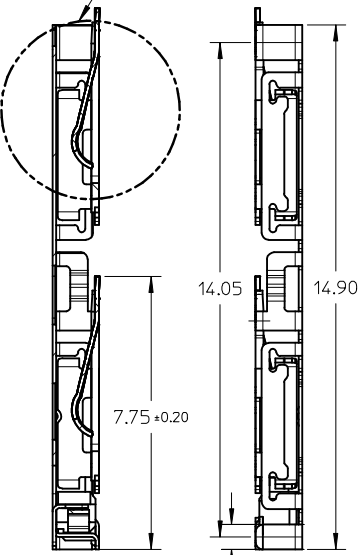

SECTION Z-Z

CUTAWAY 1

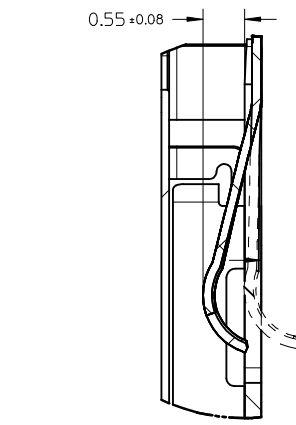

DEFLECTED TERMINAL  
(0.53)

DETAIL 1


NOTES:

1. MATERIALS:
  - 1.1 CONNECTOR:-
    - INSERT MOLD HOUSING: LCP, GLASS FILLED, UL94V-0, COLOUR BLACK.
    - TERMINAL: TITANIUM COPPER, THICKNESS: 0.12MM
    - DETECT PIN: TITANIUM COPPER, THICKNESS: 0.12MM
    - SHELL: STAINLESS STEEL, THICKNESS: 0.10MM
  - 2. PLATING FINISHES:
    - 2.1 TERMINAL:-
      - CONTACT: 0.38um MIN. GOLD ON CONTACT AREA OVER 2.00um MIN. NICKEL UNDERPLATE.
      - SOLDERTAIL: 0.025um MIN. GOLD FLASH OVER 2.00um MIN. NICKEL UNDERPLATE.
    - 2.2 SHELL:-
      - CONTACT: 0.05um MIN. GOLD ON CONTACT AREA OVER 2.00um MIN. NICKEL UNDERPLATE.
      - SOLDERTAIL: 0.025um MIN. GOLD FLASH OVER 2.00um MIN. NICKEL UNDERPLATE.
    - 2.3 DETECT PIN:-
      - CONTACT: 0.127um MIN. GOLD ON CONTACT AREA OVER 2.00um MIN. NICKEL UNDERPLATE.
      - SOLDERTAIL: 1.27um MIN. MATTE TIN OVER 2.00um MIN. NICKEL UNDERPLATE.
  - 3. PRODUCT SPECIFICATION: PS-151073-0001
  - 4. PACKAGING SPECIFICATION: PK-151073-0001
  - 5. OVERALL (SOLDERTAIL & SOLDERTAB) COPLANARITY 0.08MM MAX. BEFORE REFLOW.
  - 6. CONNECTOR TO BE USED TOGETHER WITH MOLEX NANO SIM CARD TRAY ONLY.
  - △ DIMENSION INCLUSIVE OF BULGE
  - 8. CUSTOMER STENCIL THICKNESS: 0.10 ~ 0.12mm AND STENCIL OPENING: 1:1 MIN , 1:1.5 MAX


PRELIM. RELEASE EC NO: S2016-0054 DRWNS: SCHEONG 2015/07/07 CHKD: APPR: SCHEONG 2015/07/14 REV 1	QUALITY SYMBOLS △ F/0 △ F/6 △ F/0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
				MM ONLY	NTS	METRIC	
				DRAWN BY	DATE	TITLE	
				CHECKED BY	DATE		
				APPROVED BY	DATE		
		ANGULAR ± 3 °		MATERIAL NO.	DOCUMENT NO.	NANO SIM CONNECTOR 1.32MM HEIGHT WITH TRAY AND DETECT PIN <b>molex</b>	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-151073-0010		SHEET NO. 1 OF 3	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

9 8 7 6 5 4 3 2 1

CENTRELINES OF TRAY AND CONNECTOR OPENING ARE THE SAME

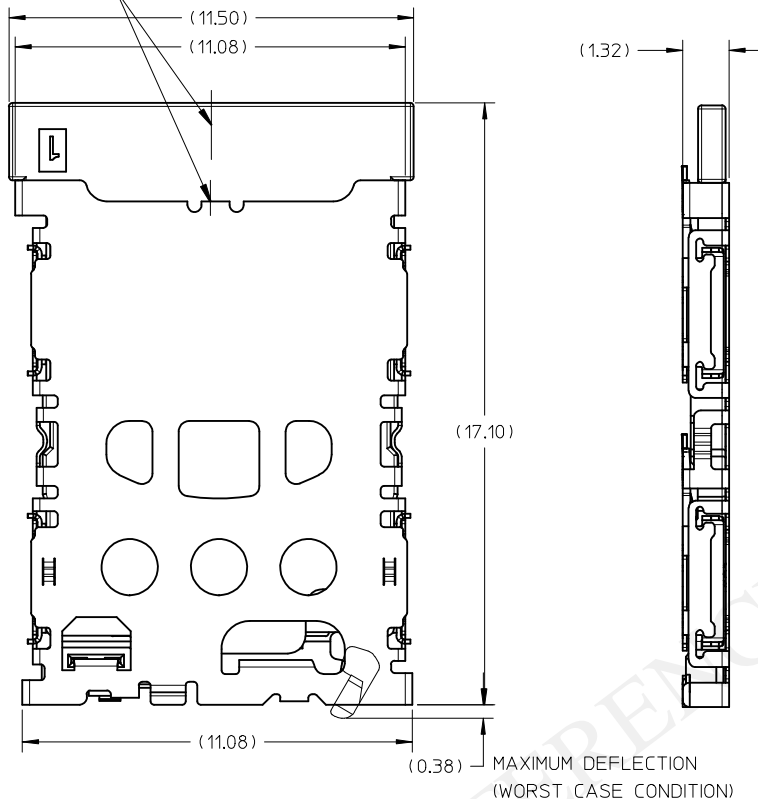

CONNECTOR WITH TRAY

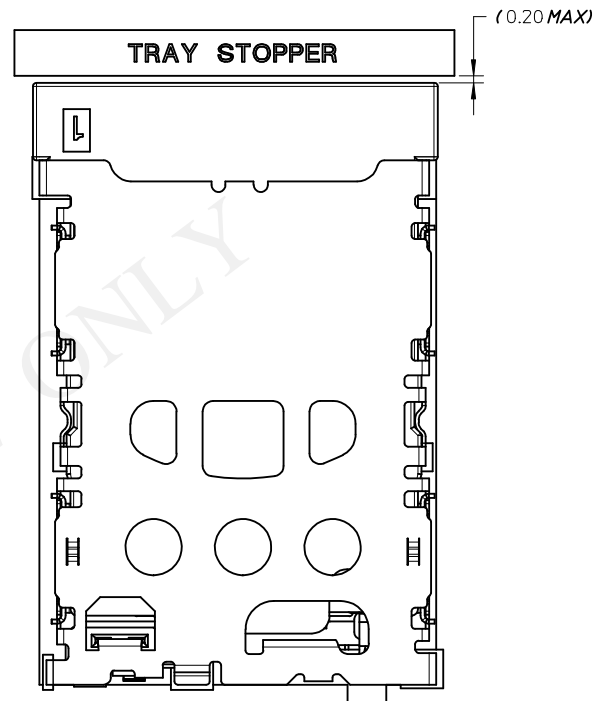

SYSTEM LEVEL

DESCRIPTION	PART NUMBER
CONNECTOR	151073-0001
NANO SIM CARD TRAY	151073-0030

CARD INSERTION STATE	DETECT SWITCH CIRCUIT STATE	SCHEMATIC
CARD MATED	OPENED	
CARD UNMATED	CLOSED	


PRELIM. RELEASE	2015/07/07
EC NO: S2016-0054	
DRWNS: SCHEONG	2015/07/14
CHKD:	
APPR: SCHEONG	
REV	DESCRIPTION
1	

QUALITY SYMBOLS

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm INCH
4 PLACES	± --- ± ---
3 PLACES	± --- ± ---
2 PLACES	± 0.10 ± ---
1 PLACE	± --- ± ---
0 PLACE	± --- ± ---
ANGULAR ± 3 °	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM ONLY	
DRAWN BY	DATE
SCHEONG	2015/07/07
CHECKED BY	DATE
APPROVED BY	DATE
SCHEONG	2015/07/14
MATERIAL NO.	
SEE TABLE	
SIZE	A3

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
NTS	METRIC	
TITLE		
NANO SIM CONNECTOR 1.32MM HEIGHT WITH TRAY AND DETECT PIN		
<b>molex</b>		
MATERIAL NO.	DOCUMENT NO.	SHEET NO.
	SD-151073-0010	2 OF 3

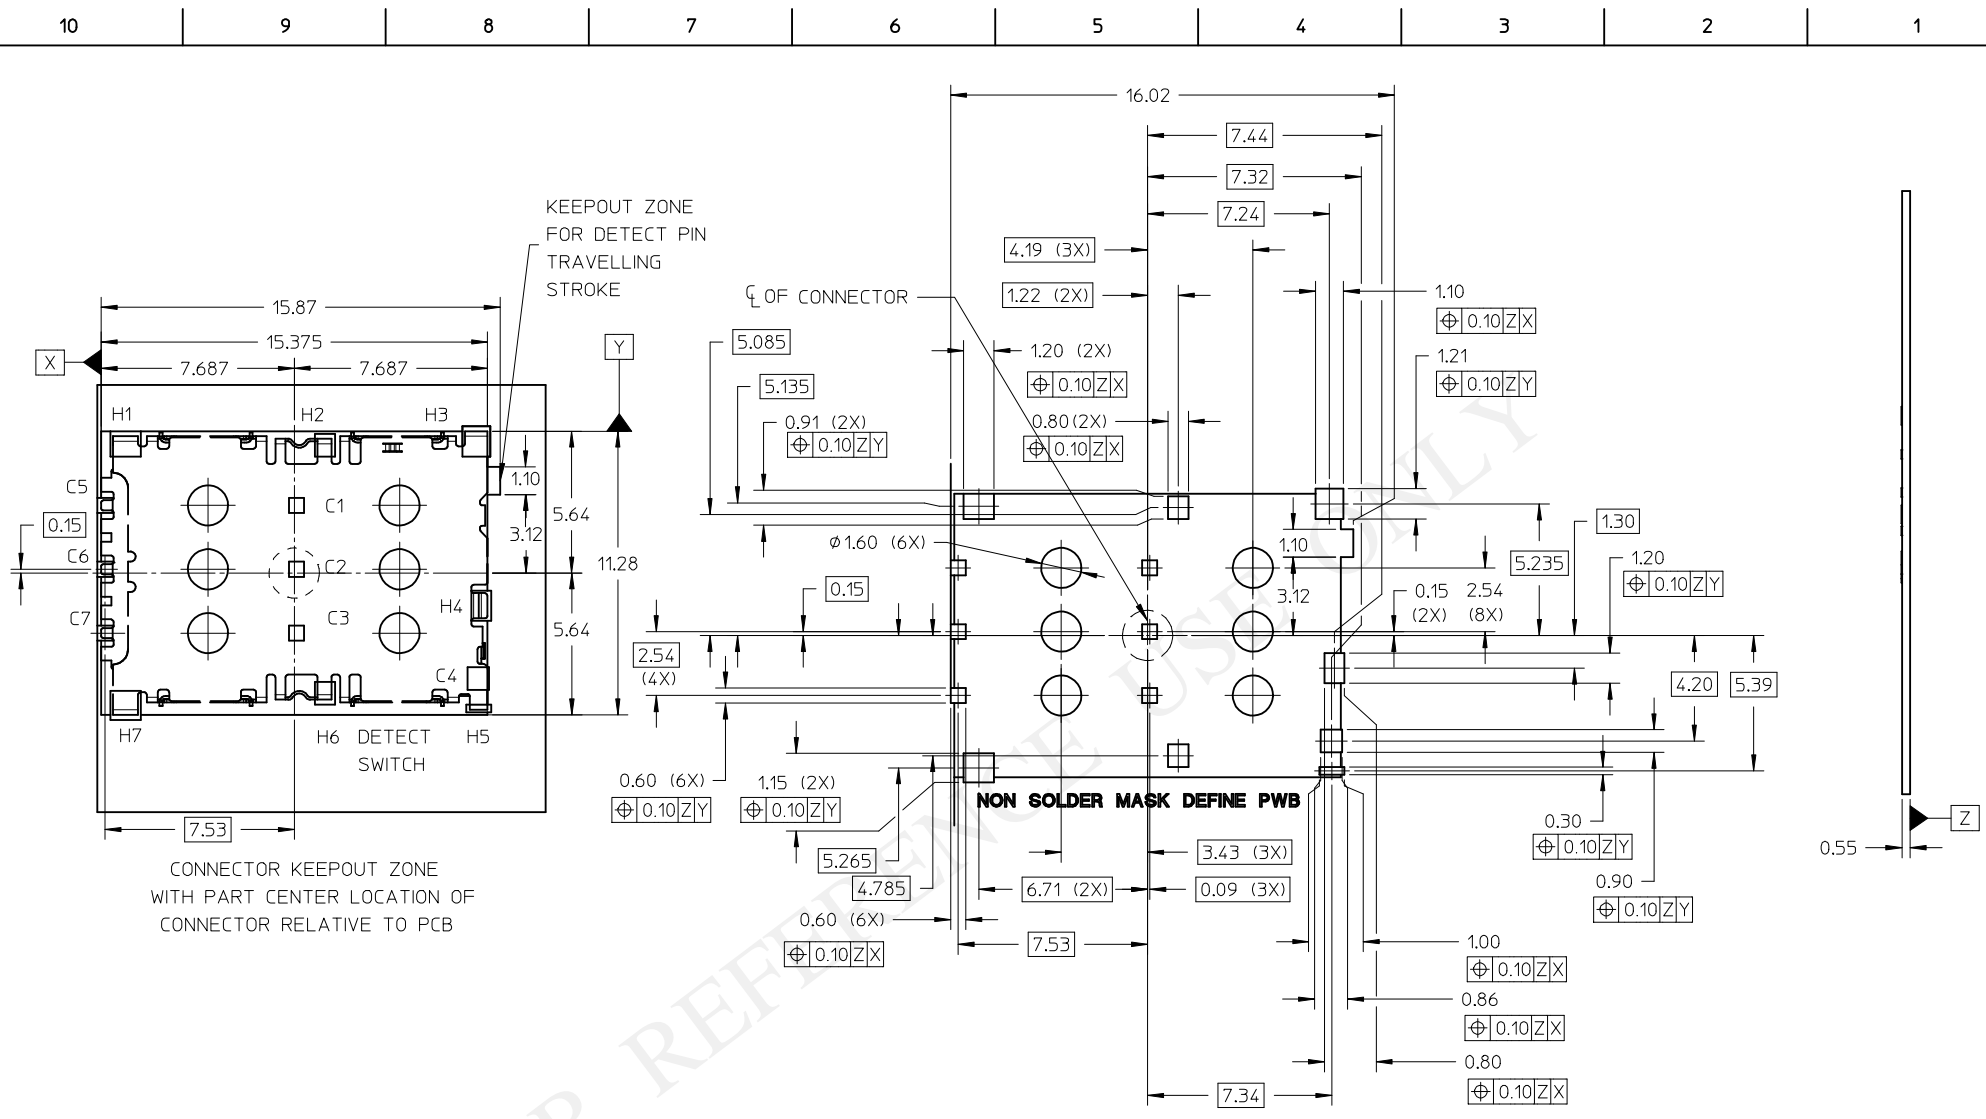

RECOMMENDED PWB LAYOUT  
 (NON SOLDER MASK DEFINE PWB)  
 PWB TOLERANCE: ±0.05MM

<b>PRELIM. RELEASE</b> EC NO: S2016-0054 DRWN: SCHEONG CHKD: APPR: SCHEONG	DESCRIPTION 2015/07/07 2015/07/14	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION																																																										
		$\nabla_F = 0$ $\nabla_F = 0$ $\nabla_F = 0$	<table border="1"> <tr><th></th><th>mm</th><th>INCH</th></tr> <tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr> <tr><td>3 PLACES</td><td>± ---</td><td>± ---</td></tr> <tr><td>2 PLACES</td><td>± 0.10</td><td>± ---</td></tr> <tr><td>1 PLACE</td><td>± ---</td><td>± ---</td></tr> <tr><td>0 PLACE</td><td>± ---</td><td>± ---</td></tr> </table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± 0.10	± ---	1 PLACE	± ---	± ---	0 PLACE	± ---	± ---	<table border="1"> <tr><th>mm</th><th>INCH</th></tr> <tr><td>± 0.10</td><td>± 0.004</td></tr> <tr><td>± 0.20</td><td>± 0.008</td></tr> <tr><td>± 0.30</td><td>± 0.012</td></tr> <tr><td>± 0.40</td><td>± 0.016</td></tr> <tr><td>± 0.50</td><td>± 0.020</td></tr> <tr><td>± 0.60</td><td>± 0.024</td></tr> <tr><td>± 0.70</td><td>± 0.028</td></tr> <tr><td>± 0.80</td><td>± 0.032</td></tr> <tr><td>± 0.90</td><td>± 0.036</td></tr> <tr><td>± 1.00</td><td>± 0.040</td></tr> <tr><td>± 1.20</td><td>± 0.048</td></tr> <tr><td>± 1.50</td><td>± 0.060</td></tr> <tr><td>± 2.00</td><td>± 0.080</td></tr> <tr><td>± 2.50</td><td>± 0.100</td></tr> <tr><td>± 3.00</td><td>± 0.120</td></tr> <tr><td>± 4.00</td><td>± 0.160</td></tr> <tr><td>± 5.00</td><td>± 0.200</td></tr> <tr><td>± 6.00</td><td>± 0.240</td></tr> <tr><td>± 8.00</td><td>± 0.320</td></tr> <tr><td>± 10.00</td><td>± 0.400</td></tr> </table>	mm	INCH	± 0.10	± 0.004	± 0.20	± 0.008	± 0.30	± 0.012	± 0.40	± 0.016	± 0.50	± 0.020	± 0.60	± 0.024	± 0.70	± 0.028	± 0.80	± 0.032	± 0.90	± 0.036	± 1.00	± 0.040	± 1.20	± 0.048	± 1.50	± 0.060	± 2.00	± 0.080	± 2.50	± 0.100	± 3.00	± 0.120	± 4.00	± 0.160	± 5.00	± 0.200	± 6.00	± 0.240	± 8.00	± 0.320	± 10.00	± 0.400	DRAWN BY SCHEONG DATE 2015/07/07 CHECKED BY DATE	TITLE	<b>NANO SIM CONNECTOR</b> <b>1.32MM HEIGHT WITH TRAY</b> <b>AND DETECT PIN</b> 
			mm	INCH																																																															
		4 PLACES	± ---	± ---																																																															
3 PLACES	± ---	± ---																																																																	
2 PLACES	± 0.10	± ---																																																																	
1 PLACE	± ---	± ---																																																																	
0 PLACE	± ---	± ---																																																																	
mm	INCH																																																																		
± 0.10	± 0.004																																																																		
± 0.20	± 0.008																																																																		
± 0.30	± 0.012																																																																		
± 0.40	± 0.016																																																																		
± 0.50	± 0.020																																																																		
± 0.60	± 0.024																																																																		
± 0.70	± 0.028																																																																		
± 0.80	± 0.032																																																																		
± 0.90	± 0.036																																																																		
± 1.00	± 0.040																																																																		
± 1.20	± 0.048																																																																		
± 1.50	± 0.060																																																																		
± 2.00	± 0.080																																																																		
± 2.50	± 0.100																																																																		
± 3.00	± 0.120																																																																		
± 4.00	± 0.160																																																																		
± 5.00	± 0.200																																																																		
± 6.00	± 0.240																																																																		
± 8.00	± 0.320																																																																		
± 10.00	± 0.400																																																																		
APPROVED BY SCHEONG DATE 2015/07/14	MATERIAL NO.	DOCUMENT NO.	SHEET NO.																																																																
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE SIZE A3	SD-151073-0010	3 OF 3																																																																
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																			

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)