





Optocoupler, Phototransistor Output (Single, Dual, Quad Channel)



Single Channel



Dual Channel



Quad Channel

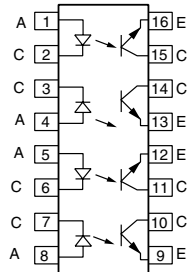

1179015

FEATURES

- IL74/ILD74/ILQ74 TTL compatible
- Transfer ratio, 35 % typical
- Coupling capacitance, 0.5 pF
- Single, dual, and quad channel
- Industry standard DIP packages
- Lead (Pb)-free component
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



RoHS
COMPLIANT

AGENCY APPROVALS

- UL1577, file no. E52744 system code H or J, double protection
- CSA 93751
- BSI IEC 60950; IEC 60065
- DIN EN 60747-5-2 (VDE 0884)/DIN EN 60747-5-5 pending available with option 1, X001 suffix
- FIMKO

DESCRIPTION

The IL74/ILD74/ILQ74 is an optically coupled pair with a GaAlAs infrared LED and a silicon NPN phototransistor. Signal information, including a DC level, can be transmitted by the device while maintaining a high degree of electrical isolation between input and output. The IL74/ILD74/ILQ74 is especially for driving medium-speed logic, where it may be used to eliminate troublesome ground loop and noise problems. Also it can be used to replace relays and transformers in many digital interface applications, as well as analog applications such as CTR modulation.

The ILD74 has two isolated channels in a single DIP package; the ILQ74 has four isolated channels per package.

| ORDER INFORMATION | |
|--------------------------|---|
| PART | REMARKS |
| IL74 | CTR _{DC} > 12.5 %, single channel DIP-6 |
| ILD74 | CTR _{DC} > 12.5 %, dual channel DIP-8 |
| ILQ74 | CTR _{DC} > 12.5 %, quad channel DIP-16 |
| IL74-X006 | CTR _{DC} > 12.5 %, single channel DIP-6 400 mil (option 6) |
| ILD74-X006 | CTR _{DC} > 12.5 %, dual channel DIP-8 400 mil (option 6) |
| ILD74-X007 | CTR _{DC} > 12.5 %, dual channel SMD-8 (option 7) |
| ILD74-X009 | CTR _{DC} > 12.5 %, dual channel SMD-8 (option 9) |
| ILQ74-X009 | CTR _{DC} > 12.5 %, dual channel SMD-16 (option 9) |

Note

For additional information on the available options refer to option information.

| ABSOLUTE MAXIMUM RATINGS | | | | | |
|-------------------------------------|--|-------|------------|----------------|-----------|
| PARAMETER | TEST CONDITION | PART | SYMBOL | VALUE | UNIT |
| INPUT | | | | | |
| Peak reverse voltage | | | V_R | 3.0 | V |
| Forward continuous current | | | I_F | 60 | mA |
| Power dissipation | | | P_{diss} | 100 | mW |
| Derate linearly from 55 % | | | | 1.33 | mW/°C |
| OUTPUT | | | | | |
| Collector emitter breakdown voltage | | | BV_{CEO} | 20 | V |
| Emitter collector breakdown voltage | | | BV_{ECO} | 5.0 | V |
| Collector base breakdown voltage | | | BV_{CBO} | 70 | V |
| Power dissipation | | | P_{diss} | 150 | mW |
| Derate linearly from 25 °C | | | | 2.0 | mW/°C |
| COUPLER | | | | | |
| Isolation test voltage | $t = 1.0 \text{ s}$ | | V_{ISO} | 5300 | V_{RMS} |
| Isolation resistance | $V_{IO} = 500 \text{ V}, T_{amb} = 25 \text{ °C}$ | | R_{IO} | $\geq 10^{12}$ | Ω |
| | $V_{IO} = 500 \text{ V}, T_{amb} = 100 \text{ °C}$ | | R_{IO} | $\geq 10^{11}$ | Ω |
| Total package dissipation | | IL74 | P_{tot} | 200 | mW |
| | | ILD74 | P_{tot} | 400 | mW |
| | | ILQ74 | P_{tot} | 500 | mW |
| Derate linearly from 25 °C | | IL74 | | 2.7 | mW/°C |
| | | ILD74 | | 5.33 | mW/°C |
| | | ILQ74 | | 6.67 | mW/°C |
| Creepage distance | | | | ≥ 7.0 | mm |
| Clearance distance | | | | ≥ 7.0 | mm |
| Storage temperature | | | T_{stg} | - 55 to + 150 | °C |
| Operating temperature | | | T_{amb} | - 55 to + 100 | °C |
| Lead soldering time at 260 °C | | | | 10 | s |

Note

$T_{amb} = 25 \text{ °C}$, unless otherwise specified.

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to absolute maximum ratings for extended periods of the time can adversely affect reliability.

| ELECTRICAL CHARACTERISTICS | | | | | | |
|---------------------------------------|---|-------------|------|------|------|---------------|
| PARAMETER | TEST CONDITION | SYMBOL | MIN. | TYP. | MAX. | UNIT |
| INPUT | | | | | | |
| Forward voltage | $I_F = 20 \text{ mA}$ | V_F | | 1.3 | 1.5 | V |
| Reverse current | $V_R = 3.0 \text{ V}$ | I_R | | 0.1 | 100 | μA |
| Capacitance | $V_R = 0 \text{ V}$ | C_O | | 25 | | pF |
| OUTPUT | | | | | | |
| Collector emitter breakdown voltage | $I_C = 1.0 \text{ mA}$ | BV_{CEO} | 20 | 50 | | V |
| Collector emitter leakage current | $V_{CE} = 5.0 \text{ V}, I_F = 0 \text{ A}$ | I_{CEO} | | 5.0 | 500 | nA |
| Capacitance collector emitter | $V_{CE} = 0 \text{ V}, f = 1.0 \text{ Hz}$ | C_{CE} | | 10 | | pF |
| COUPLER | | | | | | |
| Saturation voltage, collector emitter | $I_C = 2.0 \text{ mA}, I_F = 16 \text{ mA}$ | V_{CEsat} | | 0.3 | 0.5 | V |
| Resistance (input to output) | | R_{IO} | | 100 | | $G\Omega$ |
| Capacitance (input to output) | | C_{IO} | | 0.5 | | pF |

Note

$T_{amb} = 25 \text{ °C}$, unless otherwise specified.

Minimum and maximum values are testing requirements. Typical values are characteristics of the device and are the result of engineering evaluation. Typical values are for information only and are not part of the testing requirements.




| CURRENT TRANSFER RATIO | | | | | | |
|---------------------------|--|------------|------|------|------|------|
| PARAMETER | TEST CONDITION | SYMBOL | MIN. | TYP. | MAX. | UNIT |
| DC current transfer ratio | $I_F = 16 \text{ mA}$, $V_{CE} = 5.0 \text{ V}$ | CTR_{DC} | 12.5 | 35 | | % |

| SWITCHING CHARACTERISTICS | | | | | | |
|---------------------------|---|----------------------|------|------|------|---------------|
| PARAMETER | TEST CONDITION | SYMBOL | MIN. | TYP. | MAX. | UNIT |
| Switching times | $R_L = 100 \Omega$, $V_{CE} = 10 \text{ V}$, $I_C = 2.0 \text{ mA}$ | t_{on} , t_{off} | | 3.0 | | μs |


TYPICAL CHARACTERISTICS

$T_{amb} = 25 \text{ }^\circ\text{C}$, unless otherwise specified

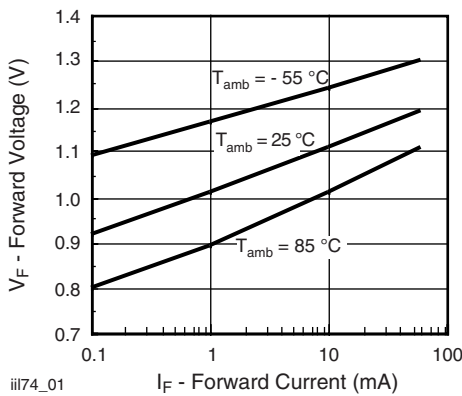


iii74_01

Fig. 1 - Forward Voltage vs. Forward Current

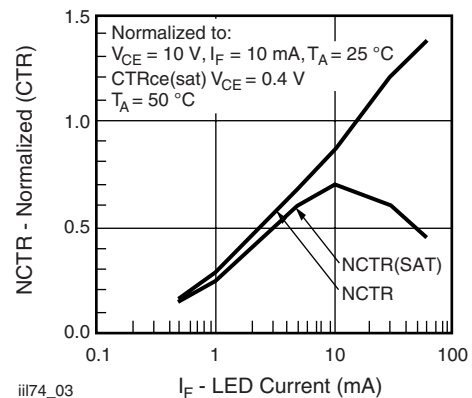


iii74_03

Fig. 3 - Normalized Non-Saturated and Saturated CTR vs. LED Current

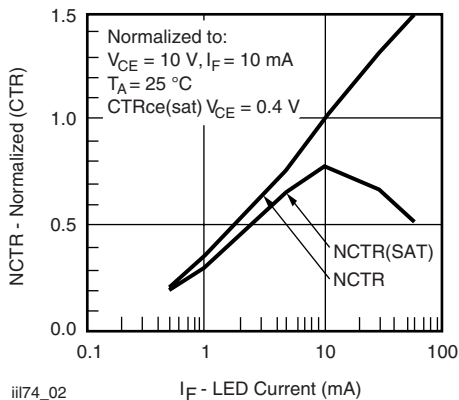

iii74_02

Fig. 2 - Normalized Non-Saturated and Saturated CTR vs. LED Current

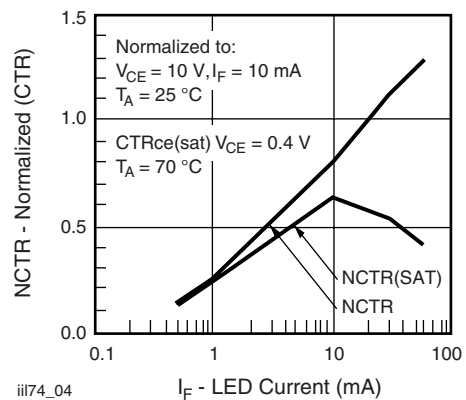

iii74_04

Fig. 4 - Normalized Non-Saturated and Saturated CTR vs. LED Current

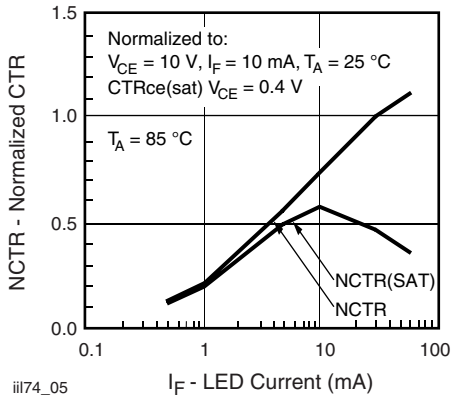


Fig. 5 - Normalized Non-Saturated and Saturated CTR vs. LED Current

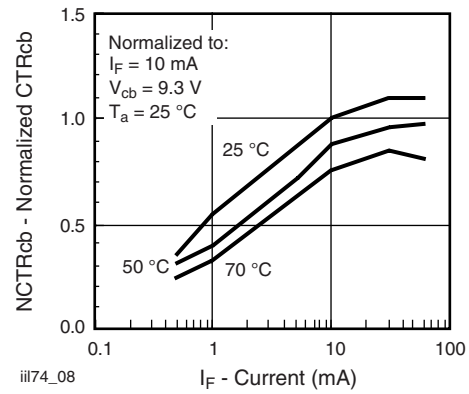


Fig. 8 - Normalized CTR_{cb} vs. LED Current and Temperature

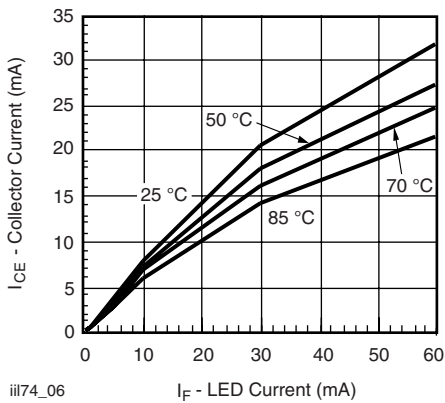


Fig. 6 - Collector Emitter Current vs. Temperature and LED Current

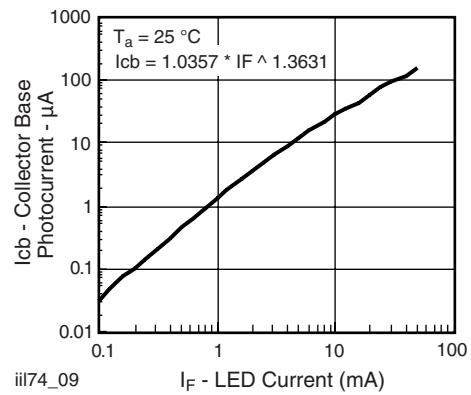


Fig. 9 - Collector Base Photocurrent vs. LED Current

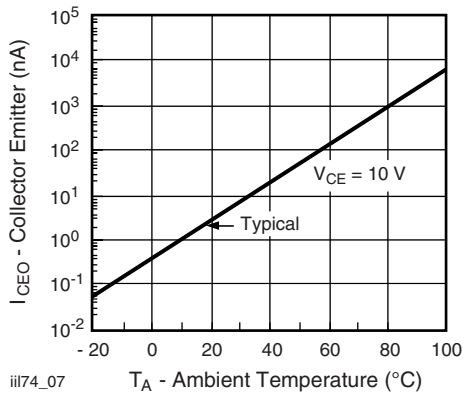


Fig. 7 - Collector Emitter Leakage Current vs. Temperature

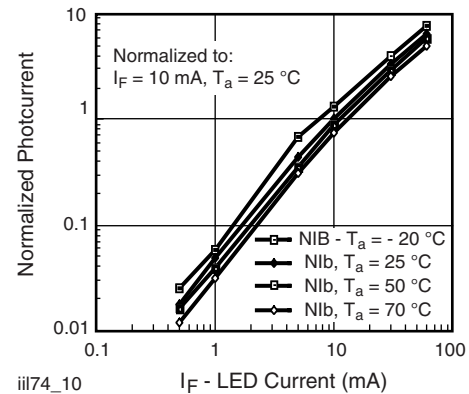


Fig. 10 - Normalized Photocurrent vs. I_F and Temperature



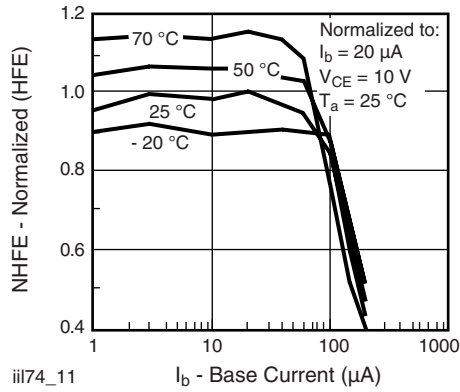

 Fig. 11 - Normalized Non-Saturated h_{FE} vs. Base Current and Temperature

 Fig. 12 - Normalized Saturated h_{FE} vs. Base Current and Temperature


Fig. 13 - Propagation Delay vs. Collector Load Resistor



IL74/ILD74/ILQ74

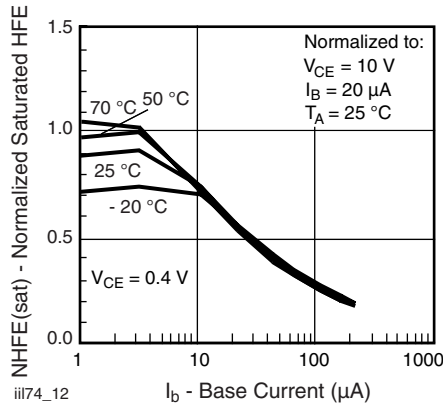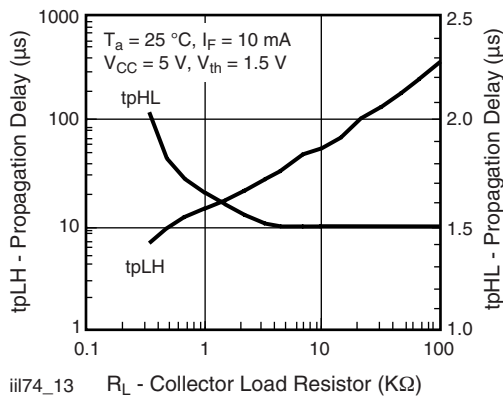

Vishay Semiconductors

Optocoupler, Phototransistor Output
(Single, Dual, Quad Channel)

PACKAGE DIMENSIONS in inches (millimeters)

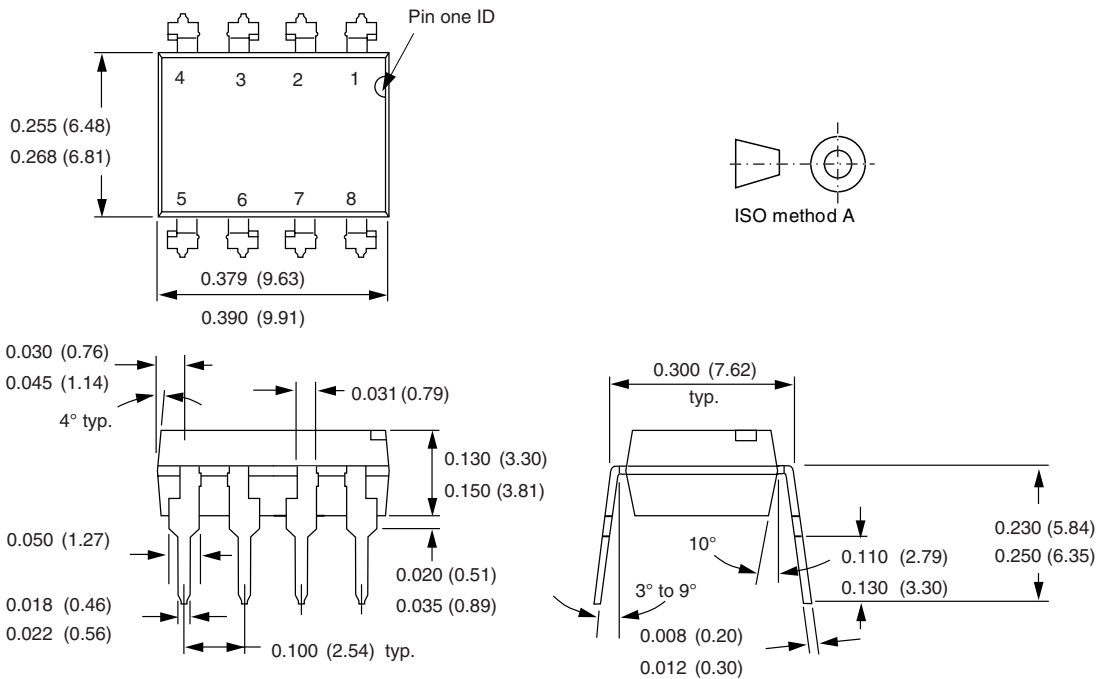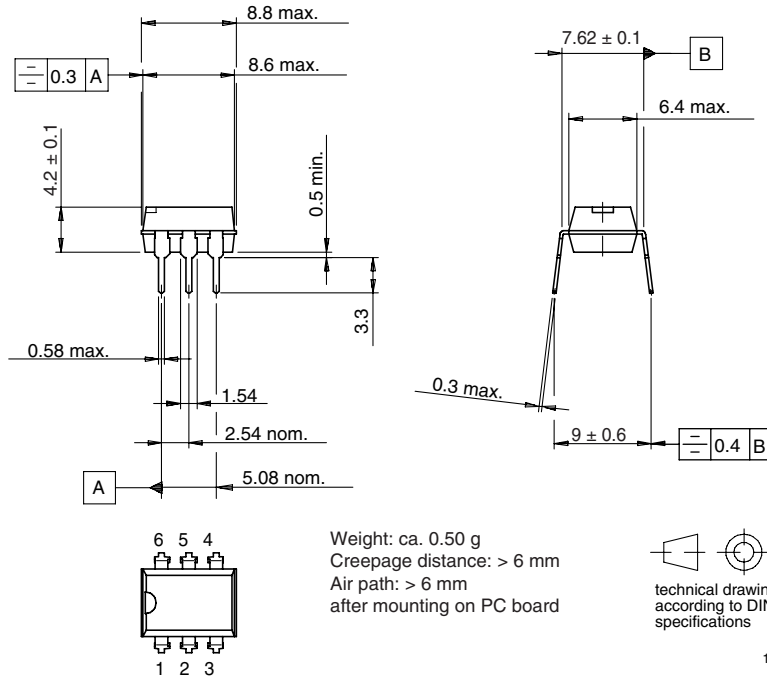


i178006




Optocoupler, Phototransistor Output (Single, Dual, Quad Channel)

IL74/ILD74/ILQ74 Vishay Semiconductors

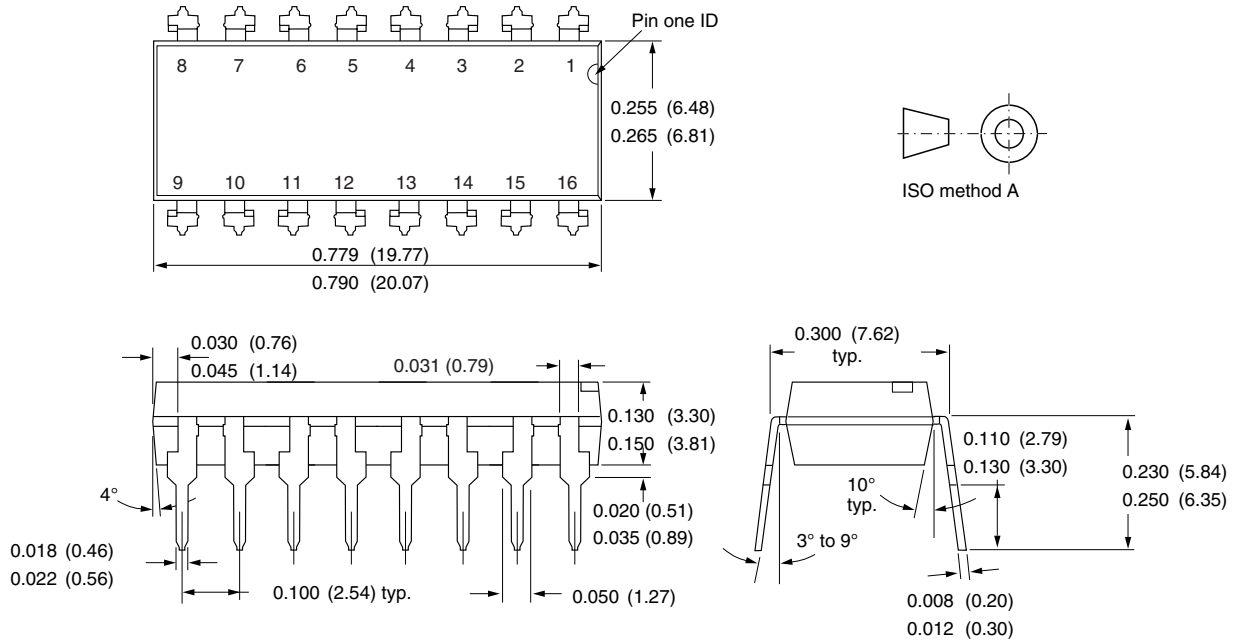


i178007


Option 6

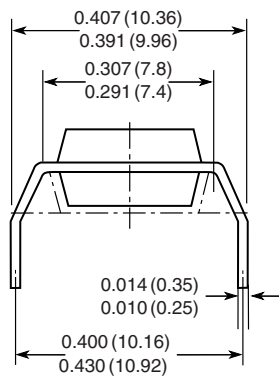

Option 7

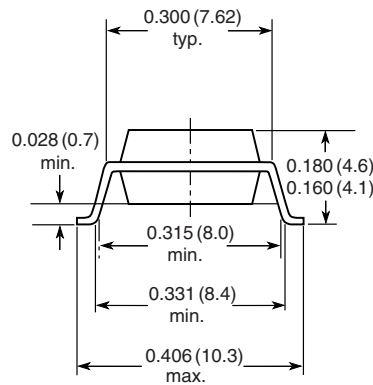

Option 9

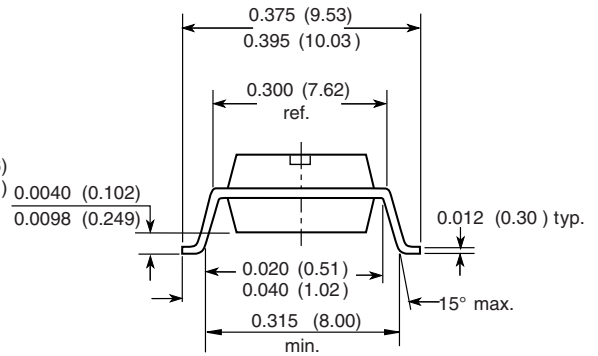

18450

OZONE DEPLETING SUBSTANCES POLICY STATEMENT

It is the policy of Vishay Semiconductor GmbH to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively.
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA.
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design
and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify Vishay Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru