# Amphenol® Low Mating Force Rectangular Connectors

12-035-11





## www.amphenol-aerospace.com

Visit our website and see the very broad range of cylindrical and rectangular interconnection products from Amphenol Aerospace.



## Amphenol's Broad Family of Low Mating Force Interconnect Products with Brush Contacts



Design Flexibility -Combination of Brush Contacts and Fiber Optic Termini



Combination of Brush Contacts, Coax and Power Contacts



Power Strip Connector Series with cavities for size 16 or 12 power contacts (or size 16 or 12 coax contacts).



Hybrid Custom Connector with Brush Contacts and Power Contacts



Docking Connectors -The Brush Contact offers high performance where frequent docking to charge and transfer data is a necessity.

The Bristle Brush contact has been proven in military avionics packages and meets the requirements of MIL-DTL-55302. It provides high density in tighter spacing, low mating/unmating forces, proven durability and long contact life. Applications for Amphenol® Connectors with Brush contacts include:

- Medical equipment
- IC chip testers
- Telecommunications
- Military and Commercial Aviation
- Military Ground Vehicles
- · GPS systems

## Other Similar Rectangular Connectors from Amphenol

For more information, see additional Amphenol Rectangular Products at the end of this catalog.



### Brush vs. Conventional Contacts

#### **Brush Contact Innovation**

- Multiple contact interfaces -Strands of high tensile wire are bundled together to form brush-like contacts. By intermeshing two multi-strand wire bundles, an electrical connection is made.
- Provides redundant current paths, 14-70 (points of contact) per mated contact with a gas tight junction
- Very smooth (low friction) interface

#### Conventional Pin/Socket

- Machined surface finish on both parts
- Higher friction and wear
- Limited number of contact sites

## Amphenol's High Technology Machining and Computer Driven Centers for Connector and Contact Production

Amphenol Aerospace, located in upstate New York USA, has diverse manufacturing capability including state of the art CNC machining, die-casting, molding, impact and extruding, screw machining and plating.


Also within this facility are complete design engineering and environmental test facilities. High technology production centers at the Amphenol home facility and its satellite facilities create volume runs that are cost effective and meet on-time delivery demands.

Amphenol operates a Quality System that is third-party certified to ISO-9001:2000 and AS9100.

For more information on Amphenol Aerospace capabilities in Rectangular products, or any other of the wide range of connector products, please contact us:
Amphenol Aerospace Operations 40-60 Delaware Avenue Sidney, NY 13838-1395
Phone: 800-678-0141 or 607-563-5011

www.amphenol-aerospace.com

#### **Rrush Contacts**




## Conventional Pin and Socket Crimp Contacts





High Technology Machine Center



Brush Contact Machining

## **Bristle Brush Contacts**

- High density in tighter spacing a main concern for integrated electronics.
- A superior choice for board level interconnects.

#### **Table of Contents**

Low Mating Force Rectangular Connectors with Brush Contacts			
Features, Peformance, Materials	1		
Selecting the Correct Mated Connection,			
Four Body Styles	2		
How to Order			
Military and Commercial	5		
Connector Row and Cavity Identification,			
Contact Arrangements 2 Row			
Contact Arrangements 3 and 4 Row			
Mother Board Connector	1		
Daughter Board Connector	5		
Input/Output Connector	9		
PC Connector	3		
Accessories, Polarization Keys	4		
Accessories, Test Probe Kit	5		
Connector Installation/User Application Information 26-2	9		
Smaller Sized Brush Connectors - Design Flexibility 30, 3	1		
Hybrid Configurations with Contact Options	2		
Hybrid Designs, Small Color-Coded Brush Connectors	3		
Other Breek Ordert Besteventer Orders start			
Other Brush Contact Rectangular Connectors:			
Docking Connectors			
HDB <sup>3</sup> High Density Brush Connectors			
HSB <sup>3</sup> High Density Brush Connectors			
Ruggedized Rack and Panel Connectors			
LRM (Line Replaceable Module) Connectors			
LRM Hybrids and High Speed LRM Gigastak & Digastak	9		
Other Rectangular Connectors:			
Total Packaging with Amphenol Printed Circuit Boards,			
Rectangular and Cylindrical Connectors	0		
Amphenol Sales Office and Distributor Listing Inside Bac	·k		
Amphenoi dales diffee and Distributor Listing Illiside Dat	11		

## Amphenol<sup>®</sup> B<sup>3</sup> Bristle<sup>®</sup> Brush<sup>®</sup> Contact Advantages:



## Low Mating & Jumating Forces

- Smooth, low friction interfaces
- 70% to 90% reduction in mating/unmating forces from conventional pin-socket contacts
- 1.5 oz. maximum forces per contact pair (one ounce typical)
- Easy mating/unmating makes high circuit counts practical (25 lbs. typical for 400 contacts)
- Mechanical mating aids not required
- No need for external board support structures for connectors up to 7 inches long.
   A center support is recommended for Mother Board Connectors over 7 inches.

## Proven Durability and Long Contact Life

- 100,000 mating cycles, even when hot swapped
- Documented intermittency free performance – no 10 nano second discontinuities during 50m cycles of 0.010 displacement
- Overall cost effectiveness (reduced life cycle costs)

## Multiple Points of Contact Provide Superior Electrical Capability

- 14-70 points of contact per mated contact
- Stable, low resistance 20 milliohms max.
- Redundant current paths results in lower total resistance
- Proven electrical and gas tight contact sites

## Amphenol Low Mating Force Rectangular Connectors MIL-DTL-55302 (M55302/166 thru /172)

Amphenol's Low Mating Force Connectors are well known in the connector arena – with proven performance on the ground, in the air, and at sea. – In service for over 25 years, with over 50 million brush contacts fielded; and qualified for use on M1A2 Abrams, F-16 Falco, F/A-22 Raptor, F-35 Lightning II, AIM-132 ASRAAM and many more applications.

## **Four Standard Body Styles**



#### **Key Connector Features**

- 0.100 inch center to center, square grid contact spacing
- Application flexibility (parallel boards, perpendicular boards, wire to board, end to end boards, card extenders
- 2, 3 and 4 row contact arrangements with 10 to 100 contacts per row in one contact per row increments
- Military versions meet MIL-DTL-55302/166 through /172
- Termination versatility; straight & 90° PCB stud, wire wrap & crimp
- · Options on termination lengths and plating
- Front release/front removable contacts in Mother Board, Daughter Board and PC version; rear release/rear removable crimp contacts (size 22D) or printed circuit board pins provided with Input/Output connectors
- Accessories available for latching and polarization
- Up to 256 keyed, mating polarizations available
- Hybrids available mix signal with power, RF or fiber optics
- Smaller sized connector designs with as few as 5 contacts per row
- RoHS compliant versions are available, consult Amphenol Aerospace for more information

#### **Performance**


- voltage rating: <u>SL</u> <u>70,000 ft.</u>
   1300 325
- one and one-half ounce max. average contact engaging/ separating forces
- 7 million average contact resistance for row A contacts
- (Resistance will vary depending on the point of measurement and the length of the contact.)
- 3 ampere PCB contacts; 5 ampere wire wrap / crimp contacts
- -65°C to +125°C temperature rating
- 5 gigaohms minimum insulation resistance

#### **Materials**

- Connector Body Glass-filled thermoplastic molding material in accordance with MIL-M-24519 type GPT-15F and/or Grade B,
- Class 15 of MIL-P-46161 (UL94V-O)
- Polarization Keys Glass-filled acetal plastic molding material in accordance with MIL-P-46137
- Locking Screw/Mounting Bushing Corrosion resistant steel AISI 300 types passivated in accordance with QQ-P-35

#### Contacts


- Holders Copper alloy in accordance with Federal Specification QQ-B-626 or SAE J463
- Wire Berryllium copper in accordance with Federal Specification ASTM B197
- Sleeves If applicable, stainless steel in accordance with AMS-5514 passivated in accordance with ASTM A967



Unmated Input/Output and PC Connector



An Input/Output and Mother Board Connector



Mated Mother Board and Daughter Board Connector

## selecting the correct mated connection

## STANDARD FOUR BODY STYLES Mother Board Connector (MB)

also can be referred to as a "Backplane" Connector

- Straight PCB stud or Wire wrap termination
- Mates with: Daughter board or I/O connectors

## **Daughter Board Connector (DB)**

also can be referred to as a "Module Connector"

- 90° PCB stud
- Mates with: Mother board or PC connectors

### **Printed Circuit Connector (PC)**


also can be referred to as a "Right Angle Mother board Connector or a "Card Extender Connector"


- 90° PCB stud
- Mates with: I/O or Daughter board connectors


#### Input/Output Connector (I/O)


also can be referred to as a "Cable Connector"


- I/O-C has rear removable crimp contacts
- I/O-P has round PCB stud solder contacts
- Mates with: Mother board or PC connectors

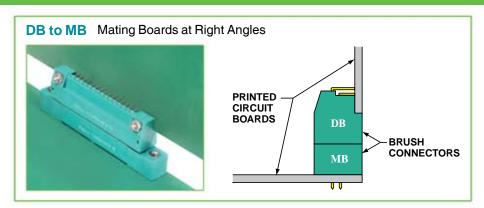

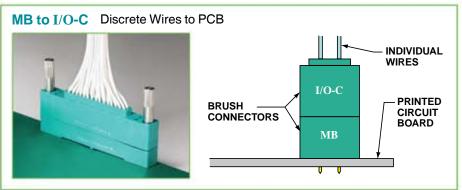

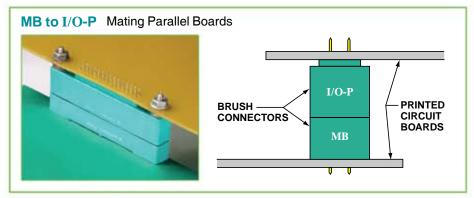

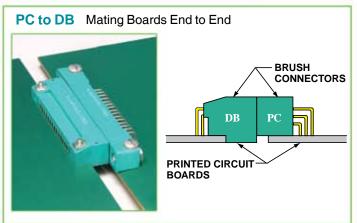


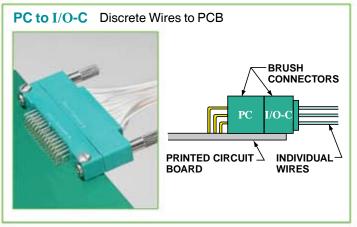

## how to order (military types)

## MB, DB, PC Connectors Military Part Number Ordering Procedure

Example part number M55302/166A10X1 is shown as follows:

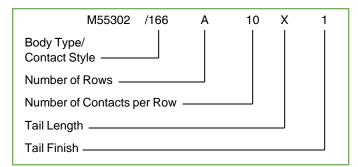

## **Body Type/Contact Style**

- /166 designates MB-P (Mother Board, Printed Circuit Board Termination)
- /167 designates MB-W (Mother Board, Wire-wrap Contacts)
- /168 designates PC (Printed Circuit, 90° Printed Circuit Board Termination)
- /170 designates DB (Daughter Board, 90° Printed Circuit Board Termination)

## **Number of Rows**

A - 2 Rows

B - 3 Rows

C - 4 Rows

#### **Number of Contacts per Row**

Contact counts per row range from 10 to 100 (Only 2 digits permitted in this space; for 100 contacts per row, use 00)

#### Tail Length

MB-P	MB-W**
(PCB Termination)*	(Wire-wrap)
W222 ±.025 X300 ±.025 Y145 ±.025 Z113 ±.025	Y700 ±.025 Z542 ±.025

DB*	PC*	
X300 ±.025 Y150 ±.025 Z120 ±.025	Y150 +.035 025 Z095 +.035 025	

<sup>\*</sup> Reference "J" Dimension on all connector drawings in this catalog.


#### **Tail Finish**

- 1 Tin lead per MIL-P-81728, 50 to 70% tin, .0001 min. thick over copper
- 2 Gold per MIL-G-45204, type II, grade C, class 00 (01 for MB-W) over nickel per QQ-N-290



## IO Connectors Military Part Number Ordering Procedure

Example part number M55302/169A101 is shown as follows:

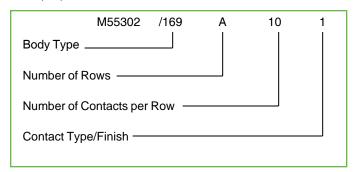

## **Body Type**

/169 designates IO (Input/Output) (Contact type/finish is last digit of IO part number - see list of options below)

#### **Number of Rows**

A - 2 Rows

B - 3 Rows

C - 4 Rows

## **Number of Contacts per Row**

Contact counts per row range from 10 to 100 (Only 2 digits permitted in this space; for 100 contacts per row, use 00)

#### **Contact Type/Finish**

- 1 Crimp contact Tin lead per MIL-P-81728, 50 to 70% tin, .0001 min. thick over copper
- 2 Crimp contact Gold per MIL-G-45204, type II, grade C, class 1 over copper
- 3 Connectors supplied less contacts
- 4 PCB contacts installed with .145 ±.025 stickout Tin lead per MIL-P-81728, 50 to 70% tin, .0001 min. thick over copper (Reference "J" Dimension on connector drawing on page 16).

## To Order I O Contacts

(For use with connectors less contacts)

M55302/171-1

\_\_\_\_ suffix designates crimp well finish

Crimp well finish

- 1 Crimp contact Tin lead per MIL-P-81728, 50 to 70% tin, .0001 min. thick over copper
- 2 Crimp contact Gold per MIL-G-45204, type II, grade C class 1 over copper


To order Accessories, see page 5.

<sup>\*\*</sup> For MB-W only: Reference "H" Dimension on connector drawing on page 12.

## how to order (commercial types)

## MB, DB, I/O, PC Connectors Proprietary Part Number Ordering Procedure

Example part number MB2-120P- ( ) is shown as follows:



## **Body Type**

MB designates Mother Board
DB designates Daughter Board
I/O designates Input/Output
PC designates Printed Circuit

#### **Number of Rows**

2, 3 or 4 rows

#### **Total Number of Contacts**

See Contact Arrangements, pages 8 and 9

#### **Standard Termination Style**

(Stickout values below apply to "J" dimension referenced on individual connector catalog pages).

MBX-XXXP	Straight PCB stud, .021 dia, .113 ±.025 stickout, Sn/Ni plate
MBX-XXXW	Solderless wrap,.025 sq.,.507 ±.025 stickout, Sn/Ni plate
DBX-XXXP	90° PCB stud, .021 dia, .085 ±.025 stickout, Sn/Ni plate
IOX-XXXC	Crimp, rear removable contact, size 22D wire well, Sn/Ni plate
IOX-XXXP	PCB stud, .021 dia, .145 ±.025 stickout, Sn/Ni plate
PCX-XXXP	90° PCB stud, .021 dia., .095 <sup>+.035</sup> <sub>025</sub> stickout Sn/Ni plate

#### LEGEND:

Sn/Ni designates Tin over Nickel Au/Ni designates Gold over Nickel Au/Cu designates Gold over Copper



SnPb/Cu designates Tin-Lead over Copper

#### **Variation Suffix**

(Stickout values below apply to "J" dimension referenced on individual connector catalog pages.)

in Individual connector catalog pages.)					
(700)	II, .000030 min. thick gold (.000050 for solderless wrap) over .000050 min. thick nickel (standard termination length)				
(701)	Gold plate in accordance with MIL-G-45204, type II, .000050 min. thick gold over .00015 min. thick copper (standard termination length)				
(702)	PCB stud stickout of .145, Sn/Ni plate, MB-P				
(703)	Au/Ni [same as (700)], PCB stud stickout of .145, MB-P				
(704)	Au/Cu [same as (701)], PCB stud stickout of .145, MB-P				
(705)	90° PCB stud, .120 stickout. Sn/Ni plate, DB				
(706)	Au/Ni [same as (700)], 90° PCB stud .120 stickout, DB				
(707)	Au/Cu [same as (701)], 90° PCB .120 stickout, DB				
(709)	PCB stud stickout of .300 DB (90°), .300 MB-P & .335 IO-P, Sn/Ni plate				
(710)	Solderless wrap, .025 sq., .665 stickout, Sn/Ni plate, MB-W				
(711)	Solderless wrap, .025 sq., .665 stickout, Au/Ni, [same as (700)], MB-W				
(713)	PCB stud stickout of .060, Sn/Ni plate, IO-P				
(714)	90° PCB stud stickout of .150, Sn/Ni plate, PC & DB				
(715)	Solderless wrap, .025 sq., .665 stickout, Au/Cu [same as (701)], MB-W				
(716)	90° PCB stud stickout of .085 matte tin, DB				
(717)	90° PCB stud stickout of .095 matte tin, PC				
(718)	90° PCB stud stickout of .120 matte tin, DB				
(719)	PCB stud stickout of .300 MB-P & .335 IO-P, matte tin				
(720)	PCB stud stickout of .060 matte tin, IO-P				
(721)	PCB stud stickout of .500, Sn/Ni plate, IO-P				
(722)	PCB stud stickout of .356 matte tin, MB-P				
(723)	PCB stud stickout of .192, Sn/Ni plate, MB-P				
(724)	90° PCB stud stickout of .095, RTV potted rear, Sn/Ni plate, PC				
(725)	90° PCB stud stickout of .120, RTV potted rear, Sn/Ni plate, DB				
(726)	90° PCB stud stickout of .150, RTV potted rear, Sn/Ni plate, PC & DB				
(727)	PCB stud stickout of .145, RTV potted rear, Sn/Ni plate, MB-P				
(728)	PCB stud stickout of .145, Au/Ni, [same as (700)], RTV potted rear, MB-P				
(729)	90° PCB stud stickout of .120, Au/Ni, [same as (700)], RTV potted rear, DB				
(730)	90° PCB stud stickout of .150, Au/Ni, [same as (700) above], PC and DB				
(731)	PCB stud stickout of .145, matte tin, MB-P				

Variation Suffixes continued on next page.

## how to order (commercial types)/accessories

## MB, DB, I/O, PC Connectors Proprietary Part Number Ordering Procedure

## Variation Suffix, cont.

(732)	PCB stud stickout of .300 DB (90°), .300 MB-P and .335 IO-P, Au/Cu [same as (701)],
(733)	PCB stud stickout of .421, matte tin, MB-P
(734)	Solderless wrap .025 sq.; .665 stickout, Au/Ni, [same as (700)], RTV potted rear, MB-W
(735)	RTV potted rear, standard termination length, Au/Ni, [same as (700)]
(736)	RTV potted rear, standard termination length, Sn/Ni [use (724) for PC]
(737)	PCB stud stickout of .300 DB (90°), .300 MB-P and .335 IO-P, Au/Ni, [same as (700)], RTV potted rear
(738)	PCB stud stickout of .192 SnPb/Cu (Mil-Spec), MB-P
(739)	PCB stud stickout of .300 DB (90°), .300 MB-P and .335 IO-P;, RTV potted rear, Sn/Ni
(740)	Solderless wrap .025 sq.; .665 stickout, Sn/Ni, RTV potted rear, MB-W
(741)	Solderless wrap .025 sq.; .280 stickout, Au/Ni, [same as (700)], MB-W
(742)	PCB .145, Au/Ni, [same as (700)], epoxy potted rear, MB-P
(743)	90° PCB .120, Au/Ni, [same as (700)], epoxy potted rear, DB
(744)	90° PCB .120, Au/Ni, [same as (700)], (MIL-Spec), epoxy potted rear, DB
(746)	90° PCB .120, SnPb/Cu, (MIL-Spec), epoxy potted rear, DB
(747)	PCB stud stickout of .200, Sn/Ni, IO-P
(748)	PCB stud stickout of .145, Sn/Ni, epoxy potted rear, MB-P
(749)	PCB, epoxy potted rear, standard termination length, Sn/Ni

(750)	PCB stud stickout of .172 termination, Au/Ni, [same as (700)], RTV potted rear, MB-P
(751)	90° PCB stud stickout of .150, Sn/Ni, epoxy potted rear, PC
(752)	Au/Ni, epoxy potted rear, standard termination length
(753)	Solderless wrap .025 sq.; .665 stickout, Au/Ni, [same as (700)], epoxy potted rear, MB-W
(754)	PCB stud stickout of .172 termination, SnPb/Cu (MIL-Spec), MB-P
(757)	PCB stud, .391 stickout, matte tin, MB-P
(758)	PCB stud, .172 stickout, Au/Ni, [same as (700)], epoxy potted rear, MB-P
(760)	PCB stud, .192 stickout, Au/Ni (Mil-Spec), MB-P
(761)	90° PCB stud, .120 stickout, Sn/Ni, epoxy potted rear, DB
(762)	PCB stud, .145 stickout, Au/Ni (Mil-Spec), epoxy potted rear, MB-P
(763)	PCB stud, .145 stickout, SnPb/Cu (Mil-Spec), epoxy potted rear, MB-P
(764)	90° PCB stud, .150 stickout, SnPb/Cu (Mil-Spec), epoxy potted rear, DB & PC
(765)	PCB stud, stickout of .300 DB (90°), .300 MB-P, SnPb/Cu (Mil-Spec), epoxy potted rear
(766)	90° PCB stud, .120 stickout, Au/Ni (Mil-Spec), epoxy potted rear, DB
(767)	PCB stud, .192 stickout, Au/Ni (Mil-Spec), epoxy potted rear, MB-P
(768)	PCB stud, .172 stickout, Au/Ni (Mil-Spec), MB-P
(769)	90° PCB stud, .200 stickout, Au/Ni (Mil-Spec), DB
(770)	90° PCB stud, .260 stickout, Au/Ni (Mil-Spec), DB
(773)	90° PCB stud, .150 stickout, Au/Ni (Mil-Spec), RTV potted rear, PC & DB

#### **Accessories**

Amphenol® Low Mating Force Connectors are shipped less accessory items. Accessories may be ordered by either military or proprietary part numbers shown below:

Accessory Item	Series	Military Part Number	Proprietary Part Number	Qty. Required
Polarization Keys	MB, DB, IO, PC	M55302/78-02	10-285422-2	4*
Locking/Mounting Bushing	МВ	M55302/172-01	10-411196-3	2
Alternate Length Bushing (Longer)	MB	M55302/172-02	10-411196-5	2
Locking Bushing	PC	M55302/172-05	10-411196-4	2
Locking Screw, Plain	IO	M55302/172-04	10-502599	2
Locking Screw, Slotted	IO	-	10-502599-1	2
Locking Screw, Slotted (Low Profile)	IO	M55302/172-03	10-502599-2	2
Test Probe Kit	MB, DB, IO, PC	-	11-10400-22	1**

See pages 24-29 for more detailed information on these accessory items and how they are assembled into connectors.

<sup>\* 4</sup> Keys required per connector half, if used

\*\* One kit per connector gender is recommended

# connector row and cavity identification, contact arrangements

## BRUSH CONNECTOR ROW AND CAVITY IDENTIFICATION

Contact rows and cavities are identified with molded-in letters and numbers respectively and, depending on the connector style, are located either on the front, rear or both faces of the connector. See illustration at right.

Note: The brand name of Bendix may appear molded-in on connectors. As manufacturing molds are remade, the correct Amphenol name will replace the former Bendix name.

As shown in the second illustration at right, row identification is always at the radius end and begins with Row "A". Contact cavity identification always starts at radius end and begins with cavity #6 and then every fifth cavity thereafter, except for arrangements consisting of 10 contacts per row, which lack numerals. Up to every 9 contact locations at the high numeral end of the contact row will not be identified.

#### **Mother Board and PC Connectors**


Contact rows are identified on the <u>front</u> and <u>rear</u> faces. Contact cavities are identified on the rear face.

#### **Daughter Board Connectors**


Contact rows and cavities are identified on the front face.

#### **Input/Output Connectors**

Contact rows and cavities are identified on the rear face.




CONTACT ROWS AND CAVITIES ARE IDENTIFIED WITH MOLDED-IN LETTERS AND NUMBERS (FRONT FACE OF DAUGHTER BOARD SHOWN)

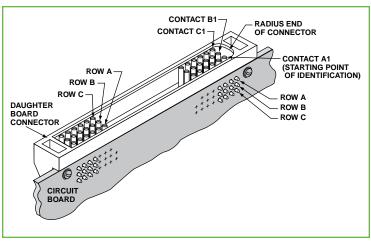

IDENTIFICATION STARTS AT THE RADIUS END OF THE CONNECTOR

#### **Contacts**

Contacts are supplied with MB, DB, IO and PC Connector Series assemblies as ordered.

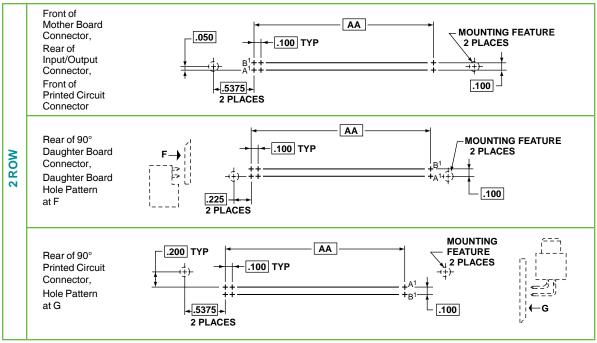


#### Designates Basic Dimension.

Consult Amphenol drawing for solderless wrap contact fixturing (datum) hole locations to facilitate connector alignment.

## 2 ROW 10 per Row


Total Contacts	AA
20	.900
30	1.400
40	1.900
50	2.400
60	2.900
70	3.400
80	3.900
90	4.400
100	4.900
110	5.400
120	5.900
130	6.400
140	6.900
150	7.400
160	7.900
170	8.400
180	8.900
190	9.400
200	9.900

## contact arrangements, cont.

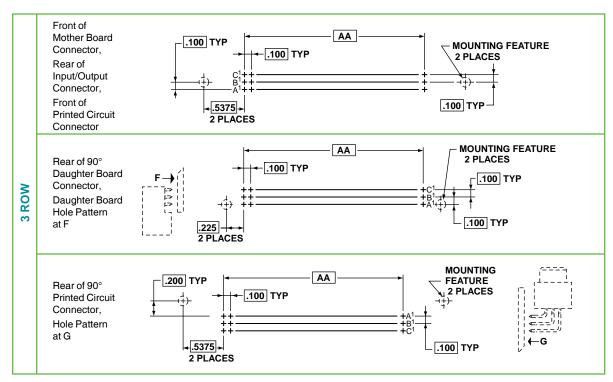

## 3 ROW 10 per Row

10 pc	IXOW
Total Contacts	AA
30	.900
45	1.400
60	1.900
75	2.400
90	2.900
105	3.400
120	3.900
135	4.400
150	4.900
165	5.400
180	5.900
195	6.400
210	6.900
225	7.400
240	7.900
255	8.400
270	8.900
285	9.400
300	9.900

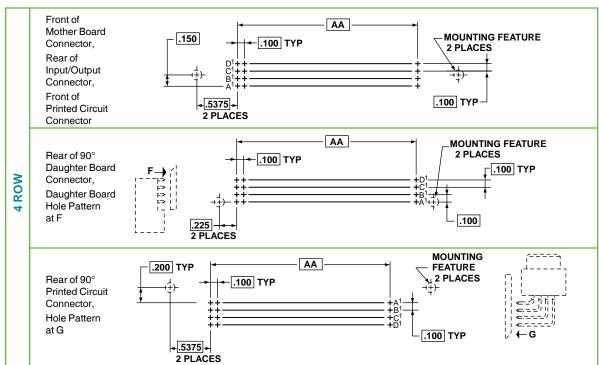


## 4 ROW 10 Per Row

.0.0	
Total Contacts	AA
40	.900
60	1.400
80	1.900
100	2.400
120	2.900
140	3.400
160	3.900
180	4.400
200	4.900
220	5.400
240	5.900
260	6.400
280	6.900
300	7.400
320	7.900
340	8.400
360	8.900
380	9.400
400	9.900

Designates Basic Dimension.

Consult Amphenol drawing for solderless wrap contact fixturing (datum) hole locations to facilitate connector alignment.

## mother board connector

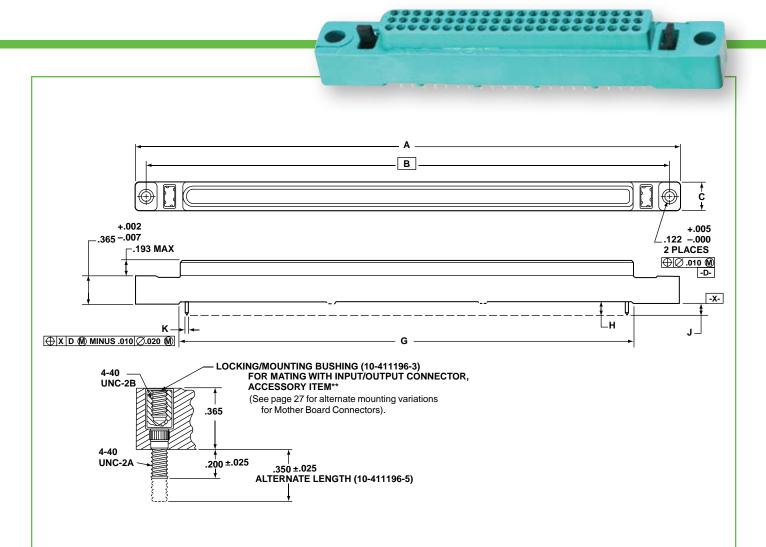

## MATES WITH DB AND IO SERIES CONNECTORS

Notes:

When mating with DB connector, a total of .035 inch minimum radial pilot is available for connector body alignment.

All dimensions for reference only.

Polarization keys are not supplied as part of MB Connector Series assemblies. See Accessories How to Order, page 5 and further description, page 24.

\*\* Locking/mounting bushings are not supplied as part of MB Connector Series assemblies. See Accessories How to Order, page 5 and further description on page 27.

Designates Basic Dimension

Consult Amphenol drawing for solderless wrap contact fixturing (datum) hole locations to facilitate connector alignment.

Contact Data				
Description	Termination Style Letter	H ±.020	J ±.020	K ±.002
Round PCB Stud Solder Termination	Р	.148	.113	.021 Dia.
	P-(702)	.180	.145	.021 Dia.
	P-(709)	.335	.300	.021 Dia.
Square	W	.542	.507	.025 Sq.
Solderless Wrap Termination	W-(710)	.700	.665	.025 Sq.

NOTE: Other variations available - see pages 4 and 5, or consult Amphenol Aerospace.

# Low Mating Force mother board connector 2 row contact arrangements

Number of Contacts	MB Number*	A Max.	В	C Max.	G Min.
020	MB2-020(*)	2.295	1.975	.390	1.040
022	MB2-022(*)	2.395	2.075	.390	1.140
024	MB2-024(*)	2.495	2.175	.390	1.240
026	MB2-026(*)	2.595	2.275	.390	1.340
028	MB2-028(*)	2.695	2.375	.390	1.440
030	MB2-030(*)	2.795	2.475	.390	1.540
032	MB2-032(*)	2.895	2.575	.390	1.640
034	MB2-034(*)	2.995	2.675	.390	1.740
036	MB2-036(*)	3.095	2.775	.390	1.840
038	MB2-038(*)	3.195	2.875	.390	1.940
040	MB2-040(*)	3.295	2.975	.390	2.040
042	MB2-042(*)	3.395	3.075	.390	2.140
044	MB2-044(*)	3.495	3.175	.390	2.240
046	MB2-046(*)	3.595	3.275	.390	2.340
048	MB2-048(*)	3.695	3.375	.390	2.440
050	MB2-050(*)	3.795	3.475	.390	2.540
052	MB2-052(*)	3.895	3.575	.390	2.640
054	MB2-054(*)	3.995	3.675	.390	2.740
056	MB2-056(*)	4.095	3.775	.390	2.840
058	MB2-058(*)	4.195	3.875	.390	2.940
060	MB2-060(*)	4.295	3.975	.390	3.040
062	MB2-062(*)	4.395	4.075	.390	3.140
064	MB2-064(*)	4.495	4.175	.390	3.240
066	MB2-066(*)	4.595	4.275	.390	3.340
068	MB2-068(*)	4.695	4.375	.390	3.440
070	MB2-070(*)	4.795	4.475	.390	3.540
072	MB2-072(*)	4.895	4.575	.390	3.640
074	MB2-074(*)	4.995	4.675	.390	3.740
076	MB2-076(*)	5.095	4.775	.390	3.840
078	MB2-078(*)	5.195	4.875	.390	3.940
080	MB2-080(*)	5.295	4.975	.390	4.040
082	MB2-082(*)	5.395	5.075	.390	4.140
084	MB2-084(*)	5.495	5.175	.390	4.240
086	MB2-086(*)	5.595	5.275	.390	4.340
088	MB2-088(*)	5.695	5.375	.390	4.440
090	MB2-090(*)	5.795	5.475	.390	4.540
092	MB2-092(*)	5.895	5.575	.390	4.640
094	MB2-094(*)	5.995	5.675	.390	4.740
096	MB2-096(*)	6.095	5.775	.390	4.840
098	MB2-098(*)	6.195	5.875	.390	4.940
100	MB2-100(*)	6.295	5.975	.390	5.040
102	MB2-102(*)	6.395	6.075	.390	5.140
104	MB2-104(*)	6.495	6.175	.390	5.240
106	MB2-106(*)	6.595	6.275	.390	5.340
108	MB2-108(*)	6.695	6.375	.390	5.440
110	MB2-110(*)	6.795	6.475	.390	5.540

Number					
of	MB	Α	В	C	G
Contacts	Number*	Max.		Max.	Min.
112	MB2-112(*)	6.895	6.575	.390	5.640
114	MB2-114(*)	6.995	6.675	.390	5.740
116	MB2-116(*)	7.095	6.775	.390	5.840
118	MB2-118(*)	7.195	6.875	.390	5.940
120	MB2-120(*)	7.295	6.975	.390	6.040
122	MB2-122(*)	7.395	7.075	.390	6.140
124	MB2-124(*)	7.495	7.175	.390	6.240
126	MB2-126(*)	7.595	7.275	.390	6.340
128	MB2-128(*)	7.695	7.375	.390	6.440
130	MB2-130(*)	7.795	7.475	.390	6.540
132	MB2-132(*)	7.895	7.575	.390	6.640
134	MB2-134(*)	7.995	7.675	.390	6.740
136	MB2-136(*)	8.095	7.775	.390	6.840
138	MB2-138(*)	8.195	7.875	.390	6.940
140	MB2-140(*)	8.295	7.975	.390	7.040
142	MB2-142(*)	8.395	8.075	.390	7.140
144	MB2-144(*)	8.495	8.175	.390	7.240
146	MB2-146(*)	8.595	8.275	.390	7.340
148	MB2-148(*)	8.695	8.375	.390	7.440
150	MB2-150(*)	8.795	8.475	.390	7.540
152	MB2-152(*)	8.895	8.575	.390	7.640
154	MB2-154(*)	8.995	8.675	.390	7.740
156	MB2-156(*)	9.095	8.775	.390	7.840
158	MB2-158(*)	9.195	8.875	.390	7.940
160	MB2-160(*)	9.295	8.975	.390	8.040
162	MB2-162(*)	9.395	9.075	.390	8.140
164	MB2-164(*)	9.495	9.175	.390	8.240
166	MB2-166(*)	9.595	9.275	.390	8.340
168	MB2-168(*)	9.695	9.375	.390	8.440
170	MB2-170(*)	9.795	9.475	.390	8.540
172	MB2-172(*)	9.895	9.575	.390	8.640
174	MB2-174(*)	9.995	9.675	.390	8.740
176	MB2-176(*)	10.095	9.775	.390	8.840
178	MB2-178(*)	10.195	9.875	.390	8.940
180	MB2-180(*)	10.295	9.975	.390	9.040
182	MB2-182(*)	10.395	10.075	.390	9.140
184	MB2-184(*)	10.495	10.175	.390	9.240
186	MB2-186(*)	10.595	10.275	.390	9.340
188	MB2-188(*)	10.695	10.375	.390	9.440
190	MB2-190(*)	10.795	10.475	.390	9.540
192	MB2-192(*)	10.895	10.575	.390	9.640
194	MB2-194(*)	10.995	10.675	.390	9.740
196	MB2-196(*)	11.095	10.775	.390	9.840
198	MB2-198(*)	11.195	10.875	.390	9.940
200	MB2-200(*)	11.295	10.975	.390	10.040

<sup>\*</sup>See How to Order, pages 3, 4 and 5.

# Low Mating Force mother board connector 3 row contact arrangements

Number of Contacts	MB Number*	A Max.	В	C Max.	G Min.
030	MB3-030(*)	2.295	1.975	.490	1.040
033	MB3-033(*)	2.395	2.075	.490	1.140
036	MB3-036(*)	2.495	2.175	.490	1.240
039	MB3-039(*)	2.595	2.275	.490	1.340
042	MB3-042(*)	2.695	2.375	.490	1.440
045	MB3-045(*)	2.795	2.475	.490	1.540
048	MB3-048(*)	2.895	2.575	.490	1.640
051	MB3-051(*)	2.995	2.675	.490	1.740
054	MB3-054(*)	3.095	2.775	.490	1.840
057	MB3-057(*)	3.195	2.875	.490	1.940
060	MB3-060(*)	3.295	2.975	.490	2.040
063	MB3-063(*)	3.395	3.075	.490	2.140
066	MB3-066(*)	3.495	3.175	.490	2.240
069	MB3-069(*)	3.595	3.275	.490	2.340
072	MB3-072(*)	3.695	3.375	.490	2.440
075	MB3-075(*)	3.795	3.475	.490	2.540
078	MB3-078(*)	3.895	3.575	.490	2.640
081	MB3-081(*)	3.995	3.675	.490	2.740
084	MB3-084(*)	4.095	3.775	.490	2.840
087	MB3-087(*)	4.195	3.875	.490	2.940
090	MB3-090(*)	4.295	3.975	.490	3.040
093	MB3-093(*)	4.395	4.075	.490	3.140
096	MB3-096(*)	4.495	4.175	.490	3.240
099	MB3-099(*)	4.595	4.275	.490	3.340
102	MB3-102(*)	4.695	4.375	.490	3.440
105	MB3-105(*)	4.795	4.475	.490	3.540
108	MB3-108(*)	4.895	4.575	.490	3.640
111	MB3-111(*)	4.995	4.675	.490	3.740
114	MB3-114(*)	5.095	4.775	.490	3.840
117	MB3-117(*)	5.195	4.875	.490	3.940
120	MB3-120(*)	5.295	4.975	.490	4.040
123	MB3-123(*)	5.395	5.075	.490	4.140
126	MB3-126(*)	5.495	5.175	.490	4.240
129	MB3-129(*)	5.595	5.275	.490	4.340
132	MB3-132(*)	5.695	5.375	.490	4.440
135	MB3-135(*)	5.795	5.475	.490	4.540
138	MB3-138(*)	5.895	5.575	.490	4.640
141	MB3-141(*)	5.995	5.675	.490	4.740
144	MB3-144(*)	6.095	5.775	.490	4.840
147	MB3-147(*)	6.195	5.875	.490	4.940
150	MB3-150(*)	6.295	5.975	.490	5.040
153	MB3-153(*)	6.395	6.075	.490	5.140
156	MB3-156(*)	6.495	6.175	.490	5.240
159	MB3-159(*)	6.595	6.275	.490	5.340
162	MB3-162(*)	6.695	6.375	.490	5.440
165	MB3-165(*)	6.795	6.475	.490	5.540

Number of	МВ	Α	В	С	G
Contacts	Number*	Max.		Max.	Min.
168	MB3-168(*)	6.895	6.575	.490	5.640
171	MB3-171(*)	6.995	6.675	.490	5.740
174	MB3-174(*)	7.095	6.775	.490	5.840
177	MB3-177(*)	7.195	6.875	.490	5.940
180	MB3-180(*)	7.295	6.975	.490	6.040
183	MB3-183(*)	7.395	7.075	.490	6.140
186	MB3-186(*)	7.495	7.175	.490	6.240
189	MB3-189(*)	7.595	7.275	.490	6.340
192	MB3-192(*)	7.695	7.375	.490	6.440
195	MB3-195(*)	7.795	7.475	.490	6.540
198	MB3-198(*)	7.895	7.575	.490	6.640
201	MB3-201(*)	7.995	7.675	.490	6.740
204	MB3-204(*)	8.095	7.775	.490	6.840
207	MB3-207(*)	8.195	7.875	.490	6.940
210	MB3-210(*)	8.295	7.975	.490	7.040
213	MB3-213(*)	8.395	8.075	.490	7.140
216	MB3-216(*)	8.495	8.175	.490	7.240
219	MB3-219(*)	8.595	8.275	.490	7.340
222	MB3-222(*)	8.695	8.375	.490	7.440
225	MB3-225(*)	8.795	8.475	.490	7.540
228	MB3-228(*)	8.895	8.575	.490	7.640
231	MB3-231(*)	8.995	8.675	.490	7.740
234	MB3-234(*)	9.095	8.775	.490	7.840
237	MB3-237(*)	9.195	8.875	.490	7.940
240	MB3-240(*)	9.295	8.975	.490	8.040
243	MB3-243(*)	9.395	9.075	.490	8.140
246	MB3-246(*)	9.495	9.175	.490	8.240
249	MB3-249(*)	9.595	9.275	.490	8.340
252	MB3-252(*)	9.695	9.375	.490	8.440
255	MB3-255(*)	9.795	9.475	.490	8.540
258	MB3-258(*)	9.895	9.575	.490	8.640
261	MB3-261(*)	9.995	9.675	.490	8.740
264	MB3-264(*)	10.095	9.775	.490	8.840
267	MB3-267(*)	10.195	9.875	.490	8.940
270	MB3-270(*)	10.295	9.975	.490	9.040
273	MB3-273(*)	10.395	10.075	.490	9.140
276	MB3-276(*)	10.495	10.175	.490	9.240
279	MB3-279(*)	10.595	10.275	.490	9.340
282	MB3-282(*)	10.695	10.375	.490	9.440
285	MB3-285(*)	10.795	10.475	.490	9.540
288	MB3-288(*)	10.895	10.575	.490	9.640
291	MB3-291(*)	10.995	10.675	.490	9.740
294	MB3-294(*)	11.095	10.775	.490	9.840
297	MB3-297(*)	11.195	10.875	.490	9.940
300	MB3-300(*)	11.295	10.975	.490	10.040

<sup>\*</sup>See How to Order, pages 3, 4 and 5.


# Low Mating Force mother board connector 4 row contact arrangements


Number of Contacts	MB Number*	A Max.	В	C Max.	G Min.
040	MB4-040(*)	2.295	1.975	.590	1.040
040	MB4-044(*)	2.395	2.075	.590	1.140
044	MB4-044(*)	2.495	2.175	.590	1.240
052	MB4-048(*)	2.495	2.173	.590	1.340
056	MB4-052(*)	2.695	2.375	.590	1.440
060	MB4-060(*)	2.795	2.475	.590	1.540
064	MB4-064(*)	2.895	2.575	.590	1.640
068	MB4-068(*)	2.995	2.675	.590	1.740
072	MB4-072(*)	3.095	2.775	.590	1.840
076	MB4-076(*)	3.195	2.875	.590	1.940
080	MB4-080(*)	3.295	2.975	.590	2.040
084	MB4-084(*)	3.395	3.075	.590	2.140
088	MB4-088(*)	3.495	3.175	.590	2.240
092	MB4-092(*)	3.595	3.275	.590	2.340
096	MB4-096(*)	3.695	3.375	.590	2.440
100	MB4-100(*)	3.795	3.475	.590	2.540
104	MB4-104(*)	3.895	3.575	.590	2.640
108	MB4-108(*)	3.995	3.675	.590	2.740
112	MB4-112(*)	4.095	3.775	.590	2.840
116	MB4-116(*)	4.195	3.875	.590	2.940
120	MB4-120(*)	4.295	3.975	.590	3.040
124	MB4-124(*)	4.395	4.075	.590	3.140
128	MB4-128(*)	4.495	4.175	.590	3.240
132	MB4-132(*)	4.595	4.275	.590	3.340
136	MB4-136(*)	4.695	4.375	.590	3.440
140	MB4-140(*)	4.795	4.475	.590	3.540
144	MB4-144(*)	4.895	4.575	.590	3.640
148	MB4-148(*)	4.995	4.675	.590	3.740
152	MB4-152(*)	5.095	4.775	.590	3.840
156	MB4-156(*)	5.195	4.875	.590	3.940
160	MB4-160(*)	5.295	4.975	.590	4.040
164	MB4-164(*)	5.395	5.075	.590	4.140
168	MB4-168(*)	5.495	5.175	.590	4.240
172	MB4-172(*)	5.595	5.275	.590	4.340
176	MB4-176(*)	5.695	5.375	.590	4.440
180	MB4-180(*)	5.795	5.475	.590	4.540
184	MB4-184(*)	5.895	5.575	.590	4.640
188	MB4-188(*)	5.995	5.675	.590	4.740
192	MB4-192(*)	6.095	5.775	.590	4.840
196	MB4-196(*)	6.195	5.875	.590	4.940
200	MB4-200(*)	6.295	5.975	.590	5.040
204	MB4-204(*)	6.395	6.075	.590	5.140
208	MB4-208(*)	6.495	6.175	.590	5.240
212	MB4-212(*)	6.595	6.275	.590	5.340
216	MB4-216(*)	6.695	6.375	.590	5.440
220	MB4-220(*)	6.795	6.475	.590	5.540

Number					
of	MB	A	В	С	G
Contacts	Number*	Max.		Max.	Min.
224	MB4-224(*)	6.895	6.575	.590	5.640
228	MB4-228(*)	6.995	6.675	.590	5.740
232	MB4-232(*)	7.095	6.775	.590	5.840
236	MB4-236(*)	7.195	6.875	.590	5.940
240	MB4-240(*)	7.295	6.975	.590	6.040
244	MB4-244(*)	7.395	7.075	.590	6.140
248	MB4-248(*)	7.495	7.175	.590	6.240
252	MB4-252(*)	7.595	7.275	.590	6.340
256	MB4-256(*)	7.695	7.375	.590	6.440
260	MB4-260(*)	7.795	7.475	.590	6.540
264	MB4-264(*)	7.895	7.575	.590	6.640
268	MB4-268(*)	7.995	7.675	.590	6.740
272	MB4-272(*)	8.095	7.775	.590	6.840
276	MB4-276(*)	8.195	7.875	.590	6.940
280	MB4-280(*)	8.295	7.975	.590	7.040
284	MB4-284(*)	8.395	8.075	.590	7.140
288	MB4-288(*)	8.495	8.175	.590	7.240
292	MB4-292(*)	8.595	8.275	.590	7.340
296	MB4-296(*)	8.695	8.375	.590	7.440
300	MB4-300(*)	8.795	8.475	.590	7.540
304	MB4-304(*)	8.895	8.575	.590	7.640
308	MB4-308(*)	8.995	8.675	.590	7.740
312	MB4-312(*)	9.095	8.775	.590	7.840
316	MB4-316(*)	9.195	8.875	.590	7.940
320	MB4-320(*)	9.295	8.975	.590	8.040
324	MB4-324(*)	9.395	9.075	.590	8.140
328	MB4-328(*)	9.495	9.175	.590	8.240
332	MB4-332(*)	9.595	9.275	.590	8.340
336	MB4-336(*)	9.695	9.375	.590	8.440
340	MB4-340(*)	9.795	9.475	.590	8.540
344	MB4-344(*)	9.895	9.575	.590	8.640
348	MB4-348(*)	9.995	9.675	.590	8.740
352	MB4-352(*)	10.095	9.775	.590	8.840
356	MB4-356(*)	10.195	9.875	.590	8.940
360	MB4-360(*)	10.295	9.975	.590	9.040
364	MB4-364(*)	10.395	10.075	.590	9.140
368	MB4-368(*)	10.495	10.175	.590	9.240
372	MB4-372(*)	10.595	10.275	.590	9.340
376	MB4-376(*)	10.695	10.375	.590	9.440
380	MB4-380(*)	10.795	10.475	.590	9.540
384	MB4-384(*)	10.895	10.575	.590	9.640
388	MB4-388(*)	10.995	10.675	.590	9.740
392	MB4-392(*)	11.095	10.775	.590	9.840
396	MB4-396(*)	11.195	10.775	.590	9.940
400	MB4-400(*)	11.295	10.975	.590	10.040
+00		71.200	10.070	.000	10.040

<sup>\*</sup>See How to Order, pages 3, 4 and 5.

daughter board connector

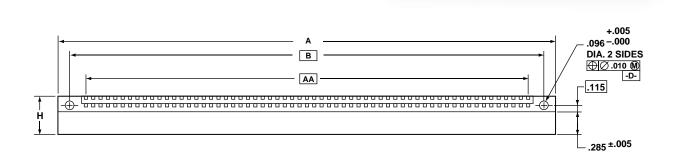

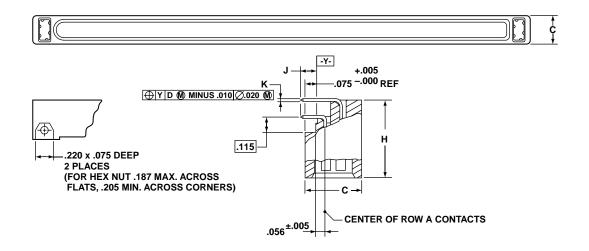

## MATES WITH MB AND PC SERIES CONNECTORS

Notes:

When mating with MB or PC connector, a total of .035 inch minimum radial pilot is available for connector body alignment.

All dimensions for reference only.

Polarization keys are not supplied as part of DB Connector Series assemblies. See Accessories How to Order, page 5 and further description, page 24.

Designates Basic Dimension

Contact Data							
Description	Termination Style Letter Arrangemer Row		J ±.020	K ±.002			
	Р	Α	.085	.021 Dia.			
	Р	В	.085	.021 Dia.			
	Р	С	.085	.021 Dia.			
	Р	D	.085	.021 Dia.			
Round PCB	P-(705)	Α	.120	.021 Dia.			
Stud, 90°	P-(705)	В	.120	.021 Dia.			
Solder	P-(705)	С	.120	.021 Dia.			
Termination	P-(705)	D	.120	.021 Dia.			
	P-(709)	Α	.300	.021 Dia.			
	P-(709)	В	.300	.021 Dia.			
	P-(709)	С	.300	.021 Dia.			
	P-(709)	D	.300	.021 Dia.			

NOTE: Other variations available - see pages 4 and 5, or consult Amphenol Aerospace.

# Low Mating Force daughter board connector 2 row contact arrangements

Number of Contacts	DB Number*	A Max.	В	C Max.	H Max.	AA
020	DB2-020P	1.680	1.350	.375	.545	.900
022	DB2-022P	1.780	1.450	.375	.545	1.000
024	DB2-024P	1.880	1.550	.375	.545	1.100
026	DB2-026P	1.980	1.650	.375	.545	1.200
028	DB2-028P	2.080	1.750	.375	.545	1.300
030	DB2-030P	2.180	1.850	.375	.545	1.400
032	DB2-032P	2.280	1.950	.375	.545	1.500
034	DB2-034P	2.380	2.050	.375	.545	1.600
036	DB2-036P	2.480	2.150	.375	.545	1.700
038	DB2-038P	2.580	2.250	.375	.545	1.800
040	DB2-040P	2.680	2.350	.375	.545	1.900
042	DB2-042P	2.780	2.450	.375	.545	2.000
044	DB2-044P	2.880	2.550	.375	.545	2.100
046	DB2-046P	2.980	2.650	.375	.545	2.200
048	DB2-048P	3.080	2.750	.375	.545	2.300
050	DB2-050P	3.180	2.850	.375	.545	2.400
052	DB2-052P	3.280	2.950	.375	.545	2.500
054	DB2-054P	3.380	3.050	.375	.545	2.600
056	DB2-056P	3.480	3.150	.375	.545	2.700
058	DB2-058P	3.580	3.250	.375	.545	2.800
060	DB2-060P	3.680	3.350	.375	.545	2.900
062	DB2-062P	3.780	3.450	.375	.545	3.000
064	DB2-064P	3.880	3.550	.375	.545	3.100
066	DB2-066P	3.980	3.650	.375	.545	3.200
068	DB2-068P	4.080	3.750	.375	.545	3.300
070	DB2-070P	4.180	3.850	.375	.545	3.400
072	DB2-072P	4.280	3.950	.375	.545	3.500
074	DB2-074P	4.380	4.050	.375	.545	3.600
076	DB2-076P	4.480	4.150	.375	.545	3.700
078	DB2-078P	4.580	4.250	.375	.545	3.800
080	DB2-080P	4.680	4.350	.375	.545	3.900
082	DB2-082P	4.780	4.450	.375	.545	4.000
084	DB2-084P	4.880	4.550	.375	.545	4.100
086	DB2-086P	4.980	4.650	.375	.545	4.200
088	DB2-088P	5.080	4.750	.375	.545	4.300
090	DB2-090P	5.180	4.850	.375	.545	4.400
092	DB2-092P	5.280	4.950	.375	.545	4.500
094	DB2-094P	5.380	5.050	.375	.545	4.600
096	DB2-096P	5.480	5.150	.375	.545	4.700
098	DB2-098P	5.580	5.250	.375	.545	4.800
100	DB2-100P	5.680	5.350	.375	.545	4.900
102	DB2-102P	5.780	5.450	.375	.545	5.000
104	DB2-104P	5.880	5.550	.375	.545	5.100
106	DB2-106P	5.980	5.650	.375	.545	5.200
108	DB2-108P	6.080	5.750	.375	.545	5.300
110	DB2-110P	6.180	5.850	.375	.545	5.400

		1				
Number of Contacts	DB Number*	A Max.	В	C Max.	H Max.	AA
112	DB2-112P	6.280	5.950	.375	.545	5.500
114	DB2-114P	6.380	6.050	.375	.545	5.600
116	DB2-116P	6.480	6.150	.375	.545	5.700
118	DB2-118P	6.580	6.250	.375	.545	5.800
120	DB2-120P	6.680	6.350	.375	.545	5.900
122	DB2-122P	6.780	6.450	.375	.545	6.000
124	DB2-124P	6.880	6.550	.375	.545	6.100
126	DB2-126P	6.980	6.650	.375	.545	6.200
128	DB2-128P	7.080	6.750	.375	.545	6.300
130	DB2-130P	7.180	6.850	.375	.545	6.400
132	DB2-132P	7.280	6.950	.375	.545	6.500
134	DB2-134P	7.380	7.050	.375	.545	6.600
136	DB2-136P	7.480	7.150	.375	.545	6.700
138	DB2-138P	7.580	7.250	.375	.545	6.800
140	DB2-140P	7.680	7.350	.375	.545	6.900
142	DB2-142P	7.780	7.450	.375	.545	7.000
144	DB2-144P	7.880	7.550	.375	.545	7.100
146	DB2-146P	7.980	7.650	.375	.545	7.200
148	DB2-148P	8.080	7.750	.375	.545	7.300
150	DB2-150P	8.180	7.850	.375	.545	7.400
152	DB2-152P	8.280	7.950	.375	.545	7.500
154	DB2-154P	8.380	8.050	.375	.545	7.600
156	DB2-156P	8.480	8.150	.375	.545	7.700
158	DB2-158P	8.580	8.250	.375	.545	7.800
160	DB2-160P	8.680	8.350	.375	.545	7.900
162	DB2-162P	8.780	8.450	.375	.545	8.000
164	DB2-164P	8.880	8.550	.375	.545	8.100
166	DB2-166P	8.980	8.650	.375	.545	8.200
168	DB2-168P	9.080	8.750	.375	.545	8.300
170	DB2-170P	9.180	8.850	.375	.545	8.400
172	DB2-172P	9.280	8.950	.375	.545	8.500
174	DB2-174P	9.380	9.050	.375	.545	8.600
176	DB2-176P	9.480	9.150	.375	.545	8.700
178	DB2-178P	9.580	9.250	.375	.545	8.800
180	DB2-180P	9.680	9.350	.375	.545	8.900
182	DB2-182P	9.780	9.450	.375	.545	9.000
184	DB2-184P	9.880	9.550	.375	.545	9.100
186	DB2-186P	9.980	9.650	.375	.545	9.200
188	DB2-188P	10.080	9.750	.375	.545	9.300
190	DB2-190P	10.180	9.850	.375	.545	9.400
192	DB2-192P	10.280	9.950	.375	.545	9.500
194	DB2-194P	10.380	10.050	.375	.545	9.600
196	DB2-196P	10.480	10.150	.375	.545	9.700
198	DB2-198P	10.580	10.250	.375	.545	9.800
200	DB2-200P	10.680	10.350	.375	.545	9.900
		1 and E				

<sup>\*</sup>See How to Order, pages 3, 4 and 5

# daughter board connector 3 row contact arrangements

Number of Contacts	DB Number*	A Max.	В	C Max.	H Max.	AA
030	DB3-030P	1.680	1.350	.475	.645	.900
033	DB3-033P	1.780	1.450	.475	.645	1.000
036	DB3-036P	1.880	1.550	.475	.645	1.100
039	DB3-039P	1.980	1.650	.475	.645	1.200
042	DB3-042P	2.080	1.750	.475	.645	1.300
045	DB3-045P	2.180	1.850	.475	.645	1.400
048	DB3-048P	2.280	1.950	.475	.645	1.500
051	DB3-051P	2.380	2.050	.475	.645	1.600
054	DB3-054P	2.480	2.150	.475	.645	1.700
057	DB3-057P	2.580	2.250	.475	.645	1.800
060	DB3-060P	2.680	2.350	.475	.645	1.900
063	DB3-063P	2.780	2.450	.475	.645	2.000
066	DB3-066P	2.880	2.550	.475	.645	2.100
069	DB3-069P	2.980	2.650	.475	.645	2.200
072	DB3-072P	3.080	2.750	.475	.645	2.300
075	DB3-075P	3.180	2.850	.475	.645	2.400
078	DB3-078P	3.280	2.950	.475	.645	2.500
081	DB3-081P	3.380	3.050	.475	.645	2.600
084	DB3-084P	3.480	3.150	.475	.645	2.700
087	DB3-087P	3.580	3.250	.475	.645	2.800
090	DB3-090P	3.680	3.350	.475	.645	2.900
093	DB3-093P	3.780	3.450	.475	.645	3.000
096	DB3-096P	3.880	3.550	.475	.645	3.100
099	DB3-099P	3.980	3.650	.475	.645	3.200
102	DB3-102P	4.080	3.750	.475	.645	3.300
105	DB3-105P	4.180	3.850	.475	.645	3.400
108	DB3-108P	4.280	3.950	.475	.645	3.500
111	DB3-111P	4.380	4.050	.475	.645	3.600
114	DB3-114P	4.480	4.150	.475	.645	3.700
117	DB3-117P	4.580	4.250	.475	.645	3.800
120	DB3-120P	4.680	4.350	.475	.645	3.900
123	DB3-123P	4.780	4.450	.475	.645	4.000
126	DB3-126P	4.880	4.550	.475	.645	4.100
129	DB3-129P	4.980	4.650	.475	.645	4.200
132	DB3-132P	5.080	4.750	.475	.645	4.300
135	DB3-135P	5.180	4.850	.475	.645	4.400
138	DB3-138P	5.280	4.950	.475	.645	4.500
141	DB3-141P	5.380	5.050	.475	.645	4.600
144	DB3-144P	5.480	5.150	.475	.645	4.700
147	DB3-147P	5.580	5.250	.475	.645	4.800
150	DB3-150P	5.680	5.350	.475	.645	4.900
153	DB3-153P	5.780	5.450	.475	.645	5.000
156	DB3-156P	5.880	5.550	.475	.645	5.100
159	DB3-159P	5.980	5.650	.475	.645	5.200
162	DB3-162P	6.080	5.750	.475	.645	5.300
165	DB3-165P	6.180	5.850	.475	.645	5.400

Number of Contacts	DB Number*	A Max.	В	C Max.	H Max.	AA
168	DB3-168P	6.280	5.950	.475	.645	5.500
171	DB3-171P	6.380	6.050	.475	.645	5.600
174	DB3-174P	6.480	6.150	.475	.645	5.700
177	DB3-177P	6.580	6.250	.475	.645	5.800
180	DB3-180P	6.680	6.350	.475	.645	5.900
183	DB3-183P	6.780	6.450	.475	.645	6.000
186	DB3-186P	6.880	6.550	.475	.645	6.100
189	DB3-189P	6.980	6.650	.475	.645	6.200
192	DB3-192P	7.080	6.750	.475	.645	6.300
195	DB3-195P	7.180	6.850	.475	.645	6.400
198	DB3-198P	7.280	6.950	.475	.645	6.500
201	DB3-201P	7.380	7.050	.475	.645	6.600
204	DB3-204P	7.480	7.150	.475	.645	6.700
207	DB3-207P	7.580	7.250	.475	.645	6.800
210	DB3-210P	7.680	7.350	.475	.645	6.900
213	DB3-213P	7.780	7.450	.475	.645	7.000
216	DB3-216P	7.880	7.550	.475	.645	7.100
219	DB3-219P	7.980	7.650	.475	.645	7.200
222	DB3-222P	8.080	7.750	.475	.645	7.300
225	DB3-225P	8.180	7.850	.475	.645	7.400
228	DB3-228P	8.280	7.950	.475	.645	7.500
231	DB3-231P	8.380	8.050	.475	.645	7.600
234	DB3-234P	8.480	8.150	.475	.645	7.700
237	DB3-237P	8.580	8.250	.475	.645	7.800
240	DB3-240P	8.680	8.350	.475	.645	7.900
243	DB3-243P	8.780	8.450	.475	.645	8.000
246	DB3-246P	8.880	8.550	.475	.645	8.100
249	DB3-249P	8.980	8.650	.475	.645	8.200
252	DB3-252P	9.080	8.750	.475	.645	8.300
255	DB3-255P	9.180	8.850	.475	.645	8.400
258	DB3-258P	9.280	8.950	.475	.645	8.500
261	DB3-261P	9.380	9.050	.475	.645	8.600
264	DB3-264P	9.480	9.150	.475	.645	8.700
267	DB3-267P	9.580	9.250	.475	.645	8.800
270	DB3-270P	9.680	9.350	.475	.645	8.900
273	DB3-273P	9.780	9.450	.475	.645	9.000
276	DB3-276P	9.880	9.550	.475	.645	9.100
279	DB3-279P	9.980	9.650	.475	.645	9.200
282	DB3-282P	10.080	9.750	.475	.645	9.300
285	DB3-285P	10.180	9.850	.475	.645	9.400
288	DB3-288P	10.280	9.950	.475	.645	9.500
291	DB3-291P	10.380	10.050	.475	.645	9.600
294	DB3-294P	10.480	10.150	.475	.645	9.700
297	DB3-397P	10.580	10.250	.475	.645	9.800
300	DB3-300P	10.680	10.350	.475	.645	9.900

<sup>\*</sup>See How to Order, pages 3, 4 and 5

# daughter board connector 4 row contact arrangements


Number	DB	А	В	С	Н	AA
of Contacts	Number*	Max.	Ь	Max.	Max.	AA
040	DB4-040P	1.680	1.350	.575	.745	.900
044	DB4-044P	1.780	1.450	.575	.745	1.000
048	DB4-048P	1.880	1.550	.575	.745	1.100
052	DB4-052P	1.980	1.650	.575	.745	1.200
056	DB4-056P	2.080	1.750	.575	.745	1.300
060	DB4-060P	2.180	1.850	.575	.745	1.400
064	DB4-064P	2.280	1.950	.575	.745	1.500
068	DB4-068P	2.380	2.050	.575	.745	1.600
072	DB4-072P	2.480	2.150	.575	.745	1.700
076	DB4-076P	2.580	2.250	.575	.745	1.800
080	DB4-080P	2.680	2.350	.575	.745	1.900
084	DB4-084P	2.780	2.450	.575	.745	2.000
088	DB4-088P	2.880	2.550	.575	.745	2.100
092	DB4-092P	2.980	2.650	.575	.745	2.200
096	DB4-096P	3.080	2.750	.575	.745	2.300
100	DB4-100P	3.180	2.850	.575	.745	2.400
104	DB4-104P	3.280	2.950	.575	.745	2.500
108	DB4-108P	3.380	3.050	.575	.745	2.600
112	DB4-112P	3.480	3.150	.575	.745	2.700
116	DB4-116P	3.580	3.250	.575	.745	2.800
120	DB4-120P	3.680	3.350	.575	.745	2.900
124	DB4-124P	3.780	3.450	.575	.745	3.000
128	DB4-128P	3.880	3.550	.575	.745	3.100
132	DB4-132P	3.980	3.650	.575	.745	3.200
136	DB4-136P	4.080	3.750	.575	.745	3.300
140	DB4-140P	4.180	3.850	.575	.745	3.400
144	DB4-144P	4.280	3.950	.575	.745	3.500
148	DB4-148P	4.380	4.050	.575	.745	3.600
152	DB4-152P	4.480	4.150	.575	.745	3.700
156	DB4-156P	4.580	4.250	.575	.745	3.800
160	DB4-160P	4.680	4.350	.575	.745	3.900
164	DB4-164P	4.780	4.450	.575	.745	4.000
168	DB4-168P	4.880	4.550	.575	.745	4.100
172	DB4-172P	4.980	4.650	.575	.745	4.200
176	DB4-176P	5.080	4.750	.575	.745	4.300
180	DB4-180P	5.180	4.850	.575	.745	4.400
184	DB4-184P	5.280	4.950	.575	.745	4.500
188	DB4-188P	5.380	5.050	.575	.745	4.600
192	DB4-192P	5.480	5.150	.575	.745	4.700
196	DB4-196P	5.580	5.250	.575	.745	4.800
200	DB4-200P	5.680	5.350	.575	.745	4.900
204	DB4-204P	5.780	5.450	.575	.745	5.000
208	DB4-208P	5.880	5.550	.575	.745	5.100
212	DB4-212P	5.980	5.650	.575	.745	5.200
216	DB4-216P	6.080	5.750	.575	.745	5.300
220	DB4-220P	6.180	5.850	.575	.745	5.400


Of Contacts         DB Number*         A Max.         B Max.         C Max.         Max.         AA           224         DB4-224P         6.280         5.950         5.75         7.45         5.500           228         DB4-228P         6.380         6.050         5.75         .745         5.600           232         DB4-236P         6.580         6.250         .575         .745         5.800           240         DB4-240P         6.680         6.350         .575         .745         5.900           244         DB4-244P         6.780         6.450         .575         .745         6.900           248         DB4-244P         6.880         6.550         .575         .745         6.100           252         DB4-256P         7.080         6.750         .575         .745         6.200           256         DB4-256P         7.080         6.750         .575         .745         6.300           260         DB4-260P         7.180         6.850         .575         .745         6.300           264         DB4-264P         7.280         6.950         .575         .745         6.600           272         DB4-268P	Number						
224         DB4-224P         6.280         5.950         .575         .745         5.600           228         DB4-228P         6.380         6.050         .575         .745         5.600           232         DB4-232P         6.480         6.150         .575         .745         5.700           236         DB4-230P         6.580         6.250         .575         .745         5.800           240         DB4-240P         6.680         6.350         .575         .745         5.800           244         DB4-244P         6.780         6.450         .575         .745         6.000           248         DB4-248P         6.880         6.550         .575         .745         6.000           252         DB4-252P         6.980         6.650         .575         .745         6.200           256         DB4-260P         7.180         6.850         .575         .745         6.300           260         DB4-264P         7.280         6.950         .575         .745         6.500           261         DB4-264P         7.280         6.950         .575         .745         6.600           272         DB4-272P         7.480 </td <td>of</td> <td></td> <td></td> <td>В</td> <td></td> <td></td> <td>AA</td>	of			В			AA
228         DB4-228P         6.380         6.050         5.75         7.45         5.600           232         DB4-232P         6.480         6.150         5.75         7.45         5.700           236         DB4-236P         6.580         6.250         5.75         7.45         5.800           240         DB4-240P         6.680         6.350         5.75         7.45         5.900           244         DB4-244P         6.780         6.450         5.575         .745         6.000           248         DB4-244P         6.880         6.550         5.75         .745         6.100           252         DB4-256P         7.080         6.750         5.75         .745         6.200           256         DB4-260P         7.180         6.850         5.75         .745         6.400           260         DB4-260P         7.180         6.850         5.75         .745         6.400           264         DB4-26P         7.280         6.950         5.75         .745         6.500           272         DB4-276P         7.380         7.050         5.75         .745         6.800           280         DB4-280P         7.680 </td <td>224</td> <td>DB4-224P</td> <td>6.280</td> <td>5.950</td> <td>.575</td> <td>.745</td> <td>5.500</td>	224	DB4-224P	6.280	5.950	.575	.745	5.500
232         DB4-232P         6.480         6.150         .575         .745         5.700           236         DB4-236P         6.580         6.250         .575         .745         5.800           240         DB4-240P         6.680         6.350         .575         .745         5.900           244         DB4-244P         6.780         6.450         .575         .745         6.000           248         DB4-248P         6.880         6.550         .575         .745         6.100           252         DB4-252P         6.980         6.650         .575         .745         6.200           256         DB4-260P         7.180         6.850         .575         .745         6.300           260         DB4-260P         7.180         6.850         .575         .745         6.400           264         DB4-264P         7.280         6.950         .575         .745         6.400           264         DB4-268P         7.380         7.050         .575         .745         6.500           272         DB4-272P         7.480         7.150         .575         .745         6.800           272         DB4-272P         7.480 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
236         DB4-236P         6.580         6.250         .575         .745         5.800           240         DB4-240P         6.680         6.350         .575         .745         5.900           244         DB4-244P         6.780         6.450         .575         .745         6.000           248         DB4-248P         6.880         6.550         .575         .745         6.200           252         DB4-256P         7.080         6.750         .575         .745         6.200           256         DB4-260P         7.180         6.850         .575         .745         6.300           260         DB4-260P         7.180         6.850         .575         .745         6.400           264         DB4-264P         7.280         6.950         .575         .745         6.400           264         DB4-264P         7.280         6.950         .575         .745         6.500           268         DB4-268P         7.380         7.050         .575         .745         6.600           272         DB4-272P         7.480         7.150         .575         .745         6.900           280         DB4-284P         7.780 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
240         DB4-240P         6.680         6.350         .575         .745         5.900           244         DB4-244P         6.780         6.450         .575         .745         6.000           248         DB4-248P         6.880         6.550         .575         .745         6.100           252         DB4-252P         6.980         6.650         .575         .745         6.200           256         DB4-266P         7.080         6.750         .575         .745         6.200           260         DB4-264P         7.280         6.950         .575         .745         6.400           264         DB4-264P         7.280         6.950         .575         .745         6.500           268         DB4-268P         7.380         7.050         .575         .745         6.600           272         DB4-272P         7.480         7.150         .575         .745         6.600           272         DB4-272P         7.480         7.150         .575         .745         6.800           280         DB4-280P         7.680         7.350         .575         .745         7.000           284         DB4-284P         7.780 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td>-</td> <td></td>						-	
244         DB4-244P         6.780         6.450         .575         .745         6.000           248         DB4-248P         6.880         6.550         .575         .745         6.100           252         DB4-252P         6.980         6.650         .575         .745         6.200           256         DB4-260P         7.080         6.750         .575         .745         6.300           260         DB4-260P         7.180         6.850         .575         .745         6.400           264         DB4-264P         7.280         6.950         .575         .745         6.500           268         DB4-268P         7.380         7.050         .575         .745         6.600           272         DB4-276P         7.580         7.250         .575         .745         6.700           276         DB4-276P         7.580         7.250         .575         .745         6.800           280         DB4-280P         7.680         7.350         .575         .745         6.900           284         DB4-284P         7.780         7.450         .575         .745         7.200           292         DB4-296P         8.080 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
248         DB4-248P         6.880         6.550         .575         .745         6.100           252         DB4-252P         6.980         6.650         .575         .745         6.200           256         DB4-256P         7.080         6.750         .575         .745         6.300           260         DB4-260P         7.180         6.850         .575         .745         6.400           264         DB4-264P         7.280         6.950         .575         .745         6.400           268         DB4-268P         7.380         7.050         .575         .745         6.600           272         DB4-276P         7.580         7.250         .575         .745         6.700           276         DB4-280P         7.680         7.350         .575         .745         6.800           280         DB4-280P         7.680         7.350         .575         .745         6.900           284         DB4-284P         7.780         7.450         .575         .745         7.000           288         DB4-294P         7.980         7.650         .575         .745         7.300           300         DB4-300P         8.180 </td <td>-</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>	-						
252         DB4-252P         6.980         6.650         .575         .745         6.200           256         DB4-256P         7.080         6.750         .575         .745         6.300           260         DB4-260P         7.180         6.850         .575         .745         6.400           264         DB4-264P         7.280         6.950         .575         .745         6.500           268         DB4-268P         7.380         7.050         .575         .745         6.600           272         DB4-272P         7.480         7.150         .575         .745         6.700           276         DB4-280P         7.680         7.350         .575         .745         6.800           280         DB4-280P         7.680         7.350         .575         .745         6.800           284         DB4-284P         7.780         7.450         .575         .745         7.000           288         DB4-284P         7.780         7.550         .575         .745         7.200           296         DB4-296P         8.080         7.750         .575         .745         7.300           300         DB4-30P         8.180 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
256         DB4-256P         7.080         6.750         .575         .745         6.300           260         DB4-260P         7.180         6.850         .575         .745         6.400           264         DB4-264P         7.280         6.950         .575         .745         6.500           268         DB4-268P         7.380         7.050         .575         .745         6.600           272         DB4-272P         7.480         7.150         .575         .745         6.600           276         DB4-276P         7.580         7.250         .575         .745         6.800           280         DB4-280P         7.680         7.350         .575         .745         6.900           284         DB4-284P         7.780         7.455         .575         .745         7.000           288         DB4-288P         7.780         7.550         .575         .745         7.000           296         DB4-296P         8.080         7.750         .575         .745         7.200           304         D84-304P         8.280         7.950         .575         .745         7.500           312         D84-312P         8.480 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
260         DB4-260P         7.180         6.850         .575         .745         6.400           264         DB4-264P         7.280         6.950         .575         .745         6.500           268         DB4-268P         7.380         7.050         .575         .745         6.600           272         DB4-272P         7.480         7.150         .575         .745         6.700           276         DB4-276P         7.580         7.250         .575         .745         6.800           280         DB4-280P         7.680         7.350         .575         .745         6.900           284         DB4-284P         7.780         7.450         .575         .745         7.000           288         DB4-284P         7.780         7.550         .575         .745         7.100           292         DB4-296P         8.080         7.750         .575         .745         7.200           296         DB4-30P         8.180         7.850         .575         .745         7.200           304         DB4-30P         8.280         7.950         .575         .745         7.500           308         DB4-30P         8.380							
264         DB4-264P         7.280         6.950         .575         .745         6.500           268         DB4-268P         7.380         7.050         .575         .745         6.600           272         DB4-272P         7.480         7.150         .575         .745         6.700           276         DB4-276P         7.580         7.250         .575         .745         6.800           280         DB4-280P         7.680         7.350         .575         .745         6.900           284         DB4-284P         7.780         7.450         .575         .745         7.000           288         DB4-284P         7.780         7.550         .575         .745         7.100           292         DB4-292P         7.980         7.650         .575         .745         7.200           296         DB4-296P         8.080         7.750         .575         .745         7.300           300         DB4-30PP         8.180         7.850         .575         .745         7.300           304         DB4-30PP         8.380         8.050         .575         .745         7.500           312         DB4-316P         8.580 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
268         DB4-268P         7.380         7.050         .575         .745         6.600           272         DB4-272P         7.480         7.150         .575         .745         6.700           276         DB4-276P         7.580         7.250         .575         .745         6.800           280         DB4-280P         7.680         7.350         .575         .745         6.900           284         DB4-284P         7.780         7.450         .575         .745         7.000           288         DB4-288P         7.780         7.550         .575         .745         7.100           292         DB4-292P         7.980         7.650         .575         .745         7.200           296         DB4-296P         8.080         7.750         .575         .745         7.300           300         DB4-30P         8.180         7.850         .575         .745         7.300           304         DB4-30P         8.280         7.950         .575         .745         7.500           308         DB4-30P         8.380         8.050         .575         .745         7.600           312         DB4-31EP         8.480						_	
272         DB4-272P         7.480         7.150         .575         .745         6.700           276         DB4-276P         7.580         7.250         .575         .745         6.800           280         DB4-280P         7.680         7.350         .575         .745         6.900           284         DB4-284P         7.780         7.450         .575         .745         7.000           288         DB4-288P         7.780         7.550         .575         .745         7.100           292         DB4-292P         7.980         7.650         .575         .745         7.200           296         DB4-296P         8.080         7.750         .575         .745         7.300           300         DB4-300P         8.180         7.850         .575         .745         7.300           304         DB4-304P         8.280         7.950         .575         .745         7.500           308         DB4-304P         8.280         7.950         .575         .745         7.500           312         DB4-312P         8.480         8.150         .575         .745         7.800           320         DB4-316P         8.580 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
276         DB4-276P         7.580         7.250         .575         .745         6.800           280         DB4-280P         7.680         7.350         .575         .745         6.900           284         DB4-284P         7.780         7.450         .575         .745         7.000           288         DB4-288P         7.780         7.550         .575         .745         7.100           292         DB4-292P         7.980         7.650         .575         .745         7.200           296         DB4-296P         8.080         7.750         .575         .745         7.300           300         DB4-300P         8.180         7.850         .575         .745         7.300           304         DB4-304P         8.280         7.950         .575         .745         7.500           308         DB4-304P         8.280         7.950         .575         .745         7.500           308         DB4-312P         8.480         8.150         .575         .745         7.500           312         DB4-316P         8.580         8.250         .575         .745         7.700           316         DB4-316P         8.680 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
280         DB4-280P         7.680         7.350         .575         .745         6.900           284         DB4-284P         7.780         7.450         .575         .745         7.000           288         DB4-288P         7.780         7.550         .575         .745         7.100           292         DB4-292P         7.980         7.650         .575         .745         7.200           296         DB4-296P         8.080         7.750         .575         .745         7.300           300         DB4-300P         8.180         7.850         .575         .745         7.300           304         DB4-304P         8.280         7.950         .575         .745         7.500           308         DB4-304P         8.280         7.950         .575         .745         7.500           308         DB4-312P         8.480         8.150         .575         .745         7.500           312         DB4-316P         8.580         8.250         .575         .745         7.700           316         DB4-320P         8.680         8.350         .575         .745         7.800           324         DB4-324P         8.780 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
284         DB4-284P         7.780         7.450         .575         .745         7.000           288         DB4-288P         7.780         7.550         .575         .745         7.100           292         DB4-292P         7.980         7.650         .575         .745         7.200           296         DB4-296P         8.080         7.750         .575         .745         7.300           300         DB4-300P         8.180         7.850         .575         .745         7.400           304         DB4-304P         8.280         7.950         .575         .745         7.500           308         DB4-304P         8.280         7.950         .575         .745         7.500           308         DB4-312P         8.480         8.150         .575         .745         7.600           312         DB4-312P         8.480         8.150         .575         .745         7.600           312         DB4-316P         8.580         8.250         .575         .745         7.800           316         DB4-316P         8.680         8.350         .575         .745         7.800           324         DB4-32P         8.680 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
288         DB4-288P         7.780         7.550         .575         .745         7.100           292         DB4-292P         7.980         7.650         .575         .745         7.200           296         DB4-296P         8.080         7.750         .575         .745         7.300           300         DB4-300P         8.180         7.850         .575         .745         7.400           304         DB4-304P         8.280         7.950         .575         .745         7.500           308         DB4-304P         8.280         7.950         .575         .745         7.500           312         DB4-312P         8.480         8.150         .575         .745         7.600           316         DB4-316P         8.580         8.250         .575         .745         7.800           320         DB4-320P         8.680         8.350         .575         .745         7.800           324         DB4-324P         8.780         8.450         .575         .745         8.000           328         DB4-324P         8.780         8.650         .575         .745         8.100           332         DB4-332P         8.980 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
292         DB4-292P         7.980         7.650         .575         .745         7.200           296         DB4-296P         8.080         7.750         .575         .745         7.300           300         DB4-300P         8.180         7.850         .575         .745         7.400           304         DB4-304P         8.280         7.950         .575         .745         7.500           308         DB4-308P         8.380         8.050         .575         .745         7.600           312         DB4-312P         8.480         8.150         .575         .745         7.700           316         DB4-312P         8.480         8.150         .575         .745         7.800           320         DB4-320P         8.680         8.350         .575         .745         7.900           324         DB4-324P         8.780         8.450         .575         .745         8.000           332         DB4-328P         8.880         8.550         .575         .745         8.200           336         DB4-336P         9.080         8.750         .575         .745         8.200           340         DB4-340P         9.180 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
296         DB4-296P         8.080         7.750         .575         .745         7.300           300         DB4-300P         8.180         7.850         .575         .745         7.400           304         DB4-304P         8.280         7.950         .575         .745         7.500           308         DB4-308P         8.380         8.050         .575         .745         7.600           312         DB4-312P         8.480         8.150         .575         .745         7.700           316         DB4-316P         8.580         8.250         .575         .745         7.800           320         DB4-320P         8.680         8.350         .575         .745         7.900           324         DB4-324P         8.780         8.450         .575         .745         8.000           328         DB4-324P         8.780         8.650         .575         .745         8.000           332         DB4-332P         8.980         8.650         .575         .745         8.200           336         DB4-340P         9.180         8.850         .575         .745         8.400           344         DB4-34P         9.280 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
300         DB4-300P         8.180         7.850         .575         .745         7.400           304         DB4-304P         8.280         7.950         .575         .745         7.500           308         DB4-308P         8.380         8.050         .575         .745         7.600           312         DB4-312P         8.480         8.150         .575         .745         7.700           316         DB4-316P         8.580         8.250         .575         .745         7.800           320         DB4-320P         8.680         8.350         .575         .745         7.900           324         DB4-324P         8.780         8.450         .575         .745         8.000           328         DB4-328P         8.880         8.550         .575         .745         8.000           332         DB4-332P         8.980         8.650         .575         .745         8.200           336         DB4-336P         9.080         8.750         .575         .745         8.300           340         DB4-340P         9.180         8.850         .575         .745         8.400           344         DB4-34P         9.280 <td></td> <td>DB4-296P</td> <td></td> <td></td> <td></td> <td>.745</td> <td></td>		DB4-296P				.745	
308         DB4-308P         8.380         8.050         .575         .745         7.600           312         DB4-312P         8.480         8.150         .575         .745         7.700           316         DB4-316P         8.580         8.250         .575         .745         7.800           320         DB4-320P         8.680         8.350         .575         .745         7.900           324         DB4-324P         8.780         8.450         .575         .745         8.000           328         DB4-328P         8.880         8.550         .575         .745         8.000           332         DB4-332P         8.980         8.650         .575         .745         8.200           336         DB4-336P         9.080         8.750         .575         .745         8.200           340         DB4-340P         9.180         8.850         .575         .745         8.400           344         DB4-344P         9.280         8.950         .575         .745         8.500           352         DB4-352P         9.480         9.150         .575         .745         8.600           356         DB4-36P         9.580 <td>300</td> <td>DB4-300P</td> <td>8.180</td> <td>7.850</td> <td></td> <td>.745</td> <td>7.400</td>	300	DB4-300P	8.180	7.850		.745	7.400
312         DB4-312P         8.480         8.150         .575         .745         7.700           316         DB4-316P         8.580         8.250         .575         .745         7.800           320         DB4-320P         8.680         8.350         .575         .745         7.900           324         DB4-324P         8.780         8.450         .575         .745         8.000           328         DB4-328P         8.880         8.550         .575         .745         8.100           332         DB4-332P         8.980         8.650         .575         .745         8.200           336         DB4-336P         9.080         8.750         .575         .745         8.300           340         DB4-340P         9.180         8.850         .575         .745         8.400           344         DB4-344P         9.280         8.950         .575         .745         8.500           352         DB4-352P         9.480         9.150         .575         .745         8.600           352         DB4-356P         9.580         9.250         .575         .745         8.800           360         DB4-36P         9.680 <td>304</td> <td>DB4-304P</td> <td>8.280</td> <td>7.950</td> <td>.575</td> <td>.745</td> <td>7.500</td>	304	DB4-304P	8.280	7.950	.575	.745	7.500
316         DB4-316P         8.580         8.250         .575         .745         7.800           320         DB4-320P         8.680         8.350         .575         .745         7.900           324         DB4-324P         8.780         8.450         .575         .745         8.000           328         DB4-328P         8.880         8.550         .575         .745         8.100           332         DB4-332P         8.980         8.650         .575         .745         8.200           336         DB4-336P         9.080         8.750         .575         .745         8.300           340         DB4-340P         9.180         8.850         .575         .745         8.400           344         DB4-344P         9.280         8.950         .575         .745         8.500           348         DB4-348P         9.380         9.050         .575         .745         8.600           352         DB4-352P         9.480         9.150         .575         .745         8.800           360         DB4-360P         9.680         9.350         .575         .745         8.900           364         DB4-364P         9.780 </td <td>308</td> <td>DB4-308P</td> <td>8.380</td> <td>8.050</td> <td>.575</td> <td>.745</td> <td>7.600</td>	308	DB4-308P	8.380	8.050	.575	.745	7.600
320         DB4-320P         8.680         8.350         .575         .745         7.900           324         DB4-324P         8.780         8.450         .575         .745         8.000           328         DB4-328P         8.880         8.550         .575         .745         8.100           332         DB4-332P         8.980         8.650         .575         .745         8.200           336         DB4-336P         9.080         8.750         .575         .745         8.300           340         DB4-340P         9.180         8.850         .575         .745         8.400           344         DB4-344P         9.280         8.950         .575         .745         8.500           348         DB4-348P         9.380         9.050         .575         .745         8.600           352         DB4-352P         9.480         9.150         .575         .745         8.800           360         DB4-36P         9.580         9.250         .575         .745         8.800           364         DB4-36P         9.680         9.350         .575         .745         8.900           372         DB4-372P         9.980 <td>312</td> <td>DB4-312P</td> <td>8.480</td> <td>8.150</td> <td>.575</td> <td>.745</td> <td>7.700</td>	312	DB4-312P	8.480	8.150	.575	.745	7.700
324         DB4-324P         8.780         8.450         .575         .745         8.000           328         DB4-328P         8.880         8.550         .575         .745         8.100           332         DB4-332P         8.980         8.650         .575         .745         8.200           336         DB4-336P         9.080         8.750         .575         .745         8.300           340         DB4-340P         9.180         8.850         .575         .745         8.400           344         DB4-344P         9.280         8.950         .575         .745         8.500           348         DB4-348P         9.380         9.050         .575         .745         8.600           352         DB4-352P         9.480         9.150         .575         .745         8.700           356         DB4-356P         9.580         9.250         .575         .745         8.800           360         DB4-36P         9.680         9.350         .575         .745         8.900           364         DB4-36P         9.780         9.450         .575         .745         9.00           372         DB4-376P         10.080 <td>316</td> <td>DB4-316P</td> <td>8.580</td> <td>8.250</td> <td>.575</td> <td>.745</td> <td>7.800</td>	316	DB4-316P	8.580	8.250	.575	.745	7.800
328         DB4-328P         8.880         8.550         .575         .745         8.100           332         DB4-332P         8.980         8.650         .575         .745         8.200           336         DB4-336P         9.080         8.750         .575         .745         8.300           340         DB4-340P         9.180         8.850         .575         .745         8.400           344         DB4-344P         9.280         8.950         .575         .745         8.500           348         DB4-348P         9.380         9.050         .575         .745         8.600           352         DB4-352P         9.480         9.150         .575         .745         8.700           356         DB4-356P         9.580         9.250         .575         .745         8.800           360         DB4-360P         9.680         9.350         .575         .745         8.900           364         DB4-364P         9.780         9.450         .575         .745         9.000           368         DB4-376P         10.080         9.550         .575         .745         9.200           376         DB4-376P         10.080	320	DB4-320P	8.680	8.350	.575	.745	7.900
332         DB4-332P         8.980         8.650         .575         .745         8.200           336         DB4-336P         9.080         8.750         .575         .745         8.300           340         DB4-340P         9.180         8.850         .575         .745         8.400           344         DB4-344P         9.280         8.950         .575         .745         8.500           348         DB4-348P         9.380         9.050         .575         .745         8.600           352         DB4-352P         9.480         9.150         .575         .745         8.700           356         DB4-356P         9.580         9.250         .575         .745         8.800           360         DB4-360P         9.680         9.350         .575         .745         8.900           364         DB4-364P         9.780         9.450         .575         .745         9.000           368         DB4-364P         9.780         9.550         .575         .745         9.100           372         DB4-372P         9.980         9.650         .575         .745         9.300           380         DB4-380P         10.180<	324	DB4-324P	8.780	8.450	.575	.745	8.000
336         DB4-336P         9.080         8.750         .575         .745         8.300           340         DB4-340P         9.180         8.850         .575         .745         8.400           344         DB4-344P         9.280         8.950         .575         .745         8.500           348         DB4-348P         9.380         9.050         .575         .745         8.600           352         DB4-352P         9.480         9.150         .575         .745         8.700           356         DB4-356P         9.580         9.250         .575         .745         8.800           360         DB4-360P         9.680         9.350         .575         .745         8.900           364         DB4-364P         9.780         9.450         .575         .745         9.000           368         DB4-368P         9.880         9.550         .575         .745         9.100           372         DB4-372P         9.980         9.650         .575         .745         9.300           380         DB4-380P         10.180         9.850         .575         .745         9.400           384         DB4-384P         10.280	328	DB4-328P	8.880	8.550	.575	.745	8.100
340         DB4-340P         9.180         8.850         .575         .745         8.400           344         DB4-344P         9.280         8.950         .575         .745         8.500           348         DB4-348P         9.380         9.050         .575         .745         8.600           352         DB4-352P         9.480         9.150         .575         .745         8.700           356         DB4-356P         9.580         9.250         .575         .745         8.800           360         DB4-360P         9.680         9.350         .575         .745         8.900           364         DB4-364P         9.780         9.450         .575         .745         9.000           368         DB4-368P         9.880         9.550         .575         .745         9.100           372         DB4-372P         9.980         9.650         .575         .745         9.200           376         DB4-376P         10.080         9.750         .575         .745         9.300           380         DB4-380P         10.180         9.850         .575         .745         9.500           384         DB4-384P         10.28	332	DB4-332P	8.980	8.650	.575	.745	8.200
344         DB4-344P         9.280         8.950         .575         .745         8.500           348         DB4-348P         9.380         9.050         .575         .745         8.600           352         DB4-352P         9.480         9.150         .575         .745         8.700           356         DB4-356P         9.580         9.250         .575         .745         8.800           360         DB4-360P         9.680         9.350         .575         .745         8.900           364         DB4-364P         9.780         9.450         .575         .745         9.000           368         DB4-368P         9.880         9.550         .575         .745         9.100           372         DB4-372P         9.980         9.650         .575         .745         9.200           376         DB4-376P         10.080         9.750         .575         .745         9.300           380         DB4-380P         10.180         9.850         .575         .745         9.500           384         DB4-384P         10.280         9.950         .575         .745         9.600           392         DB4-392P         10.4	336	DB4-336P	9.080	8.750	.575	.745	8.300
348         DB4-348P         9.380         9.050         .575         .745         8.600           352         DB4-352P         9.480         9.150         .575         .745         8.700           356         DB4-356P         9.580         9.250         .575         .745         8.800           360         DB4-360P         9.680         9.350         .575         .745         8.900           364         DB4-364P         9.780         9.450         .575         .745         9.000           368         DB4-368P         9.880         9.550         .575         .745         9.100           372         DB4-372P         9.980         9.650         .575         .745         9.200           376         DB4-376P         10.080         9.750         .575         .745         9.300           380         DB4-380P         10.180         9.850         .575         .745         9.400           384         DB4-384P         10.280         9.950         .575         .745         9.600           392         DB4-392P         10.480         10.150         .575         .745         9.800           396         DB4-396P         10	340	DB4-340P	9.180	8.850	.575	.745	8.400
352         DB4-352P         9.480         9.150         .575         .745         8.700           356         DB4-356P         9.580         9.250         .575         .745         8.800           360         DB4-360P         9.680         9.350         .575         .745         8.900           364         DB4-364P         9.780         9.450         .575         .745         9.000           368         DB4-368P         9.880         9.550         .575         .745         9.100           372         DB4-372P         9.980         9.650         .575         .745         9.200           376         DB4-376P         10.080         9.750         .575         .745         9.300           380         DB4-380P         10.180         9.850         .575         .745         9.400           384         DB4-384P         10.280         9.950         .575         .745         9.500           388         DB4-392P         10.480         10.150         .575         .745         9.600           392         DB4-396P         10.580         10.250         .575         .745         9.800	344	DB4-344P	9.280	8.950	.575	.745	8.500
356         DB4-356P         9.580         9.250         .575         .745         8.800           360         DB4-360P         9.680         9.350         .575         .745         8.900           364         DB4-364P         9.780         9.450         .575         .745         9.000           368         DB4-368P         9.880         9.550         .575         .745         9.100           372         DB4-372P         9.980         9.650         .575         .745         9.200           376         DB4-376P         10.080         9.750         .575         .745         9.300           380         DB4-380P         10.180         9.850         .575         .745         9.400           384         DB4-384P         10.280         9.950         .575         .745         9.500           388         DB4-388P         10.380         10.050         .575         .745         9.600           392         DB4-396P         10.480         10.150         .575         .745         9.800           396         DB4-396P         10.580         10.250         .575         .745         9.800	348	DB4-348P	9.380	9.050	.575	.745	8.600
360         DB4-360P         9.680         9.350         .575         .745         8.900           364         DB4-364P         9.780         9.450         .575         .745         9.000           368         DB4-368P         9.880         9.550         .575         .745         9.100           372         DB4-372P         9.980         9.650         .575         .745         9.200           376         DB4-376P         10.080         9.750         .575         .745         9.300           380         DB4-380P         10.180         9.850         .575         .745         9.400           384         DB4-384P         10.280         9.950         .575         .745         9.500           388         DB4-388P         10.380         10.050         .575         .745         9.600           392         DB4-392P         10.480         10.150         .575         .745         9.800           396         DB4-396P         10.580         10.250         .575         .745         9.800	352	DB4-352P	9.480	9.150	.575	.745	8.700
364         DB4-364P         9.780         9.450         .575         .745         9.000           368         DB4-368P         9.880         9.550         .575         .745         9.100           372         DB4-372P         9.980         9.650         .575         .745         9.200           376         DB4-376P         10.080         9.750         .575         .745         9.300           380         DB4-380P         10.180         9.850         .575         .745         9.400           384         DB4-384P         10.280         9.950         .575         .745         9.500           388         DB4-388P         10.380         10.050         .575         .745         9.600           392         DB4-392P         10.480         10.150         .575         .745         9.800           396         DB4-396P         10.580         10.250         .575         .745         9.800	356	DB4-356P	9.580	9.250	.575	.745	8.800
368         DB4-368P         9.880         9.550         .575         .745         9.100           372         DB4-372P         9.980         9.650         .575         .745         9.200           376         DB4-376P         10.080         9.750         .575         .745         9.300           380         DB4-380P         10.180         9.850         .575         .745         9.400           384         DB4-384P         10.280         9.950         .575         .745         9.500           388         DB4-388P         10.380         10.050         .575         .745         9.600           392         DB4-392P         10.480         10.150         .575         .745         9.700           396         DB4-396P         10.580         10.250         .575         .745         9.800	360	DB4-360P	9.680	9.350	.575	.745	8.900
372         DB4-372P         9.980         9.650         .575         .745         9.200           376         DB4-376P         10.080         9.750         .575         .745         9.300           380         DB4-380P         10.180         9.850         .575         .745         9.400           384         DB4-384P         10.280         9.950         .575         .745         9.500           388         DB4-388P         10.380         10.050         .575         .745         9.600           392         DB4-392P         10.480         10.150         .575         .745         9.700           396         DB4-396P         10.580         10.250         .575         .745         9.800	364	DB4-364P	9.780	9.450	.575	.745	9.000
376         DB4-376P         10.080         9.750         .575         .745         9.300           380         DB4-380P         10.180         9.850         .575         .745         9.400           384         DB4-384P         10.280         9.950         .575         .745         9.500           388         DB4-388P         10.380         10.050         .575         .745         9.600           392         DB4-392P         10.480         10.150         .575         .745         9.700           396         DB4-396P         10.580         10.250         .575         .745         9.800	368	DB4-368P	9.880	9.550	.575	.745	9.100
380         DB4-380P         10.180         9.850         .575         .745         9.400           384         DB4-384P         10.280         9.950         .575         .745         9.500           388         DB4-388P         10.380         10.050         .575         .745         9.600           392         DB4-392P         10.480         10.150         .575         .745         9.700           396         DB4-396P         10.580         10.250         .575         .745         9.800	372	DB4-372P	9.980	9.650	.575	.745	9.200
384         DB4-384P         10.280         9.950         .575         .745         9.500           388         DB4-388P         10.380         10.050         .575         .745         9.600           392         DB4-392P         10.480         10.150         .575         .745         9.700           396         DB4-396P         10.580         10.250         .575         .745         9.800	376	DB4-376P	10.080	9.750	.575		9.300
388         DB4-388P         10.380         10.050         .575         .745         9.600           392         DB4-392P         10.480         10.150         .575         .745         9.700           396         DB4-396P         10.580         10.250         .575         .745         9.800	380	DB4-380P	10.180	9.850	.575	.745	9.400
392         DB4-392P         10.480         10.150         .575         .745         9.700           396         DB4-396P         10.580         10.250         .575         .745         9.800	384	DB4-384P	10.280	9.950	.575	.745	9.500
396 DB4-396P 10.580 10.250 .575 .745 9.800	388	DB4-388P	10.380	10.050	.575	.745	9.600
	392	DB4-392P	10.480	10.150	.575	.745	9.700
400   DB4-400P   10.680   10.350   .575   .745   9.900		DB4-396P	10.580	10.250	.575	.745	9.800
	400	DB4-400P	10.680	10.350	.575	.745	9.900


<sup>\*</sup>See How to Order, pages 3, 4 and 5

## input/output connector







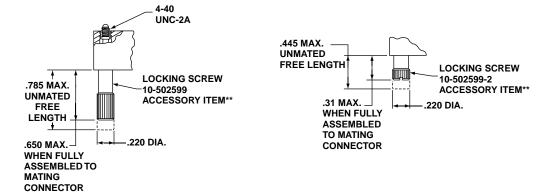

#### MATES WITH MB AND PC SERIES CONNECTORS

Notes

When mating with MB or PC connector, a total of .022 inch minimum radial pilot is available for connector body alignment.

All dimensions for reference only.

Crimp contact, wire well size 22D, supplied with IO Connector Series assemblies. Optional noble metal termination plating available. See How to Order, page 5.

Polarization keys are not supplied as part of IO Connector Series assemblies. See Accessories How to Order, page 5 and further description, page 24.

\*\* Locking Screws are not supplied as part of IO Connector Series assemblies. See Accessories How to Order, page 5 and further description, page 29.

Contact Data					
Description	Termination Style Letter	J ±.020	K ±.002		
Rear Removable Crimp Contact	С	N/A	N/A		
Round PCB	Р	.145	.021		
Stud Solder	P-(713)	.060	.021		
Termination	P-(709)	.335	.021		

NOTE: Other variations available - see pages 4 and 5, or consult Amphenol Aerospace.

# Low Mating Force input/output connector 2 row contact arrangements

Number	10		В	
of Contacts	IO Number*	A Max.	В	C Max.
020	IO2-020(*)	2.295	1.975	.390
022	IO2-022(*)	2.395	2.075	.390
024	IO2-024(*)	2.495	2.175	.390
026	IO2-026(*)	2.595	2.275	.390
028	IO2-028(*)	2.695	2.375	.390
030	IO2-030(*)	2.795	2.475	.390
032	IO2-032(*)	2.895	2.575	.390
034	IO2-034(*)	2.995	2.675	.390
036	IO2-036(*)	3.095	2.775	.390
038	IO2-038(*)	3.195	2.875	.390
040	IO2-040(*)	3.295	2.975	.390
042	IO2-042(*)	3.395	3.075	.390
044	IO2-044(*)	3.495	3.175	.390
046	IO2-046(*)	3.595	3.275	.390
048	IO2-048(*)	3.695	3.375	.390
050	IO2-050(*)	3.795	3.475	.390
052	IO2-052(*)	3.895	3.575	.390
054	IO2-054(*)	3.995	3.675	.390
056	IO2-056(*)	4.095	3.775	.390
058	IO2-058(*)	4.195	3.875	.390
060	IO2-060(*)	4.295	3.975	.390
062	IO2-062(*)	4.395	4.075	.390
064	IO2-064(*)	4.495	4.175	.390
066	IO2-066(*)	4.595	4.275	.390
068	IO2-068(*)	4.695	4.375	.390
070	IO2-070(*)	4.795	4.475	.390
072	IO2-072(*)	4.895	4.575	.390
074	IO2-074(*)	4.995	4.675	.390
076	IO2-076(*)	5.095	4.775	.390
078	IO2-078(*)	5.195	4.875	.390
080	IO2-080(*)	5.295	4.975	.390
082	IO2-082(*)	5.395	5.075	.390
084	IO2-084(*)	5.495	5.175	.390
086	IO2-086(*)	5.595	5.275	.390
088	IO2-088(*)	5.695	5.375	.390
090	IO2-090(*)	5.795	5.475	.390
092	IO2-092(*)	5.895	5.575	.390
094	IO2-094(*)	5.995	5.675	.390
096	IO2-096(*)	6.095	5.775	.390
098	IO2-098(*)	6.195	5.875	.390
100	IO2-100(*)	6.295	5.975	.390
102	IO2-102(*)	6.395	6.075	.390
104	IO2-104(*)	6.495	6.175	.390
106	IO2-106(*)	6.595	6.275	.390
108	IO2-108(*)	6.695	6.375	.390
110	IO2-110(*)	6.795	6.475	.390
. 10	102 / 10( )	0.700	0.170	.555

Number of	10	Α	В	С
Contacts	Number*	Max.	_	Max.
112	IO2-112(*)	6.895	6.575	.390
114	IO2-114(*)	6.995	6.675	.390
116	IO2-116(*)	7.095	6.775	.390
118	IO2-118(*)	7.195	6.875	.390
120	IO2-120(*)	7.295	6.975	.390
122	IO2-122(*)	7.395	7.075	.390
124	IO2-124(*)	7.495	7.175	.390
126	IO2-126(*)	7.595	7.275	.390
128	IO2-128(*)	7.695	7.375	.390
130	IO2-130(*)	7.795	7.475	.390
132	IO2-132(*)	7.895	7.575	.390
134	IO2-134(*)	7.995	7.675	.390
136	IO2-136(*)	8.095	7.775	.390
138	IO2-138(*)	8.195	7.875	.390
140	IO2-140(*)	8.295	7.975	.390
142	IO2-142(*)	8.395	8.075	.390
144	IO2-144(*)	8.495	8.175	.390
146	IO2-146(*)	8.595	8.275	.390
148	IO2-148(*)	8.695	8.375	.390
150	IO2-150(*)	8.795	8.475	.390
152	IO2-152(*)	8.895	8.575	.390
154	IO2-154(*)	8.995	8.675	.390
156	IO2-156(*)	9.095	8.775	.390
158	IO2-158)*)	9.195	8.875	.390
160	IO2-160(*)	9.295	8.975	.390
162	IO2-162(*)	9.395	9.075	.390
164	IO2-164(*)	9.495	9.175	.390
166	IO2-166(*)	9.595	9.275	.390
168	IO2-168(*)	9.695	9.375	.390
170	IO2-170(*)	9.795	9.475	.390
172	IO2-172(*)	9.895	9.575	.390
174	IO2-174(*)	9.995	9.675	.390
176	IO2-176(*)	10.095	9.775	.390
178	IO2-178(*)	10.195	9.875	.390
180	IO2-180(*)	10.295	9.975	.390
182	IO2-182(*)	10.395	10.075	.390
184	IO2-184(*)	10.495	10.175	.390
186	IO2-186(*)	10.595	10.275	.390
188	IO2-188(*)	10.695	10.375	.390
190	IO2-190(*)	10.795	10.475	.390
192	IO2-192(*)	10.895	10.575	.390
194	IO2-194(*)	10.995	10.675	.390
196	IO2-196(*)	11.095	10.775	.390
198	IO2-198(*)	11.195	10.875	.390
200	IO2-200(*)	11.295	10.975	.390
	Order nages 3 4	·	10.070	.000

<sup>\*</sup>See How to Order, pages 3, 4 and 5

# input/output connector 3 row contact arrangements

Number of	10	А	В	С
Contacts	Number*	Max.		Max.
030	IO3-030(*)	2.295	1.975	.490
033	IO3-033(*)	2.395	2.075	.490
036	IO3-036(*)	2.495	2.175	.490
039	IO3-039(*)	2.595	2.275	.490
042	IO3-042(*)	2.695	2.375	.490
045	IO3-045(*)	2.795	2.475	.490
048	IO3-048(*)	2.894	2.575	.490
051	IO3-051(*)	2.995	2.675	.490
054	IO3-054(*)	3.095	2.775	.490
057	IO3-057(*)	3.195	2.875	.490
060	IO3-060(*)	3.295	2.975	.490
063	IO3-063(*)	3.395	3.075	.490
066	IO3-066(*)	3.495	3.175	.490
069	IO3-069(*)	3.595	3.275	.490
072	IO3-072(*)	3.695	3.375	.490
075	IO3-075(*)	3.795	3.475	.490
078	IO3-078(*)	3.895	3.575	.490
081	IO3-081(*)	3.995	3.675	.490
084	IO3-084(*)	4.095	3.775	.490
087	IO3-087(*)	4.195	3.875	.490
090	IO3-090(*)	4.295	3.975	.490
093	IO3-093(*)	4.395	4.075	.490
096	IO3-096(*)	4.495	4.175	.490
099	IO3-099(*)	4.595	4.275	.490
102	IO3-102(*)	4.695	4.375	.490
105	IO3-105(*)	4.795	4.475	.490
108	IO3-108(*)	4.895	4.575	.490
111	IO3-111(*)	4.995	4.675	.490
114	IO3-114(*)	5.095	4.775	.490
117	IO3-117(*)	5.195	4.875	.490
120	IO3-120(*)	5.295	4.975	.490
123	IO3-123(*)	5.395	5.075	.490
126	IO3-126(*)	5.495	5.175	.490
129	IO3-129(*)	5.595	5.275	.490
132	IO3-132(*)	5.695	5.375	.490
135	IO3-135(*)	5.795	5.475	.490
138	IO3-138(*)	5.895	5.575	.490
141	IO3-141(*)	5.995	5.675	.490
144	IO3-144(*)	6.095	5.775	.490
147	IO3-147(*)	6.195	5.875	.490
150	IO3-150(*)	6.295	5.975	.490
153	IO3-153(*)	6.395	6.075	.490
156	IO3-156(*)	6.495	6.175	.490
159	IO3-159(*)	6.595	6.275	.490
162	IO3-162(*)	6.695	6.375	.490
165	IO3-165(*)	6.795	6.475	.490

Contacts         Number*         Max.         Max.           168         IO3-168(*)         6.895         6.575         .4           171         IO3-171(*)         6.995         6.675         .4	90 90 90 90
Contacts         Number*         Max.         Max.           168         IO3-168(*)         6.895         6.575         .4           171         IO3-171(*)         6.995         6.675         .4	90 90 90 90
171 IO3-171(*) 6.995 6.675 .4	90 90 90
	90 90
174 IO3-174(*) 7.095 6.775 .4	90
177 IO3-177(*) 7.195 6.875 .4	an
180 IO3-180(*) 7.295 6.975 .4	00
183 IO3-183(*) 7.395 7.075 .4	90
186 IO3-186(*) 7.495 7.175 .4	90
189 IO3-189(*) 7.595 7.275 .4	90
192 IO3-192(*) 7.695 7.375 .4	90
195 IO3-195(*) 7.795 7.475 .4	90
198 IO3-198(*) 7.895 7.575 .4	90
201 IO3-201(*) 7.995 7.675 .4	90
204 IO3-204(*) 8.095 7.775 .4	90
207 IO3-207(*) 8.195 7.875 .4	90
210 IO3-210(*) 8.295 7.975 .4	90
	90
	90
219 IO3-219(*) 8.595 8.275 .4	90
	90
	90
228 IO3-228(*) 8.895 8.575 .4	90
	90
234 IO3-234(*) 9.095 8.775 .4	90
l i i i i i i i i i i i i i i i i i i i	90
	90
	90
246 IO3-246(*) 9.495 9.175 .4	90
	90
	90
l i i i i i i i i i i i i i i i i i i i	90
	90
	90
264 IO3-264(*) 10.095 9.775 .4	90
	90
	90
	90
	90
Y ,	90
	90
	90
	90
	90
	90
Y ,	90
	90

<sup>\*</sup>See How to Order, pages 3, 4 and 5


# Low Mating Force input/output connector 4 row contact arrangements

Number				
of Contacts	IO Number*	A Max.	В	C Max.
040	IO4-040(*)	2.295	1.975	.590
040	IO4-040(*)	2.395	2.075	.590
				.590
048	IO4-048(*)	2.495	2.175	
052	IO4-052(*)	2.595	2.275	.590
056	IO4-056(*)	2.695	2.375	.590
060	IO4-060(*)	2.795	2.475	.590
064	IO4-064(*)	2.895	2.575	.590
068	IO4-068(*)	2.995	2.675	.590
072	IO4-072(*)	3.095	2.775	.590
076	IO4-076(*)	3.195	2.875	.590
080	IO4-080(*)	3.295	2.975	.590
084	IO4-084(*)	3.395	3.075	.590
088	IO4-088(*)	3.495	3.175	.590
092	IO4-092(*)	3.595	3.275	.590
096	IO4-096(*)	3.695	3.375	.590
100	IO4-100(*)	3.795	3.475	.590
104	IO4-104(*)	3.895	3.575	.590
108	IO4-108(*)	3.995	3.675	.590
112	IO4-112(*)	4.095	3.775	.590
116	IO4-116(*)	4.195	3.875	.590
120	IO4-120(*)	4.295	3.975	.590
124	IO4-124(*)	4.395	4.075	.590
128	IO4-128(*)	4.495	4.175	.590
132	IO4-132(*)	4.595	4.275	.590
136	IO4-136(*)	4.695	4.375	.590
140	IO4-140(*)	4.795	4.475	.590
144	IO4-144(*)	4.895	4.575	.590
148	IO4-148(*)	4.995	4.675	.590
152	IO4-152(*)	5.095	4.775	.590
156	IO4-156(*)	5.195	4.875	.590
160	IO4-160(*)	5.295	4.975	.590
164	IO4-164(*)	5.395	5.075	.590
168	IO4-168(*)	5.495	5.175	.590
172	IO4-172(*)	5.595	5.275	.590
176	IO4-176(*)	5.695	5.375	.590
180	IO4-180(*)	5.795	5.475	.590
184	IO4-184(*)	5.895	5.575	.590
188	IO4-188(*)	5.995	5.675	.590
192	IO4-192(*)	6.095	5.775	.590
192	IO4-192( )	6.195	5.875	.590
200	IO4-200(*)	6.295	5.975	.590
200	IO4-200( )			
		6.395	6.075	.590
208 212	IO4-208(*)	6.495	6.175	.590
	IO4-212(*)	6.595	6.275	.590
216	IO4-216(*)	6.695	6.375	.590
220	IO4-220(*)	6.795	6.475	.590

		1			
Number of	10	Α	В	С	
Contacts	Number*	Max.	_ B	Max.	
224	IO4-224(*)	6.895	6.575	.590	
228	IO4-228(*)	6.995	6.675	.590	
232	IO4-232(*)	7.095	6.775	.590	
236	IO4-236(*)	7.195	6.875	.590	
240	IO4-240(*)	7.295	6.975	.590	
244	IO4-244(*)	7.395	7.075	.590	
248	IO4-248(*)	7.495	7.175	.590	
252	IO4-252(*)	7.595	7.275	.590	
256	IO4-256(*)	7.695	7.375	.590	
260	IO4-260(*)	7.795	7.475	.590	
264	IO4-264(*)	7.895	7.575	.590	
268	IO4-268(*)	7.995	7.675	.590	
272	IO4-272(*)	8.095	7.775	.590	
276	IO4-276(*)	8.195	7.875	.590	
280	IO4-280(*)	8.295	7.975	.590	
284	IO4-284(*)	8.395	8.075	.590	
288	IO4-288(*)	8.495	8.175	.590	
292	IO4-292(*)	8.595	8.275	.590	
296	IO4-296(*)	8.695	8.375	.590	
300	IO4-300(*)	8.795	8.475	.590	
304	IO4-304(*)	8.895	8.575	.590	
308	IO4-308(*)	8.995	8.675	.590	
312	IO4-312(*)	9.095	8.775	.590	
316	IO4-316(*)	9.195	8.875	.590	
320	IO4-320(*)	9.295	8.975	.590	
324	IO4-324(*)	9.395	9.075	.590	
328	IO4-328(*)	9.496	9.175	.590	
332	IO4-332(*)	9.595	9.275	.590	
336	IO4-336(*)	9.695	9.375	.590	
340	IO4-340(*)	9.795	9.475	.590	
344	IO4-344(*)	9.895	9.575	.590	
348	IO4-348(*)	9.995	9.675	.590	
352	IO4-352(*)	10.095	9.775	.590	
356	IO4-356(*)	10.195	9.875	.590	
360	IO4-360(*)	10.295	9.975	.590	
364	IO4-364(*)	10.395	10.075	.590	
368	IO4.368(*)	10.495	10.175	.590	
372	IO4-372(*)	10.595	10.275	.590	
376	IO4-376(*)	10.695	10.375	.590	
380	IO4-380(*)	10.795	10.475	.590	
384	IO4-384(*)	10.895	10.575	.590	
388	IO4-388(*)	10.995	10.675	.590	
392	IO4-392(*)	11.095	10.775	.590	
396	IO4-396(*)	11.195	10.875	.590	
400	IO4-400(*)	11.295	10.975	.590	
See How to Order, pages 3, 4 and 5					

<sup>\*</sup>See How to Order, pages 3, 4 and 5

## PC connector

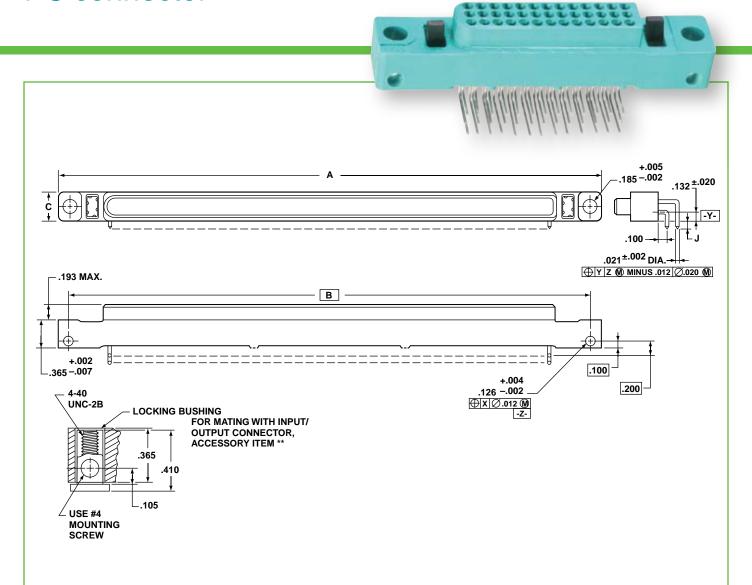

#### MATES WITH DB AND IO SERIES CONNECTORS

Notes:

When mating with DB connector, a total of .035 inch minimum radial pilot is available for connector body alignment.

All dimensions for reference only.

Polarization keys are not supplied as part of PC Connector Series assemblies. See Accessories How to Order, page 5 and further description, page 24.

\*\* Locking busings are not supplied as part of PC Connector Series assembles. See Accessories How to Order, page 5, and further description, page 28.

Designates Basic Dimension

	Contact Data					
Description	Termination Style Letter	Arrangement Row	J +.035 025			
	Р	Α	.095			
	Р	В	.095			
Round PCB	Р	С	.095			
Stud, 90°	Р	D	.095			
Solder	Solder P-(714)		.150			
Termination	ermination P-(714)		.150			
	P-(714)	С	.150			
	P-(714)	D	.150			

NOTE: Other variations available - see pages 4 and 5, or consult Amphenol Aerospace.

# Low Mating Force PC connector 2 row contact arrangements

Number				
of	, PC	A	В	, c
Contacts	Number*	Max.		Max.
020	PC2-020P	2.295	1.975	.390
022	PC2-022P	2.395	2.075	.390
024	PC2-024P	2.495	2.175	.390
026	PC2-026P	2.595	2.275	.390
028	PC2-028P	2.695	2.375	.390
030	PC2-030P	2.795	2.475	.390
032	PC2-032P	2.895	2.575	.390
034	PC2-034P	2.995	2.675	.390
036	PC2-036P	3.095	2.775	.390
038	PC2-038P	3.195	2.875	.390
040	PC2-040P	3.295	2.975	.390
042	PC2-042P	3.395	3.075	.390
044	PC2-044P	3.495	3.175	.390
046	PC2-046P	3.595	3.275	.390
048	PC2-048P	3.695	3.375	.390
050	PC2-050P	3.795	3.475	.390
052	PC2-052P	3.895	3.575	.390
054	PC2-054P	3.995	3.675	.390
056	PC2-056P	4.095	3.775	.390
058	PC2-058P	4.195	3.875	.390
060	PC2-060P	4.295	3.975	.390
062	PC2-062P	4.395	4.075	.390
064	PC2-064P	4.495	4.175	.390
066	PC2-066P	4.595	4.275	.390
068	PC2-068P	4.695	4.375	.390
070	PC2-070P	4.795	4.475	.390
072	PC2-072P	4.895	4.575	.390
074	PC2-074P	4.995	4.675	.390
076	PC2-076P	5.095	4.775	.390
078	PC2-078P	5.195	4.875	.390
080	PC2-080P	5.295	4.975	.390
082	PC2-082P	5.395	5.075	.390
084	PC2-084P	5.495	5.175	.390
086	PC2-086P	5.595	5.275	.390
088	PC2-088P	5.695	5.375	.390
090	PC2-090P	5.795	5.475	.390
090	PC2-090F	5.895	5.575	.390
092	PC2-092P	5.995	5.675	.390
				.390
096 098	PC2-096P	6.095	5.775	
100	PC2-098P PC2-100P	6.195	5.875	.390
	PC2-100P PC2-102P	6.295	5.975	.390
102	PC2-102P PC2-104P	6.395	6.075	.390
104		6.495	6.175	.390
106	PC2-106P	6.595	6.275	.390
108	PC2-108P	6.695	6.375	.390
110	PC2-110P	6.795	6.475	.390

Niconale				
Number of	PC	Α	В	С
Contacts	Number*	Max.		Max.
112	PC2-112P	6.895	6.575	.390
114	PC2-114P	6.995	6.675	.390
116	PC2-116P	7.095	6.775	.390
118	PC2-118P	7.195	6.875	.390
120	PC2-120P	7.295	6.975	.390
122	PC2-122P	7.395	7.075	.390
124	PC2-124P	7.495	7.175	.390
126	PC2-126P	7.595	7.275	.390
128	PC2-128P	7.695	7.375	.390
130	PC2-130P	7.795	7.475	.390
132	PC2-132P	7.895	7.575	.390
134	PC2-134P	7.995	7.675	.390
136	PC2-136P	8.095	7.775	.390
138	PC2-138P	8.195	7.875	.390
140	PC2-140P	8.295	7.975	.390
142	PC2-142P	8.395	8.075	.390
144	PC2-144P	8.495	8.175	.390
146	PC2-146P	8.595	8.275	.390
148	PC2-148P	8.695	8.375	.390
150	PC2-150P	8.795	8.475	.390
152	PC2-152P	8.895	8.575	.390
154	PC2-154P	8.995	8.675	.390
156	PC2-156P	9.095	8.775	.390
158	PC2-158P	9.195	8.875	.390
160	PC2-160P	9.295	8.975	.390
162	PC2-162P	9.395	9.075	.390
164	PC2-164P	9.495	9.175	.390
166	PC2-166P	9.595	9.275	.390
168	PC2-168P	9.695	9.375	.390
170	PC2-170P	9.795	9.475	.390
172	PC2-172P	9.895	9.575	.390
174	PC2-174P	9.995	9.675	.390
176	PC2-176P	10.095	9.775	.390
178	PC2-178P	10.195	9.875	.390
180	PC2-180P	10.295	9.975	.390
182	PC2-182P	10.395	10.075	.390
184	PC2-184P	10.495	10.175	.390
186	PC2-186P	10.595	10.275	.390
188	PC2-188P	10.695	10.375	.390
190	PC2-190P	10.795	10.475	.390
192	PC2-192P	10.895	10.575	.390
194	PC2-194P	10.995	10.675	.390
196	PC2-196P	11.095	10.775	.390
198	PC2-198P	11.195	10.875	.390
200	PC2-200P	11.295	10.975	.390

<sup>\*</sup>See How to Order, pages 3, 4 and 5

# Low Mating Force PC connector 3 row contact arrangements

Number of Contacts	PC Number*	A Max.	В	C Max.
030	PC3-030P	2.295	1.975	.490
033	PC3-033P	2.395	2.075	.490
036	PC3-036P	2.495	2.175	.490
039	PC3-039P	2.595	2.175	.490
042	PC3-042P	2.695	2.375	.490
045	PC3-045P	2.795	2.475	.490
048	PC3-048P	2.895	2.575	.490
051	PC3-051P	2.995	2.675	.490
054	PC3-054P	3.095	2.775	.490
057	PC3-057P	3.195	2.875	.490
060	PC3-060P	3.295	2.975	.490
063	PC3-063P	3.395	3.075	.490
066	PC3-066P	3.495	3.175	.490
069	PC3-069P	3.595	3.275	.490
072	PC3-072P	3.695	3.375	.490
075	PC3-075P	3.795	3.475	.490
078	PC3-078P	3.895	3.575	.490
081	PC3-081P	3.995	3.675	.490
084	PC3-084P	4.095	3.775	.490
087	PC3-087P	4.195	3.875	.490
090	PC3-090P	4.295	3.975	.490
093	PC3-093P	4.395	4.075	.490
096	PC3-096P	4.495	4.175	.490
099	PC3-099P	4.595	4.275	.490
102	PC3-102P	4.695	4.375	.490
105	PC3-105P	4.795	4.475	.490
108	PC3-108P	4.895	4.575	.490
111	PC3-111P	4.995	4.675	.490
114	PC3-114P	5.095	4.775	.490
117	PC3-117P	5.195	4.875	.490
120	PC3-120P	5.295	4.975	.490
123	PC3-123P	5.395	5.075	.490
126	PC3-126P	5.495	5.175	.490
129	PC3-129P	5.595	5.275	.490
132	PC3-132P	5.695	5.375	.490
135	PC3-135P	5.795	5.475	.490
138	PC3-138P	5.895	5.575	.490
141	PC3-141P	5.995	5.675	.490
144	PC3-144P	6.095	5.775	.490
147	PC3-147P	6.195	5.875	.490
150	PC3-150P	6.295	5.975	.490
153	PC3-153P	6.395	6.075	.490
156	PC3-156P	6.495	6.175	.490
159	PC3-159P	6.595	6.275	.490
162	PC3-162P	6.695	6.375	.490
165	PC3-165P	6.795	6.475	.490

	T.	1	1	
Number of	PC	A	В	C
Contacts	Number*	Max.		Max.
168	PC3-168P	6.895	6.575	.490
171	PC3-171P	6.995	6.675	.490
174	PC3-174P	7.095	6.775	.490
177	PC3-177P	7.195	6.875	.490
180	PC3-180P	7.295	6.975	.490
183	PC3-183P	7.395	7.075	.490
186	PC3-186P	7.495	7.175	.490
189	PC3-189P	7.595	7.275	.490
192	PC3-192P	7.695	7.375	.490
195	PC3-195P	7.795	7.475	.490
198	PC3-198P	7.895	7.575	.490
201	PC3-201P	7.995	7.675	.490
204	PC3-204P	8.095	7.775	.490
207	PC3-207P	8.195	7.875	.490
210	PC3-210P	8.295	7.975	.490
213	PC3-213P	8.395	8.075	.490
216	PC3-216P	8.495	8.175	.490
219	PC3-219P	8.595	8.275	.490
222	PC3-222P	8.695	8.375	.490
225	PC3-225P	8.795	8.475	.490
228	PC3-228P	8.895	8.575	.490
231	PC3-231P	8.995	8.675	.490
234	PC3-234P	9.095	8.775	.490
237	PC3-237P	9.195	8.875	.490
240	PC3-240P	9.295	8.975	.490
243	PC3-243P	9.395	9.075	.490
246	PC3-246P	9.495	9.175	.490
249	PC3-249P	9.595	9.275	.490
252	PC3-252P	9.695	9.375	.490
255	PC3-255P	9.795	9.475	.490
258	PC3-258P	9.895	9.575	.490
261	PC3-261P	9.995	9.675	.490
264	PC3-264P	10.095	9.775	.490
267	PC3-267P	10.195	9.875	.490
270	PC3-270P	10.295	9.975	.490
273	PC3-273P	10.395	10.075	.490
276	PC3-276P	10.495	10.175	.490
279	PC3-279P	10.595	10.275	.490
282	PC3-282P	10.695	10.375	.490
285	PC3-285P	10.795	10.475	.490
288	PC3-288P	10.895	10.575	.490
291	PC3-291P	10.995	10.675	.490
294	PC3-294P	11.095	10.775	.490
279	PC3-297P	11.195	10.875	.490
300	PC3-300P	11.295	10.975	.490
300	1 00 0001	11.200	10.070	.700

<sup>\*</sup>See How to Order, pages 3, 4 and 5

# Low Mating Force PC connector 4 row contact arrangements

Number				
of	, PC	A	В	, C
Contacts	Number*	Max.		Max.
040	PC4-040P	2.295	1.975	.590
044	PC4-044P	2.395	2.075	.590
048	PC4-048P	2.495	2.175	.590
052	PC4-052P	2.595	2.275	.590
056	PC4-056P	2.695	2.375	.590
060	PC4-060P	2.795	2.475	.590
064	PC4-064P	2.895	2.575	.590
068	PC4-068P	2.995	2.675	.590
072	PC4-072P	3.095	2.775	.590
076	PC4-076P	3.195	2.875	.590
080	PC4-080P	3.295	2.975	.590
084	PC4-084P	3.395	3.075	.590
088	PC4-088P	3.495	3.175	.590
092	PC4-092P	3.595	3.275	.590
096	PC4-096P	3.695	3.375	.590
100	PC4-100P	3.795	3.475	.590
104	PC4-104P	3.895	3.575	.590
108	PC4-108P	3.995	3.675	.590
112	PC4-112P	4.095	3.775	.590
116	PC4-116P	4.195	3.875	.590
120	PC4-120P	4.295	3.975	.590
124	PC4-124P	4.395	4.075	.590
128	PC4-128P	4.495	4.175	.590
132	PC4-132P	4.595	4.275	.590
136	PC4-136P	4.695	4.375	.590
140	PC4-140P	4.795	4.475	.590
144	PC4-144P	4.895	4.575	.590
148	PC4-148P	4.995	4.675	.590
152	PC4-152P	5.095	4.775	.590
156	PC4-156P	5.195	4.875	.590
160	PC4-160P	5.295	4.975	.590
164	PC4-164P	5.395	5.075	.590
168	PC4-168P	5.495	5.175	.590
172	PC4-172P	5.595	5.275	.590
176	PC4-176P	5.695	5.375	.590
180	PC4-180P	5.795	5.475	.590
184	PC4-184P	5.895	5.575	.590
188	PC4-188P	5.995	5.675	.590
192	PC4-192P	6.095	5.775	.590
196	PC4-196P	6.195	5.875	.590
200	PC4-200P	6.295	5.975	.590
204	PC4-204P	6.395	6.075	.590
208	PC4-208P	6.495	6.175	.590
212	PC4-212P	6.595	6.275	.590
216	PC4-216P	6.695	6.375	.590
220	PC4-220P	6.795	6.475	.590
	1 07 2201	0.730	0.473	.090

		1				
Number of	PC	Α	В	С		
Contacts	Number*	Max.	В	Max.		
224	PC4-224P	6.895	6.575	.590		
228	PC4-228P	6.995	6.675	.590		
232	PC4-232P	7.095	6.775	.590		
236	PC4-236P	7.195	6.875	.590		
240	PC4-240P	7.295	6.975	.590		
244	PC4-244P	7.395	7.075	.590		
248	PC4-248P	7.495	7.175	.590		
252	PC4-252P	7.595	7.275	.590		
256	PC4-256P	7.695	7.375	.590		
260	PC4-260P	7.795	7.475	.590		
264	PC4-264P	7.895	7.575	.590		
268	PC4-268P	7.995	7.675	.590		
272	PC4-272P	8.095	7.775	.590		
276	PC4-276P	8.195	7.875	.590		
280	PC4-280P	8.295	7.975	.590		
284	PC4-284P	8.395	8.075	.590		
288	PC4-288P	8.495	8.175	.590		
292	PC4-292P	8.595	8.275	.590		
296	PC4-296P	8.695	8.375	.590		
300	PC4-300P	8.795	8.475	.590		
304	PC4-304P	8.895	8.575	.590		
308	PC4-308P	8.995	8.675	.590		
312	PC4-312P	9.095	8.775	.590		
316	PC4-316P	9.195	8.875	.590		
320	PC4-320P	9.295	8.975	.590		
324	PC4-324P	9.395	9.075	.590		
328	PC4-328P	9.495	9.175	.590		
332	PC4-332P	9.595	9.275	.590		
336	PC4-336P	9.695	9.375	.590		
340	PC4-340P	9.795	9.475	.590		
344	PC4-344P	9.895	9.575	.590		
348	PC4-348P	9.995	9.675	.590		
352	PC4-352P	10.095	9.775	.590		
356	PC4-356P	10.195	9.875	.590		
360	PC4-360P	10.295	9.975	.590		
364	PC4-364P	10.395	10.075	.590		
368	PC4-368P	10.495	10.175	.590		
372	PC4-372P	10.595	10.275	.590		
376	PC4-376P	10.695	10.375	.590		
380	PC4-380P	10.795	10.475	.590		
384	PC4-384P	10.895	10.575	.590		
388	PC4-388P	10.995	10.675	.590		
392	PC4-392P	11.095	10.775	.590		
396	PC4-396P	11.195	10.875	.590		
400	PC4-400P	11.295	10.975	.590		
See How to Order, pages 3, 4 and 5						

<sup>\*</sup>See How to Order, pages 3, 4 and 5

## **Low Mating Force Connector Accessories**

## polarization keys

General information follows on this page and the next three pages for assembling connector accessories with Amphenol® Low Mating Force B³ Brush Contact Connectors.\* Provided are suggestions for proper connector installation that will help to maintain connector straightness after equipment assembly.

Low mating force connector bodies are intentionally designed to be non-rigid to facilitate application variables such as compliance to printed circuit boards, fixtures and card cages, vibration and shock exposure, thermal excursions and differential expansion characteristics. Users may employ installation procedures that will provide mating surface straightness of these non-rigid bodies within 0.010 inch to ensure maximum connector performance.

Generally, no external board support structures are required with B³ brush contact connectors as long as the mounting surface offers sufficient rigidity. However, longer installations should consider external support to prevent excessive flexing of the connector/printed circuit board assembly.

#### **POLARIZATION KEYS**

Polarization Keys, 10-285422-2 are accessory items, ordered separately for MB, DB, IO and PC Series Low Mating Force Connectors. If used, 4 keys are required per connector half. See page 5 for ordering information.

Examples at right show key locations for mating connector halves. The number or letter designations on all mating connectors are arranged so that the projecting keys on one relate to the same numbers or letters on the other. With the numbers or letters matching, the connector will mate.

#### **TYPICAL CODE SEQUENCE**

B, H-1, 5 4 Different possibilities at each position = 256



DAUGHTER BOARD CONNECTOR WITH POLARIZATION KEYS

\* Installation Instructions for B³ Low Mating Force Connectors had formerly been covered in publication L-1220. This has been discontinued and all installation instructions are covered here on pages 24-29.


## CONNECTOR ACCESSORIES THAT ARE USED WITH B<sup>3</sup> BRUSH CONNECTORS INCLUDE:

- Locking screws for I/O connector mounting to board
- Locking/mounting bushings:
  - for PC connector mounting to board or mating to I/O connector
  - for MB connector mounting to board or mating to I/O connector
- Polarization keys for each style connector provide up to 256 different key locations for alternate keying
- Test Probe kits for ensuring that contacts are properly wired within a connector and to prevent damage to brush contacts during probing.


For How to Order Accessories see page 5.

B³ brush PC style connectors are shipped with PC tail combs that not only protect the tails during shipment, but aid the person assembling the connectors to boards to align the contacts.

Refer to page 2 of this catalog for illustration of the connector styles and how they mate.



KEY LOCATIONS
MOTHER BOARD OR PC CONNECTORS



KEY LOCATIONS
DAUGHTER BOARD OR INPUT/OUTPUT CONNECTORS

## **Low Mating Force Connector Accessories**

## test probe kit

In order to insure that contacts are properly wired within a connector, a Test Probe Kit is needed (Part number to order is 11-10400-22). This kit is especially designed to prevent damage to brush contacts during probing. It consists of a plastic holder, insert, and two contacts, usable for either Mother Board or Daughter Board applications. It is recommended that the user buy two kits, if using connectors of two genders. The kits are not convertible after assembly.

#### **Instructions:**

DB-IO Test Probe -

Slide the insert back over the wire and crimp contact on. Follow crimping procedure below. Then snap the insert and contact assembly into the holder.


MB-PC Test probe -

Slide holder over wire and then crimp contact. Follow crimping procedure below. Slide the insert on the contact and seat it against the shoulder. Slide the holder forward and snap it onto the insert.


Crimping Procedure: Using accepted industry procedures, strip wire end to be terminated 1/8 to 5/32 inch. Care should be taken not to nick wire strands. Assemble the M22520/2-01 crimp tool and the M22520/2-27 positioner, and place tool selector in correct setting for wire size. Selected wire size must not have an insulation diameter more than .062 for MB-PC and not more than .038 for DB/IO.

AWG 22 24 26 28 SEL 5 4 3 2

Insert stripped wire end into contact wire well. Strands should be visible in wire well inspection hole. Bottom contact and wire assembly in positioner, and close handles of crimp tool to complete crimp. Handles will not open unless full crimping cycle has been completed.

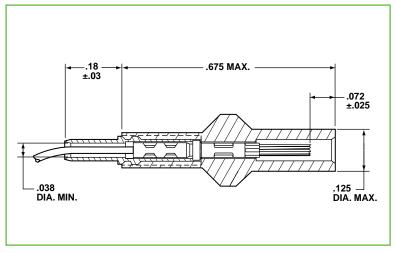

DAUGHTER BOARD - INPUT/OUTPUT TEST PROBE

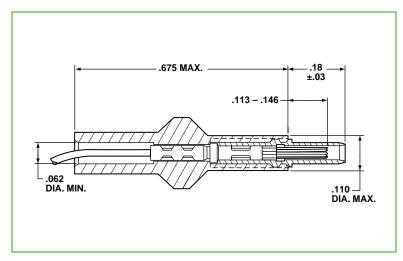

MOTHER BOARD - PC TEST PROBE

## BRUSH CONNECTORS USER APPLICATION INFORMATION

The Brush B³ connector is a highly sophisticated, innovative low mating force device designed to provide a multiplicity or highly redundant number of contact sites for high density, high performance applications. Contact resistance is stable and low, approximately 1/3 lower than the most widely available contemporary two piece printed circuit card connector type. To maximize the B³ connector capability and assure the greatest potential reliability, several guidelines should be followed.


Ideally, connectors should be fully mated and not used as a packaging system tolerance absorber. Full mating occurs when the two molded thermoplastic contact housings (connector bodies) touch, plug skirt to receptacle shoulder over the entire length of the connector. However, manufacturing tolerances and user installation procedures must be considered and can be expected to prevent the "ideal" situation.

Connector bodies were intentionally designed to be non-rigid as permanent flexibility is necessary to allow compliance to user printed circuit cards, fixtures and card cages. Vibration and shock exposure, thermal excursions, contact repairability, and differential expansion characteristics further dictate the desirability of flexible connectors.

Amphenol drawing call-outs of part flatness to a 0.010 inch FIM (Total Indicator Reading - Full Indicator Movement) over the mating surface length is to be interpreted as in an "as used" condition. Rigid mounting of Mother Board (plug) parts to frames, multi-layer printed circuit boards or back panels should consider the need for the 0.010 inch maximum condition after soldering or solderless wrapping procedures.

Normal Mother Board parts in an unrestrained, unused condition may exceed the "as used" 0.010 inch reading at normal ambient or storage environments. Thermal cycling may further aggravate or adjust the condition. These parts present a profile from flat to a "smile" appearance when viewed from the side with the mating surface uppermost. (For example, see photo above). Normal positioning of this part on the Mother Board with slight restraint through use of mounting hardware or standard mounting bolts will automatically allow part compliance to the flatness condition of the board. Slight restraint is urged to allow for differential thermal expansion compensation during preheating and soldering operations. Final torquing or permanent fastening should be effected after cool down and thermal neutralization. Normal solderless wrapping procedures could ignore the differential expansion consideration.

Daughter Board connectors present the same flat to "smile" profile in a free state with the mating surface downward. The relief shelf can be used as a reference or guide when used with a straight edged Daughter Board or printed circuit board "page". Once proper positioning is verified and contact tails are solder fixed to the plated through holes, straightness will be permanently retained.



DAUGHTER BOARD AND MOTHER BOARD FULLY MATED CONDITION

Users are urged to monitor the quality of connector installation to optimize the mating of connectors.

During usage and when mated the worst case condition of the "as used" 0.010 inch maximum reading of both the plug and receptacle could cause a maximum gap between plug and receptacle moldings of 0.020 inch. This condition is well within the B³ product mated performance goals as our minimum effective electrical contact engagement has greater than a 100% safety factor. Users are urged to monitor the quality of connector installation to optimize the mating of connectors.

Input/Output connectors also normally exhibit a flat to "smile" profile with the mating surface downward. This "smile" condition self corrects once mated with the Mother Board counterpart and accessory locking screws are fastened. Again, checking for the 0.020 inch maximum gap is urged as a quality control monitor of user application techniques.

Amphenol has attempted to design in the ultimate for connector compliancy and self-correction during normal user installation procedures. The connector capabilities and inherent reliability rely in part on practical user procedures and application considerations. Refer to pages 27 - 29 for other installation instructions. And, refer to page 2 for correct mating of low mating force connectors. Amphenol board level engineers and product specialists are available to assist the user with application recommendations and processing guidance. Give us a call at 607-563-5011 and ask for board level technical assistance if further information is needed.

#### MOTHER BOARD CONNECTOR

MB connectors that are mounted on printed circuit boards should be installed on the board and held somewhat loosely, yet assuring all connector molding standoff pads contact the surface of the board, prior to soldering. There are several methods for attaching the MB connector to the board.

Inserting locking/mounting bushings with an arbor press is shown in the top photo at right. Locking/mounting bushing accessory, two per connector, may be inserted into 0.185 inch diameter CSK holes at each end of the front of a MB connector body. (Part number to order locking/mounting bushing is 10-41196-3). Using a light arbor press or similar device, firmly press the knurled section of the bushing into the lower 0.122 inch diameter hole until the front of the bushing is flush with, or slightly below, the front surface of the MB connector. Refer to Figure 1 at right.

Make sure the bushing and hole axis are properly aligned. Avoid excessive force which may crack the back surface of the MB connector body.

The back of the locking/mounting bushing has a 4–40 UNC-2A THD to mount the connector. Fasten the connector with a suitable washer and nut. The front of the locking/mounting bushing has a 4–40 UNC-2B THD which will mate with the locking screw accessory of an IO connector.

#### **Alternate Mounting Variations for Mother Board Connector**

A clinch nut (such as all ESNA 79NCFMA2-26 or equivalent may be pressed from the front, knurled end first, through the 0.185 diameter CSK into the 0.122 inch diameter hole at each end of the connector. An appropriate length 2–56 UNC-3A screw, washer, and nut may be used to mount the connector. Mounting forces should be applied to the bushing toward the rear of the connector. (See Figure 2 below)

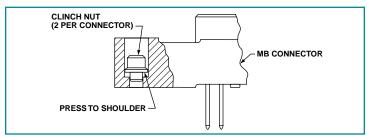


FIGURE 2: MB CONNECTOR WITH CLINCH NUT MOUNTING

When a Daughter Board is mated, use a 4–40 screw of appropriate length with a suitable washer under the head. Insert the screw from the front of the connector through the 0.185 inch diameter CSK into the 0.122 inch diameter hole at each end of the connector and fasten with a suitable washer and nut. (Refer to Figure 3 below). Torque to 5.5 pound-inch maximum after soldering operation has been completed.

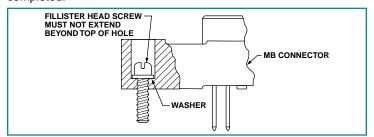


FIGURE 3: MB CONNECTOR WITH SCREW MOUNTING



LOCKING/MOUNTING BUSHING ACCESSORY INSERTED INTO MB CONNECTOR BODY




FIGURE 1: ASSEMBLY OF LOCKING/MOUNTING BUSHING INTO MB CONNECTOR

If MB connectors are to be wave soldered to printed circuit boards, the boards should be fixtured to maintain assembly straightness prior to and during the wave soldering process. (Refer to Figure 4 below).




FIGURE 4: TYPICAL FIXTURE FOR SOLDERING MB CONNECTORS

#### **DAUGHTER BOARD CONNECTOR**

DB connectors should be loosely held on the printed circuit board prior to and during wave soldering. Care must be taken to ensure that the board does not bow away from the center of the connector during the soldering process. Also, especially on long length daughter board connectors, care must be taken that the connector does not bow on the circuit board. (Refer to Figure 5.)

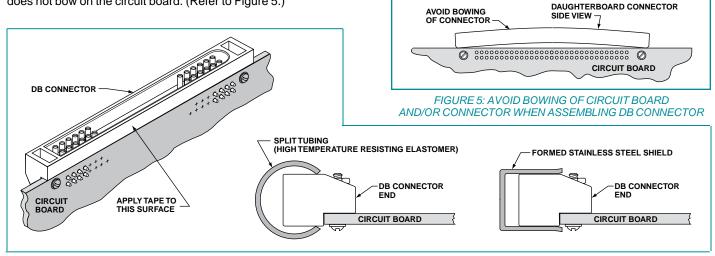


FIGURE 6: THREE TYPICAL MASKING APPLICATIONS FOR SOLDERING DB CONNECTORS

After soldering, mounting screws should be properly torqued.

For cosmetic purposes, the board side of the DB connector can be masked prior to wave soldering to protect it from heat exposure and solder wash. Acceptable masking may be accomplished with split tubing, stainless steel, or Mystik Tape #7010 or #7367. (Refer to Figure 6).


Printed wiring boards with DB connectors attached should be inserted into the housing until firmly seated. If possible, visual observation of the MB/DB mated condition is recommended. The fully mated condition occurs when the DB connector skirt bottoms on the MB or PC connector shoulder along the full length. (Refer to Figure 7).

Printed circuit boards should be supported in card guides and locked in position when connectors are fully mated.

#### **PC CONNECTOR**

The PC connector should be loosely attached to the printed circuit board prior to any soldering of contacts.

Locking bushing accessory, two per connector, may be inserted from the back of a PC connector body into large mounting holes at each end. See photo at right. Part number to order locking bushing accessory for PC connectors is 10-411196-4. The 0.126 inch diameter cross holes in the locking bushing must be aligned with the 0.126 inch diameter cross hole in the PC connector body. These holes accept a 4–40 UNC-2A screw which should be long enough to allow mounting to the board. Fasten with a suitable washer and nut, making sure an appropriate washer is also under the head. The front of the locking bushing has a 4–40 UNC-2B thread which will mate with the locking bushing accessory of an IO connector.

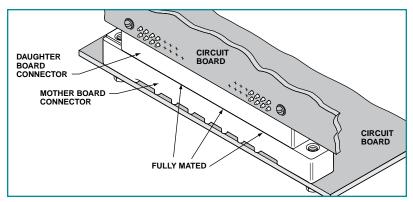

DAUGHTERBOARD CONNECTOR

AVOID BOWING OF CIRCUIT BOARD

CIRCUIT BOARD

FIGURE 7: MB CONNECTOR & DB CONNECTOR IN FULLY MATED CONDITION



LOCKING BUSHING ACCESSORY INSERTED INTO PC CONNECTOR BODY

#### PC CONNECTOR, CONT.

The mounting surface to which the connector is applied should not extend forward of the shoulder of the PC connector. If the mounting surface does extend beyond the shoulder, a shim (minimum 0.005 inch thick) must be inserted between the connector body and the mounting surface. (Refer to Figure 8). After soldering, mounting screws should be properly torqued.

Fixturing of the PC connector and mounting surface may be desirable to assure straightness after wave soldering.

# SHOULDER PC CONNECTOR USE A 0.005 INCH SHIM OR WASHER IF MOUNTING SURFACE EXTENDS BEYOND SHOULDER OF CONNECTOR

FIGURE 8: PC CONNECTOR MOUNTING

#### INPUT/OUTPUT CONNECTOR


Use of mating hardware, such as locking screws, is recommended with I/O connectors. See photo at right. Locking screw accessory, two per connector, may be inserted into the large holes at each end of the back of an IO connector body. Part number to order locking screw accessory is 10-411196-4. By hand, press the locking screw firmly down into the cavity until it reaches a positive stop. The locking screw is then captivated in the retention system of the cavity. The front of the locking screw has a 4-40 UNC-2A thread which will mate with the locking bushing accessories of MB or PC connectors. (Refer to Figure 9 for I/O locking screw dimensions).

Should it be necessary to remove the captivated locking screw accessory, push the screw as far forward as possible. Using vise grip pliers to grasp the threaded end and pliers to hold the knurled end, apply torque until the locking screw breaks in two. Each half will then drop out.



For fixed mounting, a 6-32 thread forming screw, type AB (MS5186) may be inserted through the mounting member and into the holes at each end of the connector body from the back. The screws must be used with suitable washers and must be of sufficient length to penetrate the connector body 0.350 inch. Care must be taken not to over-tighten the screws.

Visual observation of the mating of the MB connector to the I/O connector or the PC connector to the I/O connector is recommended. The fully mated condition occurs when the I/O connector skirt bottoms on the MB or PC shoulder along the full length. (Refer to Figure 10).



LOCKING SCREW ACCESSORY INSERTED INTO IO CONNECTOR BODY





FIGURE 9: I/O LOCKING SCREW DIMENSIONS

Printed circuit boards containing PC connectors that are mating with I/O connectors should utilize a holding device that is capable of locking the board in place to prevent back-off during use.

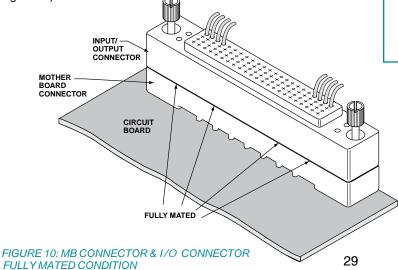

## **Low Mating Force Connector** Smaller Sizes with .100 X .100 Sq. Inch Grid

Ε Tail Length

±.020 .148 .180

.335

## design flexibility

To meet more customer needs and provide more design flexibility, Amphenol expanded their low mating force connector family with smaller contact count connectors (sizes with less than standard 10 contacts per row). These are available with as few as 10 brush contacts per connector and up to 36 brush contacts per connector. The arrangements are in the same .100 X .100 square inch grid pattern as standard low mating force connectors. They are offered in mother board, daughter board, input/output and printed circuit styles. (Shown on this page and the following page). For how to order information please consult Amphenol Aerospace.




LOW MATING FORCE CONNECTORS IN SMALLER SIZES

#### **Mother Board Connector**

Number of Contacts	Contact Pattern	A Max.	В	C Max.
10	2 Row X 5	1.795	1.475	.390
12	2 Row X 6	1.895	1.575	.390
14	2 Row X 7	1.995	1.675	.390
15	3 Row X 5	1.795	1.475	.490
16	2 Row X 8	2.095	1.775	.390
10	2 Row X 9	2.195	1.875	.390
18	3 Row X 6	1.895	1.575	.490
20	4 Row X 5	1.795	1.475	.590
21	3 Row X 7	1.995	1.675	.490
24	3 Row X 8	2.095	1.775	.490
	4 Row X 6	1.895	1.575	.590
27	3 Row X 9	2.195	1.875	.490
28	4 Row X 7	1.995	1.675	.590
32	4 Row X 8	2.095	1.775	.590
36	4 Row X 9	2.195	1.875	.590


<sup>\*\*</sup> Accessory item supplied separately. See Accessory How to Order page 5 and page 27 for alternate mounting methods.

## **Mother Board Connector**



## **Daughter Board Connector**

Number of Contacts	Contact Pattern	A Max.	В	C Max.	D Max.
10	2 Row X 5	1.180	.850	.375	.545
12	2 Row X 6	1.280	.950	.375	.545
14	2 Row X 7	1.380	1.050	.375	.545
15	3 Row X 5	1.180	.850	.475	.645
16	2 Row X 8	1.480	1.150	.375	.545
40	2 Row X 9	1.580	1.250	.375	.545
18	3 Row X 6	1.280	.950	.475	.645
20	4 Row X 5	1.180	.850	.575	.745
21	3 Row X 7	1.380	1.050	.475	.645
24	3 Row X 8	1.480	1.150	.475	.645
24	4 Row X 6	1.280	.950	.575	.745
27	3 Row X 9	1.580	1.250	.475	.645
28	4 Row X 7	1.380	1.050	.575	.745
32	4 Row X 8	1.480	1.150	.575	.745
36	4 Row X 9	1.580	1.250	.575	.745

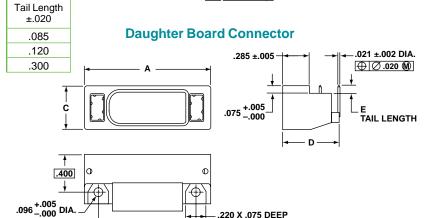

.220 X .075 DEEP

(ACCOMMODATES HEX NUT .187 MAX. ACROSS FLATS &

.205 MIN. ACROSS CORNERS)

В

⊕ Ø.020 M

# Low Mating Force Connector Smaller Sizes, cont.

## design flexibility


## Input/Output Connector

Number of Contacts	Contact Pattern	A Max.	В	C Max.
10	2 Row X 5	1.795	1.475	.390
12	2 Row X 6	1.895	1.575	.390
14	2 Row X 7	1.995	1.675	.390
15	3 Row X 5	1.795	1.475	.490
16	2 Row X 8	2.095	1.775	.390
40	2 Row X 9	2.195	1.875	.390
18	3 Row X 6	1.895	1.575	.490
20	4 Row X 5	1.795	1.475	.590
21	3 Row X 7	1.995	1.675	.490
24	3 Row X 8	2.095	1.775	.490
24	4 Row X 6	1.895	1.575	.590
27	3 Row X 9	2.195	1.875	.490
28	4 Row X 7	1.995	1.675	.590
32	4 Row X 8	2.095	1.775	.590
36	4 Row X 9	2.195	1.875	.590

Contact Type	K Dia. ±.020	E Tail Length ±.020
Rear Removable Crimp Contact	N/A	N/A
Round PCB Stud	.021	.145
Solder Termination	.021	.335

## **Input/Output Connector**

В

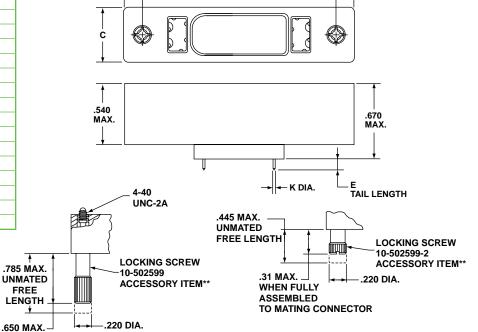


#### **Printed Circuit Connector**

WHEN FULLY ASSEMBLED TO MATING CONNECTOR

Number of Contacts	Contact Pattern	A Max.	В	C Max.	D Max.
10	2 Row X 5	1.180	.850	.375	.545
12	2 Row X 6	1.280	.950	.375	.545
14	2 Row X 7	1.380	1.050	.375	.545
15	3 Row X 5	1.180	.850	.475	.645
16	2 Row X 8	1.480	1.150	.375	.545
40	2 Row X 9	1.580	1.250	.375	.545
18	3 Row X 6	1.280	.950	.475	.645
20	4 Row X 5	1.180	.850	.575	.745
21	3 Row X 7	1.380	1.050	.475	.645
24	3 Row X 8	1.480	1.150	.475	.645
24	4 Row X 6	1.280	.950	.575	.745
27	3 Row X 9	1.580	1.250	.475	.645
28	4 Row X 7	1.380	1.050	.575	.745
32	4 Row X 8	1.480	1.150	.575	.745
36	4 Row X 9	1.580	1.250	.575	.745

<sup>\*\*</sup> Accessory item supplied separately. See Accessory How to Order page 5 and page 27 for alternate mounting methods.

#### **Printed Circuit Connector**

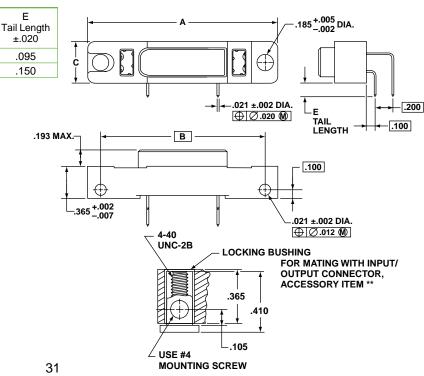

## **Hybrid Configurations with Contact Options**

## signal, power, coax or fiber optics

The B³ Brush contact is the standard contact for Low mating force connectors due to its low mating force, stable electrical performance and extended service life. Design flexibility is expanded with the ability to add combinations of other types of contacts: signal, power, high speed coax or fiber optic termini; in one high density hybrid connector.

Power, shielded coax or twinax contacts, in combination with Brush signal contacts are available in configurations of the following (see next page for illustrations):

- A single row of size 16 power or coax or twinax contacts with 2 rows of brush contacts
- A single row of size 12 power or coax or twinax contacts with 3 rows of brush contacts
- A double row of size 16 power or coax or twinax contacts with 4 rows of brush contacts

Power and coax contacts are standard MIL-DTL-38999 Series II type. Consult Amphenol board level product marketing (800-678-0141) for assistance with available hybrid configurations.

NOTE: Power and coax contacts and fiber optic termini are not provided with the connector and must be purchased separately.



Amphenol's Power Strip connectors were developed for use as a dedicated power interface between module cards and backplanes. These connectors use the same insert bodies as Amphenol low mating force connectors, but have power contacts rather than brush contacts. Cavities allow for size 16 or 12 power contacts. Or, coax/twinax contacts can also be used in these size 16 or 12 cavities.


## HYBRID BRUSH CONNECTORS WITH FIBER OPTIC TERMINI

Amphenol's superiority and breadth of product offering is demonstrated in its capability for packaging fiber termini and the Brush contact in a printed circuit board rectangular connector. Fiber optic MIL-PRF-29504 termini size 16 and HD20 can be used as well as the 90° termini style with optical performance the same as when used in cylindrical connectors.

For more information on Amphenol fiber optic connectors and termini, see Amphenol catalog 12-352, on-line at www.amphenol-aerospace.com.




COMBINATION OF BRUSH CONTACTS & SHIELDED CONTACTS

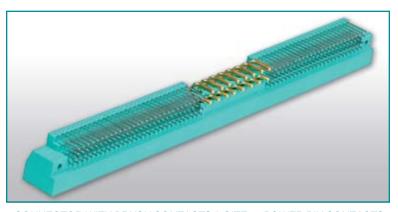

CONNECTOR WITH BRUSH CONTACTS & SIZE 16 POWER PIN CONTACTS



POWER STRIP RECTANGULARS WITH SIZE 16 POWER CONTACTS

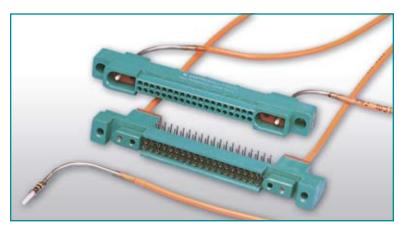

COMBINATION OF BRUSH CONTACTS & MS29504 FIBER OPTIC TERMINI


# **Custom Hybrid Designs, Small Color-Coded Brush Connectors**

## design flexibility


The following shows a few hybrid configuration connectors that have been developed. Consult Amphenol Aerospace for assistance in solving design problems and for part numbers that will provide the proper combination of these hybrid configurations to meet your specific connector application requirements.


Hybrid: 30 B<sup>3</sup> brush contacts, 6 size 12 power/coax/twinax contacts






Hybrid: 10 B³ brush contacts, 4 size 16 power/coax/twinax contacts







Hybrid: 40 B³ brush contacts, 16 size 16 power/coax/twinax contacts



Hybrid: 40 B<sup>3</sup> Brush contacts, 4 size 16 power/coax/twinax contacts



Hybrid: 30 B3 brush contacts, 10 size 12 power/coax/twinax contacts



Amphenol can meet innovative connector solutions with custom designs. Our board level engineers can work with customers who need special contact arrangements or special sized inserts.

The special hybrid connector shown at right was developed for the Vetronics System on a military tank. This custom shape insert design houses a combination of contact types, a sealing grommet and it has special mounting/locking screws.



HYBRID CUSTOM CONNECTOR WITH 75 BRUSH DIGITAL CONTACTS, 26 SIZE 16 POWER CONTACTS & 2 SIZE 04 POWER CONTACTS

## SMALL COLOR-CODED BRUSH CONTACT CONNECTORS DESIGNED FOR MEDICAL INSTRUMENTATION

Amphenol has responded to the needs of the medical industry by offering even smaller inserts with brush contacts. These small profile, but highly reliable interconnects, are ideal for medical and test equipment such as patient monitoring systems. Color coding of these connectors was a market-driven requirement for frequent plugging and unplugging on equipment, so Amphenol provides these small sized brush connectors in a variety of color materials.



SMALL COLOR-CODED BRUSH CONNECTORS WITH AS FEW AS 5 CONTACTS PER CONNECTOR

## **Docking Connectors** with (.0787 inch X .100 inch) staggered grid spacing

## **BRUSH CONTACT CONNECTORS MAKE THE IDEAL CHOICE FOR FREQUENT DOCKING APPLICATIONS**

When frequent docking to charge and transfer data is a necessity, the brush contact system offers high performance of over 100,000 mating cycles. This long contact life without degradation in performance provides customers with reliability in frequent docking applications such as:

- Handheld GPS units Handheld radios
- Rugged computers
- Controllers
- Scanners
- Accessories
- Cellular phones

#### **Performance**

Durability: . . . . . . . . . . . . Up to 100,000 mating cycles Insertion/Extraction Force: 1.5 ounce typical per contact

Operating Temperature: . -65° to 125°C

Current Rating: . . . . . Up to 5 amperes (termination dependent)

Hot swap 1 ampere maximum (load

dependent)

Data Rate

(Select connectors only): . Configurable for 3.125 Gbps differential signal

Insulation Resistance: . . 5 gigaohms minimum

Dielectric Withstanding

250 volts @ 70,000 feet elevation min.

Solderability: . . . . . . MIL-STD-202, method 208

Salt Fog: . . . . . . . 48 hours IAW MIL-STD-1344, method

1002, type II

Humidity: . . . . . . . . IAW MIL-STD-1344, method 1002, type II Vibration: . . . . . . . 4 hours in each of 3 mutually perpendicular

axes IAW MIL-STD-1344, method 2004, test

condition G

Shock: . . . . . . . . . . . . 1 shock along each of three mutually

perpendicular axes IAW MIL-STD-1344,

method 2004, test condition G

#### **Features**

Radial Misalignment: . . . Capable of correcting up to a .040" initial

radial misalignment

Angular Misalignment: . . Capable of mating with up to a 4° initial

angular misalignment

Polarization: . . . . . . "D" shaped interface

Color: . . . . . . . . Standard is black, variety of other colors are

available

#### **Materials**

Insulator: . . . . . . . . . . . . . . . Glass-filled thermoplastic molding

Contact: Wire . . . . . Beryllium copper per ASTM B197; finish is

gold per ASTM B488 over nickel per AMS-

QQ-N-290

Holder . . . . Brass similar to UNS C33500; finish is gold per MIL-G-45204 or tin-lead per MIL-P-81728


or tin per MIL-T-10727 (RoHS compliant

Sleeve: . . . Stainless steel per AMS-5514, passivated IAW QQ-P-35

(DB and I/O connectors only)

For more information, including how to order, consult Amphenol Aerospace. Call 800-648-0141 and ask for Amphenol board level product marketing for assistance.



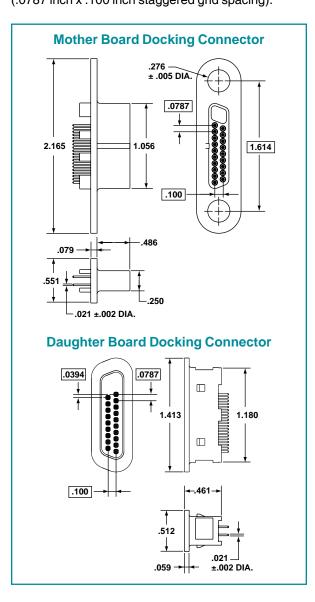

# HDB<sup>3</sup> High Density Brush Series - tighter (.070 in. X .060 in.) staggered grid spacing


#### **HDB<sup>3</sup> CONNECTORS**

The new connector series of brush connectors incorporates an even higher density contact pattern and lower mated height than Amphenol's standard low mating force rectangular connectors. These HDB³ connectors utilize the same durable and reliable B³ brush contact, but in a tighter .070 inch X .060 inch staggered grid spacing. They offer the advantage of a higher density pattern in a compact-height connector that will take up less board space; thus saving cost over adding additional connectors to meet power requirements. HDB³ connector styles include mother board, daughter board, input/output and a stacker style.

For how to order information of the HDB³ see Amphenol brochure SL-402\* online at www.amphenol-aerospace.com.



When more contact density is required, the HDB<sup>3</sup> High Density Series with .070 inch X .060 inch staggered grid spacing is the solution.

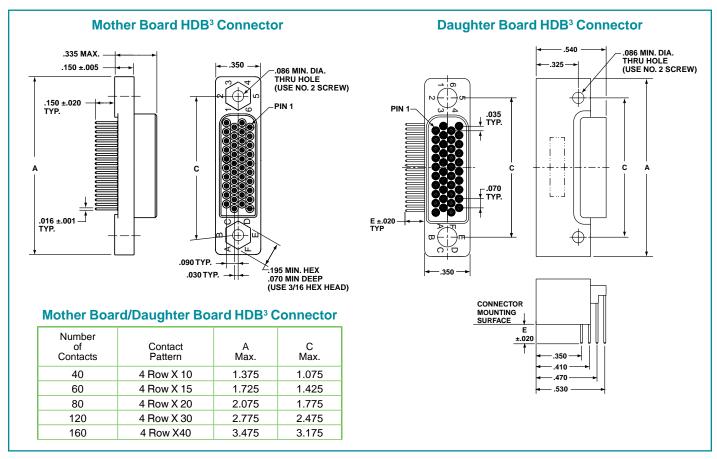

<sup>\*</sup> Also in SL-402 brochure are other HDB3 style connectors: input/output style, stacker and high speed configurations.


# HSB<sup>3</sup> High Density Series with 3.125 Gb/s High Speed data rate

#### **HSB<sup>3</sup> CONNECTORS**


The HSB³ is a further new development of the higher density HDB³ connector series. The HSB³ offers higher speed as well as higher density. Benefits include:

- Allows data rates up to 3.125 Gb/s via 100 ohm matched impedance differential pairs
- Uses partially populated HDB<sup>3</sup> mother board and daughter board inserts. See HSB<sup>3</sup> arrangements below.

For more information refer to Amphenol® brochure SL-402, on-line at www.amphenol-aerospace.com. or call 800-678-0141 and ask for Amphenol board level product marketing for assistance.




HSB3 HIGH DENSITY/HIGH SPEED BRUSH CONNECTOR

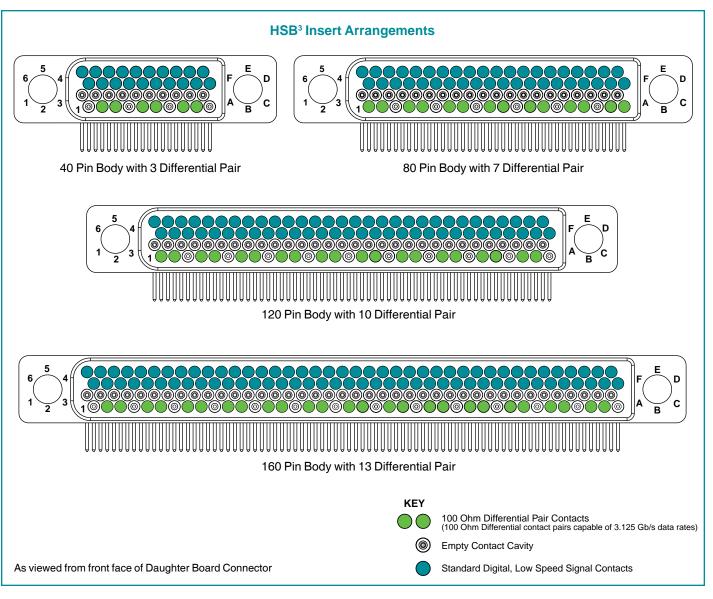

# Ruggedized, Non-Floating Brush Rack and Panel Connectors

This new connector series utilizes Amphenol's durable and reliable B³ contact system in a rugged, non-floating Rack and Panel connector. Included in this series are digital and power/digital "hybrid" insert arrangements.

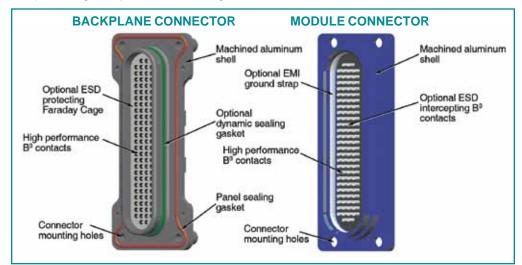

Standard Ruggedized, Nonfloating Brush Rack and Panel Connector Features include:

- 126 high performance B<sup>3</sup> brush contacts
- 0.100 inch x 0.100 inch square grid footprint
- Environmentally sealed at connector interface with mated (optional feature)
- Environmentally sealed connector mounting interface
- EMI protection is available at mounting surfaces and connector interface
- ESD protection is available

   allows use of Class 3
   hardened chips (4KV max. voltage)

Standard Ruggedized Brush Rack and Panel Connector Performance:

Durability: 500 mating cycles

Insertion/Extraction

Force: 7 lbs. typical
Operating Temp.: -60° to +125°C
Current Rating: 3 amperes

Hot swap 1 ampere maximum (load dependant) - non ESD protected version

• Insulation Resistance: 1 gagohm minimum

Dielectric

Withstanding Voltage: 500V, 60 Hz RMS @ sea level

300V, 60 Hz RMS @ 15,000 ft. elevation

Solderability: J-STD-004, -005 & -006
Salt Fog: EIA-364-26B, test condition B
Humidity: EIA-364-31B, test method III
Vibration: EIA-364-28B, test condition III
Shock: EIA-364-27B, test condition G

Hybrid arrangements are available as shown in top photo at right, that utilize a combination of brush contacts and high power RADSOK® contacts. The photo shows a 74 signal and 6 power configuration. For other hybrid arrangements, consult Amphenol Aerospace. Product data sheet #203 provides further information including how to order this product. (online at www.amphenol-aerospace.com)



HYBRD RUGGEDIZED, NON-FLOATING RACK & PANEL CONNECTOR (8 RADSOK® HIGH POWER CONTACTS, 72 BRUSH CONTACTS)



2 BAY SHELL CONFIGURATION RUGGEDIZED, NON-FLOATING RACK AND PANEL CONNECTOR (126 BRUSH CONTACTS PER BAY)

## LRM (Line Replaceable Modules)

## AMPHENOL CONTINUES TO DEVELOP INTERCONNECTS THAT MEET THE DEMANDS OF THE AVIONICS INDUSTRY

Starting with the development of the B³ contact, incorporated into the low mating force PCB connectors, the LRM line replaceable module followed as the avionics high density rectangular interconnect solution. LRM interconnects are combinations of module and backplane inserts, in one bay, two bay, three bay or more configurations. LRM products are used on major programs of aircraft and military vehicles.

This page and the next briefly describe the LRM family of connectors. For complete information please see Amphenol® High Performance Line Replaceable Module (LRM) Interconnects catalog.\*

The Brush contact has superior performance in LRM interconnects due to its low mating force, stable electrical performance and extended life. Other LRM features include:

- Backplane versatility: available with through-hole solder posts or with compliant pins for solderless applications
- Wide range of PCB/heat sink accommodations with standard surface mount tails or flex termination
- Polarization keys up to 4096 possible keying positions
- · Superior intermittancy-free performance under vibration
- Dielectric withstanding voltage: Staggered grid and GEN-X styles: 100 volts at sea level (due to the incorporation of ESD shield)
- Temperature range: suitable for vapor phase soldering; normal operating temp. is -65°C to +125°C
- Current rating: 3.0A derated to 1.5A typical (dependent on loading)


#### LRM CONNECTORS WITH STAGGERED GRID

- Provides higher contact density for high speed integrated circuitry in SEM-E and custom form factors
- 180 contact insert pattern grid in 8 rows: 0.100 inch spacing along the row with 0.050 inch between rows, rows offset 0.050 inch
- Options include various shell designs to accommodate a wide range of PC board/heat sink combinations
- Solder tail, wire wrap or compliant contact availability
- Amphenol ESD (Electrostatic Discharge) protection:
   Utilization of the Faraday Cage principal to shunt
   electrostatic discharge events to the conductive enclosure on which the connector is mounted, thus never
   allowing the high voltage, high current discharge
   event to reside on any contacts.
- Designed for level 2 (flight line) maintenance
- · Provides routing channels for backplane

## LRM CONNECTORS WITH STAGGERED GRID AIRFLOW-THRU CONTACT PATTERN

 Accommodate standard B³ tails in staggered pattern, but with increased spacing in the center, and also provide more airflow cooling of inserts; for use with wider boards, up to 0.425 inch



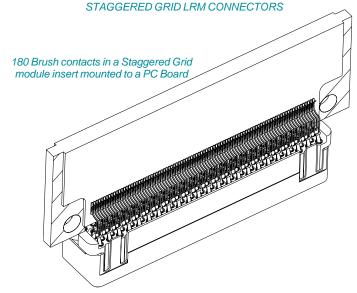



GEN-X GRID LRM CONNECTOR

#### LRM CONNECTORS WITH GEN-X GRID

- Even higher contact density than staggered grid and improved electrical performance
- All the feature of the 180 contact pattern, including ESD protection
- · Available in SEM-E and custom form factors
- 236 contact pattern grid in 8 rows: 0.075 inch spacing along the row with 0.060 inch between rows, rows offset 0.0375 inch

<sup>\*</sup> This catalog is on-line at www.amphenol-aerospace.com, or call Amphenol Aerospace (800-678-0141) for more information.

# LRM Hybrids and High Speed LRM Gigastak & Digastak Inserts

#### LRM OPTIONAL HYBRID DESIGNS

- Custom combinations of digital contacts and fiber optic termini. Optical performance of fiber optic termini within LRM connectors are the same as termini used in cylindrical connectors.\*\* Insertion losses range from .3dB to <1.5dB depending upon launch conditions, fiber NA, fiber size and the type of termination. LRM connectors are available with fiber optic termini in the following configurations:</li>
  - Modified MIL-PRF-29504/4, /5, MIL-PRF-14 & MIL-PF-15 termini - size 16, straight and 90 degree styles
  - MT ferrule (2-24 fiber lines per ferrule)
  - Hybrid arrangements with fiber optic and other contact types
- LRM inserts with RF contacts
- LRM power supply modules with 270VDC sections which are capable of providing corona-free operation at 100,000 ft.
- Designs with high speed shielded contacts coax, triax, twinax, differential twinax, and quadrax contacts
- Combinations of power contact, standard brush, high power, differential pair brush and fiber optic termini
- New designs that utilizes the RADSOK® high amperage socket contact with inserts.
   The RADSOK® design is a socket cylinder within the female contact which has several equally spaced longitudinal beams twisted into a hyperbolic shape. As the male pin is inserted, axial members in the female half deflect, imparting high current flow across the connection with minimal voltage loss. This twisted hyperbolic grid ensures a large coaxial, face-to-face
- surface area engagement.
   Incorporation of flex circuits for more versatility of PC board terminations
- · Custom shells with multiple bay configurations
- Backplane shell grounding capabilities

## HIGH SPEED LRM GIGASTAK AND DIGASTAK INSERTS

More and more speed is needed in today's interconnection products. Amphenol has recently developed a new family of high speed LRM connectors that are capable of achieving data rates in excess of 6.25 Gbps via 100 ohm matched impedance differential pairs. Each insert arrangement has been optimized through strategic placement of signal and ground contacts for the perfect balance of impedance control and cross talk mitigation for a given data rate. As an enhancement over the standard LRM, this new series offers a unique solderless termination to module cards via Amphenol Intercon's cStack technology.

For more information on LRM interconnects see catalog 12-037 online at www.amphenol-aerospace.com

\*\* For more information on Amphenol Fiber Optic Termini and Connectors see catalog 12-352 on-line at www.amphenol-aerospace.com or call Amphenol Aerospace (800-678-0141).



LRM INTERCONNECTS (SHOWN FROM TOP TO BOTTOM):

- LRM Backplane, 2 bays of staggered B<sup>3</sup> brush contacts and inserts for size 12 coax contacts
- LRM Module with Fiber Optic MT ferrules in one insert and B<sup>3</sup> Brush in a differential pair insert
- · LRM inserts with PC tails
- LRM mating Module and Backplane with MT-PRF-29504 Fiber optic termini and B<sup>3</sup> Brush contacts



HIGH SPEED LRM GIGASTAK AND DIGASTAK INSERTS

## Other Amphenol Rectangular Connectors

# Total packaging with Amphenol Printed Circuit Boards, Rectangular and Cylindrical Connectors

**VIPER® CONNECTORS** 

#### **BOARD LEVEL CONNECTORS WITH QUADRAX CONTACTS**

Amphenol leads in the electrical connector arena in offering a wide range of interconnects that provide high speed transmission and operate in high frequency conditions. The photo at right shows a board level connector with 4 size 8 quadrax compliant contacts. This will accommodate a backplane of .125 inch min. thickness. Consult Amphenol Aerospace for more information.

#### **VIPER® INTERCONNECTS**

Amphenol Backplane Systems (ABS) developed the VIPER interconnect platform to provide a ruggedized and high density modular connector solution that can scale to higher bandwidths; from 80 Mbps to over 10 Gpbs. Features and benefits of the VIPER include:

- Designed for 10+ Gbps data rate performance
- 100 ohm impedance for differential pair in a 1.8mm x 1.35mm grid
- · Press-fit termination compliant pins
- Backplane modules available in 8 & 16 row increments, 1.8mm x 1.8mm grid
- Fully footprint-compatible with VITA 46 & VITA 48 standards
- ESD protection

Consult Amphenol Backplane Systems for more information.

Phone: 603-883-5100



Amphenol Printed Circuits' capabilities are among the world's broadest and most advanced, delivering consistent quality and reliability for demanding high bandwidth systems and mission critical applications. Designs of printed circuit boards are available from Amphenol APC with a wide variety of materials, formation types, panel sizes and layer counts.

#### **AMPHENOL FLEX CIRCUIT ASSEMBLIES**

Amphenol Printed Circuits' capabilities also includes the design and manufacture of flex circuits used to attach cylindrical and rectangular connectors to PCB boards. Sculptured® Flexible Circuits with built-in terminations eliminate the failures associated with crimped or soldered-on contacts. Flex geometrically fits tight space requirements and eliminates the need to purchase and attach individual pins or connectors.

Consult APC, Amphenol Printed Circuits, for more information on printed circuit boards and flex assemblies. Phone: 603-324-4500

#### **INTEGRATED SYSTEM PACKAGING**


Amphenol can provide system solutions - everything you need inside and outside the box: Interconnect products, printed circuit boards, backplane assemblies, heat-sinks and metal enclosures. Amphenol also provides value added assembly including bussing; full system assembly including chassis build and sub-system integration and testing. The breadth of Amphenol's products and the proven expertise of being a world-wide interconnect product leader makes Amphenol the premier choice for system-level packaging. For more information on integrated systems, call: Amphenol Aerospace at 800-678-0141

Amphenol Backplane Systems at 888-318-3553

An example integrated system box, shown at right, includes the following Amphenol interconnect products:

- Circulars: D38999 cylindrical connectors with MT fiber optics, RJ Field connectors
- Rectangulars: LRM interconnects, NAFI connectors, UHD connectors
- Rectangulars: ARINC 600 connectors, Micro-D Subminiature connectors
- Rectangulars: HDB3 high density brush contact connectors
- Backplane Systems, Flex Circuitry, metal enclosure





AMPHENOL PRINTED CIRCUIT BOARDS



FLEX CIRCUITRY WITH RECTANGULAR CONNECTORS



AMPHENOL INTEGRATED SYSTEMS



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

## Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru