
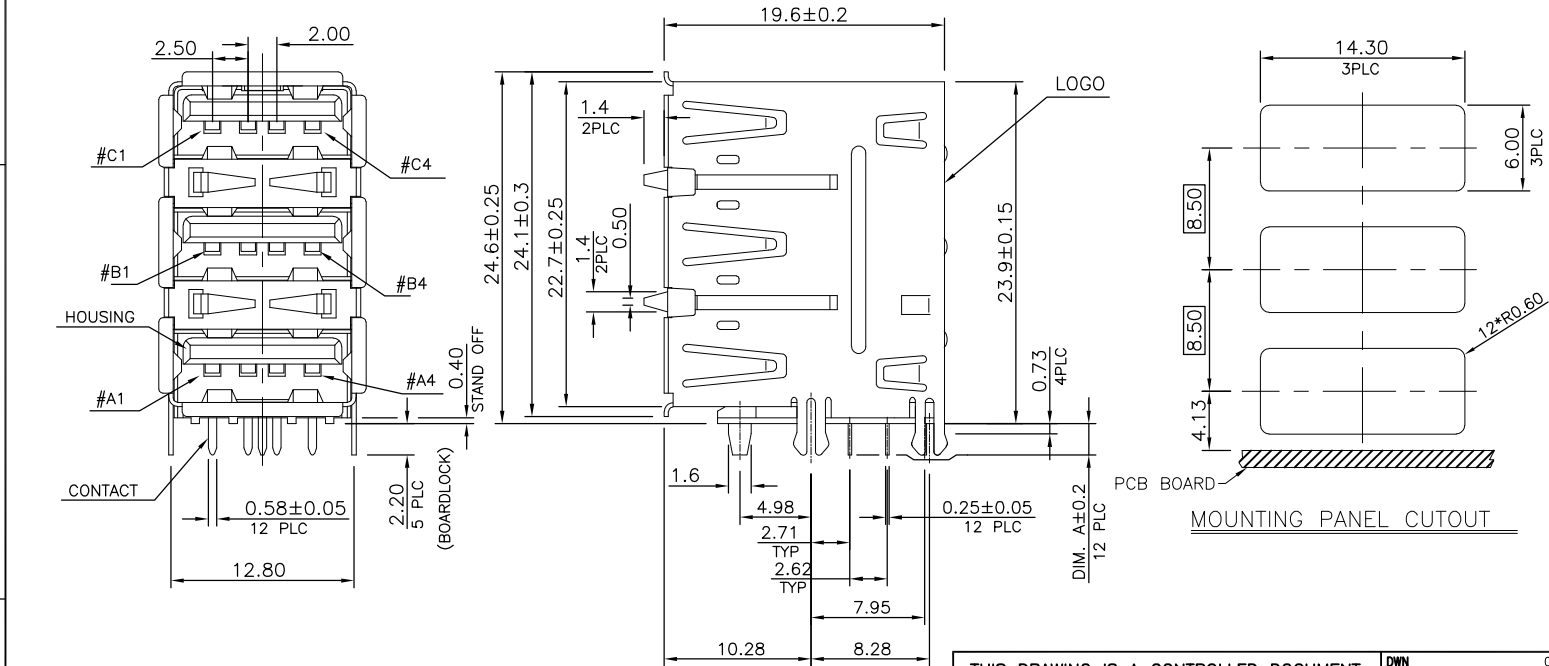


LOC DW	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			D3	REVISED (E-16-005542/P-16-013174)	13FEB17	A.X	H.W

- NOTES:
- MATERIAL:
HOUSING: A. PA6T WITH 30% GF, UL 94V-0, COLOR: SEE TABLE.
● B. PA9T WITH 33% GF, UL 94V-0, COLOR: BLACK.
CONTACTS: PHOSPHOR BRONZE.
SHELL: PHOSPHOR BRONZE.
SPRING: STAINLESS.
REAR SHELL: PHOSPHOR BRONZE.
 - FINISH:
CONTACTS: GOLD PLATING (SEE TABLE) IN CONTACT AREA,
2.54μm[100μ"] MIN. MATTE TIN PLATING ON SOLDERTAILS,
1.27μm[50μ"] MIN. NICKEL UNDERPLATED OVER ALL.
SHELL: 2.54μm[100μ"] MIN. NICKEL PLATING OVER ALL.
SPRING: 1.27μm[50μ"] MIN. NICKEL PLATING.
REAR SHELL: 1.27μm[50μ"] MIN. NICKEL PLATING.
 - RECOMMENDED PCB THICKNESS: 1.6mm.
 - WAVE SOLDER CAPABLE TO 265° PER TE CONNECTIVITY SPEC. 109-202, CONDITION B.
 - RELOW SOLDER CAPABLE TO 260° PER TE CONNECTIVITY SPEC. 109-201, CONDITION B.
 - "●" APPLIED FOR 1-1734309-5 ONLY
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

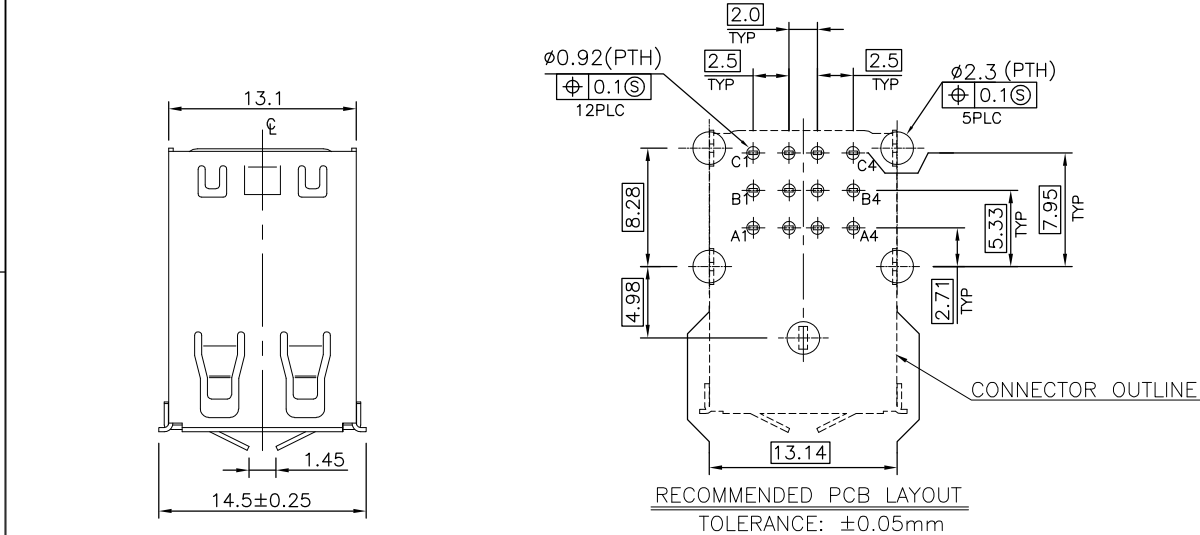

OBSOLETE	3.91	BLACK (426C)	15u"	4-1734309-7
		BEIGE (726C)	15u"	2-1734309-8
		BLACK (426C)	15u"	2-1734309-7
OBSOLETE		BEIGE (726C)	30u"	2-1734309-6
		BLACK (426C)	30u"	2-1734309-5
OBSOLETE	2.84	BEIGE (726C)	5u"	2-1734309-4
OBSOLETE		BLACK (426C)	5u"	2-1734309-3
OBSOLETE		BEIGE (726C)	C/F	2-1734309-2
OBSOLETE		BLACK (426C)	C/F	2-1734309-1
△ OBSOLETE		BEIGE (726C)	15u"	1734309-8
△ OBSOLETE		BLACK (426C)	15u"	1734309-7
△ OBSOLETE		BEIGE (726C)	30u"	1734309-6
		BLACK (426C)	30u"	1734309-5
△ OBSOLETE	2.2	BEIGE (726C)	5u"	1734309-4
		BLACK (426C)	5u"	1734309-3
OBSOLETE		BEIGE (726C)	C/F	1734309-2
OBSOLETE		BLACK (426C)	C/F	1734309-1
DIM A		HOUSHING COLOR	MIN. GOLD THICKNESS	PART NUMBER

WITH SPRING

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:MM

MATERIALSEE NOTE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC±0

1 PLC±0.30

2 PLC±0.25

3 PLC±0.20

4 PLC±0

ANGLES±3°

FINISHSEE NOTE

DWNB. HSING06FEB2009

CHK S. CHIEN06FEB2009

APVD W. KODAMA06FEB2009

PRODUCT SPEC108-57519

APPLICATION SPEC

WEIGHT9.2 GRAMS

CUSTOMER DRAWING

TE Connectivity

NAME

TRIPLE STACKED USB, A TYPE, RECEPTACLE, R/A, DIP CONN.

SIZEA3

CAGE CODE00779

DRAWING NOC=1734309

RESTRICTED TO

SHEET1 OF 3

REV D3

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION.

LOC
DW

	DIS
	↗

REVISIONS

	P
--	---

LTR




DESCRIPTION

DATE _____



	DWN
--	-----

	APVC
--	------

SEE SHEET 1.

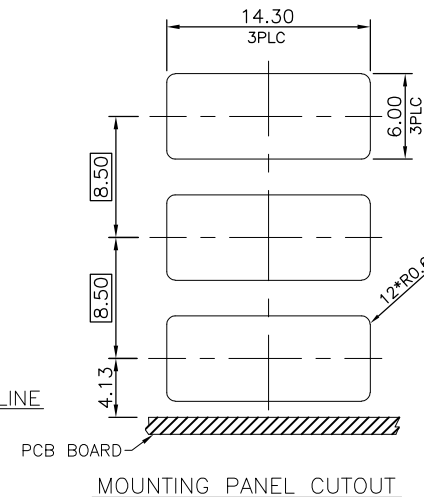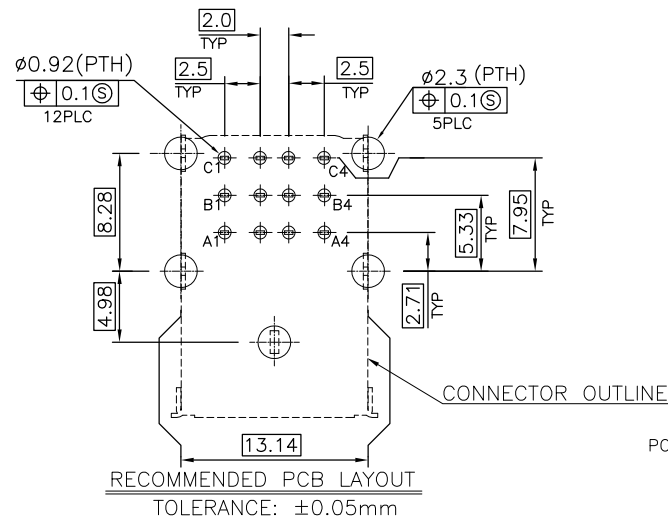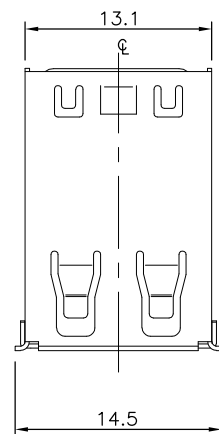

WITHOUT SPRING

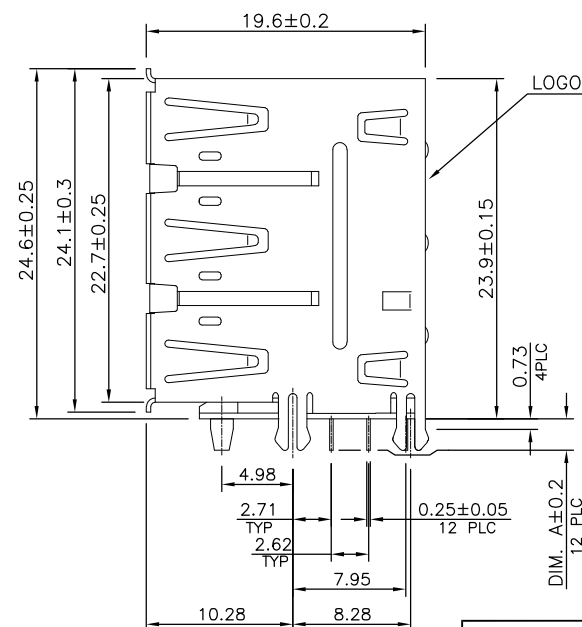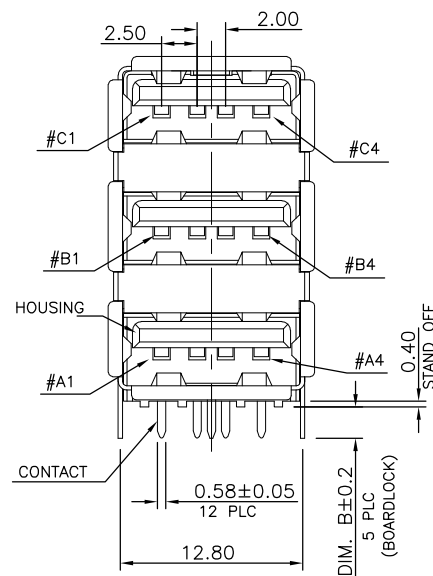

		2.84	2.84	BLACK (426C)	15μ"	5-1734309-	
	OBSOLETE	2.2	2.84	-BEIGE (726C)	15μ"	3-1734309-	
	OBSOLETE			-BLACK (426C)	15μ"	3-1734309-	
	OBSOLETE			-BEIGE (726C)	30μ"	3-1734309-	
				BLACK (426C)	30μ"	3-1734309-	
 OBSOLETE				-BEIGE (726C)	5μ"	3-1734309-	
				-BLACK (426C)	5μ"	3-1734309-	
				-BEIGE (726C)	G/F	3-1734309-	
				-BLACK (426C)	G/F	3-1734309-	
			OBSOLETE	2.2	-BEIGE (726C)	15μ"	1-1734309-
					BLACK (426C)	15μ"	1-1734309-
		-BEIGE (726C)	30μ"		1-1734309-		
		BLACK (426C)	30μ"		1-1734309-		
 OBSOLETE		-BEIGE (726C)	5μ"		1-1734309-		
		-BLACK (426C)	5μ"		1-1734309-		
		-BEIGE (726C)	G/F		1-1734309-		
		-BLACK (426C)	G/F		1-1734309-		
DIM B	DIM A		HOUSHING COLOR	MIN. GOLD THICKNESS	PART NUMBER		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CH

APV

PRODUCT SPEC

APPLICATION SPEC

WEIGHT	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

9.0 GRAMS

CUSTOMER DRAWING

	NAME
--	------

S17

F	CAGE CODE
---	-----------

DRAWING NO.	
-------------	--

RESTRICTED



TRIPLE STACKED USB, A TYPE,
RECEPTACLE, R/A, DIP CONN.

A.3 00779

©-1734309

	SCALE
--	-------

SHEET

REV D 3




D

C


B

A


100PCS/TRAY

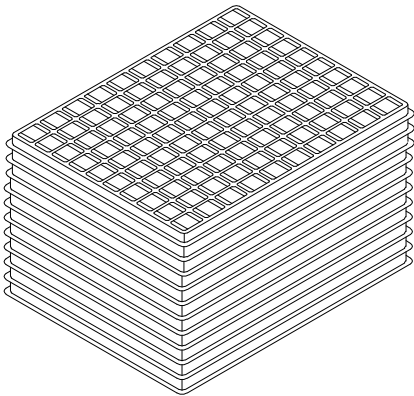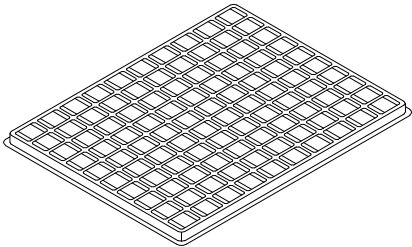

10 LAYERS

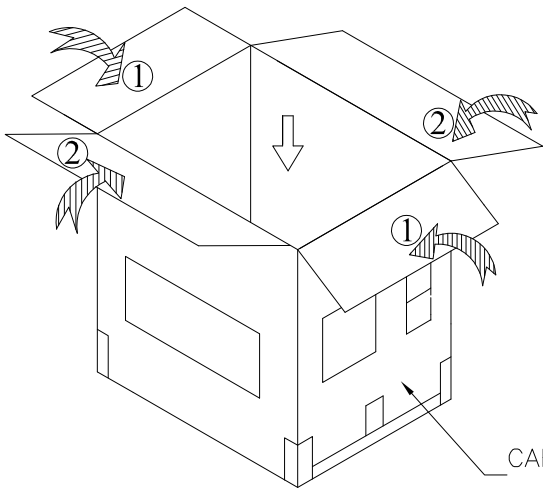

CARTON

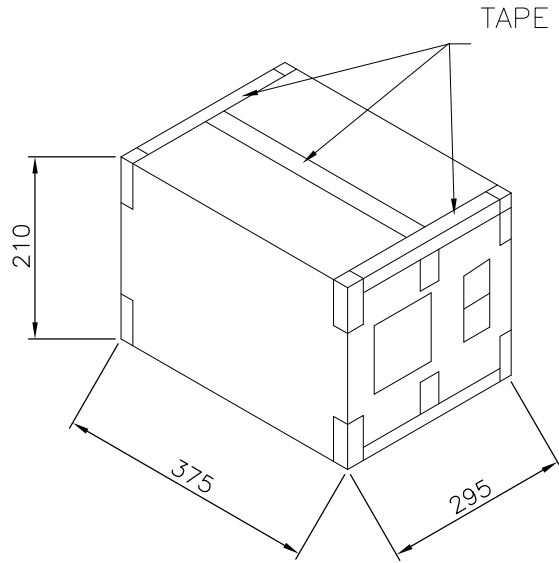

13.0	12.0	100	10	1000
G/W (KG)	N/W (KG)	PCS/TRAY	TRAY/CARTON	PCS/CARTON

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity	
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME	
0 PLC ± -		PRODUCT SPEC		TRIPLE STACKED USB, A TYPE, RECEPTACLE, R/A, DIP CONN.	
1 PLC ± -		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
2 PLC ± -		WEIGHT		A3 00779 C=1734309	
3 PLC ± -		CUSTOMER DRAWING		SCALE SHEET 3 OF 3 REV D3	
4 PLC ± -					
ANGLES ± -					
FINISH					
MATERIAL					

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru