

S505SC

5 mm x 20 mm Time-delay, axial lead ceramic tube fuses



Product features

- Time-delay, high breaking capacity
- Designed to IEC 60127-2
- Nickel-plated brass end cap construction
- 5 mm x 20 mm physical size

Applications

Primary circuit protection:

- Power supplies
- LED lighting
- LED/LCD televisions
- Appliances and white goods
- Printers

Agency information

- cURus Recognition file number: E19180, Guide JDYX2/JDYX8
- SEMKO: File 1219335, 1310139
- VDE: File 40024252, 40037710 (1 A - 8 A)
- BSI: File KM55676
- IMQ: File CA03.00529
- PSE/JET: JET1641-31003-1010, JET1641-31003-2002, JET7042-31003-2001
- CCC: 2019010207252180
- KC-Mark: File SU05011-12003, SU05011-12004, SU05011-12005A; SU05030-13003A, SU05030-13004, SU05030-13005
- TUV: J50233218

Ordering

- The ordering code is the part number replacing the " " with a "-" plus adding the packaging prefix (i.e. S505SC-1.25-R; BK-S505SC1-25-R)

Packaging prefixes

- BK- (20 parts in a carrier, 5 carriers in a box)
- TR2- (1500 parts per reel, tape width 52 mm)
- TR3- (1500 parts per reel, tape width 54 mm)

Electrical characteristics

| I_n | $1.5I_n$ min minute | $2.1I_n$ max minute | $2.75I_n$ min ms | max s | $4I_n$ min ms | max s | $10I_n$ min ms | max ms |
|------------|---------------------------|---------------------------|------------------------|----------|---------------------|----------|----------------------|-----------|
| 1 A-3.15 A | 60 | 30 | 750 | 80 | 95 | 5 | 10 | 150 |
| 4 A-6.3 A | 60 | 30 | 750 | 80 | 150 | 5 | 10 | 150 |
| 8 A-10 A | 30 | 30 | 750 | 80 | 150 | 5 | 10 | 150 |

Product specifications

| Part number ⁵ | Current rating (A) | Voltage rating (Vac) | Interrupting rating at rated voltage (50 Hz) (A) | Typical DC cold resistance (Ω) ² | Typical pre-arcing I^2t (A^2s) ³ | Typical voltage drop (mV) ⁴ | IMQ | VDE | SEMKO | cURus | PSE/JET | CCC | KC | BSI | TUV |
|--------------------------|--------------------|----------------------|--------------------------------------------------|------------------------------------------------------|---------------------------------------------------|----------------------------------------|-----|-----|-------|-------|---------|-----|----|-----|-----|
| S505SC-1-R | 1.0 | 250 | 1500 | 0.169 | 1.38 | 180 | x | x | x | x | x | x | x | x | x |
| S505SC-1.25-R | 1.25 | 250 | 1500 | 0.108 | 2.14 | 151 | x | x | x | x | x | x | x | x | x |
| S505SC-1.6-R | 1.6 | 250 | 1500 | 0.070 | 7.35 | 130 | x | x | x | x | x | x | x | x | x |
| S505SC-2-R | 2.0 | 250 | 1500 | 0.055 | 9.83 | 123.5 | x | x | x | x | x | x | x | x | x |
| S505SC-2.5-R | 2.5 | 250 | 1500 | 0.040 | 19.9 | 119 | x | x | x | x | x | x | x | x | x |
| S505SC-3.15-R | 3.15 | 250 | 1500 | 0.031 | 40.4 | 110 | x | x | x | x | x | x | x | x | x |
| S505SC-4-R | 4.0 | 250 | 1500 | 0.018 | 41.0 | 89.8 | x | x | x | x | x | x | x | x | x |
| S505SC-5-R | 5.0 | 250 | 1500 | 0.013 | 71.2 | 88 | x | x | x | x | x | x | x | x | x |
| S505SC-6.3-R | 6.3 | 250 | 1500 | 0.010 | 152 | 72.5 | x | x | x | x | x | x | x | x | x |
| S505SC-8-R | 8.0 | 250 | 1500 | 0.007 | 237 | 82.5 | x | x | x | x | x | x | x | x | x |
| S505SC-10-R | 10 | 250 | 1500 | 0.005 | 353 | 70 | x | | x | x | x | x | x | x | x |

1 Interrupting ratings 1 A to 10 A were measured at 70% to 80% PF on AC.

2 Typical DC cold resistance measured at <10% of rated current .

3. Typical I^2t value is measured at 10 times the rated current under DC.

4. Typical voltage drop is measured at +20 °C ambient temperature at rated current .

5. Part number definition: S505SC-xxx-R

S505 = Product code


SC = Single cap

xxx = Ampere rating

-R = RoHS compliant

Dimensions—mm


| |
|----------------|
| A |
| BK: 38.1±0.38 |
| TR2: 15.75 typ |
| TR3: 16.75 typ |

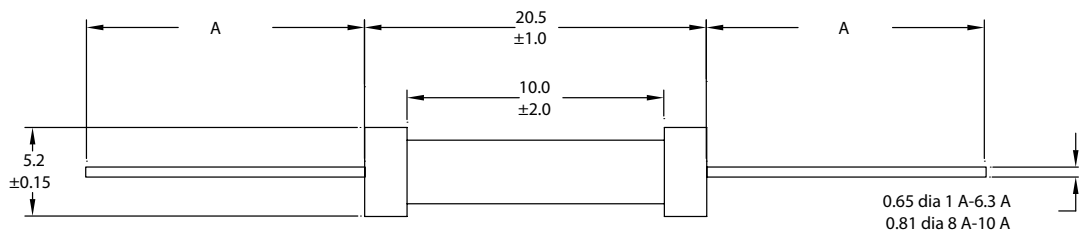


Time vs. current curve



I²t vs. time curve

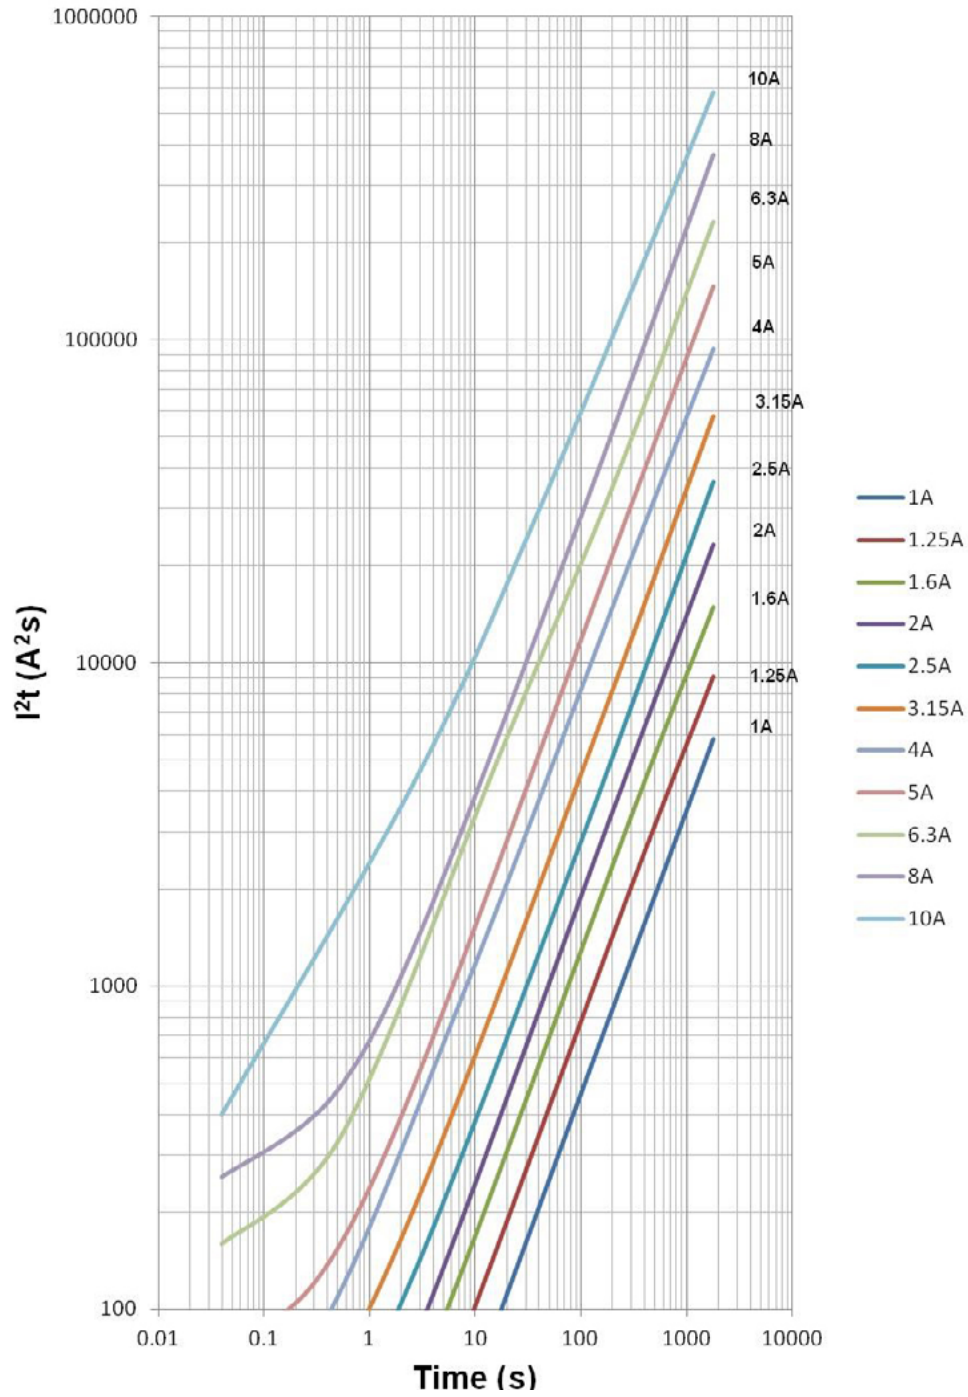


Temperature derating curve

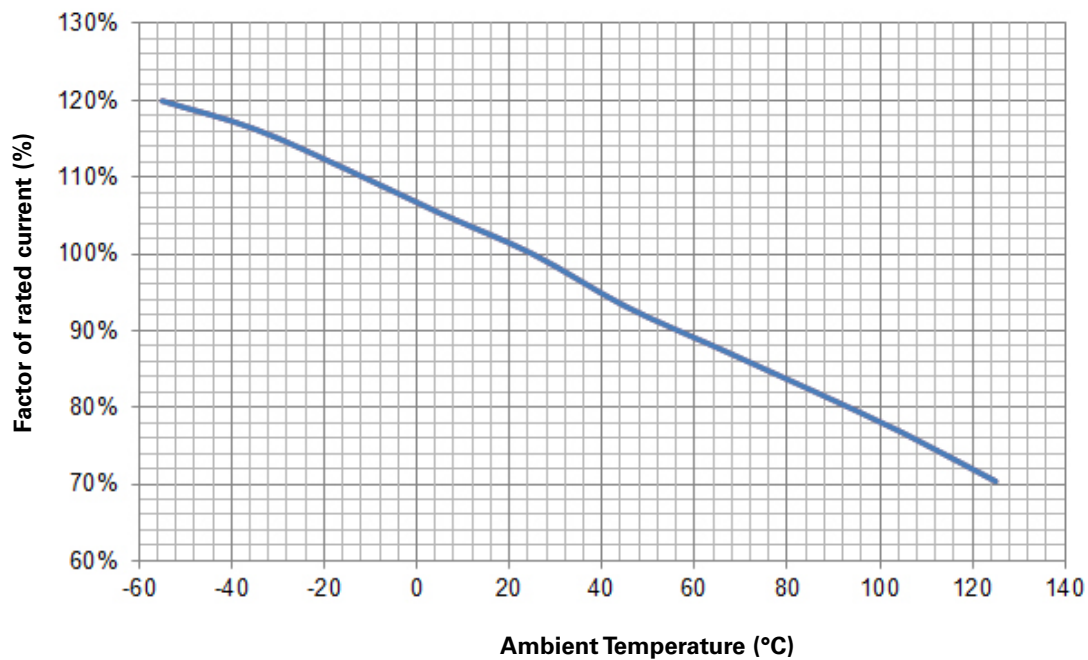

General specifications

Operating temperature: -55 °C to +125 °C (with derating)

Wave solder profile

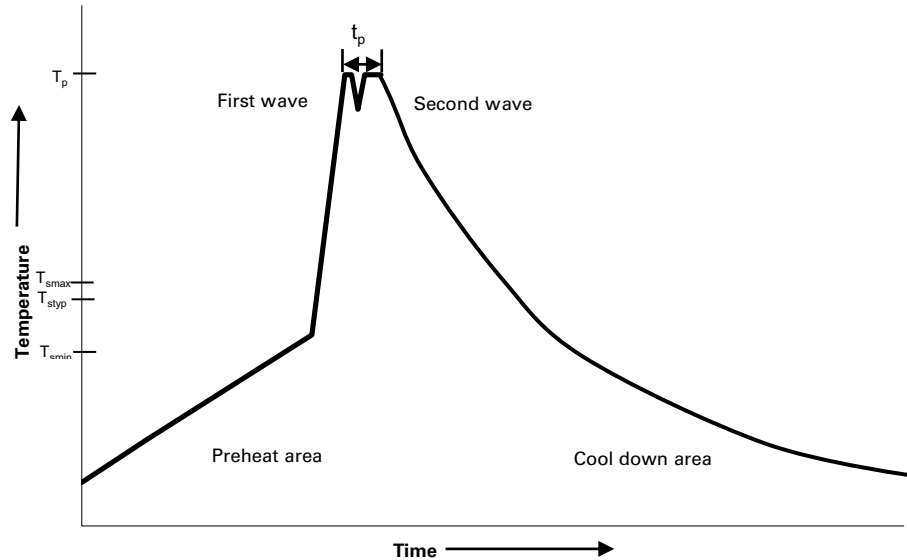

Reference EN 61760-1:2006

| Profile feature | Standard SnPb solder | Lead (Pb) free solder |
|-----------------------------------------------|-------------------------------------------|-------------------------------------------|
| Preheat | | |
| • Temperature min. (T_{smin}) | 100 °C | 100 °C |
| • Temperature typ. (T_{styp}) | 120 °C | 120 °C |
| • Temperature max. (T_{smax}) | 130 °C | 130 °C |
| • Time (T_{smin} to T_{smax}) (t_s) | 70 seconds | 70 seconds |
| Δ preheat to max Temperature | 150 °C max. | 150 °C max. |
| Peak temperature (T_p)* | 235 °C – 260 °C | 250 °C – 260 °C |
| Time at peak temperature (t_p) | 10 seconds max 5 seconds max each wave | 10 seconds max 5 seconds max each wave |
| Ramp-down rate | ~ 2 K/s min ~3.5 K/s typ ~5 K/s max | ~ 2 K/s min ~3.5 K/s typ ~5 K/s max |
| Time 25 °C to 25 °C | 4 minutes | 4 minutes |

Manual solder

+350 °C (4-5 seconds by soldering iron), generally manual/hand soldering is not recommended.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2019 Eaton
All Rights Reserved
Printed in USA
Publication No. 10132 PCN19017M
December 2019

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru