Never stop thinking

# n-Channel Power MOSFET

OptiMOS™
BSB165N15NZ3 G

## Data Sheet

2.2, 2011-07-20
Final

## Industrial & Multimarket

# 1 Description

OptiMOS™150V products are class leading power MOSFETs for highest power density and energy efficient solutions. Ultra low gate- and output charges together with lowest on state resistance in small footprint packages make OptiMOS™ 150V the best choice for the demanding requirements of voltage regulator solutions in Solar, Drives, Datacom and Telecom applications. Super fast switching Control FETs together with low EMI Sync FETs provide solutions that are easy to design in. OptiMOS™ products are available in high performance packages to tackle your most challenging applications giving full flexibility in optimizing space, efficiency and cost.




### Features

- Optimized for high switching frequency DC/DC converter
- Very low on-resistance $R_{DS(on)}$
- Excellent gate charge x $R_{DS(on)}$ product (FOM)
- Pb-free plating; RoHS compliant
- Halogen-free according to IEC61249-2-21
- Double sided cooling
- Compatible with DirectFET® package MZ footprint and outline
- Low parasitic inductance
- Low profile (<0.7 mm)

### Applications

- Synchronous rectification
- Primary side switches
- Power managment for high performance computing
- High power density point of load converters

RoHS HAL PB

**Table 1 Key Performance Parameters**

| Parameter | Value | Unit | | Related Links |
|---|---|---|---|---|
| $V_{DS}$ | 150 | V | | IFX OptiMOS webpage |
| $R_{DS(on),max}$ | 16.5 | mΩ | | IFX OptiMOS product brief |
| $I_D$ | 45 | A | | IFX OptiMOS spice models |
| $Q_{OSS}$ | 68 | nC | | IFX Design tools |
| $Q_{g,typ}$ | 26 | | | |

| Type | Package | Marking |
|---|---|---|
| BSB165N15NZ3 G | MG-WDSON-2 | 0115 |

## 2 Maximum ratings

at $T_j$ = 25 °C, unless otherwise specified.

**Table 2 Maximum ratings**

| Parameter | Symbol | Values | | | Unit | Note / Test Condition |
|---|---|---|---|---|---|---|
| | | Min. | Typ. | Max. | | |
| Continuous drain current | $I_D$ | - | - | 45 | A | $V_{GS}$=10 V, $T_C$=25 °C |
| | | - | - | 29 | | $V_{GS}$=10 V, $T_C$=100 °C |
| | | - | - | 9 | | $V_{GS}$=10 V, $T_A$=25 °C, $R_{thJA}$=45 K/W)[1] |
| Pulsed drain current[2] | $I_{D,pulse}$ | - | - | 180 | | $T_C$=25 °C |
| Avalanche energy, single pulse | $E_{AS}$ | - | - | 440 | mJ | $I_D$=30 A,$R_{GS}$=25 Ω |
| Gate source voltage | $V_{GS}$ | -20 | - | 20 | V | |
| Power dissipation | $P_{tot}$ | - | - | 78 | W | $T_C$=25 °C |
| | | - | - | 2.8 | | $T_A$=25 °C, $R_{thJA}$=45 K/W[1] |
| Operating and storage temperature | $T_j$,$T_{stg}$ | -40 | - | 150 | °C | |
| IEC climatic category; DIN IEC 68-1 | | 55/150/56 | | | | |

1) Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm2 (one layer, 70µm thick) copper area for drain connection. PCB is vertical in still air.

2) See figure 3 for more detailed information

## 3 Thermal characteristics

**Table 3 Thermal characteristics**

| Parameter | Symbol | Values | | | Unit | Note / Test Condition |
|---|---|---|---|---|---|---|
| | | Min. | Typ. | Max. | | |
| Thermal resistance, junction - case | $R_{thJC}$ | - | - | 1.6 | K/W | top |
| | | - | 1 | - | | bottom |
| Device on PCB | $R_{thJA}$ | - | - | 45 | | 6 $cm^2$ cooling area[1] |

1) Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm2 (one layer, 70µ, thick) copper area for drain conneciton. PCB is vertical in still air.

# 4 Electrical characteristics

Electrical characteristics, at $T$j=25 °C, unless otherwise specified.

**Table 4 Static characteristics**

| Parameter | Symbol | Values | | | Unit | Note / Test Condition |
|---|---|---|---|---|---|---|
| | | Min. | Typ. | Max. | | |
| Drain-source breakdown voltage | $V_{(BR)DSS}$ | 150 | - | - | V | $V_{GS}$=0 V, $I_D$=1.0 mA |
| Gate threshold voltage | $V_{GS(th)}$ | 2 | 3 | 4 | | $V_{DS}$=$V_{GS}$, $I_D$=110 µA |
| Zero gate voltage drain current | $I_{DSS}$ | - | 0.1 | 10 | µA | $V_{DS}$=120 V, $V_{GS}$=0 V, $T_j$=25 °C |
| | | - | 10 | 100 | | $V_{DS}$=120 V, $V_{GS}$=0 V, $T_j$=125 °C |
| Gate-source leakage current | $I_{GSS}$ | - | 10 | 100 | nA | $V_{GS}$=20 V, $V_{DS}$=0 V |
| Drain-source on-state resistance | $R_{DS(on)}$ | - | 13.1 | 16.5 | mΩ | $V_{GS}$=10 V, $I_D$=30A |
| | | - | 14 | 17.9 | | $V_{GS}$=8 V, $I_D$=15A |
| Gate resistance | $R_G$ | - | 0.7 | - | Ω | |
| Transconductance | $g_{fs}$ | 24 | 48 | - | S | \|$V_{DS}$\|>2\|$I_{D\|RDS(on)max}$, $I_D$=30 A |

**Table 5 Dynamic characteristics**

| Parameter | Symbol | Values | | | Unit | Note / Test Condition |
|---|---|---|---|---|---|---|
| | | Min. | Typ. | Max. | | |
| Input capacitance | $C_{iss}$ | - | 2100 | 2800 | pF | $V_{GS}$=0 V, $V_{DS}$=75V, $f$=1 MHz |
| Output capacitance | $C_{oss}$ | - | 240 | 320 | | |
| Reverse transfer capacitance | $C_{rss}$ | - | 5 | - | | |
| Turn-on delay time | $t_{d(on)}$ | - | 10 | - | ns | $V_{DD}$=75V, $V_{GS}$=10 V, $I_D$=30 A, $R_G$= 1.6 Ω |
| Rise time | $t_r$ | - | 10 | - | | |
| Turn-off delay time | $t_{d(off)}$ | - | 17 | - | | |
| Fall time | $t_f$ | - | 7 | - | | |

**Table 6 Gate charge characteristics[1)]**

| Parameter | Symbol | Values | | | Unit | Note / Test Condition |
|---|---|---|---|---|---|---|
| | | Min. | Typ. | Max. | | |
| Gate to source charge | $Q_{gs}$ | - | 11 | - | nC | $V_{DD}$=75 V, $I_D$=30 A, $V_{GS}$=0 to 10 V |
| Gate to drain charge | $Q_{gd}$ | - | 4 | - | | |
| Switching charge | $Q_{sw}$ | - | 12 | - | | |
| Gate charge total | $Q_g$ | - | 26 | 35 | | |
| Gate plateau voltage | $V_{plateau}$ | - | 5.2 | - | V | |
| Output charge | $Q_{oss}$ | - | 68 | 90 | | $V_{DD}$=75 V, $V_{GS}$=0 V |

1) See figure 16 for gate charge parameter definition

**Table 7 Reverse diode characteristics**

| Parameter | Symbol | Values | | | Unit | Note / Test Condition |
|---|---|---|---|---|---|---|
| | | Min. | Typ. | Max. | | |
| Diode continuous forward current | $I_S$ | - | - | 45 | A | $T_C$=25 °C |
| Diode pulse current | $I_{S,pulse}$ | - | - | 180 | | |
| Diode forward voltage | $V_{SD}$ | - | 0.9 | 1.2 | V | $V_{GS}$=0 V, $I_F$=45 A, $T_j$=25 °C |
| Reverse recovery time | $t_{rr}$ | - | 110 | - | ns | $V_R$=75 V, $I_F$=30A, d$i_F$/d$t$=100 A/µs |
| Reverse recovery charge | $Q_{rr}$ | - | 337 | - | nC | |

# 5 Electrical characteristics diagrams

**Table 8**

| 1 Power dissipation | 2 Drain current |
|---|---|
| 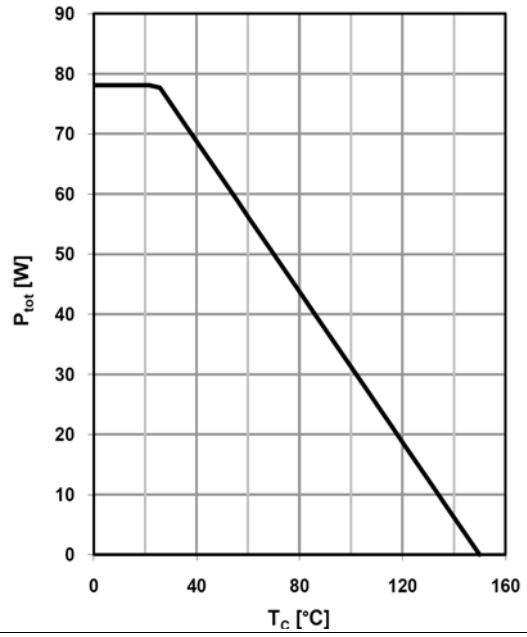 | 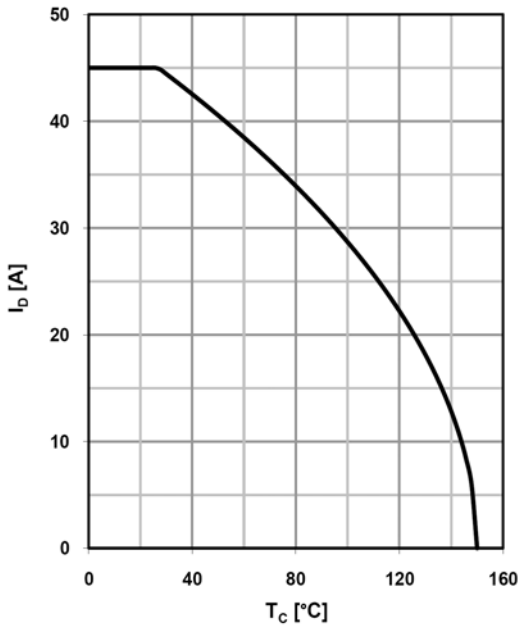 |
| $P_{tot} = f(T_C)$ | $I_D=f(T_C)$; parameter:$V_{GS}$ |

**Table 9**

| 3 Safe operating area $T_C$=25 °C | 4 Max. transient thermal impedance |
|---|---|
| 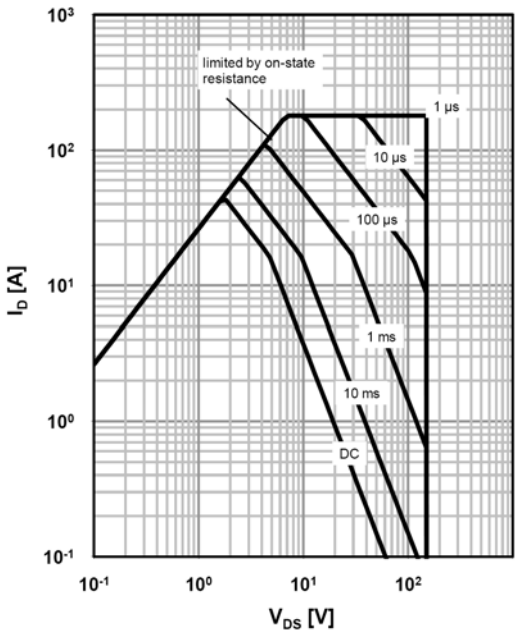 | 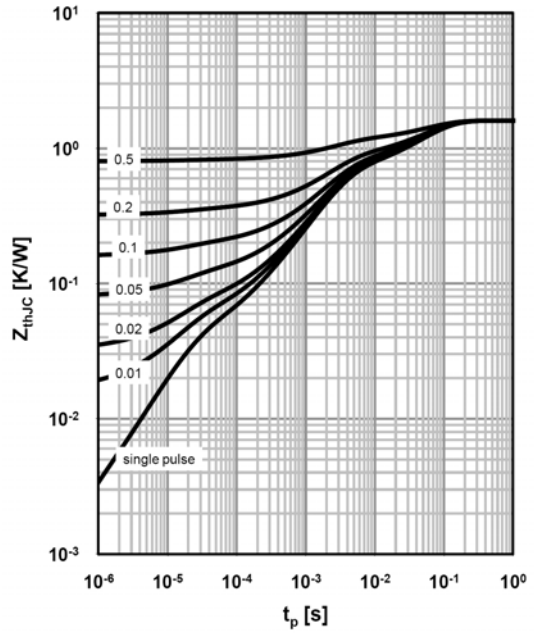 |
| $I_D$=f($V_{DS}$); $T_j$=25 °C; D=0; parameter: $T_p$ | $Z_{(thJC)}$=f($t_p$); parameter: D=$t_p$/$T$ |

**Table 10**

| 5 Typ. output characteristics $T_C$=25 °C | 6 Typ. drain-source on-state resistance |
|---|---|
| 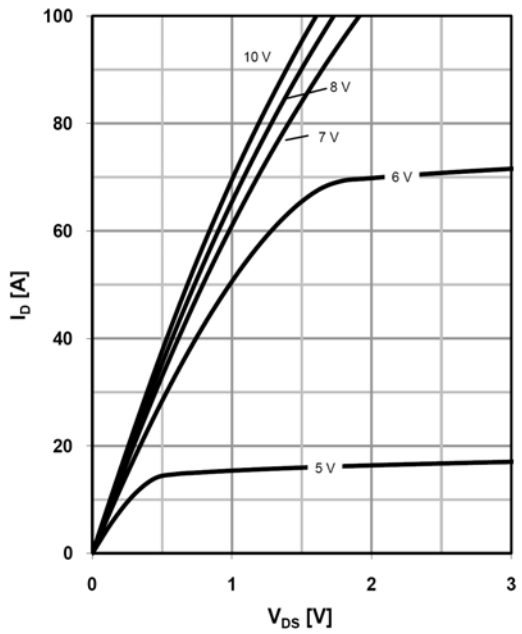 | 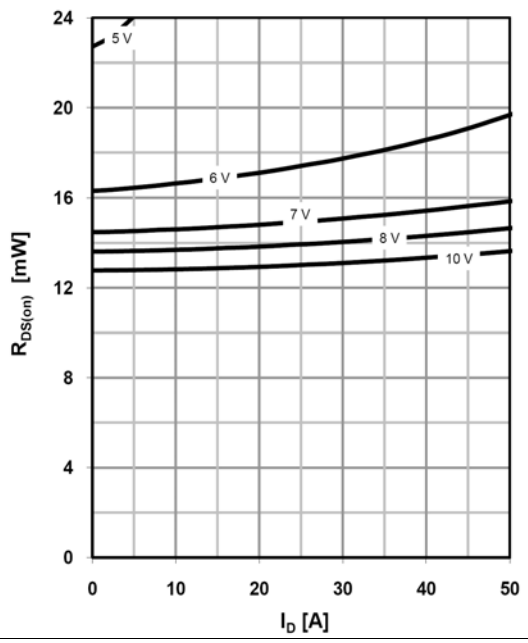 |
| $I_D$=f($V_{DS}$); $T_j$=25 °C; parameter: $V_{GS}$ | $R_{DS(on)}$=f($I_D$); $T_j$=25 °C; parameter: $V_{GS}$ |

**Table 11**

| 7 Typ. transfer characteristics | 8 Typ. forward transconductance |
|---|---|
| 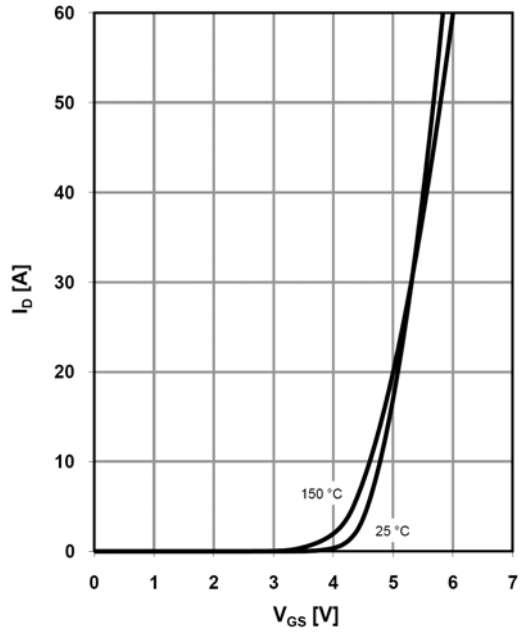 | 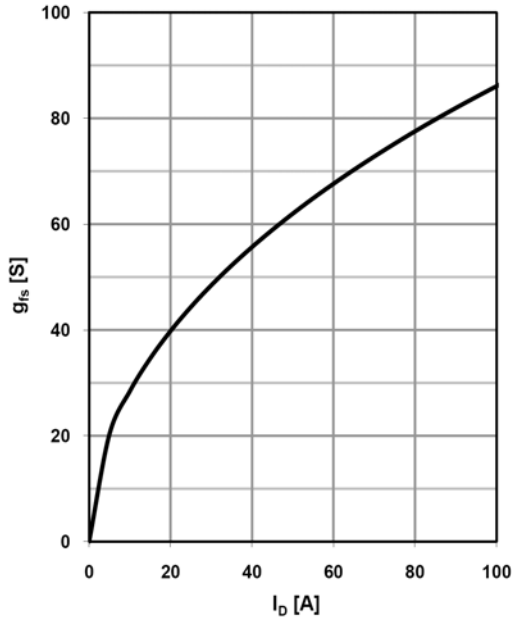 |
| $I_D$=f(VGS); \|$V_{DS}$\|>2\|$I_D$\|$R_{DS(on)max}$ | $g_{fs}$=f($I_D$); $T_j$=25 °C |

**Table 12**

| 9 Drain-source on-state resistance | 10 Typ. gate threshold voltage |
|---|---|
| 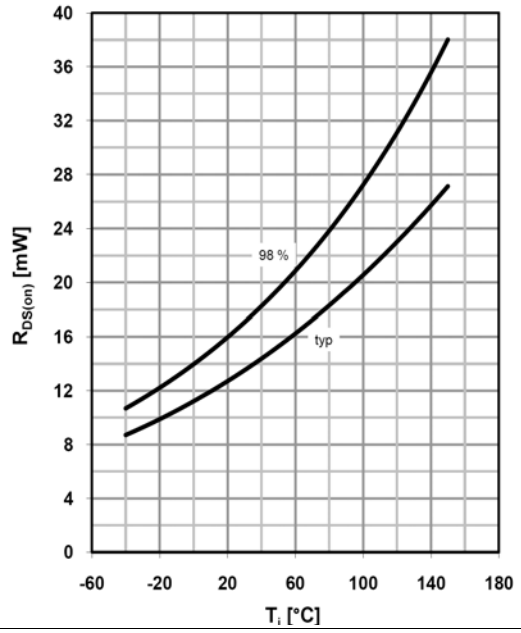 | 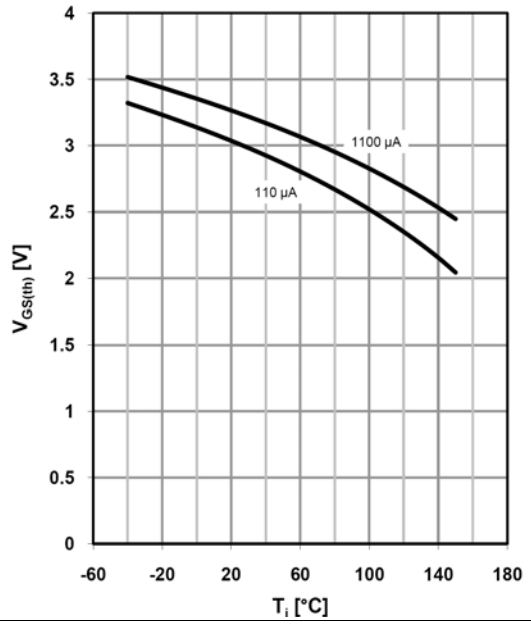 |
| $R_{DS(on)}=f(T_j)$; $I_D$=30 A; $V_{GS}$=10 V | $V_{GS(th)}=f(T_j)$; $V_{GS}=V_{DS}$; $I_D$=250 µA |

**Table 13**

| 11 Typ. capacitances | 12 Forward characteristics of reverse diode |
|---|---|
| 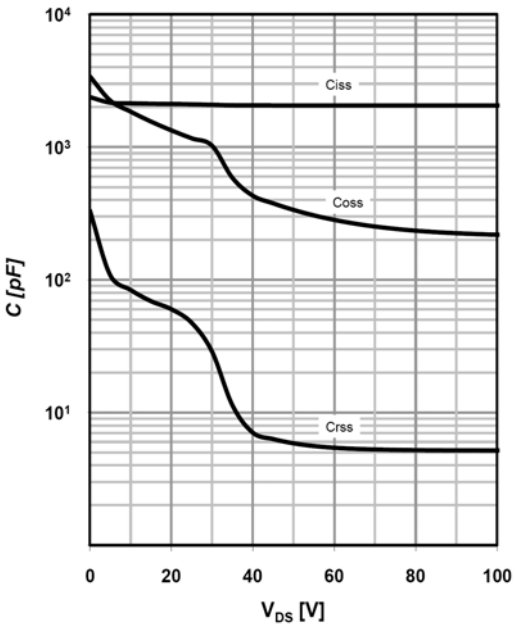 | 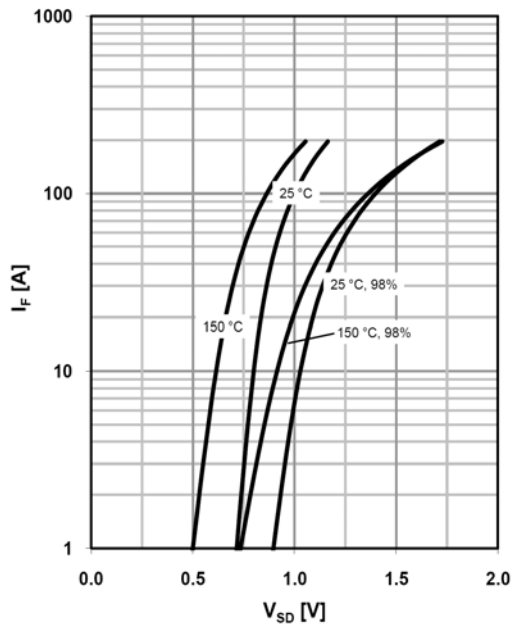 |
| C=f($V_{DS}$); $V_{GS}$=0 V; $f$=1 MHz | $I_F=f(V_{SD})$; parameter: $T_j$ |

**Table 14**

| 13 Avalanche characteristics | 14 Typ. gate charge |
|---|---|
| 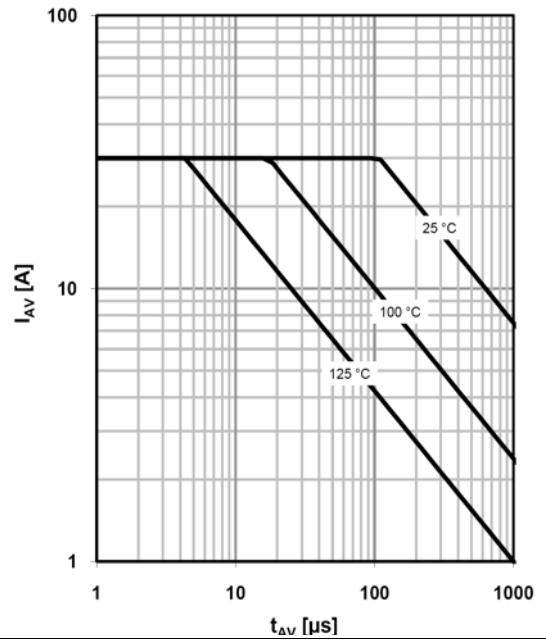 | 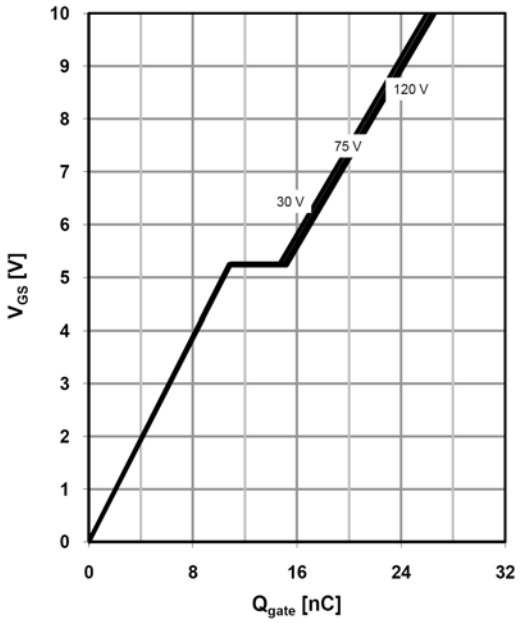 |
| $I_{AS}$=f($t_{AV}$); $R_{GS}$=25 Ω; parameter: $T_{j(start)}$ | $V_{GS}$=f($Q_{gate}$); $I_D$=30 A pulsed; parameter: $V_{DD}$ |

**Table 15**

| 15 Drain-source breakdown voltage | 16 Gate charge waveforms |
|---|---|
| 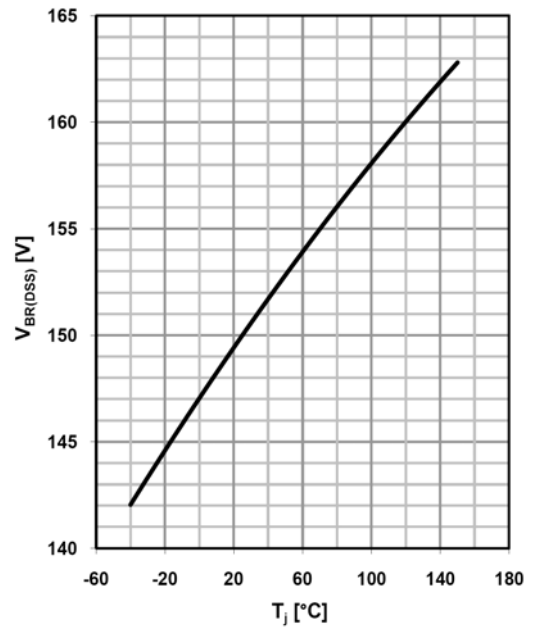 | 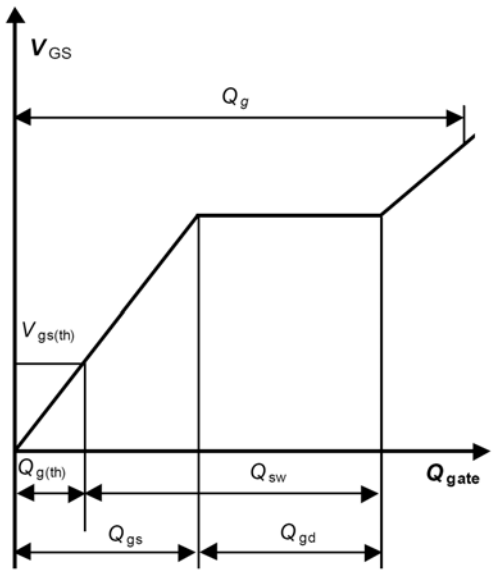 |
| $V_{BR(DSS)}$=f($T_j$); $I_D$=1 mA | |

# 6 Package outlines

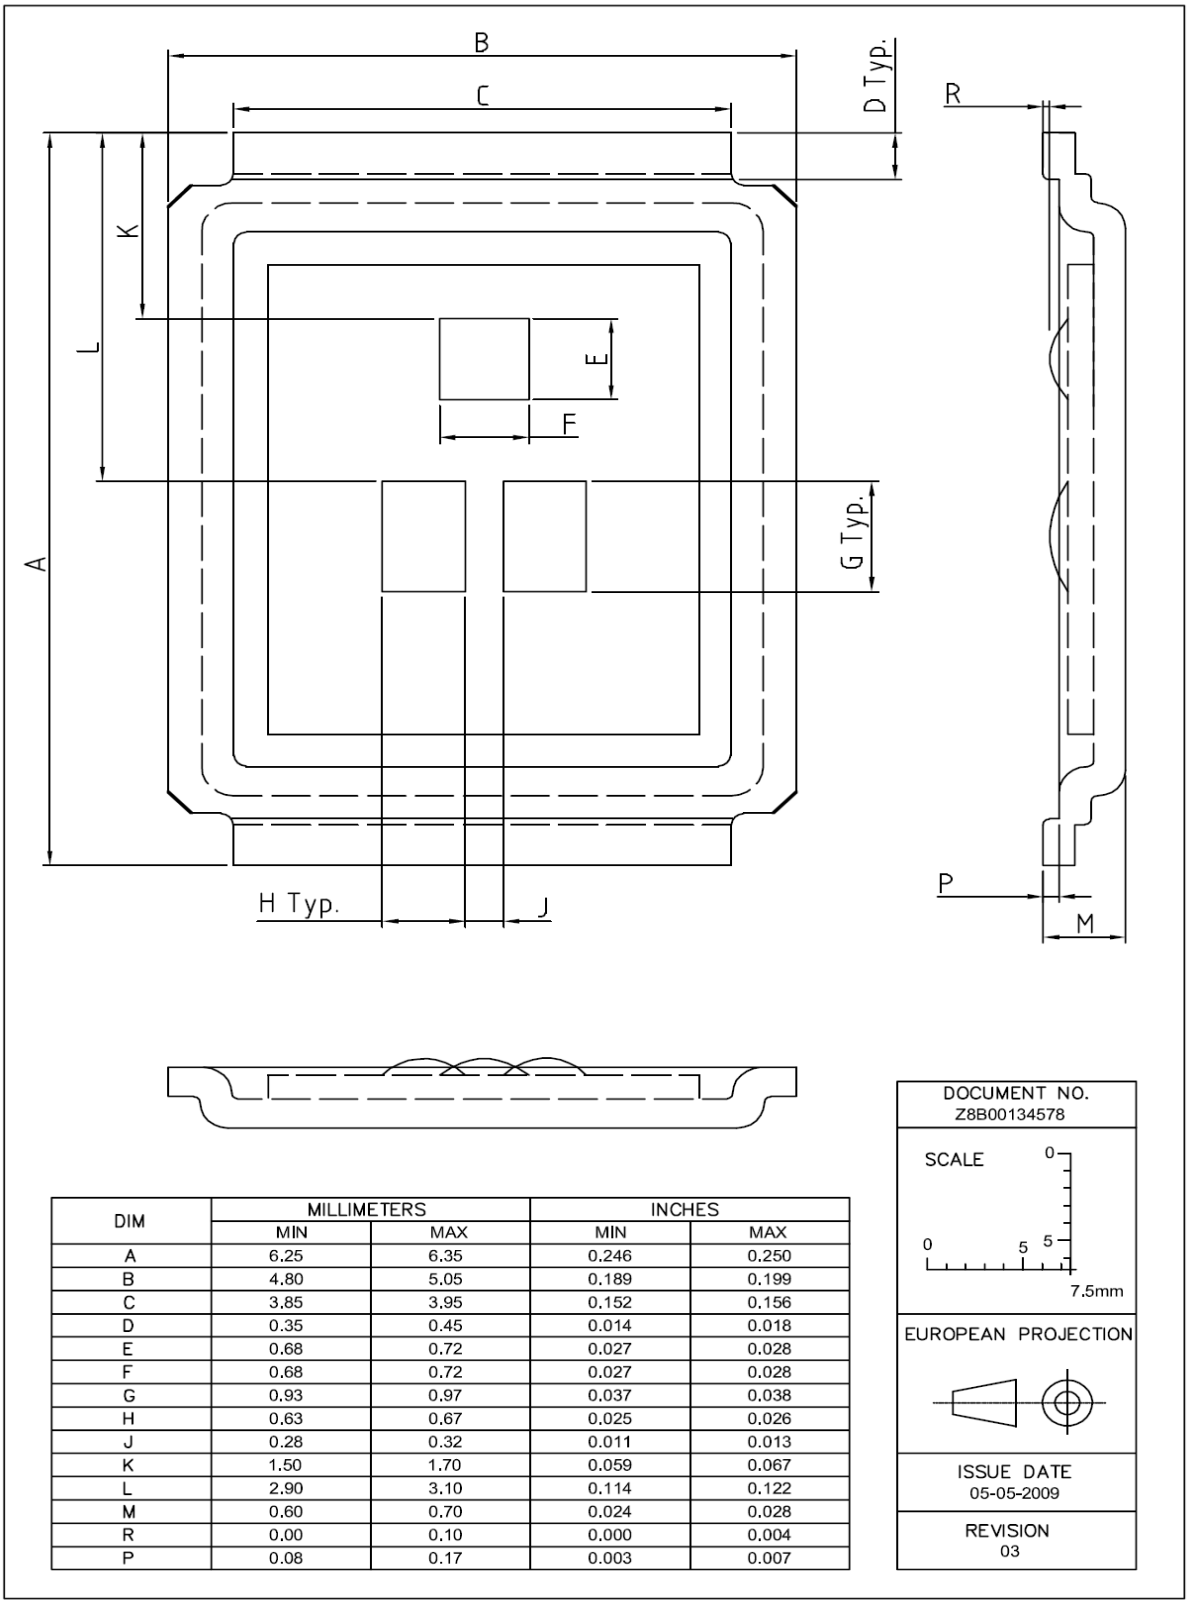


| DIM | MILLIMETERS | | INCHES | |
|---|---|---|---|---|
| | MIN | MAX | MIN | MAX |
| A | 6.25 | 6.35 | 0.246 | 0.250 |
| B | 4.80 | 5.05 | 0.189 | 0.199 |
| C | 3.85 | 3.95 | 0.152 | 0.156 |
| D | 0.35 | 0.45 | 0.014 | 0.018 |
| E | 0.68 | 0.72 | 0.027 | 0.028 |
| F | 0.68 | 0.72 | 0.027 | 0.028 |
| G | 0.93 | 0.97 | 0.037 | 0.038 |
| H | 0.63 | 0.67 | 0.025 | 0.026 |
| J | 0.28 | 0.32 | 0.011 | 0.013 |
| K | 1.50 | 1.70 | 0.059 | 0.067 |
| L | 2.90 | 3.10 | 0.114 | 0.122 |
| M | 0.60 | 0.70 | 0.024 | 0.028 |
| R | 0.00 | 0.10 | 0.000 | 0.004 |
| P | 0.08 | 0.17 | 0.003 | 0.007 |

**Figure 1 Outlines MG-WDSON-2, dimensions in mm/inches**

# 7 Package outlines

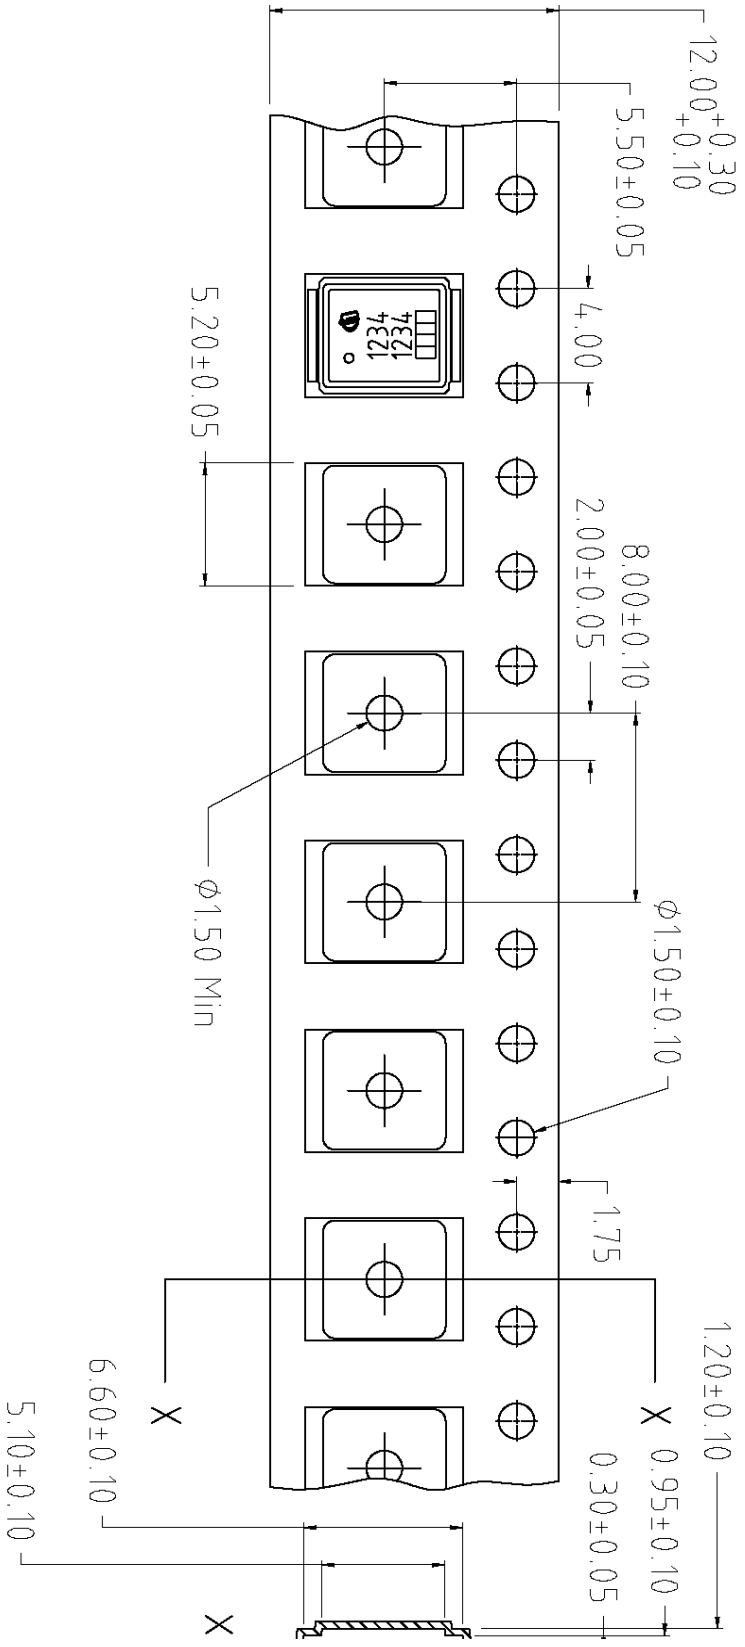


**Figure 2 Outlines MG-WDSON-2, dimensions in mm/inches**

# 8 Package outlines

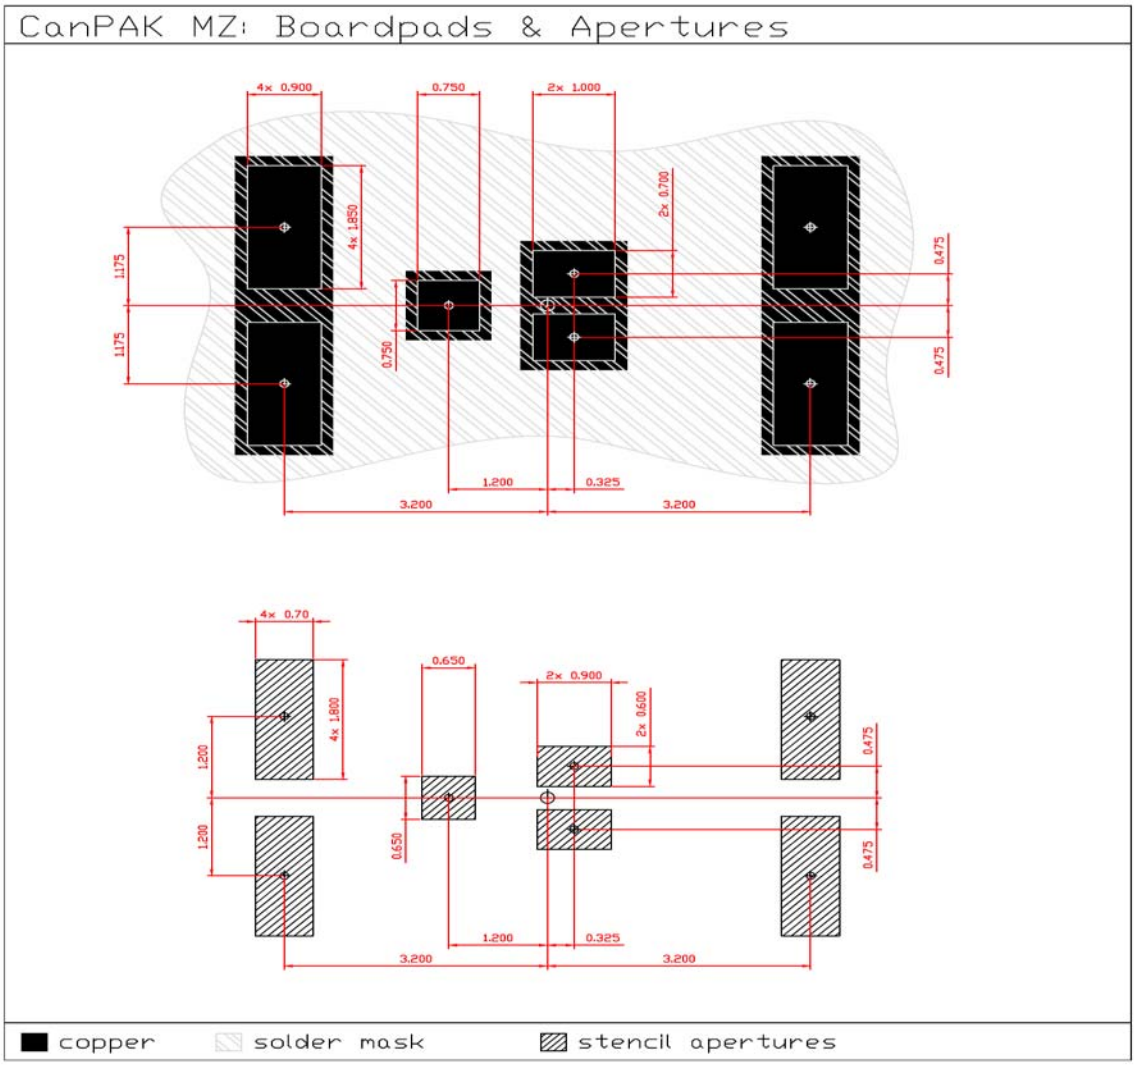


**Figure 3 Outlines MG-WDSON-2, dimensions in mm/inches**

# 9 Marking layout

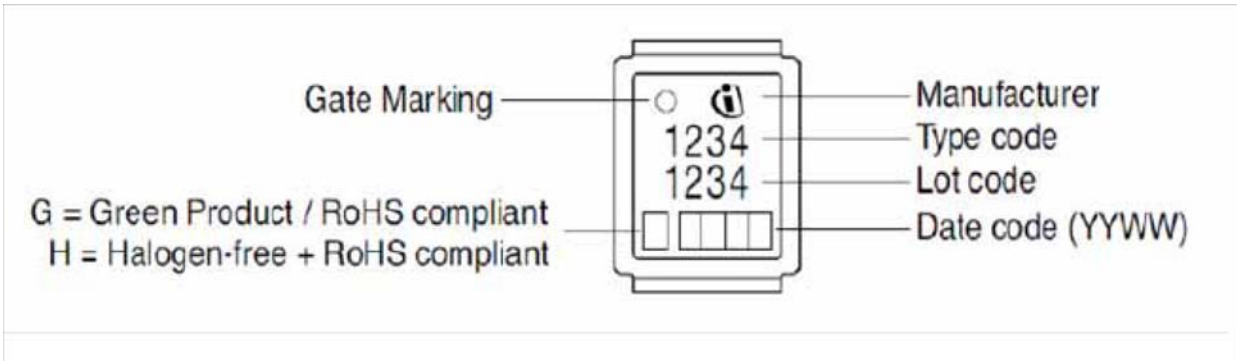

# 9 Revision History

**Revision History: 2011-07-20, 2.1**

**Previous Revision:**

| Revision | Subjects (major changes since last revision) |
|---|---|
| 0.1 | Release of target data sheet |
| 2.0 | Release Final version |
| 2.2 | Insert Marking layout |
| | |

**We Listen to Your Comments**

Any information within this document that you feel is wrong, unclear or missing at all?
Your feedback will help us to continuously improve the quality of this document.
Please send your proposal (including a reference to this document) to: **erratum@infineon.com**

Edition 2011-07-20

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2011 Infineon Technologies AG
All Rights Reserved.

**Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

**Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (**www.infineon.com**).

**Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered

LifeElectronics
Живое партнерство

**ООО «ЛайфЭлектроникс»** **“LifeElectronics” LLC**

*ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703*

*Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.*

*С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров*

*Мы предлагаем:*

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

*В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.*

*Конструкторский отдел помогает осуществить:*

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

*Тел: +7 (812) 336 43 04 (многоканальный)*
*Email: org@lifeelectronics.ru*

***www.lifeelectronics.ru***