

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0714300012

Status:

Active

Description:

0.80mm (.031") Pitch Ultra+™ VHDCI Receptacle, Right Angle, 68 Circuits, PC Tail Length 2.71mm (.107"), Shield with Enhanced Ground Tabs, No Screwlocks

Documents:

3D Model

Packaging Specification (PDF)

Drawing (PDF)

Product Specification PS-71425-9999 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

I/O Connectors

Series

71430

Application

Wire-to-Board

Comments

Shield with Enhanced Ground Tabs, No Screwlocks

Component Type

Receptacle

Product Name

SCSI+, VHDCI

Type

N/A

Physical

Boot Color

N/A

Circuits (Loaded)

68

Circuits (maximum)

68

Color - Resin

Black

Durability (mating cycles max)

500

Flammability

94V-0

Gender

Receptacle

Lock to Mating Part

Yes

Material - Plating Mating

Gold

Material - Resin

High Temperature Thermoplastic

Number of Rows

2

Orientation

Right Angle

PC Tail Length (in)

0.107 In

PC Tail Length (mm)

2.71 mm

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness Recommended (in)

0.093 In

PCB Thickness Recommended (mm)

2.36 mm

Packaging Type

Tube

Panel Mount

Yes

Pitch - Mating Interface (in)

0.031 In

Pitch - Mating Interface (mm)

0.80 mm

Pitch - Term. Interface (in)

0.031 In

Pitch - Term. Interface (mm)

0.80 mm

Polarized to Mating Part

Yes

Polarized to PCB

Yes

Ports

1

Surface Mount Compatible (SMC)

Yes

Temperature Range - Operating

-55°C to +85°C

Termination Interface: Style

Through Hole

Waterproof / Dustproof

No

Wire Size AWG

N/A

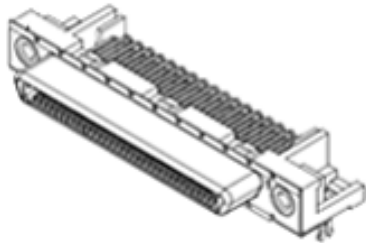


image - Reference only

Series

EU RoHS

RoHS Compliant by Exemption

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS

50

Pb

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

71430Series

Mates With

71425 Ultra+™ VHDCI Plug Kit

Electrical

Current - Maximum per Contact	0.5A
Shield Type	Full Shield
Shielded	Yes
Voltage - Maximum	30V AC (RMS)/DC

Solder Process Data

Duration at Max. Process Temperature (seconds)	40
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	245



Material Info

Reference - Drawing Numbers



Product Specification	PS-71425-9999
Sales Drawing	SD-71430-015

This document was generated on 04/05/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

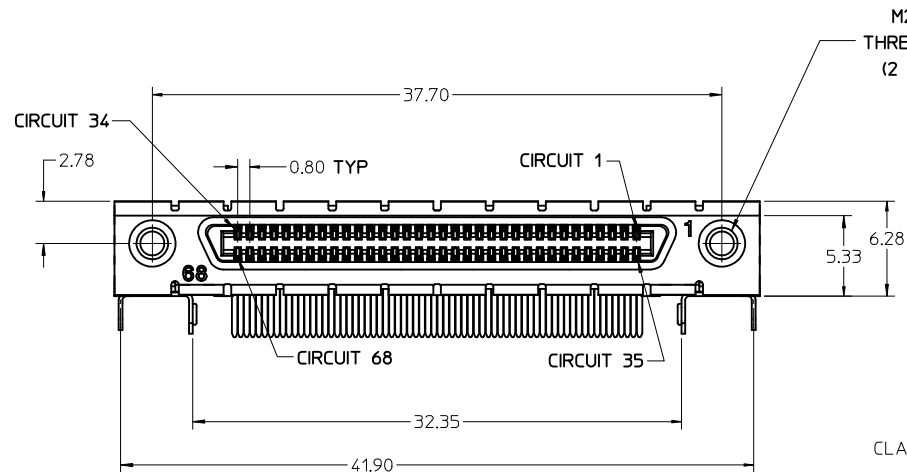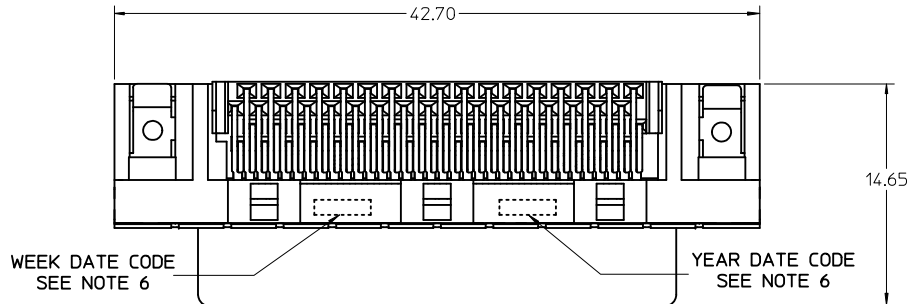

M2 X 0.4g
THREADED INSERT
(2 PLACES)

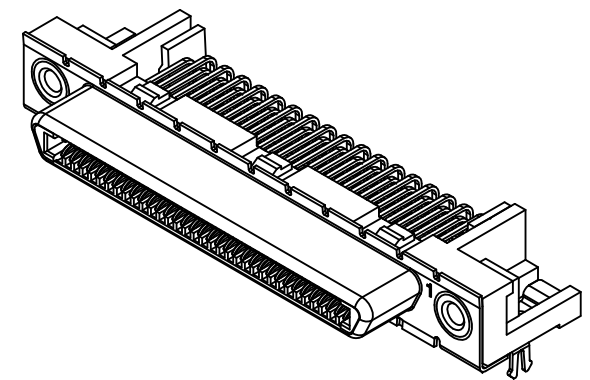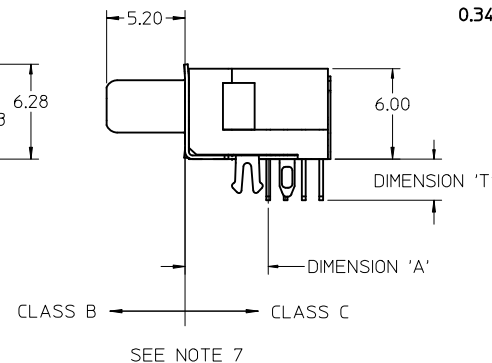

NOTES:

1. MATERIALS:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL94 V-0, COLOR:BLACK
TAIL ALIGNER: HIGH TEMPERATURE THERMOPLASTIC,
TERMINAL: HIGH PERFORMANCE COPPER ALLOY
BRACKET: BRASS
SHELL: STEEL
INSERT: BRASS

2. FINISHES:

TERMINAL: 0.05-0.25 MICROMETERS GOLD FLASH IN CRITICAL AREA
OVER 0.75 MICROMETERS MINIMUM PALLADIUM NICKEL IN
CRITICAL AREA. 1.87 MICROMETERS MINIMUM TIN IN
SOLDER TAIL AREA OVER 1.25 MICROMETERS MINIMUM NICKEL.
BRACKET: 5.0 MICROMETERS BRIGHT TIN OVER 2.50 MICROMETERS COPPER.
SHIELD: 3.8 MICROMETERS MINIMUM BRIGHT TIN OVER 1.3 MICROMETERS
MINIMUM NICKEL OVER COPPER FLASH (OPTIONAL).
INSERT: 2.54 MICROMETERS MINIMUM NICKEL.

3. PART PERFORMS TO MOLEX PRODUCT SPECIFICATION PS-71425-9999.


4. PACKAGE PER PK-71430-0101.

5. APPLICABLE STANDARDS: EIA-3652 AND SFF-8441.

6. DATE CODE: YR/WK PER EIA-476-A.




7. PRODUCT COMPLIES WITH COSMETIC SPECIFICATION PS-45499-002. SEE SIDE VIEW FOR SURFACE CLASSIFICATIONS.

8. TORQUE TO INSTALL SCREWLOCKS INTO THREADED INSERTS: 0.34 Nm MAXIMUM.

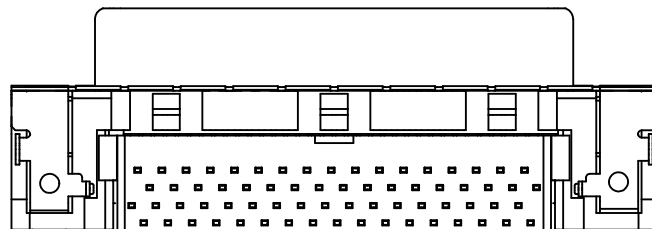


CHANGE PACKAGING EC NO: UCP2010-1970 DRAWN BY: DRWN:MS BARRA 2010/02/11 CHKD:BBARKER 11/15/2002 APPR:SMILLER 2010/04/20			DESCRIPTION	REV	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.13 ± --- 1 PLACE ± 0.25 ± --- ANGULAR ±1/2°		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION ⊙ ⏏
								MM ONLY		4:1	METRIC	
								DRAWN BY DATE		TITLE		
								KSTILES 11/14/2002		VHDCI RIGHT ANGLE ASSEMBLY		
								CHECKED BY DATE				
								KSTILES 11/15/2002				
								APPROVED BY DATE				
								MBNAKIS 11/22/2002				
								MATERIAL NO.		DOCUMENT NO.		
								SEE TABLE		SD-71430-015		
								SIZE		SHEET NO.		
								THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		1 OF 3		

PCB THICKNESS	PART NUMBER	TAIL LENGTH 'T'	ENHANCED GROUND TABS	SCREWLOCKS	TAIL LOC. 'A'	HOLE LOCATION 'B'
1.60	71430-0101	2.08	NO	NONE	5.50	6.50 MAXIMUM
1.60	71430-0007	2.08	NO	LOOSE IN BAGS		
1.60	71430-0005	2.08	YES	NONE		
1.60	71430-0008	2.08	YES	LOOSE IN BAGS		
2.36	71430-0268	2.71	NO	NONE		
2.36	71430-0006	2.71	NO	INSTALLED		
2.36	71430-0004	2.71	YES	NONE		
2.36	71430-0009	2.71	YES	INSTALLED		
2.36	71430-0016	2.71	NO	LOOSE IN BAGS		
2.36	71430-0019	2.71	YES	LOOSE IN BAGS		
2.36	71430-0012	2.71	YES	NONE	5.30	6.30 MAXIMUM
1.60	71430-0013	2.08	YES	NONE		

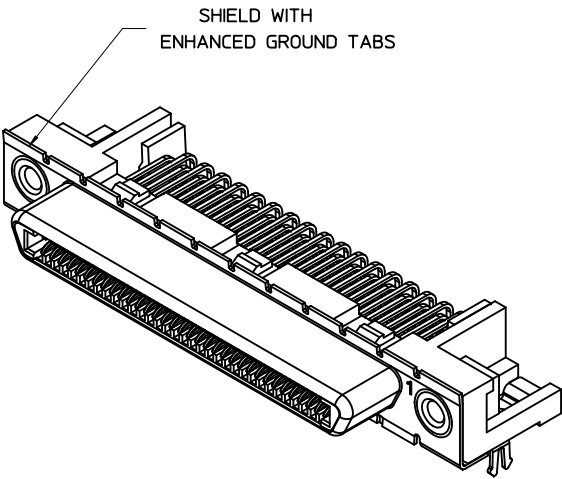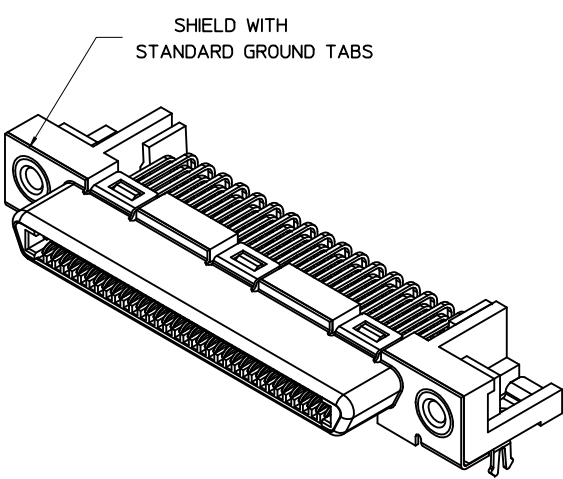

OPTIONAL SCREWLOCK
PART NUMBER 71433-0002

SEE SHEET 1 EC NO: UCP2010-1970 2010/02/11 DRWN:MS BARA 11/15/2002 CHKD:BBARKER APPR:SMILLER 2010/04/20	QUALITY SYMBOLS	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
						MM ONLY		4:1	METRIC			
				mm	INCH	DRAWN BY	DATE	TITLE				
			4 PLACES	± ---	± ---	KSTILES	11/14/2002	VHDCI RIGHT ANGLE ASSEMBLY				
			3 PLACES	± ---	± ---	CHECKED BY	DATE					
			2 PLACES	± 0.13	± ---	KSTILES	11/15/2002					
			1 PLACE	± 0.25	± ---	APPROVED BY	DATE					
			ANGULAR ±1/2°			MBNAKIS	11/22/2002	MOLEX INCORPORATED				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
						SEE TABLE		SD-71430-015		2 OF 3		
M	REV		SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

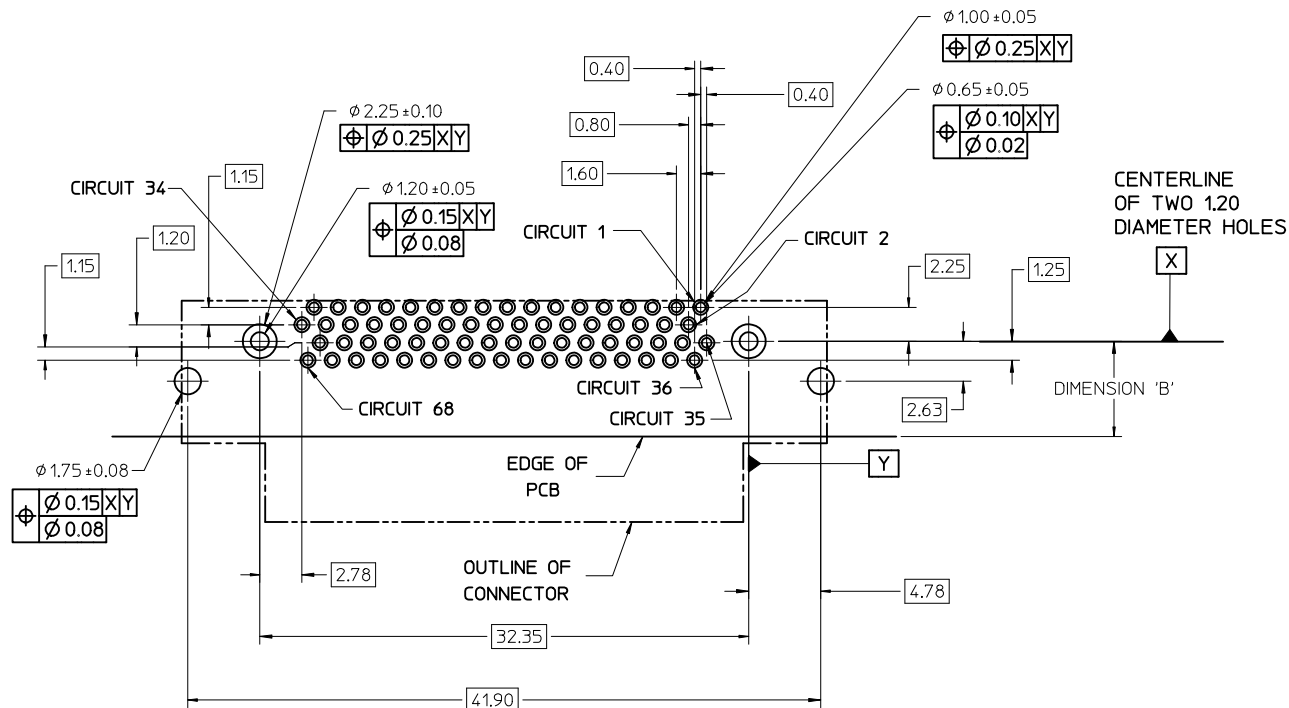


NOTES:

1. FOR FULL MATE WITH PLUG, PANEL THICKNESS SHOULD NOT EXCEED 1.0mm.

FUNCTIONAL MATING WITH MOLEX PLUG CAN STILL BE MAINTAINED WITH PANELS AS THICK AS 2.5mm (BUT PLUG AND RECEPTACLE WILL NOT BE FULLY MATED).

2. GUIDELINES FOR CHOOSING A MOLEX SCREWLOCK:

PANEL THICKNESS	RECOMMENDED SCREWLOCK
LESS THAN OR EQUAL TO 1.00 MM	71433-0002
1.01 TO 2.15 MM	71433-0010

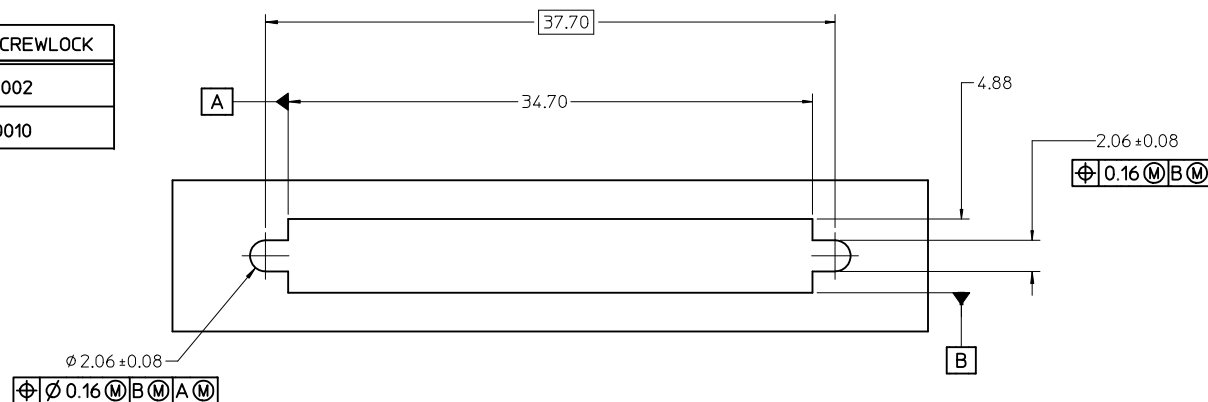

SEE SHEET 1 EC NO: UCP2010-1970 DRWN:MS BARRA 2010/02/11 CHKD:BBARKER 11/15/2002 APPR:SMILLER 2010/04/20 REV: M	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY	DATE	TITLE VHDCI RIGHT ANGLE ASSEMBLY		
			4 PLACES	± ---	± ---	KSTILES	11/14/2002			
			3 PLACES	± ---	± ---	CHECKED BY	DATE	MOLEX INCORPORATED		
			2 PLACES	± 0.13	± ---	KSTILES	11/15/2002			
			1 PLACE	± 0.25	± ---	APPROVED BY	DATE	SD-71430-015		
			ANGULAR ±1/2°		MBNAKIS	11/22/2002				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.			SHEET NO.
					SEE TABLE		SD-71430-015			3 OF 3
					SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru