

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
7	CD1275	UPDATE DRAWING	Apr.25,2018	

D

C

B




A

D

C

B

A

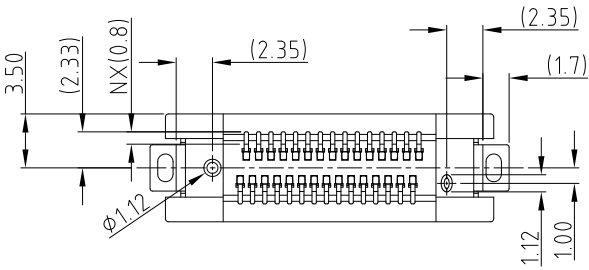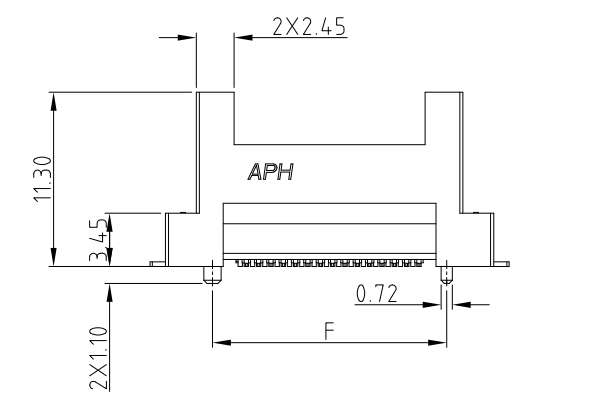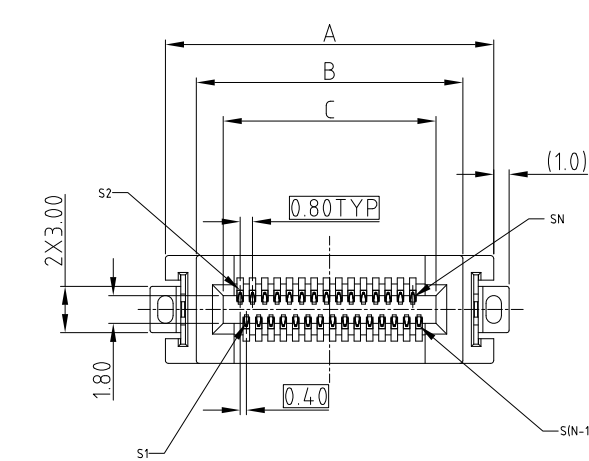

SIGNAL SPEED/IMPEDANCE
1: BELOW 16Gbps
2: 16~32Gbps WITH 85 ohm

POWER PIN COUNT
0: WITHOUT POWER PIN
2: 2PIN
4: 4PIN
6: 6PIN




PART NUMBER SYSTEM
CEXXXXXX011011X

CARD THICKNESS
0: 1.60MM

GUIDE HOLE
0: WITHOUT GUIDE HOLE
G: WITH GUIDE HOLE

SIGNAL PIN COUNT
000: 0 PIN ; 080: 80PIN
020: 20PIN ; 100: 100PIN
026: 26PIN ; 120: 120PIN
040: 40PIN ; 140: 140PIN
050: 50PIN ; 160: 160PIN
060: 60PIN ; 180: 180PIN
200: 200PIN

PLATING SPEC
1: 0.76um Au
2: 0.38um Au
3: GOLD FLASH
4: 0.76umPdNi +GF

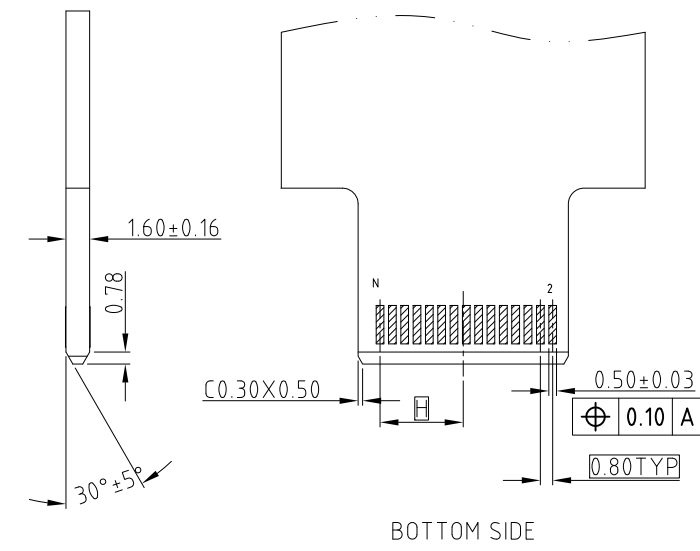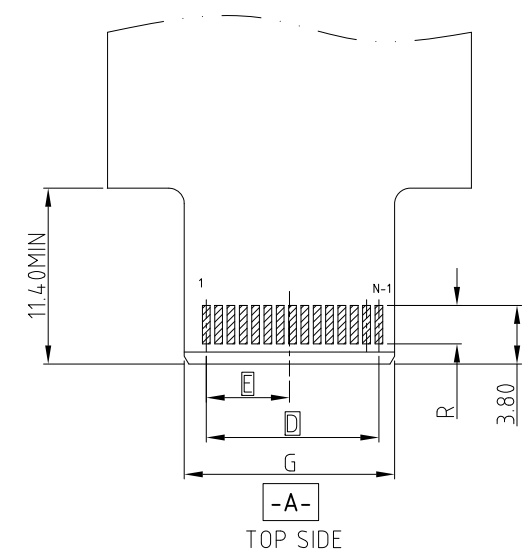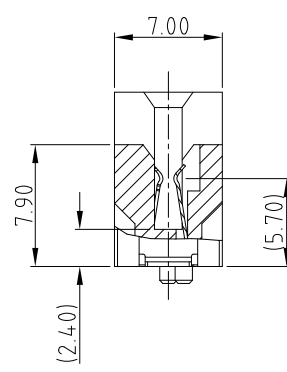

RECOMMEND MATING CARD, THICKNESS=1.60±0.16MM
GENERAL TOLERANCE ±0.05MM



SYSTEM	DIM R
IMPEDANCE	(GOLD FINGER LENGTH)
85 ohm	2.50






- NOTE:
- MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC BLACK UL94-V0
CONTACT: COPPER ALLOY
BOARDLOCK: SPCC
 - PLATING:
CONTACT: MATING AREA: SEE PLATING SEPC OVER 1.27-2.54 UM NICKEL UNDERPLATED
SOLDER AREA: 1.27 MIN TIN OVER 1.27-2.54 UM NICKEL UNDERPLATED
BOARDLOCK: 1.27 MIN TIN OVER 1.27-2.54UM NICKEL UNDERPLATED
 - ELECTRICAL PERFORMANCE:
RATED CURRENT FOR POWER PIN: REFER PRODUCT APPLICATION SPEC
RATED CURRENT FOR SIGNAL PIN: REFER PRODUCT APPLICATION SPEC
 - PRODUCT SHALL MEET ALL DIMENSIONS BEFORE EXPOSURE TO 260°C MAX. FOR 10S AND SHALL MEET ALL SELECTED FUNCTIONAL DIMENSION AFTER EXPOSURE TO 260°C MAX. FOR 10S.
 - MATERIAL SHOULD BE FULFILLED AMPHENOL SPEC # SSN002
 - ORDERING PN: REFER TO THE PN SYSTEM

PIN COUNT	DIMENSION							
N (SIGNAL)	A	B	C	D	E	F	G	H
20	17.30	13.30	9.80	7.20	3.40	11.20	9.65	3.40
26	19.70	15.70	12.20	9.60	4.60	13.60	12.05	4.60
40	25.30	21.30	17.80	15.20	7.40	19.20	17.65	7.40
50	29.30	25.30	21.80	19.20	9.40	23.20	21.65	9.40


UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC .X +/- 0.25 .XX +/- 0.20 .XXX +/- 0.15 FRACTIONS +/- ANGLES +/- 5° FOR MATERIALS AND FINISHES SEE NOTES REMOVE SHARP EDGES DIMENSIONS —U.S.— INCHES (METRIC) (mm)		APPROVAL	DATE	Amphenol COOL EDGE CONNECTOR 0.80MM PITCH SIZE A3 DRAWING NO. C CEXXXXXX011011X REV. 7 SCALE NONE SHEET 1 OF 8	
		DRAWN	Apr.25,2018		
		CHECKED			
		APPROVED			
		DRAWING FILE :	INTERNAL\DRAWING\CE\C CEXXXXXX011011X		
		ANGLE OF PROJECTION			

CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1		

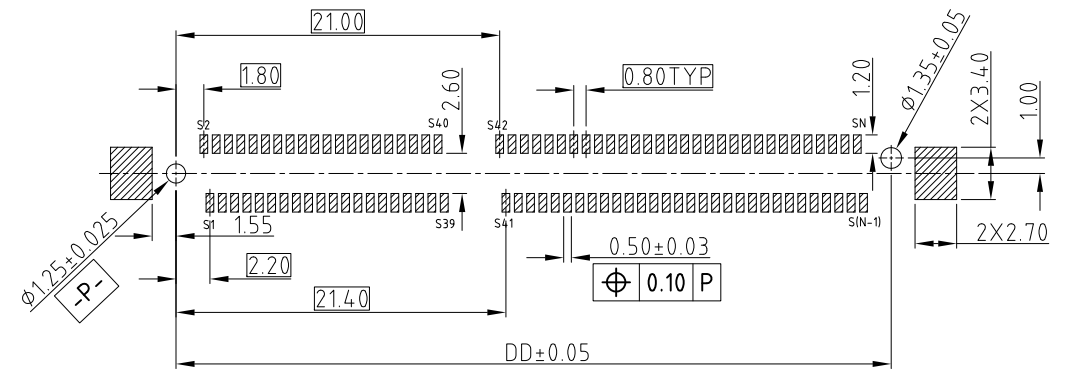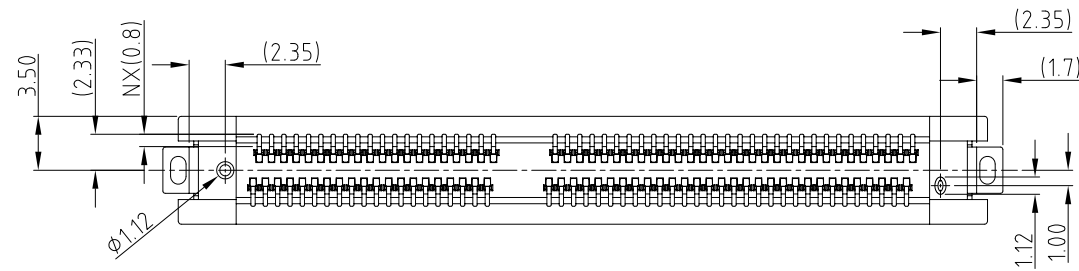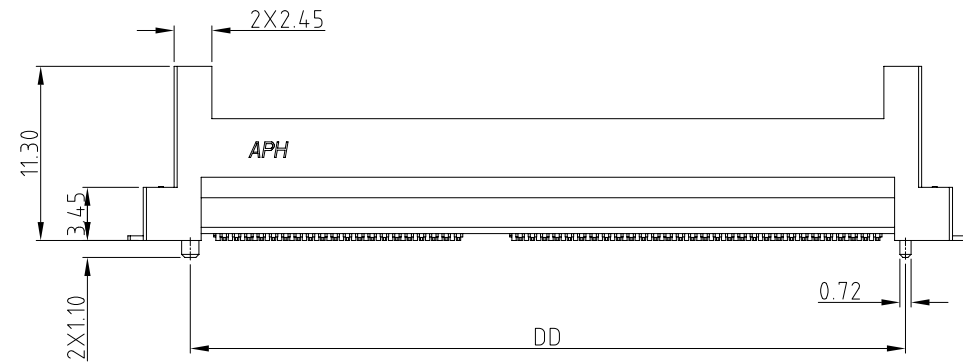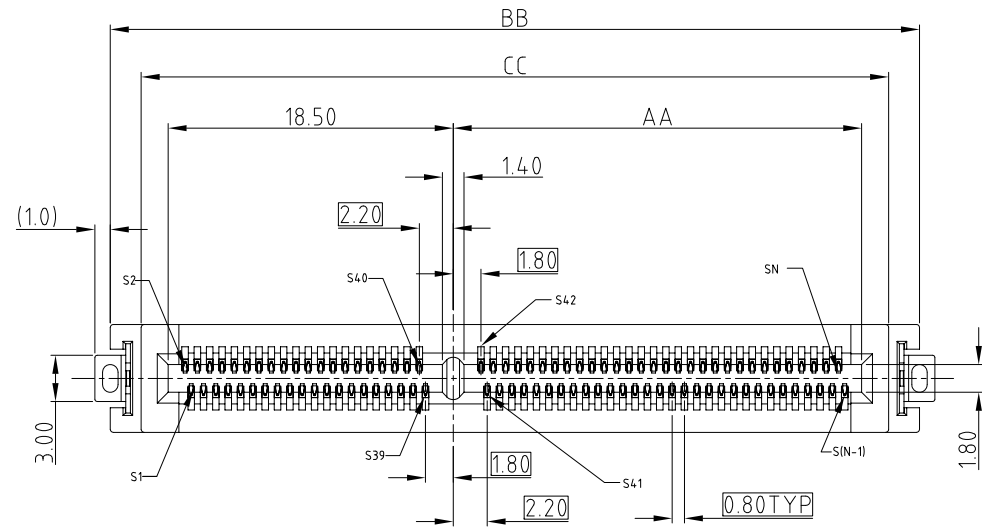


RECOMMENDED SOLDER PCB LAYOUT
GENERAL TOLERANCE ± 0.05

UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC .X +/- 0.25 .XX +/- 0.20 .XXX +/- 0.15 FRACTIONS +/- ANGLES +/- 5°		APPROVAL DRAWN CHECKED APPROVED		DATE Apr.25,2018		Amphenol	
FOR MATERIALS AND FINISHES SEE NOTES REMOVE SHARP EDGES DIMENSIONS — U.S. — INCHES (METRIC) (mm)		DRAWING FILE : INTERNAL\DRAWING\CE/C CEXXXXXX011011X		TITLE COOL EDGE CONNECTOR 0.80MM PITCH			
		ANGLE OF PROJECTION 		SIZE DRAWING NO. A3 C CEXXXXXX011011X		REV. 7	
				SCALE NONE SHEET 2 OF 8			

4
This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1		

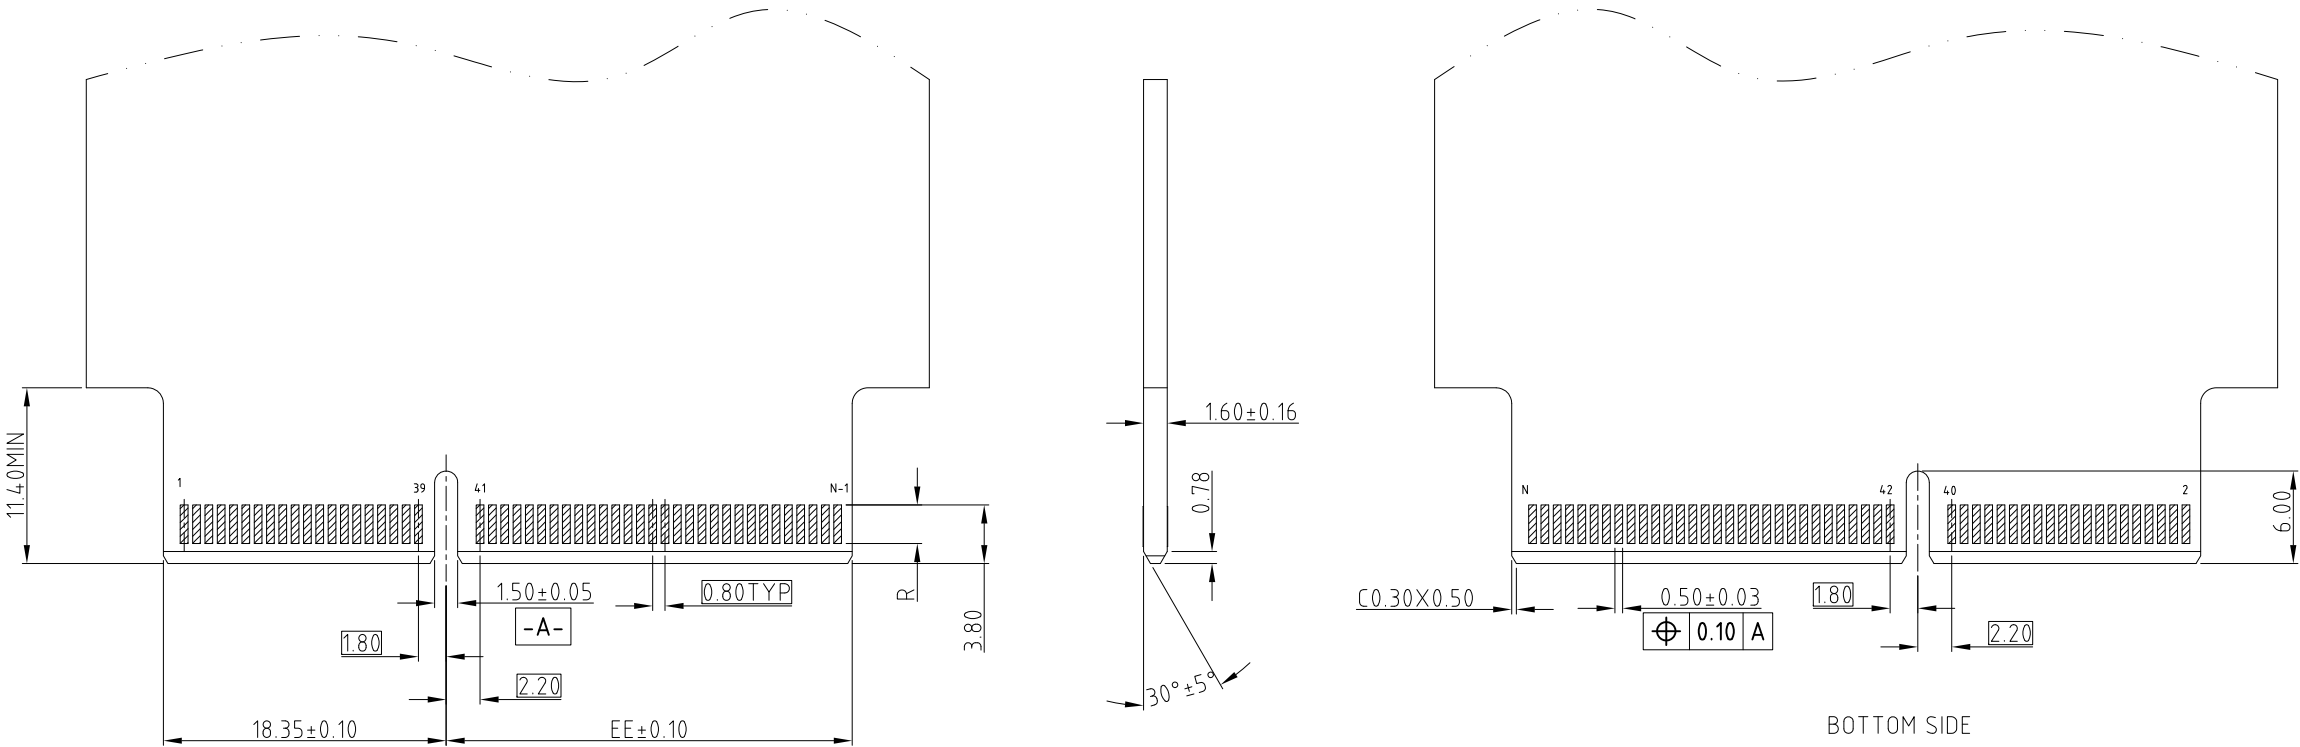

TOP SIDE

BOTTOM SIDE

RECOMMENDED LAY OUT FOR MATING CARD, THICKNESS=1.60±0.16
GENERAL TOLERANCE ±0.05

PIN COUNT	DIMENSION				
	AA	BB	CC	DD	EE
N (SIGNAL)					
60	10.50	36.50	32.50	30.40	10.35
80	18.50	44.50	40.50	38.40	18.35
100	26.50	52.50	48.50	46.40	26.35
120	34.50	60.50	56.50	54.40	34.35
140	42.50	68.50	64.50	62.40	42.35
160	50.50	76.50	72.50	70.40	50.35
180	58.50	84.50	80.50	78.40	58.35
200	66.50	92.50	88.50	86.40	66.35

SYSTEM	DIM R
IMPEDANCE	(GOLD FINGER LENGTH)
85 ohm	2.50








UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC .X +/- 0.3 .XX +/- 0.20 .XXX +/- 0.15 FRACTIONS +/- ANGLES +/- 5° FOR MATERIALS AND FINISHES SEE NOTES REMOVE SHARP EDGES DIMENSIONS —U.S.— INCHES (METRIC) (mm)		APPROVAL		DATE	Amphenol		
		DRAWN		Apr.25,2018			
		CHECKED					
		APPROVED			TITLE		
		DRAWING FILE :		INTERNAL\DRAWING\CE\C CEXXXXXX011011X	COOL EDGE CONNECTOR 0.80MM PITCH		
		ANGLE OF PROJECTION			SIZE	DRAWING NO.	REV.
					A3	C CEXXXXXX011011X	7
					SCALE	NONE	SHEET 3 OF 8

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.


CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	N/A	PRELIMINARY PROPOSAL	Mar.08,2017	

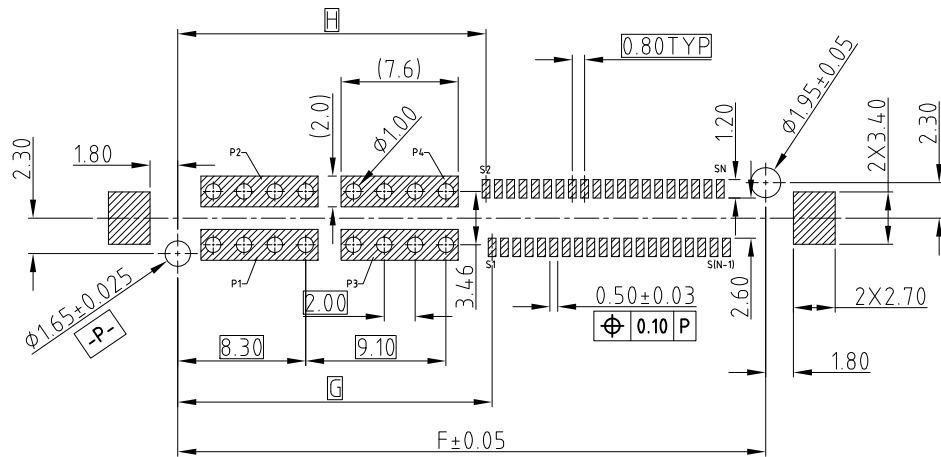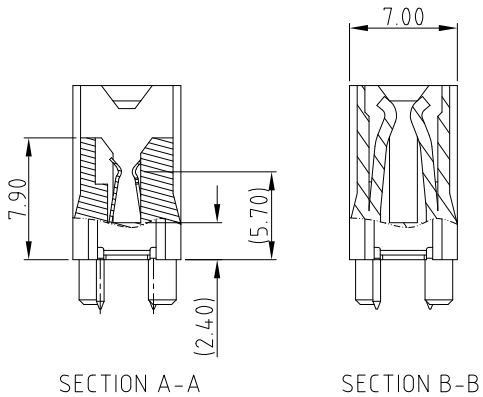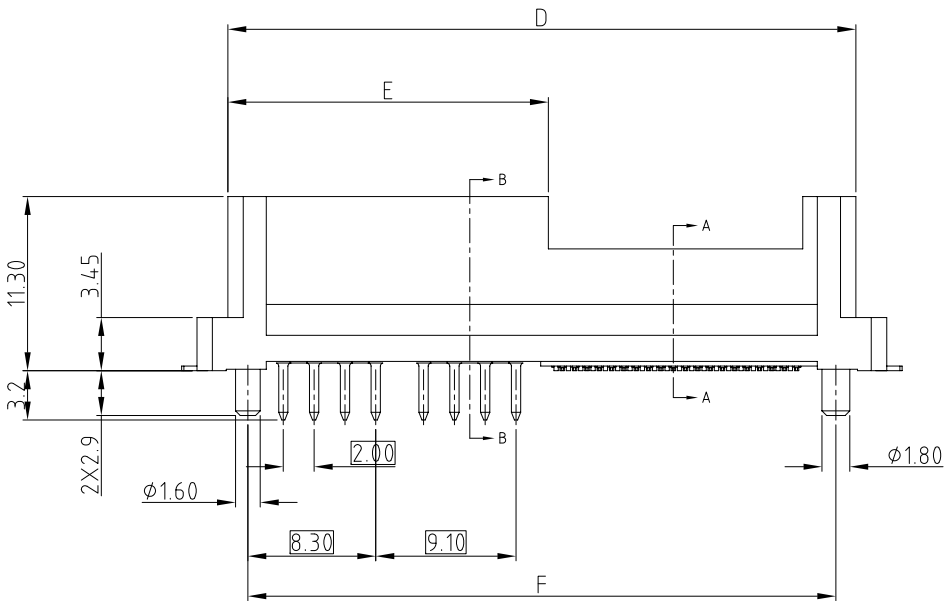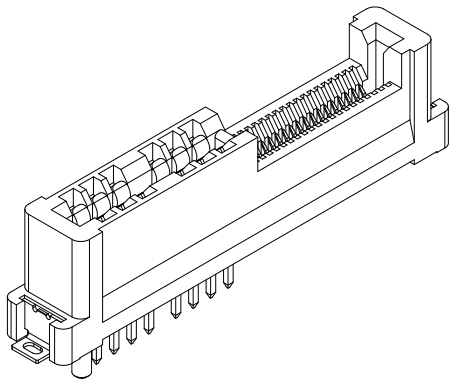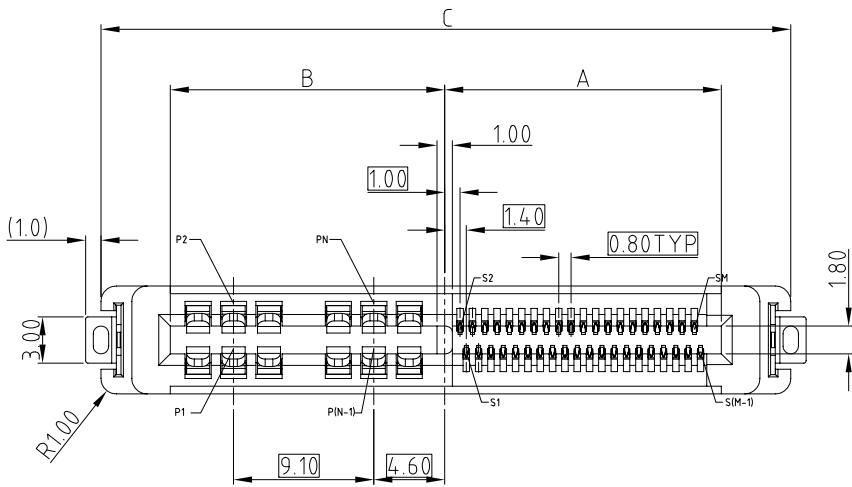

RECOMMEND SOLDER PCB LAYOUT
GENERAL TOLERANCE $\pm 0.05\text{MM}$




UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE		Amphenol	
TOLERANCES		DRAWN		Apr.25,2018			
U.S. METRIC		CHECKED					
		APPROVED					
.X +/- 0.25		DRAWING FILE :		TITLE		HYBRID COOL EDGE CONNECTOR 0.80MM PITCH	
.XX +/- 0.20							
.XXX +/- 0.15							
FRACTIONS +/-							
ANGLES +/- 5°							
FOR MATERIALS AND FINISHES SEE NOTES		INTERNAL\DRAWING\CE\C CEXXXXXX011011X					
REMOVE SHARP EDGES		ANGLE OF PROJECTION		SIZE		DRAWING NO.	
DIMENSIONS				A3		C CEXXXXXX011011X	
— U.S. —						REV.	
INCHES						7	
(METRIC)				SCALE		NONE	
(mm)						SHEET 4 OF 8	

CUSTOMER DRAWING

Technical drawing of a mechanical part showing a cross-section with dimensions and tolerances. The drawing includes the following dimensions and features:

- Overall width: 11.40
- Overall height: 9.10
- Internal width: 7.00
- Internal height: 7.00
- Distance from left face to center of first hole: 9.10
- Distance from left face to center of second hole: 9.10
- Distance between centers of two holes: 7.00
- Distance from center of second hole to right face: 0.55
- Distance from center of second hole to center of third hole: 1.40
- Distance from center of third hole to right face: 0.80 TYP
- Distance from center of third hole to center of fourth hole: 0.50 ± 0.03
- Distance from center of fourth hole to right face: 1.10 ± 0.05
- Distance from left face to center of fifth hole: $K \pm 0.10$
- Distance from center of fifth hole to right face: $J \pm 0.10$
- Distance from center of fifth hole to center of sixth hole: 0.10
- Distance from center of sixth hole to right face: 3.80
- Distance from center of sixth hole to center of seventh hole: 0.10
- Distance from center of seventh hole to right face: 0.10
- Distance from center of eighth hole to right face: 0.10
- Distance from center of ninth hole to right face: 0.10
- Distance from center of tenth hole to right face: 0.10
- Distance from center of eleventh hole to right face: 0.10
- Distance from center of twelfth hole to right face: 0.10
- Distance from center of thirteenth hole to right face: 0.10
- Distance from center of fourteenth hole to right face: 0.10
- Distance from center of fifteenth hole to right face: 0.10
- Distance from center of sixteenth hole to right face: 0.10
- Distance from center of seventeenth hole to right face: 0.10
- Distance from center of eighteenth hole to right face: 0.10
- Distance from center of nineteenth hole to right face: 0.10
- Distance from center of twentieth hole to right face: 0.10
- Distance from center of twenty-first hole to right face: 0.10
- Distance from center of twenty-second hole to right face: 0.10
- Distance from center of twenty-third hole to right face: 0.10
- Distance from center of twenty-fourth hole to right face: 0.10
- Distance from center of twenty-fifth hole to right face: 0.10
- Distance from center of twenty-sixth hole to right face: 0.10
- Distance from center of twenty-seventh hole to right face: 0.10
- Distance from center of twenty-eighth hole to right face: 0.10
- Distance from center of twenty-ninth hole to right face: 0.10
- Distance from center of thirtieth hole to right face: 0.10
- Distance from center of thirty-first hole to right face: 0.10
- Distance from center of thirty-second hole to right face: 0.10
- Distance from center of thirty-third hole to right face: 0.10
- Distance from center of thirty-fourth hole to right face: 0.10
- Distance from center of thirty-fifth hole to right face: 0.10
- Distance from center of thirty-sixth hole to right face: 0.10
- Distance from center of thirty-seventh hole to right face: 0.10
- Distance from center of thirty-eighth hole to right face: 0.10
- Distance from center of thirty-ninth hole to right face: 0.10
- Distance from center of fortieth hole to right face: 0.10
- Distance from center of forty-first hole to right face: 0.10
- Distance from center of forty-second hole to right face: 0.10
- Distance from center of forty-third hole to right face: 0.10
- Distance from center of forty-fourth hole to right face: 0.10
- Distance from center of forty-fifth hole to right face: 0.10
- Distance from center of forty-sixth hole to right face: 0.10
- Distance from center of forty-seventh hole to right face: 0.10
- Distance from center of forty-eighth hole to right face: 0.10
- Distance from center of forty-ninth hole to right face: 0.10
- Distance from center of fiftieth hole to right face: 0.10
- Distance from center of fifty-first hole to right face: 0.10
- Distance from center of fifty-second hole to right face: 0.10
- Distance from center of fifty-third hole to right face: 0.10
- Distance from center of fifty-fourth hole to right face: 0.10
- Distance from center of fifty-fifth hole to right face: 0.10
- Distance from center of fifty-sixth hole to right face: 0.10
- Distance from center of fifty-seventh hole to right face: 0.10
- Distance from center of fifty-eighth hole to right face: 0.10
- Distance from center of fifty-ninth hole to right face: 0.10
- Distance from center of sixtieth hole to right face: 0.10
- Distance from center of sixty-first hole to right face: 0.10
- Distance from center of sixty-second hole to right face: 0.10
- Distance from center of sixty-third hole to right face: 0.10
- Distance from center of sixty-fourth hole to right face: 0.10
- Distance from center of sixty-fifth hole to right face: 0.10
- Distance from center of sixty-sixth hole to right face: 0.10
- Distance from center of sixty-seventh hole to right face: 0.10
- Distance from center of sixty-eighth hole to right face: 0.10
- Distance from center of sixty-ninth hole to right face: 0.10
- Distance from center of seventieth hole to right face: 0.10
- Distance from center of seventy-first hole to right face: 0.10
- Distance from center of seventy-second hole to right face: 0.10
- Distance from center of seventy-third hole to right face: 0.10
- Distance from center of seventy-fourth hole to right face: 0.10
- Distance from center of seventy-fifth hole to right face: 0.10
- Distance from center of seventy-sixth hole to right face: 0.10
- Distance from center of seventy-seventh hole to right face: 0.10
- Distance from center of seventy-eighth hole to right face: 0.10
- Distance from center of seventy-ninth hole to right face: 0.10
- Distance from center of eightieth hole to right face: 0.10
- Distance from center of eighty-first hole to right face: 0.10
- Distance from center of eighty-second hole to right face: 0.10
- Distance from center of eighty-third hole to right face: 0.10
- Distance from center of eighty-fourth hole to right face: 0.10
- Distance from center of eighty-fifth hole to right face: 0.10
- Distance from center of eighty-sixth hole to right face: 0.10
- Distance from center of eighty-seventh hole to right face: 0.10
- Distance from center of eighty-eighth hole to right face: 0.10
- Distance from center of eighty-ninth hole to right face: 0.10
- Distance from center of ninetieth hole to right face: 0.10
- Distance from center of ninety-first hole to right face: 0.10
- Distance from center of ninety-second hole to right face: 0.10
- Distance from center of ninety-third hole to right face: 0.10
- Distance from center of ninety-fourth hole to right face: 0.10
- Distance from center of ninety-fifth hole to right face: 0.10
- Distance from center of ninety-sixth hole to right face: 0.10
- Distance from center of ninety-seventh hole to right face: 0.10
- Distance from center of ninety-eighth hole to right face: 0.10
- Distance from center of ninety-ninth hole to right face: 0.10
- Distance from center of one hundred hole to right face: 0.10

Technical drawing of a vertical rod. The drawing shows a rod with a diameter dimensioned as $T = 1.60 \pm 0.16$. A horizontal dimension of 0.45 is indicated from the centerline to the edge of a feature. A conical feature at the bottom is dimensioned with an angle of $30^\circ \pm 5^\circ$.

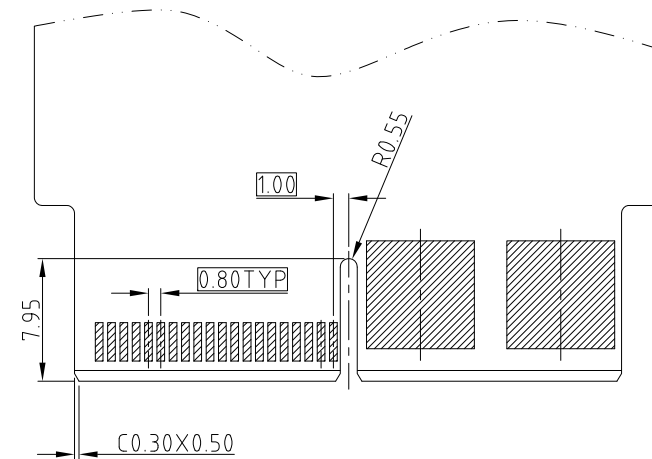

SYSTEM IMPEDANCE	DIM R (GOLD FINGER LENGTH)
85 ohm	2.50

PIN COUNT		DIMENSION									
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K
2	18	9.15	8.70	26.85	22.85	11.70	20.25	11.30	10.90	9.00	8.55
	20	9.95	8.70	27.65	23.65	11.70	21.05	11.30	10.90	9.80	8.55
	40	17.95	8.70	35.65	31.65	11.70	29.05	11.30	10.90	17.80	8.55
	60	25.95	8.70	43.65	39.65	11.70	37.05	11.30	10.90	25.80	8.55
	80	33.95	8.70	51.65	47.65	11.70	45.05	11.30	10.90	33.80	8.55
	100	41.95	8.70	59.65	55.65	11.70	53.05	11.30	10.90	41.80	8.55
	120	49.95	8.70	67.65	63.65	11.70	61.05	11.30	10.90	49.80	8.55
	140	57.95	8.70	75.65	71.65	11.70	69.05	11.30	10.90	57.80	8.55
	160	65.95	8.70	83.65	79.65	11.70	77.05	11.30	10.90	65.80	8.55
	180	73.95	8.70	91.65	87.65	11.70	85.05	11.30	10.90	73.80	8.55
	200	81.95	8.70	99.65	95.65	11.70	93.05	11.30	10.90	81.80	8.55




PIN COUNT		DIMENSION									
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K
4	20	9.95	17.80	36.75	32.75	20.80	30.15	20.40	20.00	9.80	17.65
	40	17.95	17.80	44.75	40.75	20.80	38.15	20.40	20.00	17.80	17.65
	60	25.95	17.80	52.75	48.75	20.80	46.15	20.40	20.00	25.80	17.65
	80	33.95	17.80	60.75	56.75	20.80	54.15	20.40	20.00	33.80	17.65
	100	41.95	17.80	68.75	64.75	20.80	62.15	20.40	20.00	41.80	17.65
	120	49.95	17.80	76.75	72.75	20.80	70.15	20.40	20.00	49.80	17.65
	140	57.95	17.80	84.75	80.75	20.80	78.15	20.40	20.00	57.80	17.65
	160	65.95	17.80	92.75	88.75	20.80	86.15	20.40	20.00	65.80	17.65
	180	73.95	17.80	100.75	96.75	20.80	94.15	20.40	20.00	73.80	17.65
	200	81.95	17.80	108.75	104.75	20.80	102.15	20.40	20.00	81.80	17.65

PIN COUNT		DIMENSION									
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K
6	20	9.95	26.90	45.85	41.85	29.90	39.25	29.50	29.10	9.80	26.75
	40	17.95	26.90	53.85	49.85	29.90	47.25	29.50	29.10	17.80	26.75
	60	25.95	26.90	61.85	57.85	29.90	55.25	29.50	29.10	25.80	26.75
	80	33.95	26.90	69.85	65.85	29.90	63.25	29.50	29.10	33.80	26.75
	100	41.95	26.90	77.85	73.85	29.90	71.25	29.50	29.10	41.80	26.75
	120	49.95	26.90	85.85	81.85	29.90	79.25	29.50	29.10	49.80	26.75
	140	57.95	26.90	93.85	89.85	29.90	87.25	29.50	29.10	57.80	26.75
	160	65.95	26.90	101.85	97.85	29.90	95.25	29.50	29.10	65.80	26.75
	170	69.95	26.90	105.85	101.85	29.90	99.25	29.50	29.10	69.80	26.75




1


CUSTOMER DRAWING

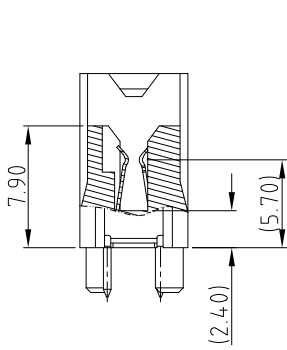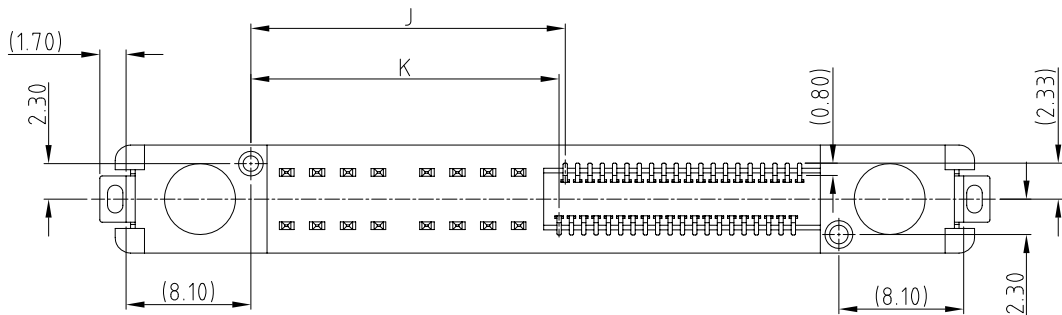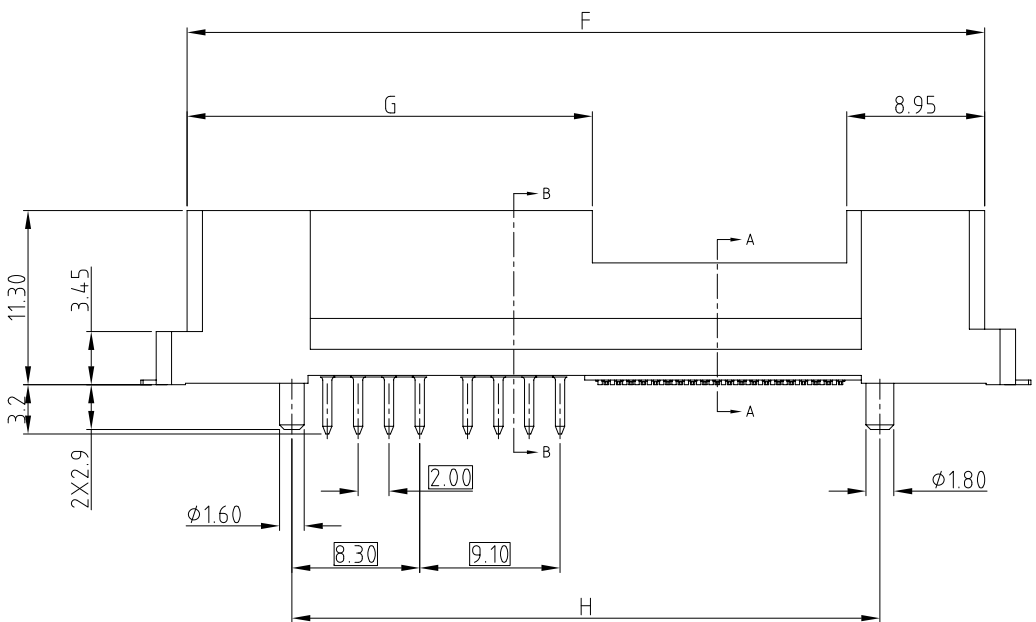


SECTION A-A




SECTION B-B

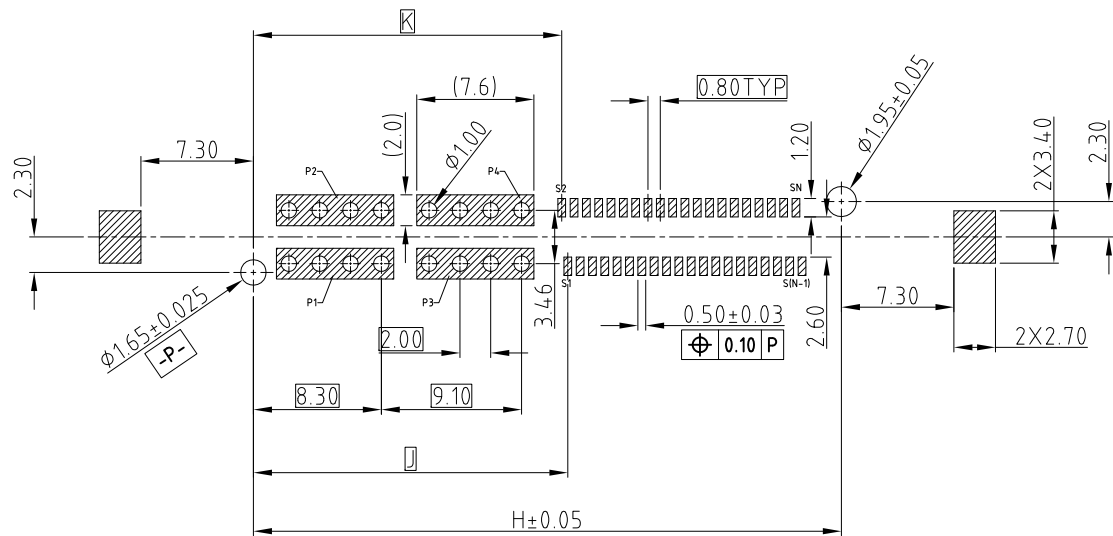

RECOMMEND SOLDER PCB LAYOUT
GENERAL TOLERANCE $\pm 0.05\text{MM}$



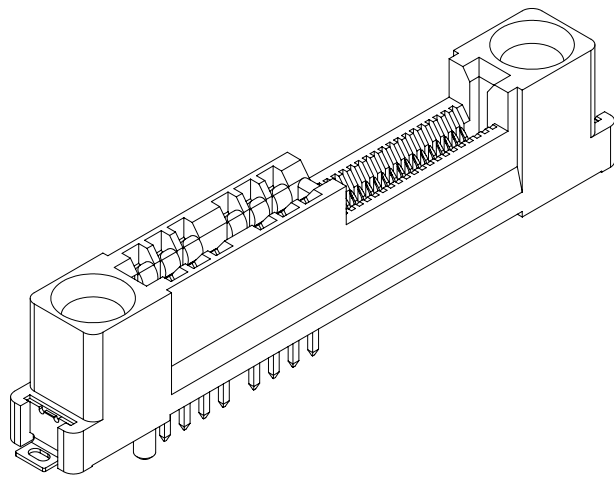


UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE		Amphenol	
U.S. METRIC		DRAWN		Apr.25,2018			
.X +/- 0.25		CHECKED					
.XX +/- 0.20		APPROVED					
.XXX +/- 0.15		DRAWING FILE :		TITLE		HYBRID COOL EDGE CONNECTOR 0.80MM PITCH	
FRACTIONS +/-							
ANGLES +/- 5°		INTERNAL\DRAWING\CE\G_CEXXXXXX011011X		SIZE		DRAWING NO.	
FOR MATERIALS AND FINISHES SEE NOTES		ANGLE OF PROJECTION 		A3		C CEXXXXXX011011X	
REMOVE SHARP EDGES						REV.	
DIMENSIONS						7	
— U.S. —							
(METRIC)		(mm)		SCALE		NONE	
						SHEET 6 OF 8	

4
This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

3
CUSTOMER DRAWING


1 REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1		

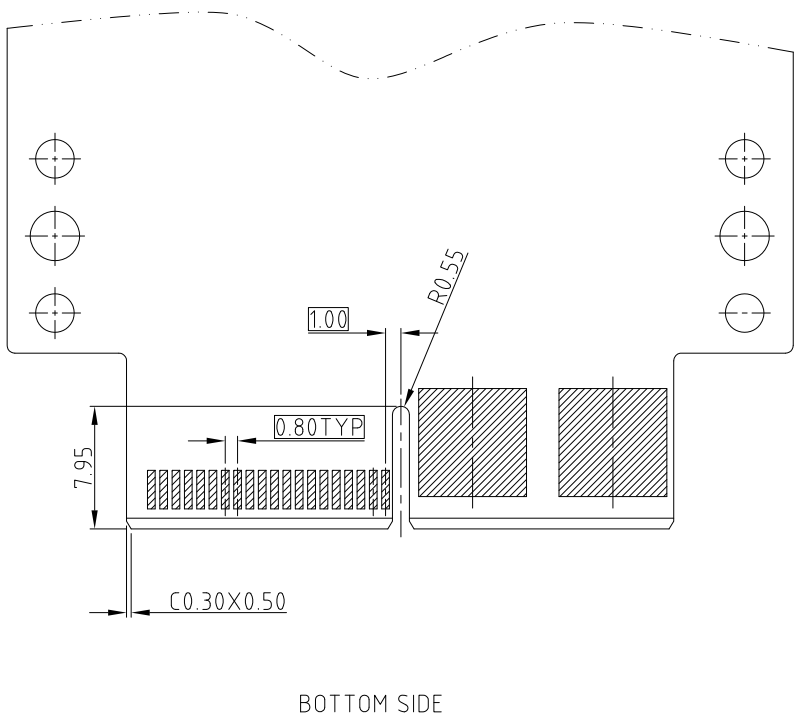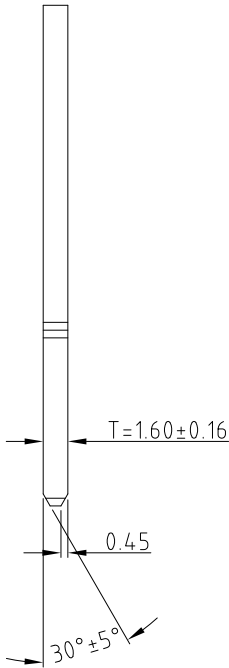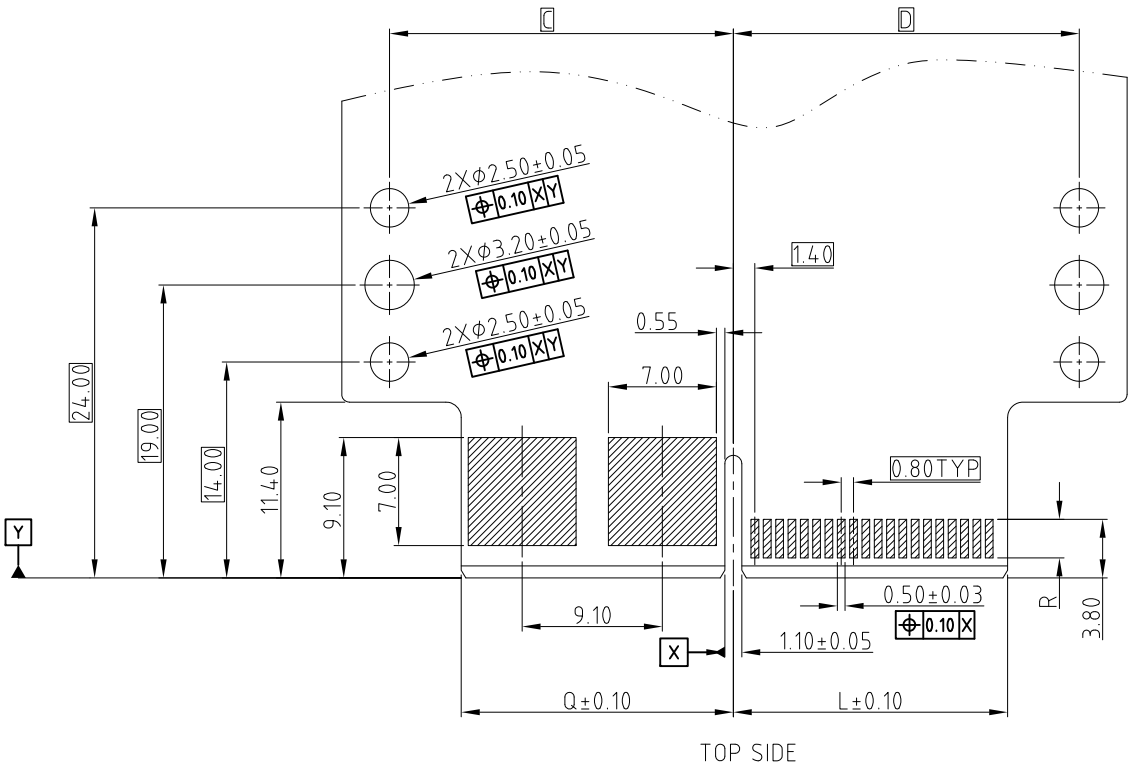

RECOMMEND MATING CARD, THICKNESS=1.60 $\pm$ 0.16MM
GENERAL TOLERANCE $\pm$ 0.05MM

SYSTEM	DIM R
IMPEDANCE	(GOLD FINGER LENGTH)
85 ohm	2.50



UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE		Amphenol	
U.S.		DRAWN		Apr.25,2018			
METRIC		CHECKED					
		APPROVED					
.X +/-						TITLE HYBRID COOL EDGE CONNECTOR 0.80MM PITCH	
.XX +/-							
.XXX +/-							
FRACTIONS +/-							
ANGLES +/-		DRAWING FILE :					
5°		INTERNAL\DRAWING\CE\C CEXXXXXX011011X					
FOR MATERIALS AND FINISHES SEE NOTES		ANGLE OF PROJECTION					
REMOVE SHARP EDGES				SIZE		REV.	
DIMENSIONS				DRAWING NO.			
—U.S.—				A3		7	
INCHES				C CEXXXXXXX011011X			
(METRIC)				SCALE		SHEET 7 OF 8	
(mm)				NONE			

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1		

PIN COUNT		DIMENSION											
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K	L	Q
2	18	9.15	8.70	13.20	13.65	37.85	33.85	17.20	20.25	11.30	10.90	9.00	8.55
	20	9.95	8.70	13.20	14.45	38.65	34.65	17.20	21.05	11.30	10.90	9.80	8.55
	40	17.95	8.70	13.20	22.45	46.65	42.65	17.20	29.05	11.30	10.90	17.80	8.55
	60	25.95	8.70	13.20	30.45	54.65	50.65	17.20	37.05	11.30	10.90	25.80	8.55
	80	33.95	8.70	13.20	38.45	62.65	58.65	17.20	45.05	11.30	10.90	33.80	8.55
	100	41.95	8.70	13.20	46.45	70.65	66.65	17.20	53.05	11.30	10.90	41.80	8.55
	120	49.95	8.70	13.20	54.45	78.65	74.65	17.20	61.05	11.30	10.90	49.80	8.55
	140	57.95	8.70	13.20	62.45	86.65	82.65	17.20	69.05	11.30	10.90	57.80	8.55
	160	65.95	8.70	13.20	70.45	94.65	90.65	17.20	77.05	11.30	10.90	65.80	8.55
	180	73.95	8.70	13.20	78.45	102.65	98.65	17.20	85.05	11.30	10.90	73.80	8.55
200	81.95	8.70	13.20	86.45	110.65	106.65	17.20	93.05	11.30	10.90	81.80	8.55	

PIN COUNT		DIMENSION											
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K	L	Q
4	20	9.95	17.80	22.30	14.45	47.75	43.75	26.30	30.15	20.40	20.00	9.80	17.65
	40	17.95	17.80	22.30	22.45	55.75	51.75	26.30	38.15	20.40	20.00	17.80	17.65
	60	25.95	17.80	22.30	30.45	63.75	59.75	26.30	46.15	20.40	20.00	25.80	17.65
	80	33.95	17.80	22.30	38.45	71.75	67.75	26.30	54.15	20.40	20.00	33.80	17.65
	100	41.95	17.80	22.30	46.45	79.75	75.75	26.30	62.15	20.40	20.00	41.80	17.65
	120	49.95	17.80	22.30	54.45	87.75	83.75	26.30	70.15	20.40	20.00	49.80	17.65
	140	57.95	17.80	22.30	62.45	95.75	91.75	26.30	78.15	20.40	20.00	57.80	17.65
	160	65.95	17.80	22.30	70.45	103.75	99.75	26.30	86.15	20.40	20.00	65.80	17.65
	180	73.95	17.80	22.30	78.45	111.75	107.75	26.30	94.15	20.40	20.00	73.80	17.65
	200	81.95	17.80	22.30	86.45	119.75	115.75	26.30	102.15	20.40	20.00	81.80	17.65

PIN COUNT		DIMENSION											
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K	L	Q
6	20	9.95	26.90	31.40	14.45	56.85	52.85	35.40	39.25	29.50	29.10	9.80	26.75
	40	17.95	26.90	31.40	22.45	64.85	60.85	35.40	47.25	29.50	29.10	17.80	26.75
	60	25.95	26.90	31.40	30.45	72.85	68.85	35.40	55.25	29.50	29.10	25.80	26.75
	80	33.95	26.90	31.40	38.45	80.85	76.85	35.40	63.25	29.50	29.10	33.80	26.75
	100	41.95	26.90	31.40	46.45	88.85	84.85	35.40	71.25	29.50	29.10	41.80	26.75
	120	49.95	26.90	31.40	54.45	96.85	92.85	35.40	79.25	29.50	29.10	49.80	26.75
	140	57.95	26.90	31.40	62.45	104.85	100.85	35.40	87.25	29.50	29.10	57.80	26.75
	160	65.95	26.90	31.40	70.45	112.85	108.85	35.40	95.25	29.50	29.10	65.80	26.75
	170	69.95	26.90	31.40	74.45	120.85	112.85	35.40	99.25	29.50	29.10	69.80	26.75



UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE		Amphenol	
U.S. METRIC		DRAWN		Apr.25,2018			
.X +/- 0.25		CHECKED					
.XX +/- 0.20		APPROVED					
.XXX +/- 0.15		DRAWING FILE :		TITLE		HYBRID COOL EDGE CONNECTOR 0.80MM PITCH	
FRACTIONS +/-							
ANGLES +/- 5°		INTERNAL\DRAWING\CE\G_CEXXXXXX011011X		SIZE		DRAWING NO.	
FOR MATERIALS AND FINISHES SEE NOTES		ANGLE OF PROJECTION 		A3		C CEXXXXXX011011X	
REMOVE SHARP EDGES						REV.	
DIMENSIONS						7	
— U.S. —						SCALE	
— INCHES —						SHEET 8 OF 8	
(METRIC)							
(mm)							

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru