

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
7	CD1275	UPDATE DRAWING	Apr.25,2018	

D

C

B




A

D

C

B

A

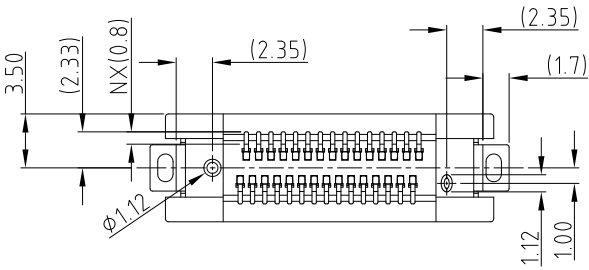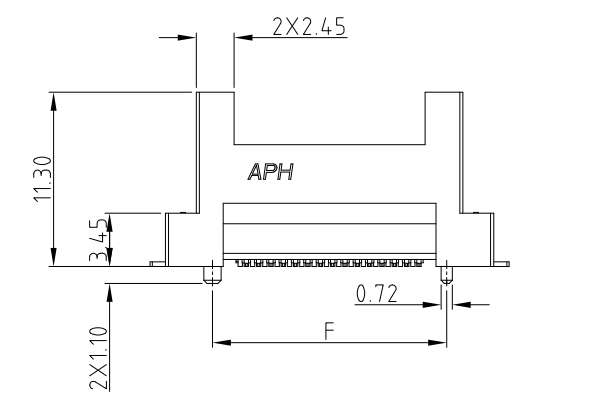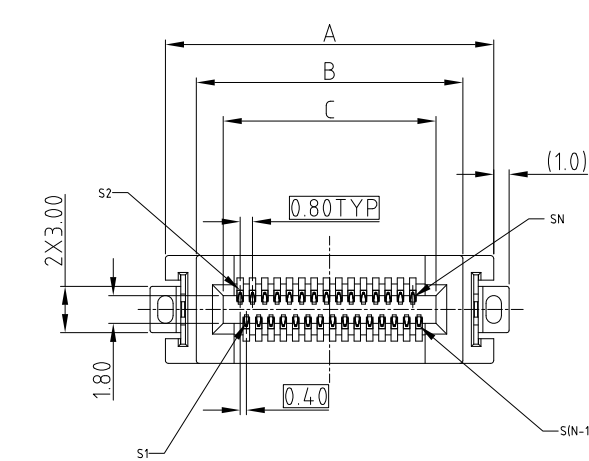

SIGNAL SPEED/IMPEDANCE
1: BELOW 16Gbps
2: 16~32Gbps WITH 85 ohm

POWER PIN COUNT
0: WITHOUT POWER PIN
2: 2PIN
4: 4PIN
6: 6PIN




PART NUMBER SYSTEM
CEXXXXXX011011X

CARD THICKNESS
0: 1.60MM

GUIDE HOLE
0: WITHOUT GUIDE HOLE
G: WITH GUIDE HOLE

SIGNAL PIN COUNT
000: 0 PIN ; 080: 80PIN
020: 20PIN ; 100: 100PIN
026: 26PIN ; 120: 120PIN
040: 40PIN ; 140: 140PIN
050: 50PIN ; 160: 160PIN
060: 60PIN ; 180: 180PIN
200: 200PIN

PLATING SPEC
1: 0.76um Au
2: 0.38um Au
3: GOLD FLASH
4: 0.76umPdNi +GF

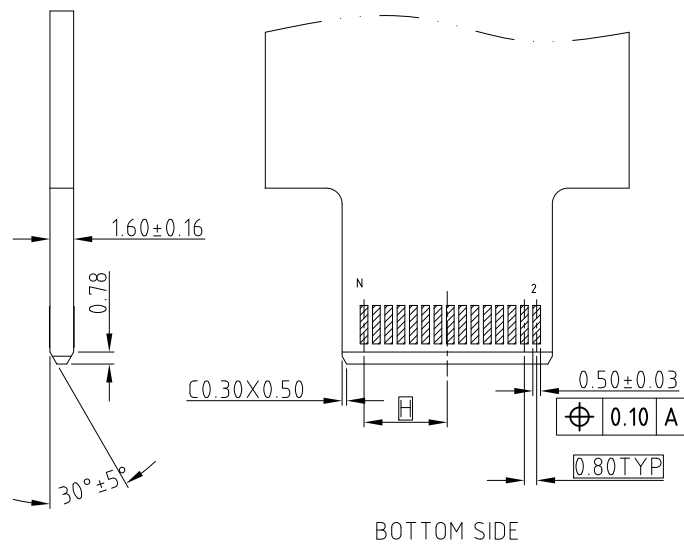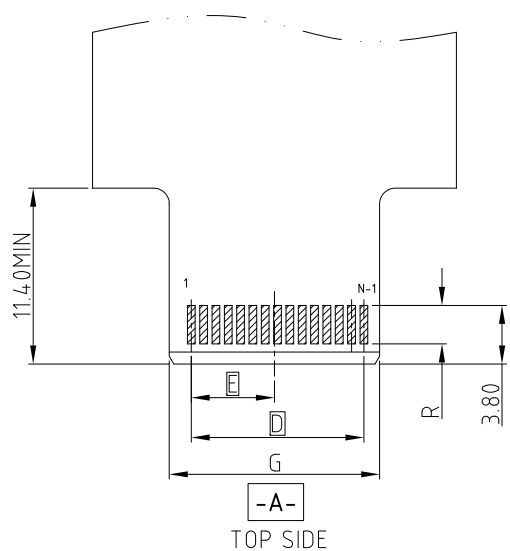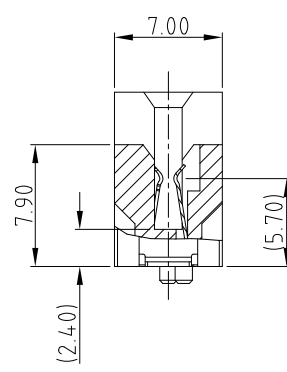

RECOMMEND MATING CARD, THICKNESS=1.60±0.16MM
GENERAL TOLERANCE ±0.05MM



SYSTEM	DIM R
IMPEDANCE	(GOLD FINGER LENGTH)
85 ohm	2.50






- NOTE:
- MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC BLACK UL94-V0
CONTACT: COPPER ALLOY
BOARDLOCK: SPCC
 - PLATING:
CONTACT: MATING AREA: SEE PLATING SEPC OVER 1.27-2.54 UM NICKEL UNDERPLATED
SOLDER AREA: 1.27 MIN TIN OVER 1.27-2.54 UM NICKEL UNDERPLATED
BOARDLOCK: 1.27 MIN TIN OVER 1.27-2.54UM NICKEL UNDERPLATED
 - ELECTRICAL PERFORMANCE:
RATED CURRENT FOR POWER PIN: REFER PRODUCT APPLICATION SPEC
RATED CURRENT FOR SIGNAL PIN: REFER PRODUCT APPLICATION SPEC
 - PRODUCT SHALL MEET ALL DIMENSIONS BEFORE EXPOSURE TO 260°C MAX. FOR 10S AND SHALL MEET ALL SELECTED FUNCTIONAL DIMENSION AFTER EXPOSURE TO 260°C MAX. FOR 10S.
 - MATERIAL SHOULD BE FULFILLED AMPHENOL SPEC # SSN002
 - ORDERING PN: REFER TO THE PN SYSTEM

PIN COUNT	DIMENSION							
N (SIGNAL)	A	B	C	D	E	F	G	H
20	17.30	13.30	9.80	7.20	3.40	11.20	9.65	3.40
26	19.70	15.70	12.20	9.60	4.60	13.60	12.05	4.60
40	25.30	21.30	17.80	15.20	7.40	19.20	17.65	7.40
50	29.30	25.30	21.80	19.20	9.40	23.20	21.65	9.40


UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC .X +/- 0.25 .XX +/- 0.20 .XXX +/- 0.15 FRACTIONS +/- ANGLES +/- 5° FOR MATERIALS AND FINISHES SEE NOTES REMOVE SHARP EDGES DIMENSIONS —U.S.— INCHES (METRIC) (mm)	APPROVAL DRAWN CHECKED APPROVED	DATE Apr.25,2018	Amphenol		
	DRAWING FILE : INTERNAL\DRAWING\CE\C CEXXXXXX011011X	ANGLE OF PROJECTION 			
	TITLE COOL EDGE CONNECTOR 0.80MM PITCH			SIZE A3	DRAWING NO. C CEXXXXXX011011X
	SCALE NONE			SHEET 1 OF 8	
			REV. 7		

CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1		

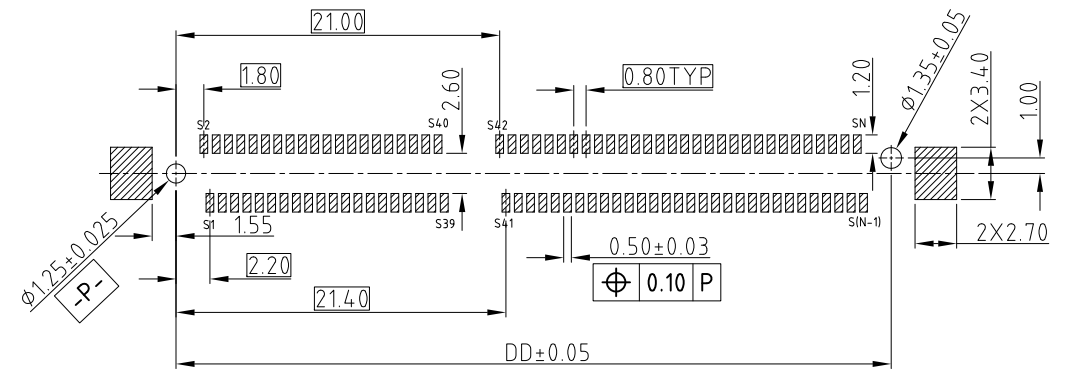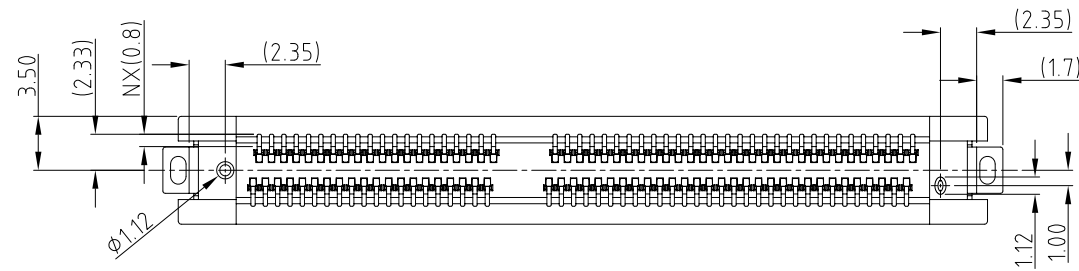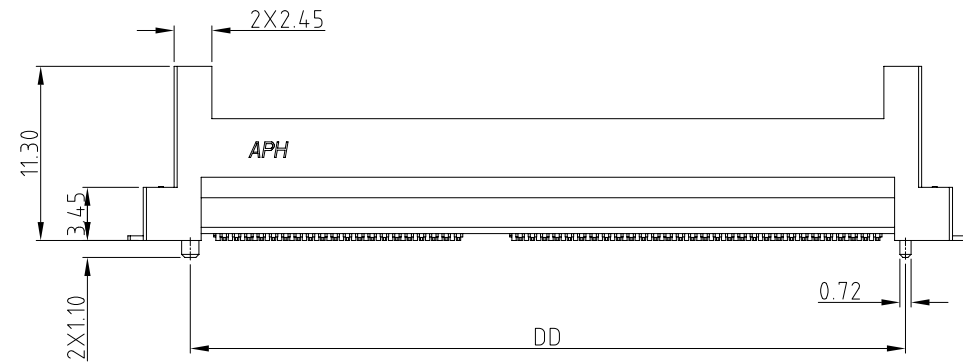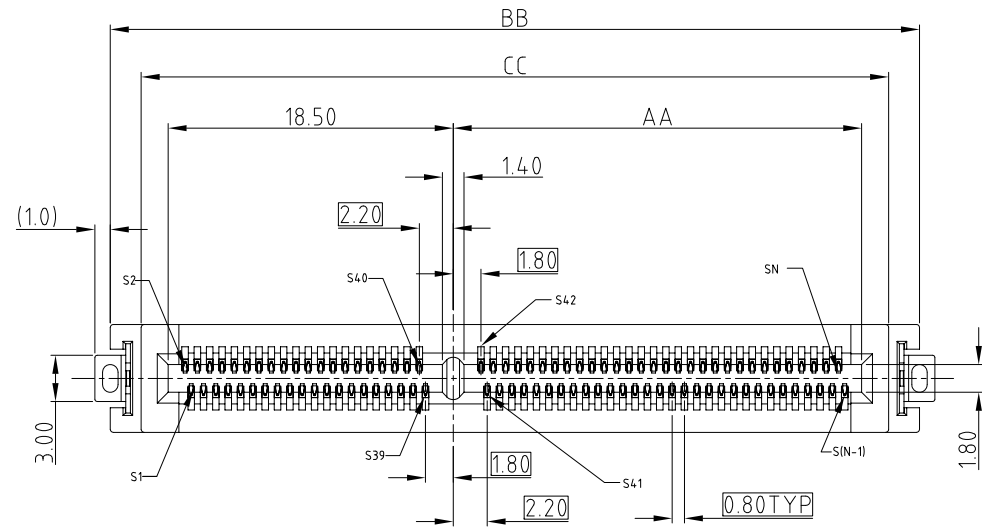


RECOMMENDED SOLDER PCB LAYOUT
GENERAL TOLERANCE ± 0.05

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE		Amphenol	
U.S. METRIC		DRAWN		Apr.25,2018			
		CHECKED					
.X +/- 0.25		APPROVED				TITLE COOL EDGE CONNECTOR 0.80MM PITCH	
.XX +/- 0.20							
.XXX +/- 0.15							
FRACTIONS +/-		DRAWING FILE :				SIZE DRAWING NO. REV. A3 C CEXXXXXX011011X 7	
ANGLES +/-		INTERNAL\DRAWING\CE/C CEXXXXXX011011X					
5°		ANGLE OF PROJECTION					
FOR MATERIALS AND FINISHES SEE NOTES							
REMOVE SHARP EDGES						SCALE NONE SHEET 2 OF 8	
DIMENSIONS							
— U.S. — — INCHES —							
(METRIC)		(mm)					

4
This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1		

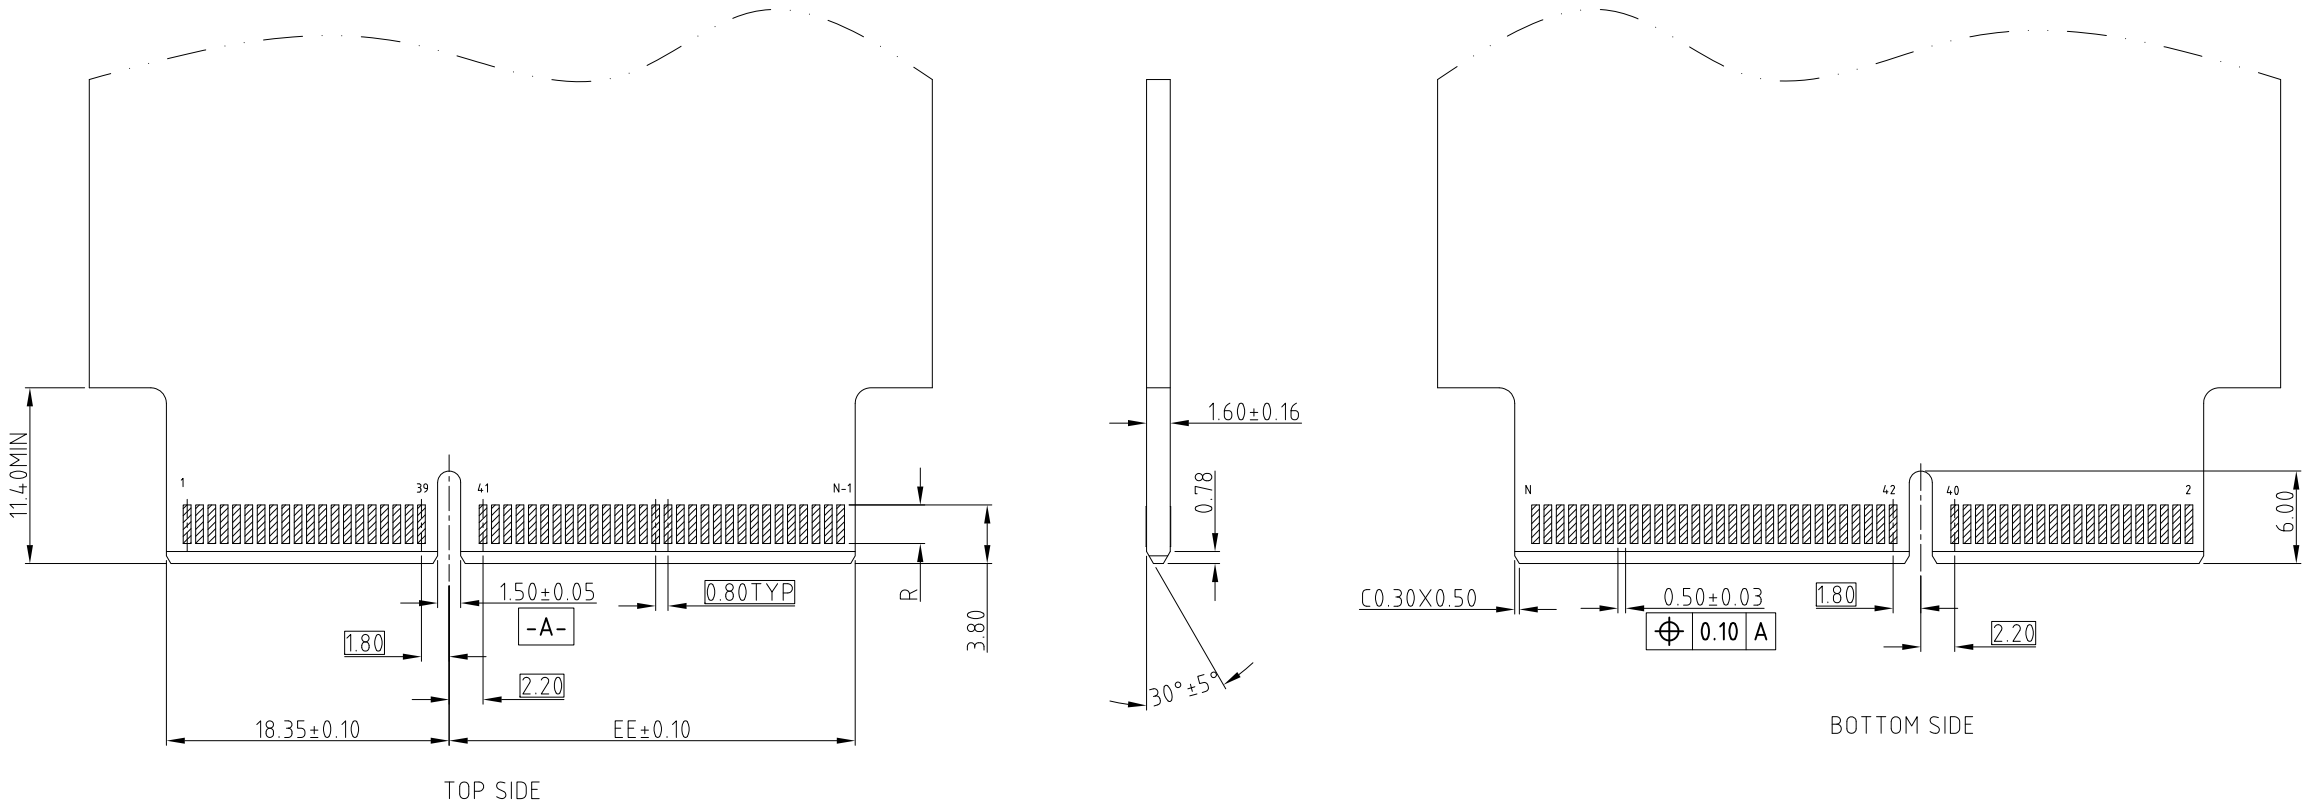

PIN COUNT	DIMENSION				
N (SIGNAL)	AA	BB	CC	DD	EE
60	10.50	36.50	32.50	30.40	10.35
80	18.50	44.50	40.50	38.40	18.35
100	26.50	52.50	48.50	46.40	26.35
120	34.50	60.50	56.50	54.40	34.35
140	42.50	68.50	64.50	62.40	42.35
160	50.50	76.50	72.50	70.40	50.35
180	58.50	84.50	80.50	78.40	58.35
200	66.50	92.50	88.50	86.40	66.35








SYSTEM	DIM R
IMPEDANCE	(GOLD FINGER LENGTH)
85 ohm	2.50

UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC .X +/- 0.3 .XX +/- 0.20 .XXX +/- 0.15 FRACTIONS +/- ANGLES +/- 5° FOR MATERIALS AND FINISHES SEE NOTES REMOVE SHARP EDGES DIMENSIONS —U.S.— INCHES (METRIC) (mm)		APPROVAL		DATE	Amphenol		
		DRAWN		Apr.25,2018			
		CHECKED					
		APPROVED			TITLE		
		DRAWING FILE :			COOL EDGE CONNECTOR 0.80MM PITCH		
		INTERNAL\DRAWING\CE\C CEXXXXXX011011X					
		ANGLE OF PROJECTION			SIZE	DRAWING NO.	REV.
					A3	C CEXXXXXX011011X	7
					SCALE	NONE	SHEET 3 OF 8

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.


CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	N/A	PRELIMINARY PROPOSAL	Mar.08,2017	

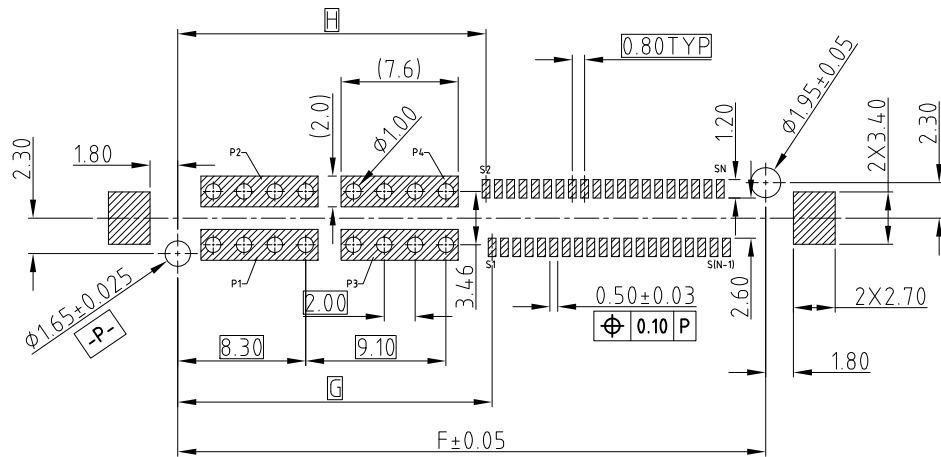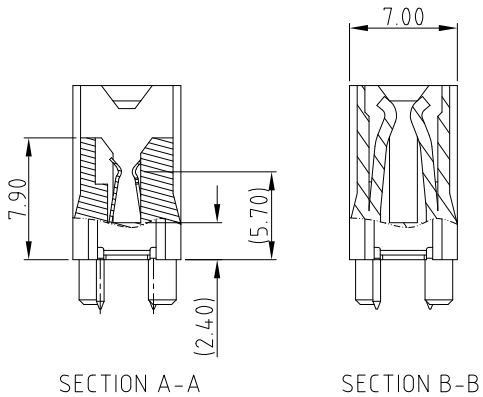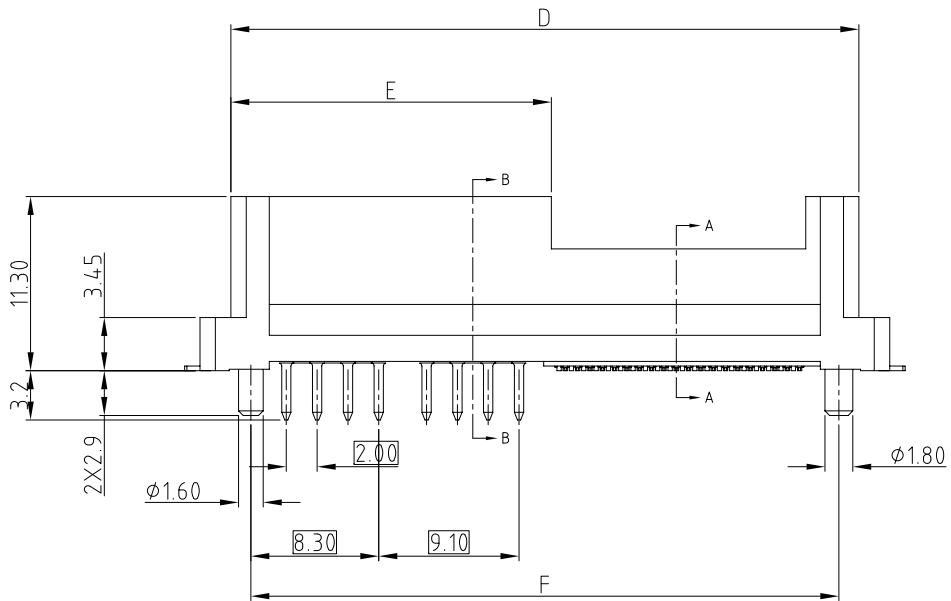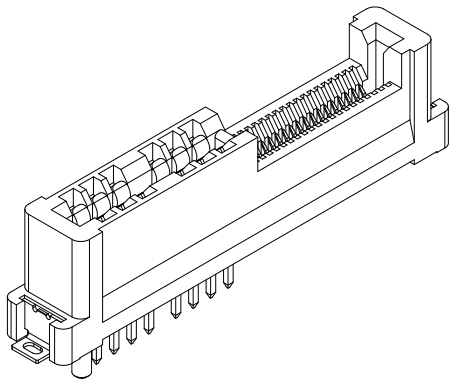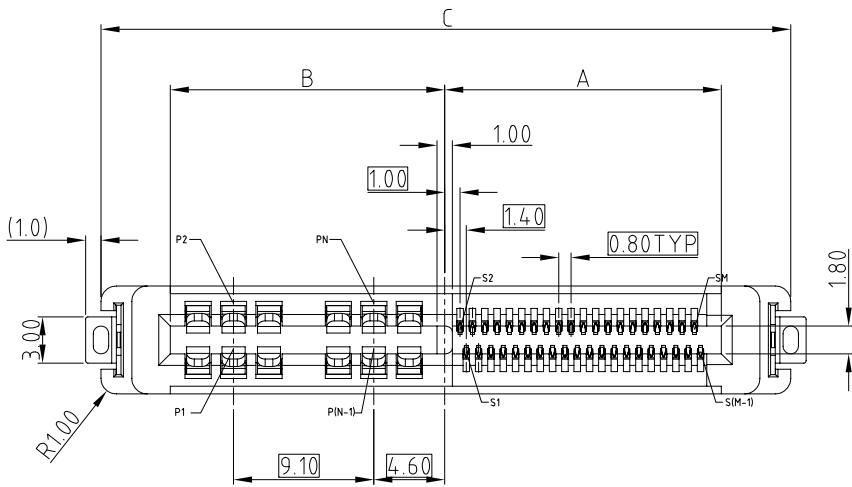

RECOMMEND SOLDER PCB LAYOUT
GENERAL TOLERANCE $\pm 0.05\text{MM}$




UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE		Amphenol			
TOLERANCES		DRAWN		Apr.25,2018					
U.S. METRIC		CHECKED							
		APPROVED							
.X +/- 0.25						TITLE HYBRID COOL EDGE CONNECTOR 0.80MM PITCH			
.XX +/- 0.20									
.XXX +/- 0.15									
FRACTIONS +/-									
ANGLES +/- 5°		DRAWING FILE :							
FOR MATERIALS AND FINISHES SEE NOTES		INTERNAL\DRAWING\CE\C CEXXXXXX011011X							
REMOVE SHARP EDGES		ANGLE OF PROJECTION							
DIMENSIONS				SIZE		DRAWING NO.		REV.	
— U.S. —				A3		C CEXXXXXX011011X		7	
INCHES				SCALE		NONE		SHEET 4 OF 8	
(METRIC)									
(mm)									

CUSTOMER DRAWING

Technical drawing of a mechanical part showing a cross-section with dimensions and tolerances. The drawing includes the following dimensions and features:

- Overall width: 11.40
- Overall height: 9.10
- Internal width: 7.00
- Internal height: 7.00
- Distance from left face to center of first hole: 9.10
- Distance from left face to center of second hole: 9.10
- Distance between centers of holes: 7.00
- Distance from center of second hole to right face: 0.55
- Distance from center of second hole to center of third hole: 1.40
- Distance from center of third hole to right face: 0.80 TYP
- Distance from center of third hole to center of fourth hole: 0.50 ± 0.03
- Distance from center of fourth hole to right face: 1.10 ± 0.05
- Distance from left face to center of fifth hole: $K \pm 0.10$
- Distance from center of fifth hole to right face: $J \pm 0.10$
- Distance from center of fifth hole to center of sixth hole: 0.10
- Distance from center of sixth hole to right face: 3.80
- Distance from center of sixth hole to center of seventh hole: 0.50 ± 0.03
- Distance from center of seventh hole to right face: 1.10 ± 0.05
- Distance from center of seventh hole to center of eighth hole: 0.10
- Distance from center of eighth hole to right face: 3.80
- Distance from center of eighth hole to center of ninth hole: 0.50 ± 0.03
- Distance from center of ninth hole to right face: 1.10 ± 0.05
- Distance from center of ninth hole to center of tenth hole: 0.10
- Distance from center of tenth hole to right face: 3.80
- Distance from center of tenth hole to center of eleventh hole: 0.50 ± 0.03
- Distance from center of eleventh hole to right face: 1.10 ± 0.05
- Distance from center of eleventh hole to center of twelfth hole: 0.10
- Distance from center of twelfth hole to right face: 3.80
- Distance from center of twelfth hole to center of thirteenth hole: 0.50 ± 0.03
- Distance from center of thirteenth hole to right face: 1.10 ± 0.05
- Distance from center of thirteenth hole to center of fourteenth hole: 0.10
- Distance from center of fourteenth hole to right face: 3.80
- Distance from center of fourteenth hole to center of fifteenth hole: 0.50 ± 0.03
- Distance from center of fifteenth hole to right face: 1.10 ± 0.05
- Distance from center of fifteenth hole to center of sixteenth hole: 0.10
- Distance from center of sixteenth hole to right face: 3.80
- Distance from center of sixteenth hole to center of seventeenth hole: 0.50 ± 0.03
- Distance from center of seventeenth hole to right face: 1.10 ± 0.05
- Distance from center of seventeenth hole to center of eighteenth hole: 0.10
- Distance from center of eighteenth hole to right face: 3.80
- Distance from center of eighteenth hole to center of nineteenth hole: 0.50 ± 0.03
- Distance from center of nineteenth hole to right face: 1.10 ± 0.05
- Distance from center of nineteenth hole to center of twentieth hole: 0.10
- Distance from center of twentieth hole to right face: 3.80
- Distance from center of twentieth hole to center of twenty-first hole: 0.50 ± 0.03
- Distance from center of twenty-first hole to right face: 1.10 ± 0.05
- Distance from center of twenty-first hole to center of twenty-second hole: 0.10
- Distance from center of twenty-second hole to right face: 3.80
- Distance from center of twenty-second hole to center of twenty-third hole: 0.50 ± 0.03
- Distance from center of twenty-third hole to right face: 1.10 ± 0.05
- Distance from center of twenty-third hole to center of twenty-fourth hole: 0.10
- Distance from center of twenty-fourth hole to right face: 3.80
- Distance from center of twenty-fourth hole to center of twenty-fifth hole: 0.50 ± 0.03
- Distance from center of twenty-fifth hole to right face: 1.10 ± 0.05
- Distance from center of twenty-fifth hole to center of twenty-sixth hole: 0.10
- Distance from center of twenty-sixth hole to right face: 3.80
- Distance from center of twenty-sixth hole to center of twenty-seventh hole: 0.50 ± 0.03
- Distance from center of twenty-seventh hole to right face: 1.10 ± 0.05
- Distance from center of twenty-seventh hole to center of twenty-eighth hole: 0.10
- Distance from center of twenty-eighth hole to right face: 3.80
- Distance from center of twenty-eighth hole to center of twenty-ninth hole: 0.50 ± 0.03
- Distance from center of twenty-ninth hole to right face: 1.10 ± 0.05
- Distance from center of twenty-ninth hole to center of thirtieth hole: 0.10
- Distance from center of thirtieth hole to right face: 3.80
- Distance from center of thirtieth hole to center of thirty-first hole: 0.50 ± 0.03
- Distance from center of thirty-first hole to right face: 1.10 ± 0.05
- Distance from center of thirty-first hole to center of thirty-second hole: 0.10
- Distance from center of thirty-second hole to right face: 3.80
- Distance from center of thirty-second hole to center of thirty-third hole: 0.50 ± 0.03
- Distance from center of thirty-third hole to right face: 1.10 ± 0.05
- Distance from center of thirty-third hole to center of thirty-fourth hole: 0.10
- Distance from center of thirty-fourth hole to right face: 3.80
- Distance from center of thirty-fourth hole to center of thirty-fifth hole: 0.50 ± 0.03
- Distance from center of thirty-fifth hole to right face: 1.10 ± 0.05
- Distance from center of thirty-fifth hole to center of thirty-sixth hole: 0.10
- Distance from center of thirty-sixth hole to right face: 3.80
- Distance from center of thirty-sixth hole to center of thirty-seventh hole: 0.50 ± 0.03
- Distance from center of thirty-seventh hole to right face: 1.10 ± 0.05
- Distance from center of thirty-seventh hole to center of thirty-eighth hole: 0.10
- Distance from center of thirty-eighth hole to right face: 3.80
- Distance from center of thirty-eighth hole to center of thirty-ninth hole: 0.50 ± 0.03
- Distance from center of thirty-ninth hole to right face: 1.10 ± 0.05
- Distance from center of thirty-ninth hole to center of fortieth hole: 0.10
- Distance from center of fortieth hole to right face: 3.80
- Distance from center of fortieth hole to center of forty-first hole: 0.50 ± 0.03
- Distance from center of forty-first hole to right face: 1.10 ± 0.05
- Distance from center of forty-first hole to center of forty-second hole: 0.10
- Distance from center of forty-second hole to right face: 3.80
- Distance from center of forty-second hole to center of forty-third hole: 0.50 ± 0.03
- Distance from center of forty-third hole to right face: 1.10 ± 0.05
- Distance from center of forty-third hole to center of forty-fourth hole: 0.10
- Distance from center of forty-fourth hole to right face: 3.80
- Distance from center of forty-fourth hole to center of forty-fifth hole: 0.50 ± 0.03
- Distance from center of forty-fifth hole to right face: 1.10 ± 0.05
- Distance from center of forty-fifth hole to center of forty-sixth hole: 0.10
- Distance from center of forty-sixth hole to right face: 3.80
- Distance from center of forty-sixth hole to center of forty-seventh hole: 0.50 ± 0.03
- Distance from center of forty-seventh hole to right face: 1.10 ± 0.05
- Distance from center of forty-seventh hole to center of forty-eighth hole: 0.10
- Distance from center of forty-eighth hole to right face: 3.80
- Distance from center of forty-eighth hole to center of forty-ninth hole: 0.50 ± 0.03
- Distance from center of forty-ninth hole to right face: 1.10 ± 0.05
- Distance from center of forty-ninth hole to center of fiftieth hole: 0.10
- Distance from center of fiftieth hole to right face: 3.80
- Distance from center of fiftieth hole to center of fifty-first hole: 0.50 ± 0.03
- Distance from center of fifty-first hole to right face: 1.10 ± 0.05
- Distance from center of fifty-first hole to center of fifty-second hole: 0.10
- Distance from center of fifty-second hole to right face: 3.80
- Distance from center of fifty-second hole to center of fifty-third hole: 0.50 ± 0.03
- Distance from center of fifty-third hole to right face: 1.10 ± 0.05
- Distance from center of fifty-third hole to center of fifty-fourth hole: 0.10
- Distance from center of fifty-fourth hole to right face: 3.80
- Distance from center of fifty-fourth hole to center of fifty-fifth hole: 0.50 ± 0.03
- Distance from center of fifty-fifth hole to right face: 1.10 ± 0.05
- Distance from center of fifty-fifth hole to center of fifty-sixth hole: 0.10
- Distance from center of fifty-sixth hole to right face: 3.80
- Distance from center of fifty-sixth hole to center of fifty-seventh hole: 0.50 ± 0.03
- Distance from center of fifty-seventh hole to right face: 1.10 ± 0.05
- Distance from center of fifty-seventh hole to center of fifty-eighth hole: 0.10
- Distance from center of fifty-eighth hole to right face: 3.80
- Distance from center of fifty-eighth hole to center of fifty-ninth hole: 0.50 ± 0.03
- Distance from center of fifty-ninth hole to right face: 1.10 ± 0.05
- Distance from center of fifty-ninth hole to center of sixtieth hole: 0.10
- Distance from center of sixtieth hole to right face: 3.80
- Distance from center of sixtieth hole to center of sixty-first hole: 0.50 ± 0.03
- Distance from center of sixty-first hole to right face: 1.10 ± 0.05
- Distance from center of sixty-first hole to center of sixty-second hole: 0.10
- Distance from center of sixty-second hole to right face: 3.80
- Distance from center of sixty-second hole to center of sixty-third hole: 0.50 ± 0.03
- Distance from center of sixty-third hole to right face: 1.10 ± 0.05
- Distance from center of sixty-third hole to center of sixty-fourth hole: 0.10
- Distance

Technical drawing of a vertical shaft. The shaft has a diameter of $T = 1.60 \pm 0.16$. A section line is shown on the left side. A dimension of 0.45 is indicated for a specific feature. The angle of the section line is $30^\circ \pm 5^\circ$.

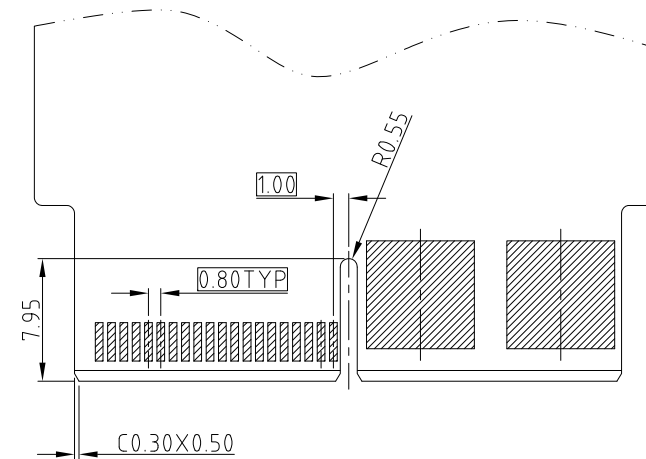

SYSTEM IMPEDANCE	DIM R (GOLD FINGER LENGTH)
85 ohm	2.50

PIN COUNT		DIMENSION									
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K
2	18	9.15	8.70	26.85	22.85	11.70	20.25	11.30	10.90	9.00	8.55
	20	9.95	8.70	27.65	23.65	11.70	21.05	11.30	10.90	9.80	8.55
	40	17.95	8.70	35.65	31.65	11.70	29.05	11.30	10.90	17.80	8.55
	60	25.95	8.70	43.65	39.65	11.70	37.05	11.30	10.90	25.80	8.55
	80	33.95	8.70	51.65	47.65	11.70	45.05	11.30	10.90	33.80	8.55
	100	41.95	8.70	59.65	55.65	11.70	53.05	11.30	10.90	41.80	8.55
	120	49.95	8.70	67.65	63.65	11.70	61.05	11.30	10.90	49.80	8.55
	140	57.95	8.70	75.65	71.65	11.70	69.05	11.30	10.90	57.80	8.55
	160	65.95	8.70	83.65	79.65	11.70	77.05	11.30	10.90	65.80	8.55
	180	73.95	8.70	91.65	87.65	11.70	85.05	11.30	10.90	73.80	8.55
	200	81.95	8.70	99.65	95.65	11.70	93.05	11.30	10.90	81.80	8.55




PIN COUNT		DIMENSION									
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K
4	20	9.95	17.80	36.75	32.75	20.80	30.15	20.40	20.00	9.80	17.65
	40	17.95	17.80	44.75	40.75	20.80	38.15	20.40	20.00	17.80	17.65
	60	25.95	17.80	52.75	48.75	20.80	46.15	20.40	20.00	25.80	17.65
	80	33.95	17.80	60.75	56.75	20.80	54.15	20.40	20.00	33.80	17.65
	100	41.95	17.80	68.75	64.75	20.80	62.15	20.40	20.00	41.80	17.65
	120	49.95	17.80	76.75	72.75	20.80	70.15	20.40	20.00	49.80	17.65
	140	57.95	17.80	84.75	80.75	20.80	78.15	20.40	20.00	57.80	17.65
	160	65.95	17.80	92.75	88.75	20.80	86.15	20.40	20.00	65.80	17.65
	180	73.95	17.80	100.75	96.75	20.80	94.15	20.40	20.00	73.80	17.65
	200	81.95	17.80	108.75	104.75	20.80	102.15	20.40	20.00	81.80	17.65

PIN COUNT		DIMENSION									
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K
6	20	9.95	26.90	45.85	41.85	29.90	39.25	29.50	29.10	9.80	26.75
	40	17.95	26.90	53.85	49.85	29.90	47.25	29.50	29.10	17.80	26.75
	60	25.95	26.90	61.85	57.85	29.90	55.25	29.50	29.10	25.80	26.75
	80	33.95	26.90	69.85	65.85	29.90	63.25	29.50	29.10	33.80	26.75
	100	41.95	26.90	77.85	73.85	29.90	71.25	29.50	29.10	41.80	26.75
	120	49.95	26.90	85.85	81.85	29.90	79.25	29.50	29.10	49.80	26.75
	140	57.95	26.90	93.85	89.85	29.90	87.25	29.50	29.10	57.80	26.75
	160	65.95	26.90	101.85	97.85	29.90	95.25	29.50	29.10	65.80	26.75
	170	69.95	26.90	105.85	101.85	29.90	99.25	29.50	29.10	69.80	26.75




UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE		Amphenol			
U.S. METRIC		DRAWN		Apr.25,2018					
.X +/- /		CHECKED							
.XX +/- /		APPROVED							
.XXX +/- /						TITLE HYBRID COOL EDGE CONNECTOR 0.80MM PITCH			
FRACTIONS +/- /									
ANGLES +/- /									
5°		DRAWING FILE :							
FOR MATERIALS AND FINISHES SEE NOTES		INTERNAL DRAWING\CE\C CEXXXXXX011011X							
REMOVE SHARP EDGES		ANGLE OF PROJECTION							
DIMENSIONS									
— U.S. —	— INCHES —			SIZE		DRAWING NO.		REV.	
(METRIC)	(mm)			A3		C CEXXXXXX011011X		7	
				SCALE		NONE		SHEET 5 OF 8	


CUSTOMER DRAWING

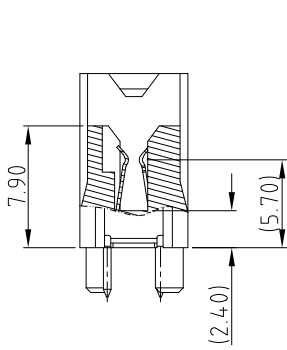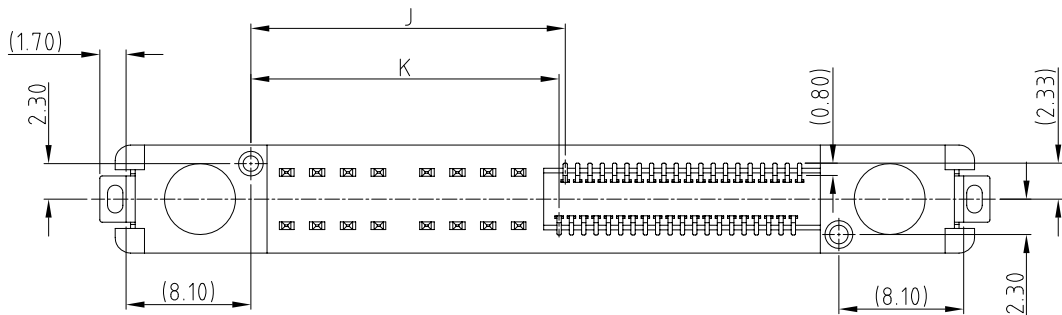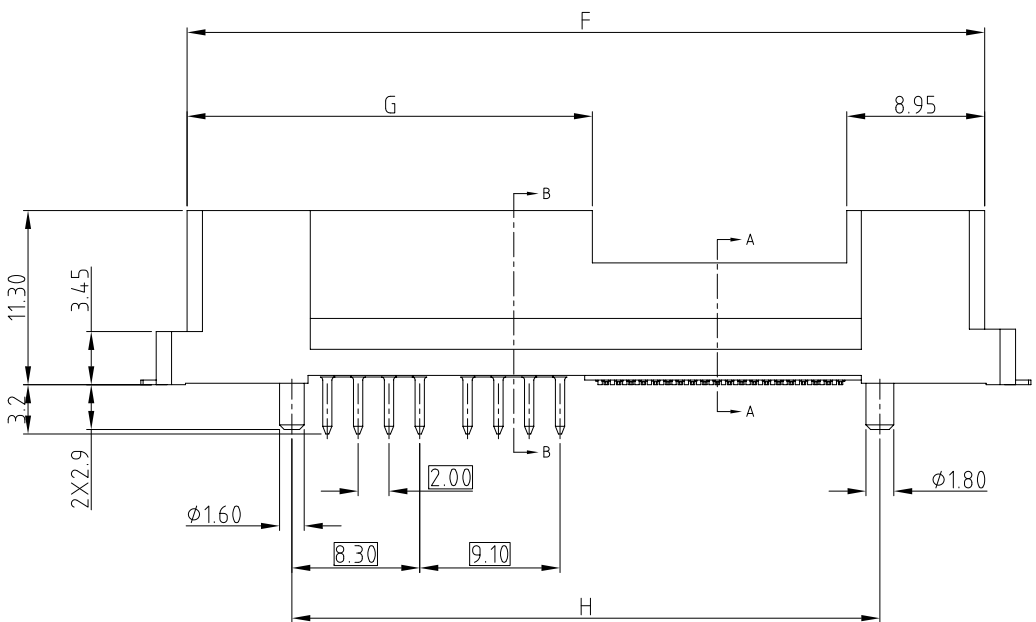[illegible]


SECTION A-A




SECTION B-B

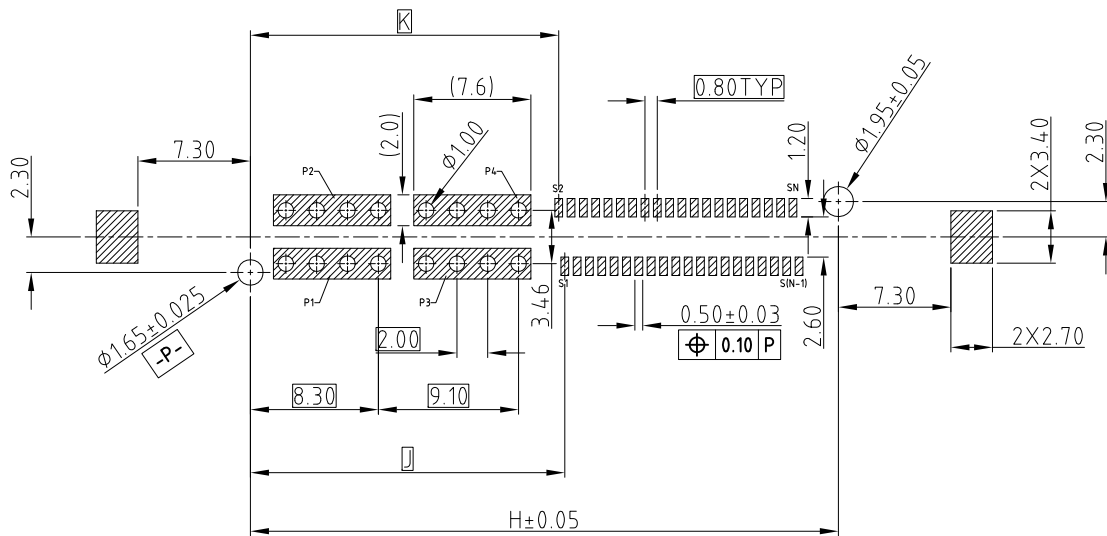

RECOMMEND SOLDER PCB LAYOUT
GENERAL TOLERANCE $\pm 0.05\text{MM}$

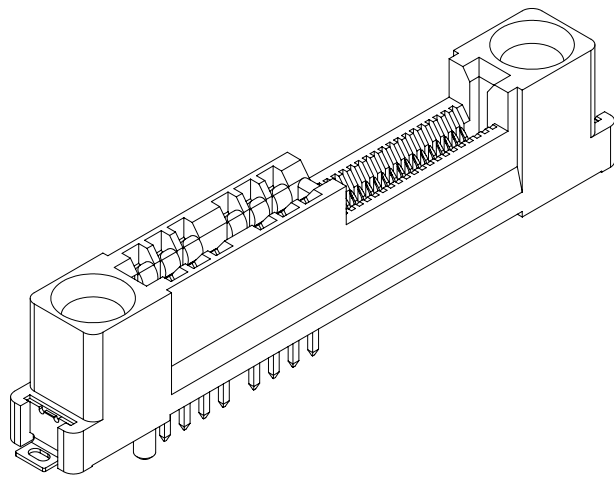


UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE		Amphenol			
TOLERANCES		DRAWN		Apr.25,2018					
U.S. METRIC		CHECKED							
.X +/- 0.25 .XX +/- 0.20 .XXX +/- 0.15		APPROVED							
FRACTIONS +/- ANGLES +/-		DRAWING FILE :		TITLE					
5°		INTERNAL\DRAWING\CE\C CEXXXXXX011011X		HYBRID COOL EDGE CONNECTOR 0.80MM PITCH					
FOR MATERIALS AND FINISHES SEE NOTES		ANGLE OF PROJECTION		SIZE		DRAWING NO.		REV.	
REMOVE SHARP EDGES				A3		C CEXXXXXX011011X		7	
DIMENSIONS				SCALE		NONE		SHEET 6 OF 8	
— U.S. —									
INCHES									
(METRIC)									
(mm)									


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1		

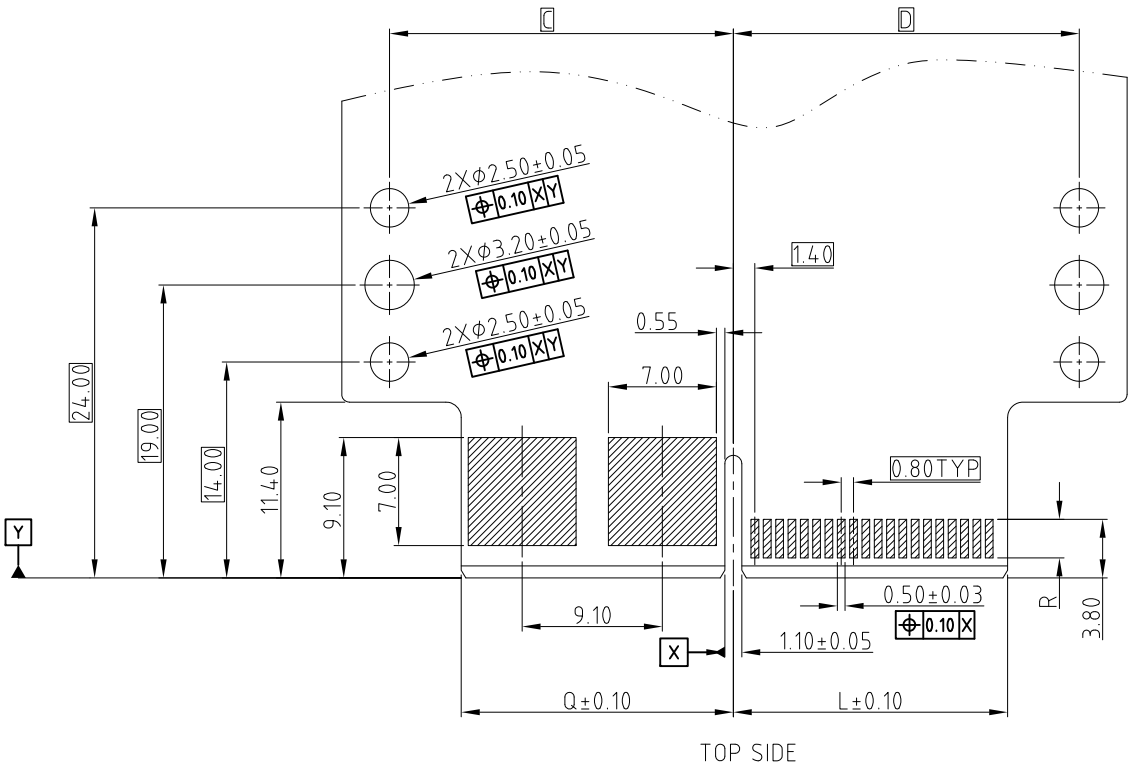

RECOMMEND MATING CARD, THICKNESS=1.60 $\pm$ 0.16MM
GENERAL TOLERANCE $\pm$ 0.05MM

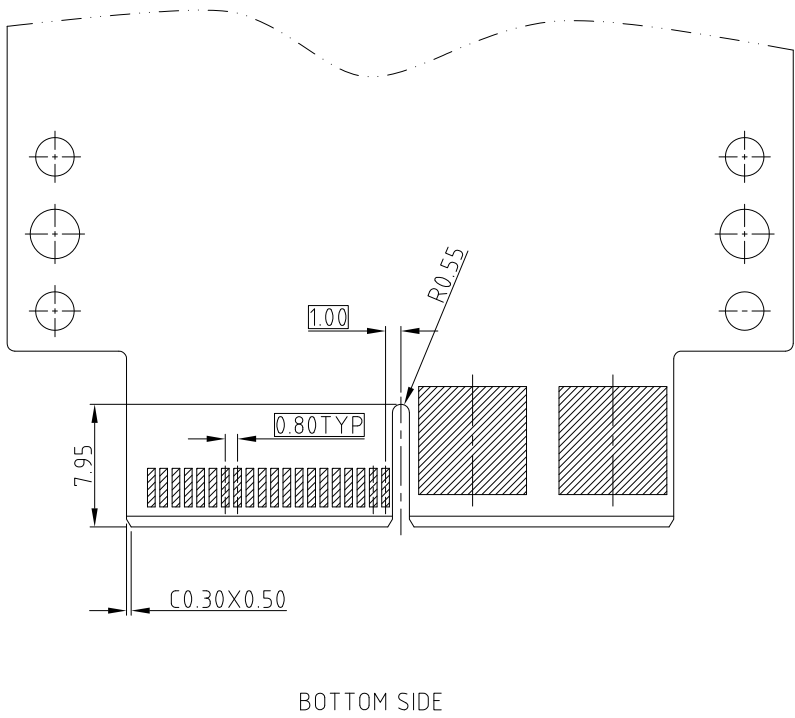

SYSTEM	DIM R
IMPEDANCE	(GOLD FINGER LENGTH)
85 ohm	2.50



UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	DATE	Amphenol	
.X +/- .XX +/- .XXX +/- FRACTIONS +/- ANGLES +/-	U.S.	DRAWN	Apr.25,2018		
	METRIC	CHECKED			
		APPROVED			
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE : INTERNAL\DRAWING\CE\C CEXXXXXX011011X		TITLE HYBRID COOL EDGE CONNECTOR 0.80MM PITCH	
REMOVE SHARP EDGES		ANGLE OF PROJECTION		SIZE	REV.
DIMENSIONS				DRAWING NO.	
—U.S.—	INCHES			A3 C CEXXXXXX011011X	7
(METRIC)	(mm)			SCALE	
				NONE	SHEET 7 OF 8

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1		

PIN COUNT		DIMENSION											
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K	L	Q
2	18	9.15	8.70	13.20	13.65	37.85	33.85	17.20	20.25	11.30	10.90	9.00	8.55
	20	9.95	8.70	13.20	14.45	38.65	34.65	17.20	21.05	11.30	10.90	9.80	8.55
	40	17.95	8.70	13.20	22.45	46.65	42.65	17.20	29.05	11.30	10.90	17.80	8.55
	60	25.95	8.70	13.20	30.45	54.65	50.65	17.20	37.05	11.30	10.90	25.80	8.55
	80	33.95	8.70	13.20	38.45	62.65	58.65	17.20	45.05	11.30	10.90	33.80	8.55
	100	41.95	8.70	13.20	46.45	70.65	66.65	17.20	53.05	11.30	10.90	41.80	8.55
	120	49.95	8.70	13.20	54.45	78.65	74.65	17.20	61.05	11.30	10.90	49.80	8.55
	140	57.95	8.70	13.20	62.45	86.65	82.65	17.20	69.05	11.30	10.90	57.80	8.55
	160	65.95	8.70	13.20	70.45	94.65	90.65	17.20	77.05	11.30	10.90	65.80	8.55
	180	73.95	8.70	13.20	78.45	102.65	98.65	17.20	85.05	11.30	10.90	73.80	8.55
200	81.95	8.70	13.20	86.45	110.65	106.65	17.20	93.05	11.30	10.90	81.80	8.55	

PIN COUNT		DIMENSION											
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K	L	Q
4	20	9.95	17.80	22.30	14.45	47.75	43.75	26.30	30.15	20.40	20.00	9.80	17.65
	40	17.95	17.80	22.30	22.45	55.75	51.75	26.30	38.15	20.40	20.00	17.80	17.65
	60	25.95	17.80	22.30	30.45	63.75	59.75	26.30	46.15	20.40	20.00	25.80	17.65
	80	33.95	17.80	22.30	38.45	71.75	67.75	26.30	54.15	20.40	20.00	33.80	17.65
	100	41.95	17.80	22.30	46.45	79.75	75.75	26.30	62.15	20.40	20.00	41.80	17.65
	120	49.95	17.80	22.30	54.45	87.75	83.75	26.30	70.15	20.40	20.00	49.80	17.65
	140	57.95	17.80	22.30	62.45	95.75	91.75	26.30	78.15	20.40	20.00	57.80	17.65
	160	65.95	17.80	22.30	70.45	103.75	99.75	26.30	86.15	20.40	20.00	65.80	17.65
	180	73.95	17.80	22.30	78.45	111.75	107.75	26.30	94.15	20.40	20.00	73.80	17.65
	200	81.95	17.80	22.30	86.45	119.75	115.75	26.30	102.15	20.40	20.00	81.80	17.65

PIN COUNT		DIMENSION											
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K	L	Q
6	20	9.95	26.90	31.40	14.45	56.85	52.85	35.40	39.25	29.50	29.10	9.80	26.75
	40	17.95	26.90	31.40	22.45	64.85	60.85	35.40	47.25	29.50	29.10	17.80	26.75
	60	25.95	26.90	31.40	30.45	72.85	68.85	35.40	55.25	29.50	29.10	25.80	26.75
	80	33.95	26.90	31.40	38.45	80.85	76.85	35.40	63.25	29.50	29.10	33.80	26.75
	100	41.95	26.90	31.40	46.45	88.85	84.85	35.40	71.25	29.50	29.10	41.80	26.75
	120	49.95	26.90	31.40	54.45	96.85	92.85	35.40	79.25	29.50	29.10	49.80	26.75
	140	57.95	26.90	31.40	62.45	104.85	100.85	35.40	87.25	29.50	29.10	57.80	26.75
	160	65.95	26.90	31.40	70.45	112.85	108.85	35.40	95.25	29.50	29.10	65.80	26.75
	170	69.95	26.90	31.40	74.45	120.85	112.85	35.40	99.25	29.50	29.10	69.80	26.75



UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE		Amphenol	
U.S. METRIC		DRAWN		Apr.25,2018			
.X +/- 0.25		CHECKED					
.XX +/- 0.20		APPROVED					
.XXX +/- 0.15		DRAWING FILE :		TITLE		HYBRID COOL EDGE CONNECTOR 0.80MM PITCH	
FRACTIONS +/-							
ANGLES +/- 5°		INTERNAL\DRAWING\CE\G_CEXXXXXX011011X		SIZE		DRAWING NO.	
FOR MATERIALS AND FINISHES SEE NOTES		ANGLE OF PROJECTION 		A3		C CEXXXXXX011011X	
REMOVE SHARP EDGES				REV.		7	
DIMENSIONS				SCALE		NONE	
— U.S. —							
INCHES							
(METRIC)							
(mm)						SHEET 8 OF 8	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru