Fixed Machined Contact Connector

Standards:
- **UL File:** E119881
- Connectors according to MIL C24308

SPECIFICATIONS:

MATERIALS AND PLATINGS

Shells	Steel yellow chromated over zinc or tinned steel with or without dimples on plug connector
Insulator	Glass-filled thermoplastic, UL 94V-0
Rear Insert	Brass, 118µ" up to 197µ" (3µm up to 5µm) tinned over nickel 78µ" up to 118µ" (2µm up to 3µm)
Boardlock	Tin-lead plating 157µ" up to 236µ" (4µm up to 6µm) over nickel 78µ" up to 118µ" (2µm up to 3µm)
Screwlock	Brass, 236µ" up to 394µ" (6µm up to 10µm) tinned over nickel 78µ" up to 118µ" (2µm up to 3µm)
Contacts	D: brass DF: pin = brass Socket = copper alloy
Right Angle Version	Selective gold in mating area over 78µ" up to 118µ" (2µm up to 3µm) nickel; 118µ" up to 197µ" (3µm up to 5µm) tin-lead on termination area over 78µ" up to 118µ" (2µm up to 3µm) nickel
Straight Version	Full gold plating over 78µ" up to 118µ" (2µm up to 3µm) nickel

ELECTRICAL DATA

Current Rating	7.5 A
Voltage Rating	300 V AC/rms 50Hz
Withstanding Voltage	1000V AC/rms 50Hz for one minute
Insulation Resistance	5000MΩ
Contact Resistance	D: 8.5mΩ max. DF: 5mΩ max.

CLIMATIC DATA

Operating Temperature	D: -67°F (-55°C) to +185°F (85°C), peak at 257°F (125°C) DF: -67°F (-55°C) to + 257°F (125°C)

MECHANICAL DATA

No. of Contacts	Mate (max.)	Unmate (min.)
9 (size E)	6.74 (3.05)	0.79 (0.36)
15 (size A)	11.24 (5.09)	1.01 (0.46)
25 (size B)	18.66 (8.44)	1.8 (0.81)
37 (size C)	27.65 (12.51)	2.47 (1.1)
50 (size D)	32.38 (14.65)	3.56 (1.6)

INCHES (MM)

D-DF SERIES

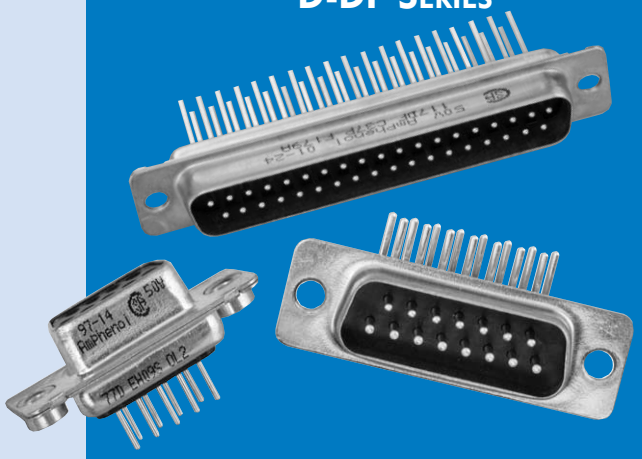

The Amphenol SD series features precision formed contacts, and 4 finger boardlocks.

This series gives you Amphenol's high standards of quality and reliability to meet all of your commercial requirements.

- Industrial
- Telecom
- Any industry standard I / O connections

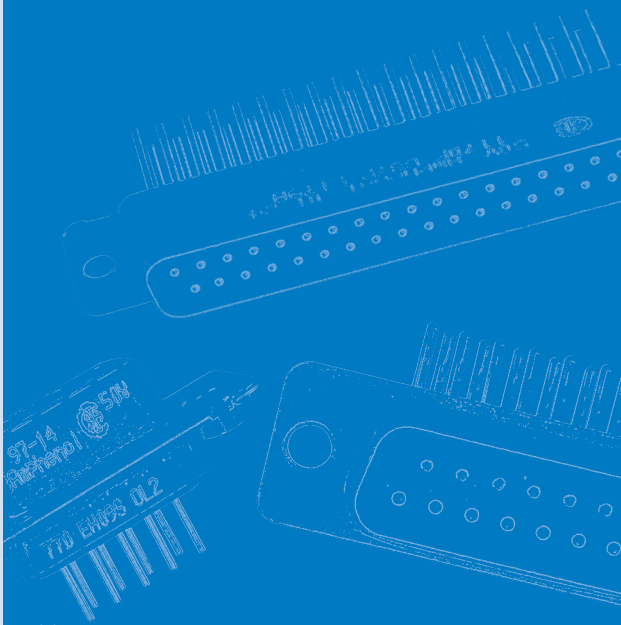

TELEPHONE: (416) 754-5656 FAX: (416) 754-8668 E-MAIL: SALES@AMPHENOLCANADA.COM

Without bracket

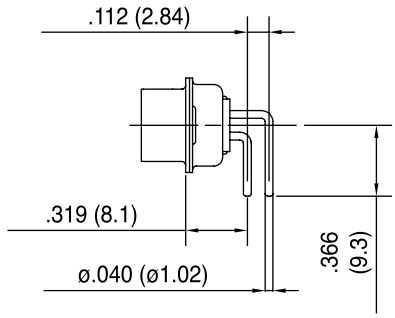

C

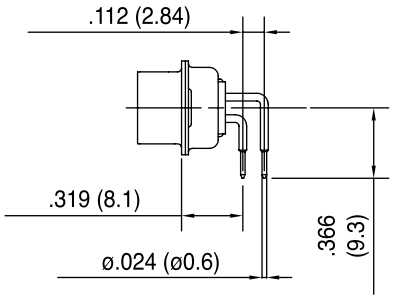

A4

Plastic bracket

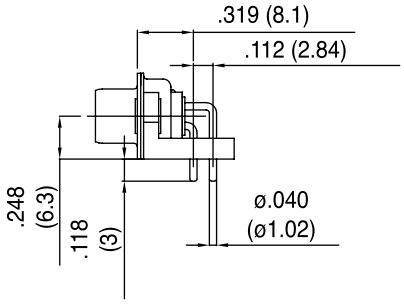

AJ3

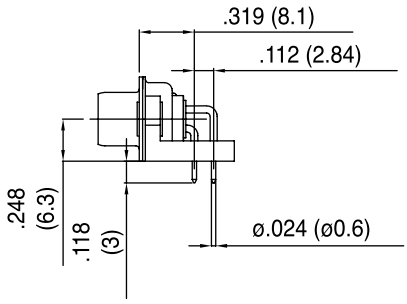

AJ4

Metal bracket

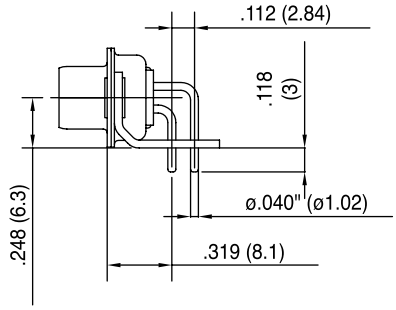

A

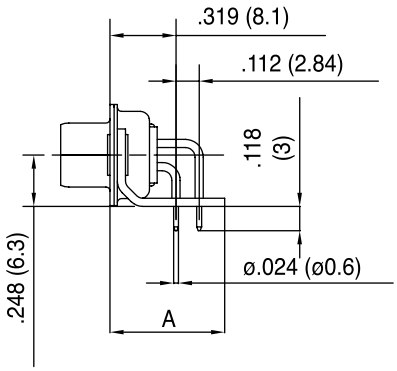

AM4 : A=.519 (13.2)
AZ4 : A=.453 (11.5)

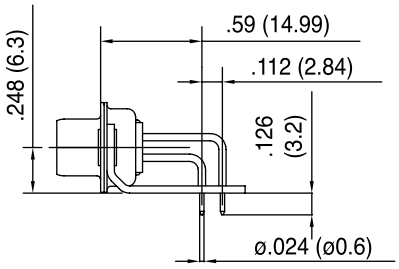

AM4B

50 contacts

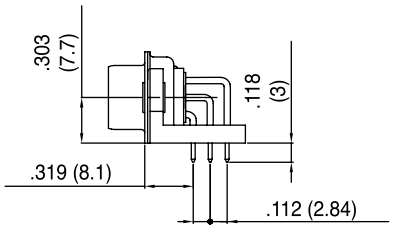

Without bracket

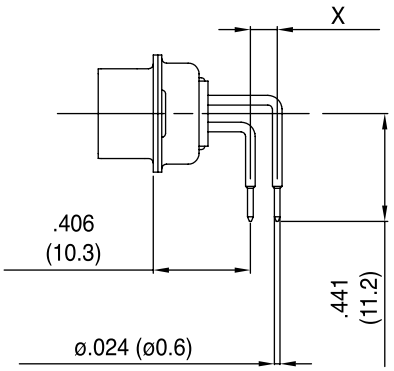

1AON : X= .100 (2.54)
1BON : X= .112 (2.84)

Plastic bracket

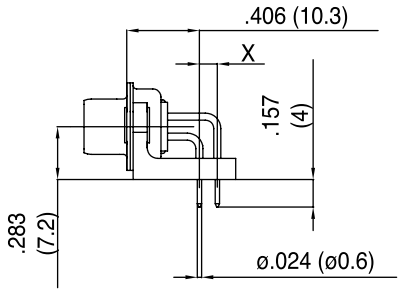

1APN : X= .100 (2.54)
1BPN : X= .112 (2.84)

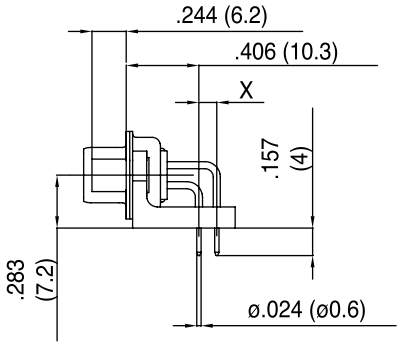

1AUN : X= .100 (2.54)
1BUN : X= .112 (2.84)

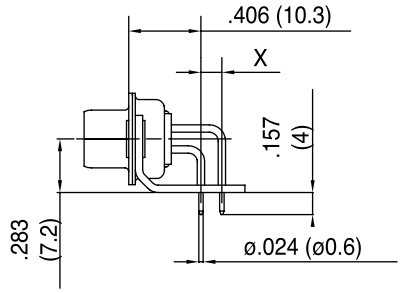

1AMN : X= .100 (2.54)
1BMN : X= .112 (2.84)

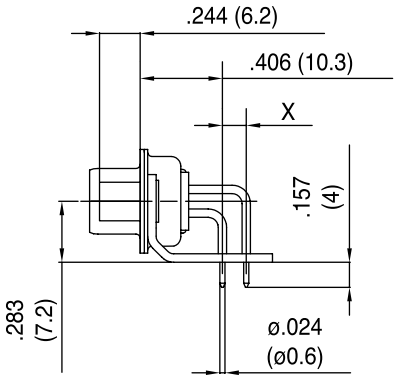

1ATN : X= .100 (2.54)
1BTN : X= .112 (2.84)

50 contacts

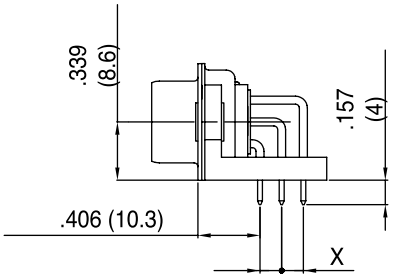

INCHES (MM)

Solder cup

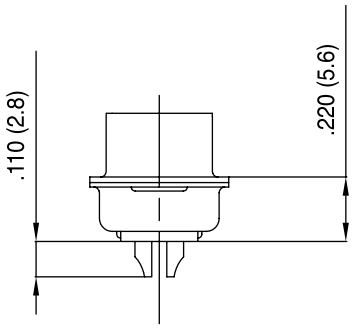

Wire Wrap

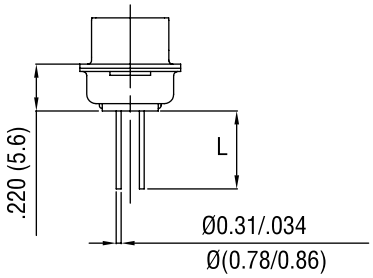

Termination	Nb of wraps	L
F179	2	.378 (9.6)
F179A	3	.512 (13)

Straight PCB

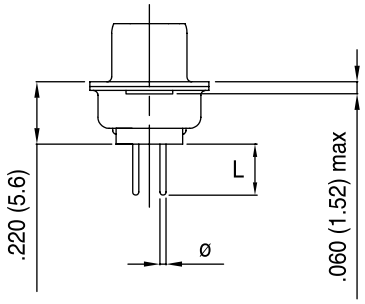

Termination	Ø	L
U	.024 (0.6)	.126 (3.2)
V	.040 (1.02)	.095 (2.4)
T	.024 (0.6)	.157 (4)
OL2	.02 (0.6)	.217 (5.5)

Grounding tabs

For straight termination



RM5



RM8

For R/A termination



RM6

For straight and R/A termination



Standard rivet Ø.120 (3.05)
no digit



Float mounting
F



Threaded rear insert
H / G



Fixed front female screwlock
VF / VFM



Removable female screwlock
VF2 / VFM2

Recommended PCB Layout

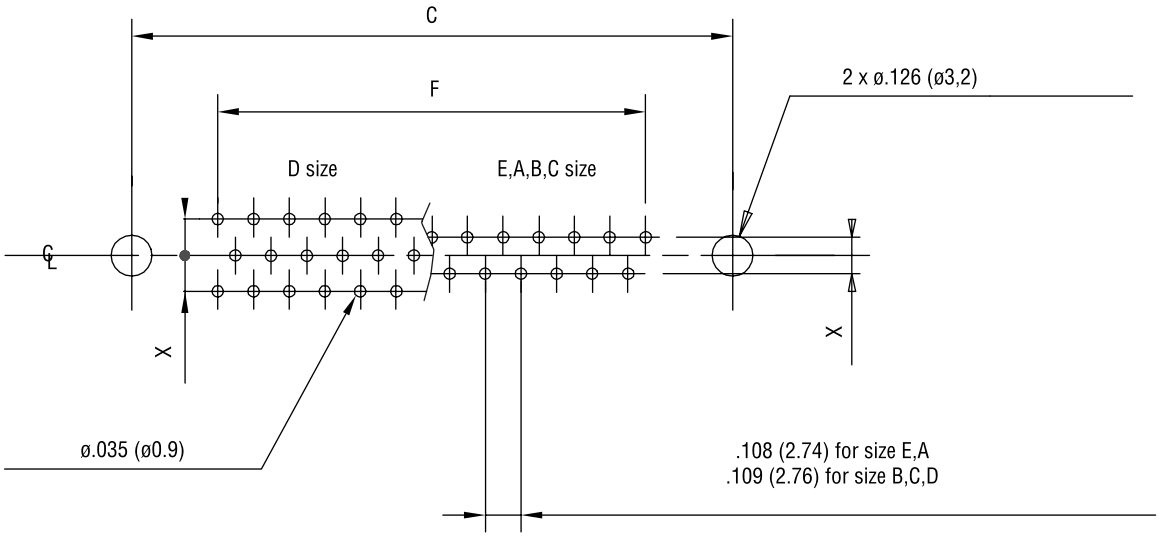

For straight PCB: X = .112 (2.84)
For right angle PCB: MIL: X = .112 (2.84)
European: X = .100 (2.54), .112 (2.84) in option

	size E	size A	size B	size C	size D
C ± .004 (0.1)	.984 (25)	1.311 (33.3)	1.85 (47)	2.5 (63.5)	2.406 (61.1)
F ± .002 (0.05)	.431 (10.96)	.755 (19.18)	1.304 (33.12)	1.956 (49.68)	1.74 (44.2)

INCHES (MM)

AMPHENOL D-SUBMINIATURE

ORDERING INFORMATION

XXXXX X X XX X XXXXX XXXX X

For specific product

Grounding tabs:

RM5	for straight PCB mounting*
RM8	for straight PCB mounting + female lock
RM6	for right angle PCB mounting
VF	front screwlock 4-40
VFM	front screwlock M3
VF2	removable screwlock 4-40
VFM2	removable screwlock M3

8µ" (0.2µm)	17D:	yellow chromated shell
	77D:	tinned shell for receptacle
	717D:	tinned shell + dimples for plug
20µ" (0.5µm)	17DF:	yellow chromated shell
	77DF:	tinned shell for receptacle
	717DF:	tinned shell + dimples for plug
30µ" (0.76µm)	117DF:	yellow chromated shell
	177DF:	tinned shell for receptacle
	777DF:	tinned shell + dimples for plug

Shell size: E, A, B, C, D

Mounting Options:

H	rear insert 4-40
G	rear insert M3
F	float mounting
no digit	standard rivet .122 (ø 3.1)

*H, G must also be used to specify the threading of RM5 grounding tabs.

Configuration: 09, 15, 25, 37, 50

Contact type:

P	pin
S	socket

Termination:
solder cup: no digit

Wire Wrap:

F179	length .378 (9.6)
F179A	length .512 (13)

Straight PCB:

U	length .126 (3.2)	tail ø.024 (ø0.6)
V	length .094 (2.4)	tail ø.040 (ø1.02)
T	length .157 (4)	tail ø.024 (ø0.6)
OL2	length .216 (5.5)	tail ø.024 (ø0.6)

Right Angle Connector:

MIL footprint			
without bracket:	C	tail	ø.040 (ø1.02)
	A4	tail	ø.024 (ø0.6)
plastic bracket:	AJ3	tail	ø.040 (ø1.02)
	AJ4	tail	ø.024 (ø0.6)
metal bracket:	A	tail	ø.040 (ø1.02)
	AM4	A	ø.519 (13.2)
	AZ4	A	ø.453 (11.5)
	AM4B	footprint	ø.590 (14.99)
European footprint			
without bracket:	1AON	X	.100 (2.54)
	1BON	X	.112 (2.84)
plastic bracket:	1APN	X	.100 (2.54)
	1BPN	X	.112 (2.84)
	1AUN	X	.100 (2.54)
	1BUN	X	.112 (2.84)
metal bracket:	1AMN	X	.100 (2.54)
	1BMN	X	.112 (2.84)
	1ATN	X	.100 (2.54)
	1BTN	X	.112 (2.84)

: Standard options

For special request, please consult factory

For Filtered D-Sub, see page 56.

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru