

ORIGINAL

This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2011/65/EU for RoHS compliant or per IEC 61249-2-21 for Halogen-Free compliant.

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A	NE-14070	NEW RELEASE	04/28/2014	HANK HSU





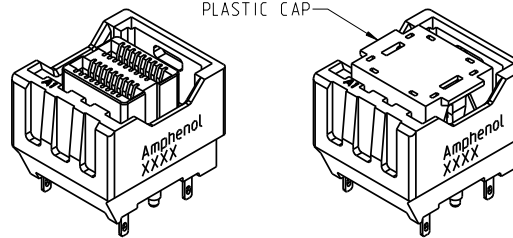


TABLE 1

DIM A	APPLICABLE PCB THK
2.40	1.57~1.60
3.59	2.36~2.79
3.98	3.18

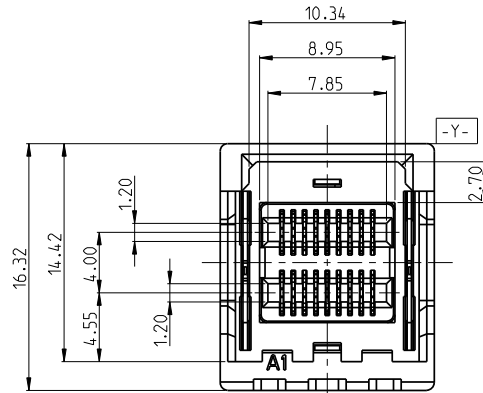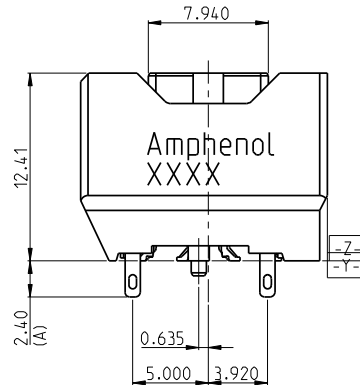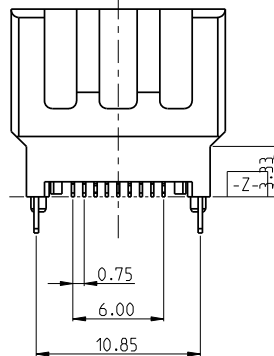

PART NUMBER SYSTEM									
G40H	D	X	X	X	X	X	XX	-	X
Mini SAS HD Integrated Connector									
Connector Style D: V/T.w/enclosing wall.85 ohm									
Number of Integration X: OPTION 1: 1X1 2: 1X2									
Contact Finish X: OPTION 3: 30u" Gold									
Terminal Style X: OPTION 2: SMT, 100u" MIN MATTE TIN PLATING									
Verification Code X: OPTION BLANK: STANDARD									
Compliant Code XX: OPTION HR: Halogen-Free & RoHS									
BOARDLOCK CODE X: OPTION 1: 2.40 mm 2: 3.59 mm 3: 3.98 mm									
Variation Code X: OPTION 1: with Cap 2: without Cap									
Packing Code X: OPTION 1: Tray 2: Tape & Reel 3: Narrow Tray									

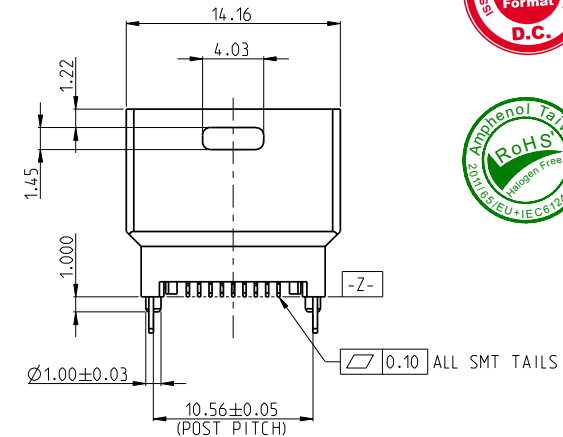

NOTES:

- INSULATOR: HIGH TEMPERATURE UL94V-0, COLOR: NC(BRACKET), BK(HOUSING)
- TERMINAL: COPPER ALLOYBRASS
CONTACT AREA: OPTION
SOLDERING AREA: OPTION
UNDER PLTING.: Ni 100u" MIN.
- THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS PER DIRECTIVE 2011/65/EU FOR RoHS AND PER IEC 61249-2-21 FOR HALOGEN-FREE COMPLIANT.




TOLERANCE		DRAWN APPROVALS		DATE	TITLE			Amphenol®		
X.		DESIGNED		04/28/2014	MINI SAS HD INTEGRATED CONNECTOR 0.75 PITCH, V/T, SMT TYPE			Amphenol Corporation Amphenol Taiwan Corporation		
X.X ±0.30		Hank Hsu								
X.XX ±0.20		CHECKED		04/28/2014				PART No. G40HDXXXXXXHR		
X.XXX ±0.10		Sondra Sang								
ANGULAR ±2°		APPROVED		04/28/2014	UNIT mm		SIZE A3	PART No. G40HDXXXXXXHR		
UNLESS OTHERWISE SPECIFIED		DWG TYPE CUST DWG		PROJECT CODE T515	SCALE NA		SHEET 1 OF 3	DWG No. G40HDXXXXXXHR		REV. A

ORIGINAL




This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2011/65/EU for RoHS compliant or per IEC 61249-2-21 for Halogen-Free compliant.

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A	NE-14070	NEW RELEASE	04/28/2014	HANK HSU

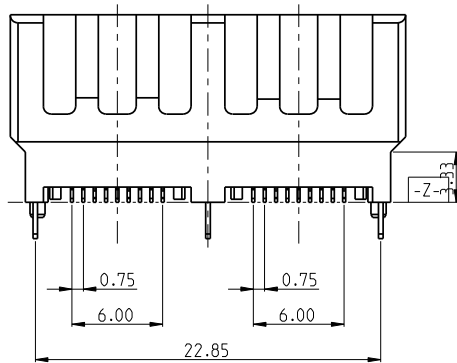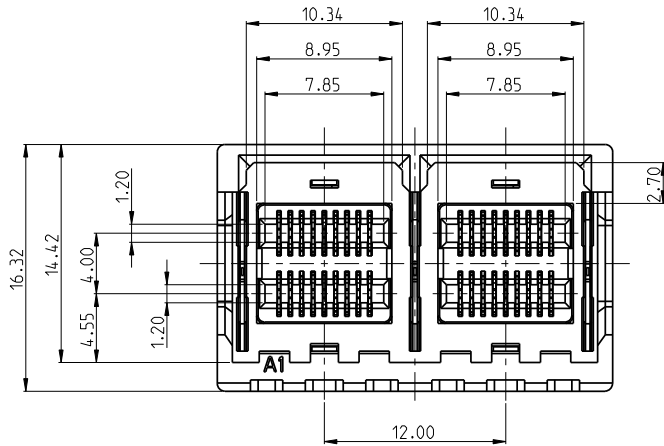

PLASTIC CAP

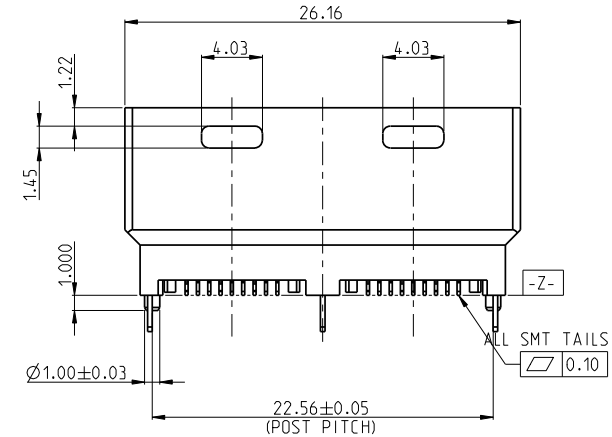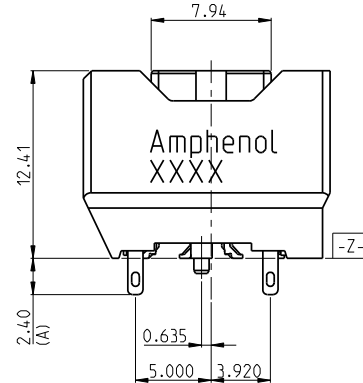


TOLERANCE	DRAWN	APPROVALS	DATE	TITLE		Amphenol®		
X.	DESIGNED	Hank Hsu	04/28/2014	MINI SAS HD		Amphenol Corporation		
X.X ±0.30	CHECKED	Sondra Sang	04/28/2014	INTEGRATED CONNECTOR		Amphenol Taiwan Corporation		
X.XX ±0.20	APPROVED	Hank Hsu	04/28/2014	0.75 PITCH, V/T,		PART No. G40HDXXXXXXHR		
X.XXX ±0.10	DWG TYPE	CUST DWG	PROJECT CODE T515	SMT TYPE		DWG No. G40HDXXXXXXHR		
ANGULAR ±2°	UNLESS OTHERWISE SPECIFIED		UNIT mm		SIZE A3	REV. A		
		SCALE NA		SHEET 2 OF 3				


The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2011/65/EU for RoHS compliant or per IEC 61249-2-21 for Halogen-Free compliant.

ORIGINAL

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A	NE-14070	NEW RELEASE	04/28/2014	HANK HSU

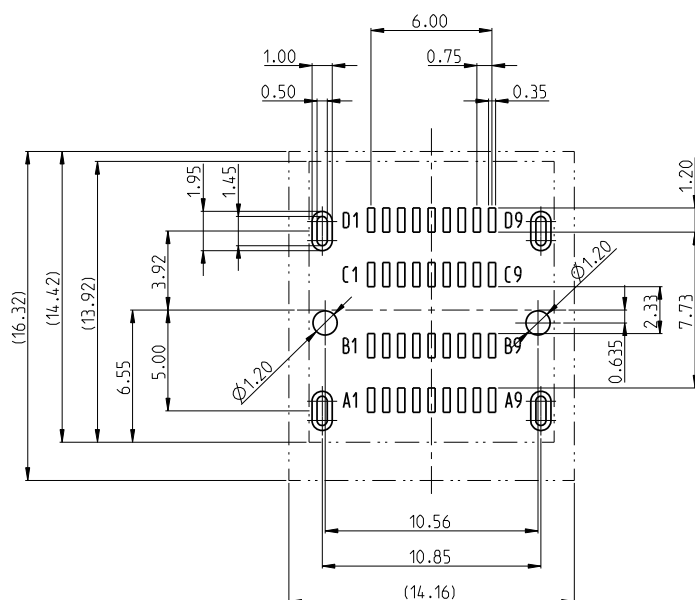

1X1 RECOMMENDED PCB LAYOUT
(ALL TOLERANCES ARE ± 0.05)

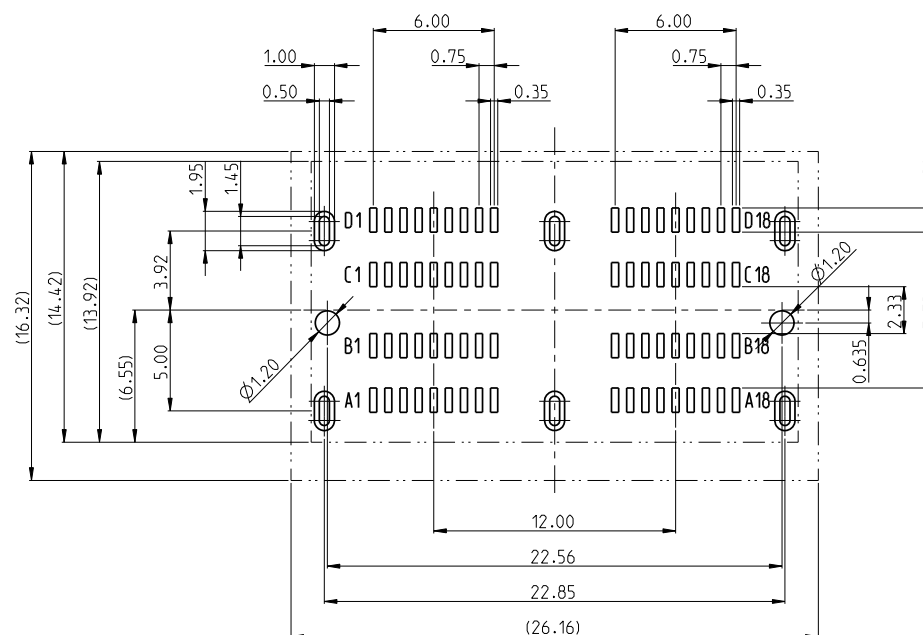

1X2 RECOMMENDED PCB LAYOUT
(ALL TOLERANCES ARE ± 0.05)

1. RECOMMENDED PCB HOLE Ø1.20 IS NPTH FOR ORIENTATION POST.
2. RECOMMENDED PCB ELLIPTICAL HOLE 0.5X1.45 IS PTH FOR BOARD-LOCK.
3. MINIMUM PCB THICKNESS: 1.57MM
4. PIN ASSIGNMENTS PLEASE REFER TO SERIAL ATTACHED SCSI-3 (SAS-3) STANDARD.

TOLERANCE		DRAWN APPROVALS		DATE	TITLE			Amphenol® Amphenol Corporation Amphenol Taiwan Corporation			
X. X.X ±0.30 X.XX ±0.20 X.XXX ±0.10		DESIGNED	Hank Hsu	04/28/2014	MINI SAS HD INTEGRATED CONNECTOR 0.75 PITCH, V/T, SMT TYPE						
		CHECKED	Sondra Sang	04/28/2014							
		APPROVED	Hank Hsu	04/28/2014							
ANGULAR ±2°						UNIT mm	SIZE A3	PART No. G40HDXXXXXXHR			
UNLESS OTHERWISE SPECIFIED		DWG TYPE CUST DWG	PROJECT CODE T515			SCALE NA	SHEET 3 OF 3	DWG No. G40HDXXXXXXHR		REV. A	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru