



**Is Now Part of**



**ON Semiconductor®**

**To learn more about ON Semiconductor, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)**

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at [www.onsemi.com](http://www.onsemi.com). Please email any questions regarding the system integration to [Fairchild\\_questions@onsemi.com](mailto:Fairchild_questions@onsemi.com).

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

# MM74HC74A

## Dual D-Type Flip-Flop with Preset and Clear

### Features

- Typical propagation delay: 20ns
- Wide power supply range: 2V–6V
- Low quiescent current: 40µA maximum (74HC Series)
- Low input current: 1µA maximum
- Fanout of 10 LS-TTL loads

### General Description

The MM74HC74A utilizes advanced silicon-gate CMOS technology to achieve operating speeds similar to the equivalent LS-TTL part. It possesses the high noise immunity and low power consumption of standard CMOS integrated circuits, along with the ability to drive 10 LS-TTL loads.

This flip-flop has independent data, preset, clear, and clock inputs and Q and  $\bar{Q}$  outputs. The logic level present at the data input is transferred to the output during the positive-going transition of the clock pulse. Preset and clear are independent of the clock and accomplished by a low level at the appropriate input.

The 74HC logic family is functionally and pinout compatible with the standard 74LS logic family. All inputs are protected from damage due to static discharge by internal diode clamps to  $V_{CC}$  and ground.

### Ordering Information


| Order Number | Package Number | Package Description                                                          |
|--------------|----------------|------------------------------------------------------------------------------|
| MM74HC74AM   | M14A           | 14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow |
| MM74HC74ASJ  | M14D           | 14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide                |
| MM74HC74AMTC | MTC14          | 14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide  |
| MM74HC74AN   | N14A           | 14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide       |

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering number.

 All packages are lead free per JEDEC: J-STD-020B standard.


## Connection Diagram

Pin Assignments for DIP, SOIC, SOP and TSSOP

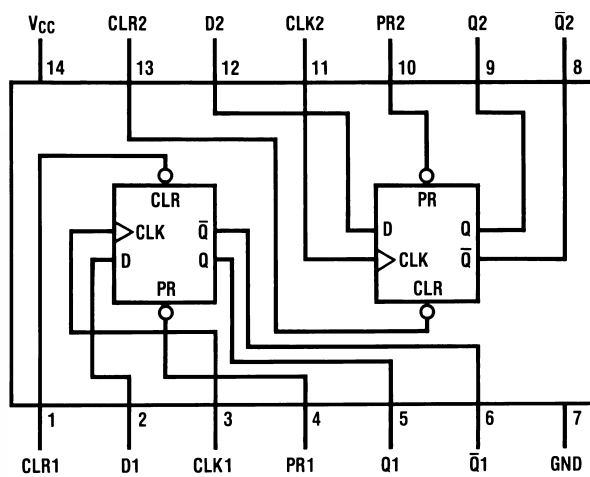

Top View

## Logic Diagram

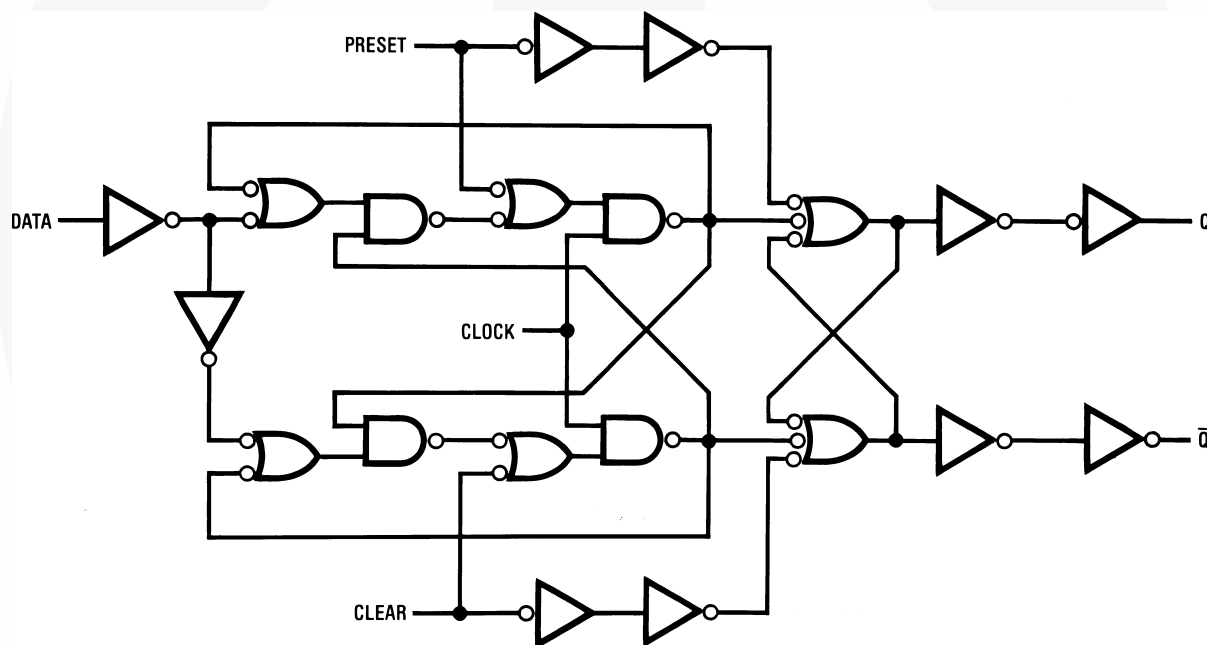

## Truth Table

| Inputs |     |     |   | Outputs          |                  |
|--------|-----|-----|---|------------------|------------------|
| PR     | CLR | CLK | D | Q                | $\bar{Q}$        |
| L      | H   | X   | X | H                | L                |
| H      | L   | X   | X | L                | H                |
| L      | L   | X   | X | H <sup>(1)</sup> | H <sup>(1)</sup> |
| H      | H   | ↑   | H | H                | L                |
| H      | H   | ↑   | L | L                | H                |
| H      | H   | L   | X | Q0               | $\bar{Q}0$       |

### Note:

Q0 = the level of Q before the indicated input conditions were established.

1. This configuration is nonstable; that is, it will not persist when preset and clear inputs return to their inactive (HIGH) level.

## Absolute Maximum Ratings<sup>(2)</sup>

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol           | Parameter                               | Rating                |
|------------------|-----------------------------------------|-----------------------|
| $V_{CC}$         | Supply Voltage                          | −0.5 to +7.0V         |
| $V_{IN}$         | DC Input Voltage                        | −1.5 to $V_{CC}+1.5V$ |
| $V_{OUT}$        | DC Output Voltage                       | −0.5 to $V_{CC}+0.5V$ |
| $I_{IK}, I_{OK}$ | Clamp Diode Current                     | ±20mA                 |
| $I_{OUT}$        | DC Output Current, per pin              | ±25mA                 |
| $I_{CC}$         | DC $V_{CC}$ or GND Current, per pin     | ±50mA                 |
| $T_{STG}$        | Storage Temperature Range               | −65°C to +150°C       |
| $P_D$            | Power Dissipation<br>Note 3             | 600mW                 |
|                  | S.O. Package only                       | 500mW                 |
| $T_L$            | Lead Temperature (Soldering 10 seconds) | 260°C                 |

### Notes:

- Unless otherwise specified all voltages are referenced to ground.
- Power Dissipation temperature derating — plastic “N” package: −12mW/°C from 65°C to 85°C.

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

| Symbol            | Parameter                                   | Min. | Max.     | Units |
|-------------------|---------------------------------------------|------|----------|-------|
| $V_{CC}$          | Supply Voltage                              | 2    | 6        | V     |
| $V_{IN}, V_{OUT}$ | DC Input or Output Voltage                  | 0    | $V_{CC}$ | V     |
| $T_A$             | Operating Temperature Range                 | −40  | +85      | °C    |
| $t_r, t_f$        | Input Rise or Fall Times<br>$V_{CC} = 2.0V$ |      | 1000     | ns    |
|                   | $V_{CC} = 4.5V$                             |      | 500      | ns    |
|                   | $V_{CC} = 6.0V$                             |      | 400      | ns    |

DC Electrical Characteristics<sup>(4)</sup>

| Symbol          | Parameter                               | V <sub>CC</sub> (V) | Conditions                                                                            | T <sub>A</sub> = 25°C |                   | T <sub>A</sub> = -40°C<br>to 85°C | T <sub>A</sub> = -55°C<br>to 125°C | Units |
|-----------------|-----------------------------------------|---------------------|---------------------------------------------------------------------------------------|-----------------------|-------------------|-----------------------------------|------------------------------------|-------|
|                 |                                         |                     |                                                                                       | Typ.                  | Guaranteed Limits |                                   |                                    |       |
| V <sub>IH</sub> | Minimum HIGH<br>Level Input<br>Voltage  | 2.0                 |                                                                                       |                       | 1.5               | 1.5                               | 1.5                                | V     |
|                 |                                         | 4.5                 |                                                                                       |                       | 3.15              | 3.15                              | 3.15                               |       |
|                 |                                         | 6.0                 |                                                                                       |                       | 4.2               | 4.2                               | 4.2                                |       |
| V <sub>IL</sub> | Maximum LOW<br>Level Input<br>Voltage   | 2.0                 |                                                                                       |                       | 0.5               | 0.5                               | 0.5                                | V     |
|                 |                                         | 4.5                 |                                                                                       |                       | 1.35              | 1.35                              | 1.35                               |       |
|                 |                                         | 6.0                 |                                                                                       |                       | 1.8               | 1.8                               | 1.8                                |       |
| V <sub>OH</sub> | Minimum HIGH<br>Level Output<br>Voltage | 2.0                 | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> ,<br> I <sub>OUT</sub>   ≤ 20μA  | 2.0                   | 1.9               | 1.9                               | 1.9                                | V     |
|                 |                                         | 4.5                 |                                                                                       | 4.5                   | 4.4               | 4.4                               | 4.4                                |       |
|                 |                                         | 6.0                 |                                                                                       | 6.0                   | 5.9               | 5.9                               | 5.9                                |       |
|                 |                                         | 4.5                 | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> ,<br> I <sub>OUT</sub>   ≤ 4.0mA | 4.3                   | 3.98              | 3.84                              | 3.7                                |       |
|                 |                                         | 6.0                 | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> ,<br> I <sub>OUT</sub>   ≤ 5.2mA | 5.2                   | 5.48              | 5.34                              | 5.2                                |       |
| V <sub>OL</sub> | Maximum LOW<br>Level Output<br>Voltage  | 2.0                 | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> ,<br> I <sub>OUT</sub>   ≤ 20μA  | 0                     | 0.1               | 0.1                               | 0.1                                | V     |
|                 |                                         | 4.5                 |                                                                                       | 0                     | 0.1               | 0.1                               | 0.1                                |       |
|                 |                                         | 6.0                 |                                                                                       | 0                     | 0.1               | 0.1                               | 0.1                                |       |
|                 |                                         | 4.5                 | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> ,<br> I <sub>OUT</sub>   ≤ 4.0mA | 0.2                   | 0.26              | 0.33                              | 0.4                                |       |
|                 |                                         | 6.0                 | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> ,<br>I <sub>OUT</sub>   ≤ 5.2mA  | 0.2                   | 0.26              | 0.33                              | 0.4                                |       |
| I <sub>IN</sub> | Maximum Input<br>Current                | 6.0                 | V <sub>IN</sub> = V <sub>CC</sub> or GND                                              |                       | ±0.1              | ±1.0                              | ±1.0                               | μA    |
| I <sub>CC</sub> | Maximum<br>Quiescent<br>Supply Current  | 6.0                 | V <sub>I N</sub> =V <sub>CC</sub> or GND,<br>I <sub>OUT</sub> = 0μA                   |                       | 4.0               | 40                                | 80                                 | μA    |

**Note:**

4. For a power supply of 5V ±10% the worst case output voltages (V<sub>OH</sub>, and V<sub>OL</sub>) occur for HC at 4.5V. Thus the 4.5V values should be used when designing with this supply. Worst case V<sub>IH</sub> and V<sub>IL</sub> occur at V<sub>CC</sub> = 5.5V and 4.5V respectively. (The V<sub>IH</sub> value at 5.5V is 3.85V.) The worst case leakage current (I<sub>IN</sub>, I<sub>CC</sub>, and I<sub>OZ</sub>) occur for CMOS at the higher voltage and so the 6.0V values should be used.

**AC Electrical Characteristics** $V_{CC} = 5V$ ,  $T_A = 25^\circ C$ ,  $C_L = 15pF$ ,  $t_r = t_f = 6ns$ 






| Symbol                | Parameter                                                       | Conditions | Typ. | Guaranteed Limit | Units |
|-----------------------|-----------------------------------------------------------------|------------|------|------------------|-------|
| $f_{MAX}$             | Maximum Operating Frequency                                     |            | 72   | 30               | MHz   |
| $t_{PHL}$ , $t_{PLH}$ | Maximum Propagation,<br>Delay Clock to Q or $\bar{Q}$           |            | 10   | 30               | ns    |
| $t_{PHL}$ , $t_{PLH}$ | Maximum Propagation,<br>Delay Preset or Clear to Q or $\bar{Q}$ |            | 17   | 40               | ns    |
| $t_{REM}$             | Minimum Removal Time,<br>Preset or Clear to Clock               |            | 6    | 5                | ns    |
| $t_s$                 | Minimum Setup Time, Data to Clock                               |            | 10   | 20               | ns    |
| $t_H$                 | Minimum Hold Time, Clock to Data                                |            | 0    | 0                | ns    |
| $t_W$                 | Minimum Pulse Width Clock, Preset or Clear                      |            | 8    | 16               | ns    |

**AC Electrical Characteristics** $C_L = 50 \text{ pF}$ ,  $t_r = t_f = 6 \text{ ns}$  (unless otherwise specified)

| Symbol                              | Parameter                                            | Conditions      | V <sub>CC</sub> (V) | T <sub>A</sub> = 25°C | T <sub>A</sub> = −40°C to 85°C | T <sub>A</sub> = −55°C to 125°C | Units |     |
|-------------------------------------|------------------------------------------------------|-----------------|---------------------|-----------------------|--------------------------------|---------------------------------|-------|-----|
|                                     |                                                      |                 |                     | Typ.                  | Guaranteed Limits              |                                 |       |     |
| f <sub>MAX</sub>                    | Maximum Operating Frequency                          |                 | 2.0                 | 22                    | 6                              | 5                               | 4     | MHz |
|                                     |                                                      |                 | 4.5                 | 72                    | 30                             | 24                              | 20    |     |
|                                     |                                                      |                 | 6.0                 | 94                    | 35                             | 28                              | 24    |     |
| t <sub>PHL</sub> , t <sub>PLH</sub> | Maximum Propagation Delay Clock to Q or Q̄           |                 | 2.0                 | 34                    | 110                            | 140                             | 165   | ns  |
|                                     |                                                      |                 | 4.5                 | 12                    | 22                             | 28                              | 33    |     |
|                                     |                                                      |                 | 6.0                 | 10                    | 19                             | 24                              | 28    |     |
| t <sub>PHL</sub> , t <sub>PLH</sub> | Maximum Propagation Delay Preset or Clear to Q or Q̄ |                 | 2.0                 | 66                    | 150                            | 190                             | 225   | ns  |
|                                     |                                                      |                 | 4.5                 | 20                    | 30                             | 38                              | 45    |     |
|                                     |                                                      |                 | 6.0                 | 16                    | 26                             | 33                              | 38    |     |
| t <sub>REM</sub>                    | Minimum Removal Time, Preset or Clear to Clock       |                 | 2.0                 | 20                    | 50                             | 65                              | 75    | ns  |
|                                     |                                                      |                 | 4.5                 | 6                     | 10                             | 13                              | 15    |     |
|                                     |                                                      |                 | 6.0                 | 5                     | 9                              | 11                              | 13    |     |
| t <sub>s</sub>                      | Minimum Setup Time Data to Clock                     |                 | 2.0                 | 35                    | 80                             | 100                             | 120   | ns  |
|                                     |                                                      |                 | 4.5                 | 10                    | 16                             | 20                              | 24    |     |
|                                     |                                                      |                 | 6.0                 | 8                     | 14                             | 17                              | 20    |     |
| t <sub>H</sub>                      | Minimum Hold Time Clock to Data                      |                 | 2.0                 |                       | 0                              | 0                               | 0     | ns  |
|                                     |                                                      |                 | 4.5                 |                       | 0                              | 0                               | 0     |     |
|                                     |                                                      |                 | 6.0                 |                       | 0                              | 0                               | 0     |     |
| t <sub>W</sub>                      | Minimum, Pulse Width Clock, Preset or Clear          |                 | 2.0                 | 30                    | 80                             | 101                             | 119   | ns  |
|                                     |                                                      |                 | 4.5                 | 9                     | 16                             | 20                              | 24    |     |
|                                     |                                                      |                 | 6.0                 | 8                     | 14                             | 17                              | 20    |     |
| t <sub>TLH</sub> , t <sub>THL</sub> | Maximum Output Rise and Fall Time                    |                 | 2.0                 | 25                    | 75                             | 95                              | 110   | ns  |
|                                     |                                                      |                 | 4.5V                | 7                     | 15                             | 19                              | 22    |     |
|                                     |                                                      |                 | 6.0V                | 6                     | 13                             | 16                              | 19    |     |
| t <sub>r</sub> , t <sub>f</sub>     | Maximum Input Rise and Fall Time                     |                 | 2.0                 |                       | 1000                           | 1000                            | 1000  | ns  |
|                                     |                                                      |                 | 4.5                 |                       | 500                            | 500                             | 500   |     |
|                                     |                                                      |                 | 6.0                 |                       | 400                            | 400                             | 400   |     |
| C <sub>PD</sub>                     | Power Dissipation Capacitance <sup>(5)</sup>         | (per flip-flop) |                     | 80                    |                                |                                 |       | pF  |
| C <sub>IN</sub>                     | Maximum Input Capacitance                            |                 |                     | 5                     | 10                             | 10                              | 10    | pF  |

**Note:**





5.  $C_{PD}$  determines the no load dynamic power consumption,  $P_D = C_{PD} V_{CC}^2 f + I_{CC} V_{CC}$ , and the no load dynamic current consumption,  $I_S = C_{PD} V_{CC} f + I_{CC}$ .

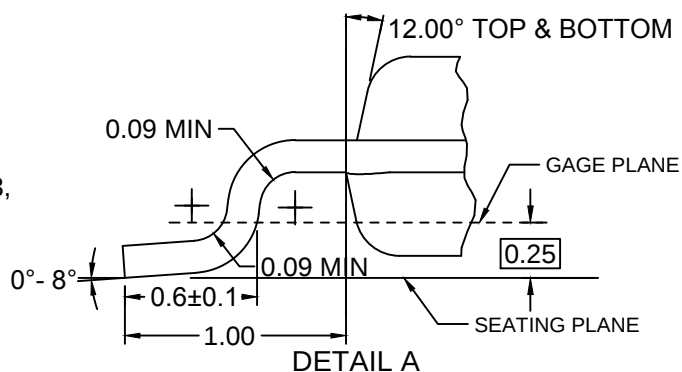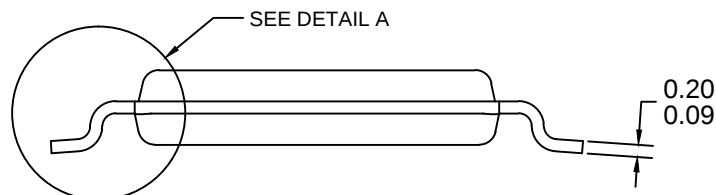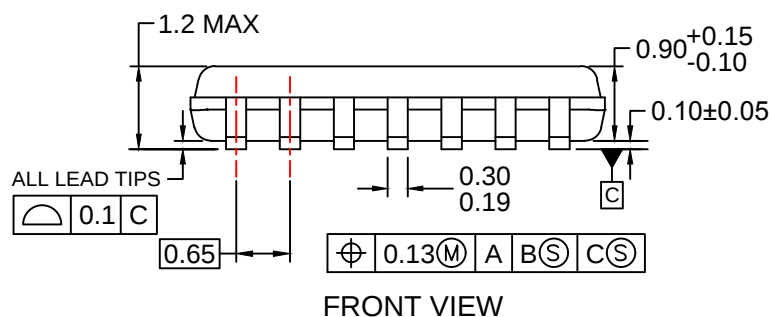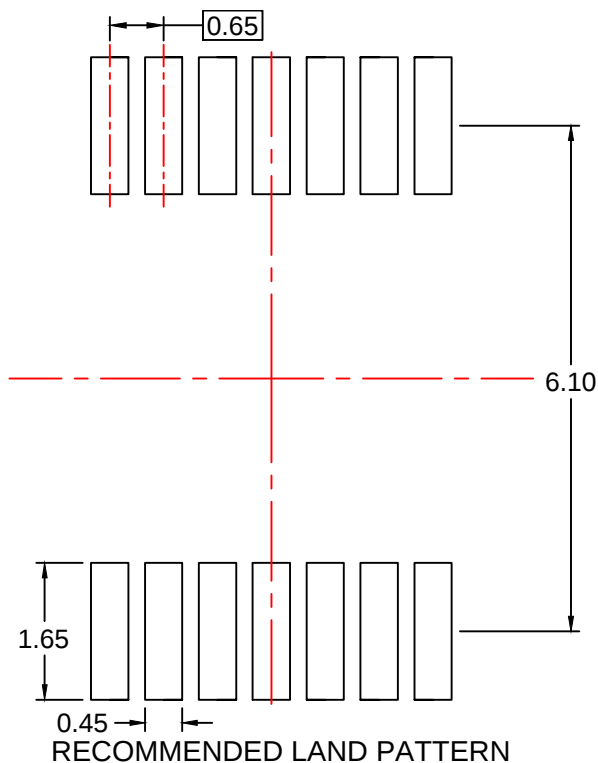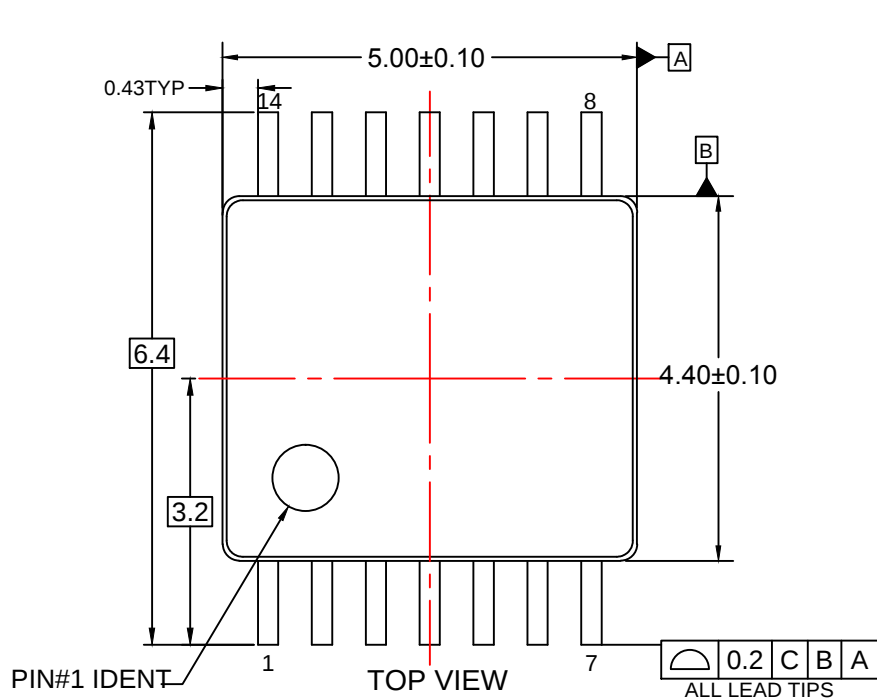


#### NOTES:



- CONFORMS TO JEDEC REGISTRATION MO-153, VARIATION AB, REF NOTE 6
- DIMENSIONS ARE IN MILLIMETERS.
- DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS
- DIMENSIONING AND TOLERANCES PER ANSI Y14.5M, 2009.
- LANDPATTERN STANDARD: SOP65P640X110-14M.
- DRAWING FILE NAME: MKT-MTC14rev7.



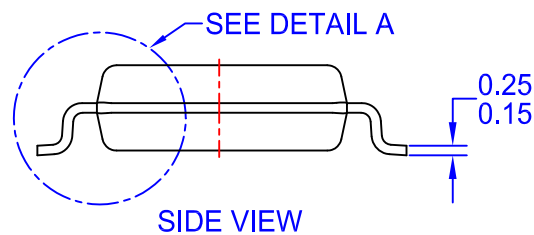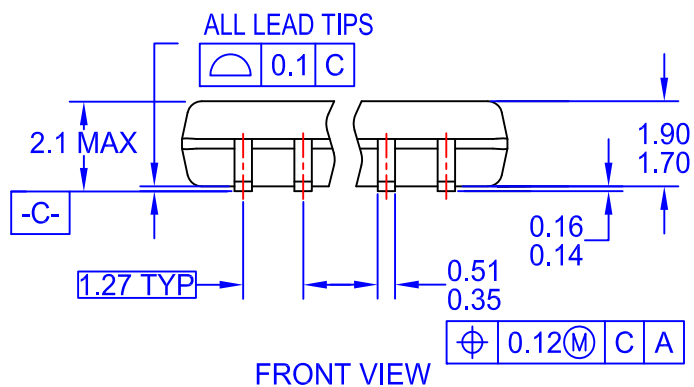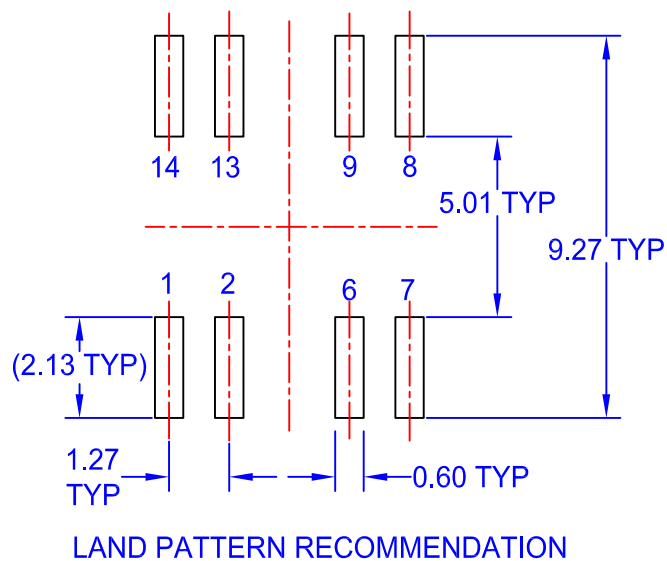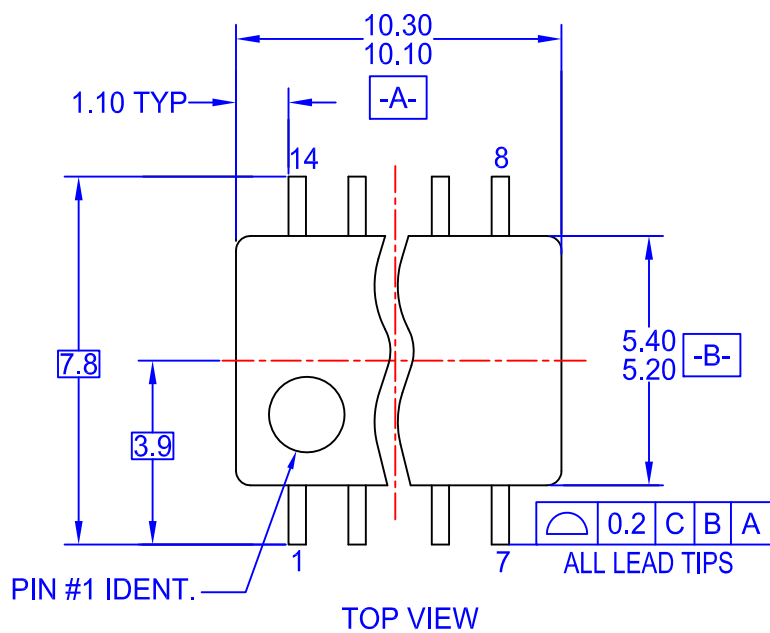

- NOTES:
- A. CONFORMS TO EIAJ EDR-7320 REGISTRATION, ESTABLISHED IN DECEMBER, 1998.
  - B. DIMENSIONS ARE IN MILLIMETERS.
  - C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
  - D. DRAWING FILENAME: MKT-M14Drev4.

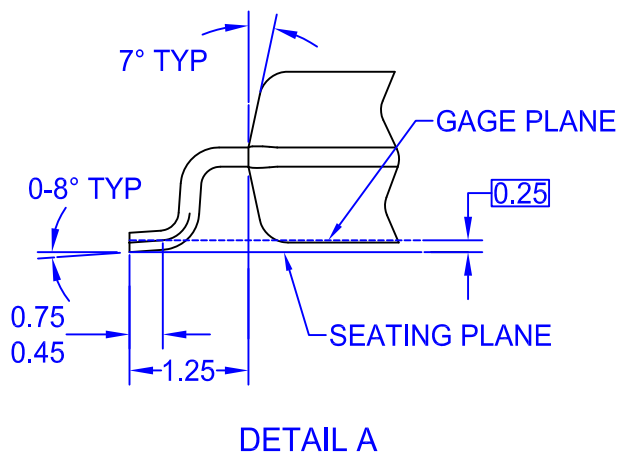

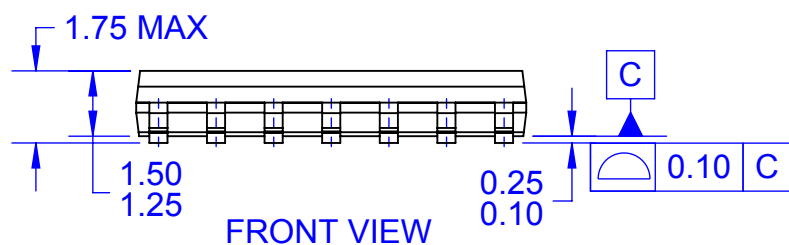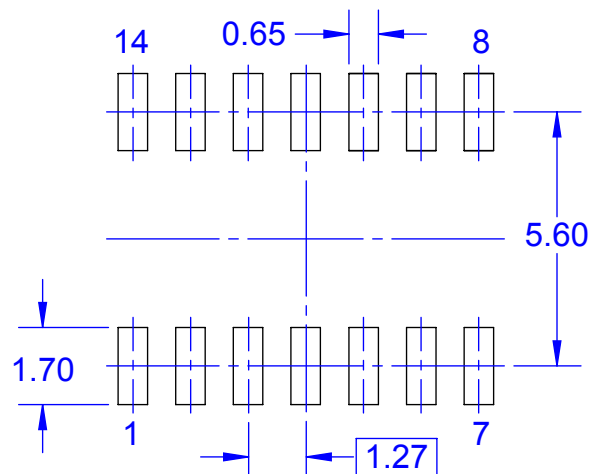

#### NOTES:

- A. CONFORMS TO JEDEC MS-012, VARIATION AB, ISSUE C
- B. ALL DIMENSIONS ARE IN MILLIMETERS
- C. DIMENSIONS DO NOT INCLUDE MOLD FLASH OR BURRS
- D. LAND PATTERN STANDARD: SOIC127P600X145-14M
- E. CONFORMS TO ASME Y14.5M, 2009
- D. DRAWING FILENAME: MKT-M14Arev14



DETAIL A  
SCALE 16 : 1



ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ON Semiconductor:](#)

[MM74HC74AMTCX](#) [MM74HC74ASJX](#) [MM74HC74AM](#) [MM74HC74AN](#) [MM74HC74AMTC](#) [MM74HC74ASJ](#)  
[MM74HC74AMX](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)