

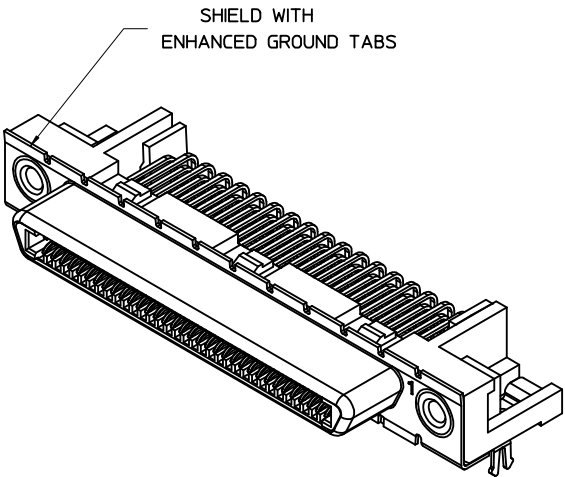


PCB THICKNESS	PART NUMBER	TAIL LENGTH *T* (SEE FIGURE FOR TOLERANCE)	ENHANCED GROUND TABS	SCREWLOCKS	TAIL LOC. *A*	HOLE LOCATION *B*
1.60	71430-0101	2.08	NO	NONE	5.5	6.50 MAXIMUM
1.60	71430-0007	2.08	NO	LOOSE IN BAGS		
1.60	71430-0005	2.08	YES	NONE		
1.60	71430-0008	2.08	YES	LOOSE IN BAGS		
2.36	71430-0268	2.71	NO	NONE		
2.36	71430-0006	2.71	NO	INSTALLED		
2.36	71430-0004	2.71	YES	NONE		
2.36	71430-0009	2.71	YES	INSTALLED		
2.36	71430-0016	2.71	NO	LOOSE IN BAGS		
2.36	71430-0019	2.71	YES	LOOSE IN BAGS		
2.36	71430-0012	2.71	YES	NONE	5.3	6.30 MAXIMUM
1.60	71430-0013	2.08	YES	NONE		

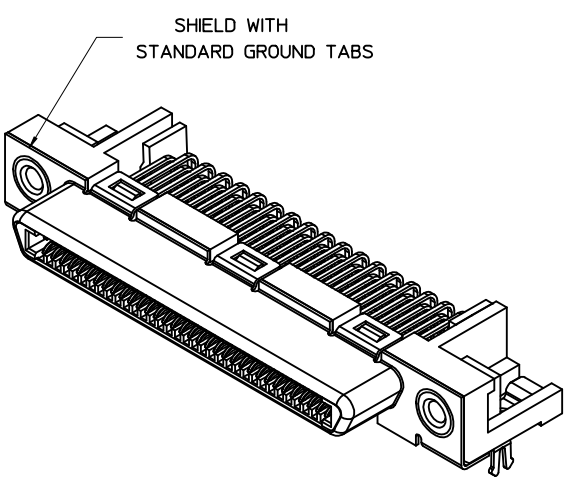

OPTIONAL SCREWLOCK
PART NUMBER 71433-0002

SEE SHEET 1 EC NO: UCP2012-3896 DRAWN: BARKER CHKD: MWOLFE APPR: SMILLER	2012/05/29 2012/08/31	DESCRIPTION REV N	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION			
					mm	INCH	DRAWN BY DATE KSTILES 11/14/2002		TITLE VHDCI RIGHT ANGLE ASSEMBLY molex				
				4 PLACES	± ---	± ---	CHECKED BY DATE KSTILES 11/15/2002						
				3 PLACES	± ---	± ---	APPROVED BY DATE MBNAKIS 11/22/2002						
				2 PLACES	± 0.13	± ---	MATERIAL NO.						
				1 PLACE	± 0.25	± ---	DOCUMENT NO.						
				0 PLACE	±	±	SEE TABLE		SD-71430-015		SHEET NO. 2 OF 3		
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				ANGULAR ±1/2°		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

NOTES:

1. MATERIALS:

HOUSING: GLASS FILLED LIQUID CRYSTAL POLYMER (LCP),

UL94 V-0, COLOR:BLACK

TAIL ALIGNER: GLASS FILLED LIQUID CRYSTAL POLYMER (LCP),

TERMINAL: HIGH PERFORMANCE COPPER ALLOY

SHIELD: STEEL

THREADED INSERT: BRASS

2. FINISHES:

TERMINAL: 0.05-0.25 MICROMETERS GOLD FLASH IN CRITICAL AREA
OVER 0.75 MICROMETERS MINIMUM PALLADIUM NICKEL IN
CRITICAL AREA. 1.87 MICROMETERS MINIMUM MATTE TIN IN
SOLDER TAIL AREA. OVERALL NICKEL UNDERPLATE.

BRACKET: 5.0 MICROMETERS MINIMUM BRIGHT TIN OVER A COPPER UNDERPLATE.

SHIELD: 3.8 MICROMETERS MINIMUM BRIGHT TIN OVER 1.3 MICROMETERS
MINIMUM NICKEL OVER COPPER FLASH (OPTIONAL).

THREADED INSERT: 2.54 MICROMETERS MINIMUM NICKEL.

3. PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-71425-9999.






4. PRODUCT IS PACKAGED PER PK-71430-0101.

5. APPLICABLE STANDARDS: EIA-3652 AND SFF-8441.

6. DATE CODE: YR/WK PER EIA-476-A.




7. PRODUCT COMPLIES WITH COSMETIC SPECIFICATION PS-45499-002. SEE SIDE VIEW FOR SURFACE CLASSIFICATIONS.

8. TORQUE TO INSTALL SCREWLOCKS INTO THREADED INSERTS: 0.34 Nm MAXIMUM.

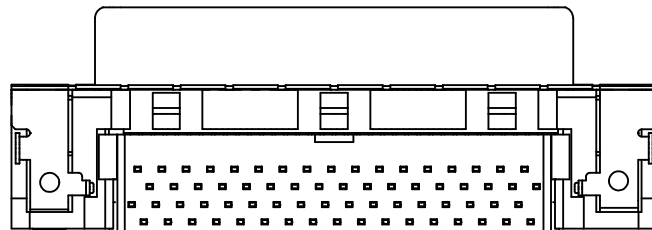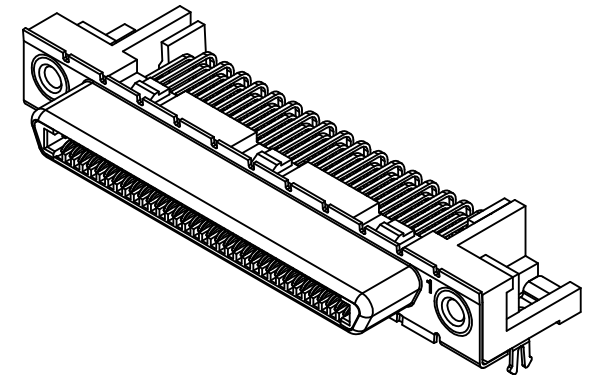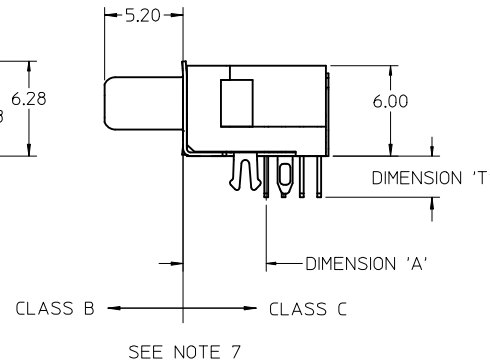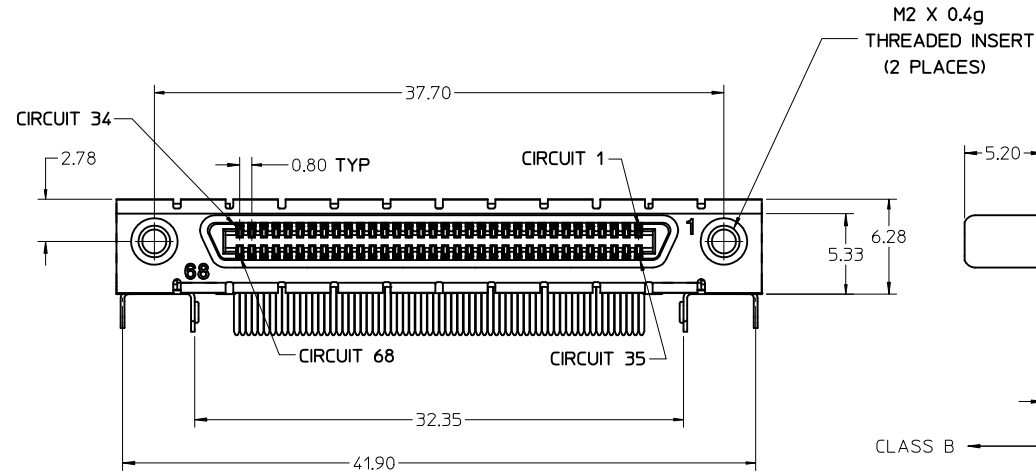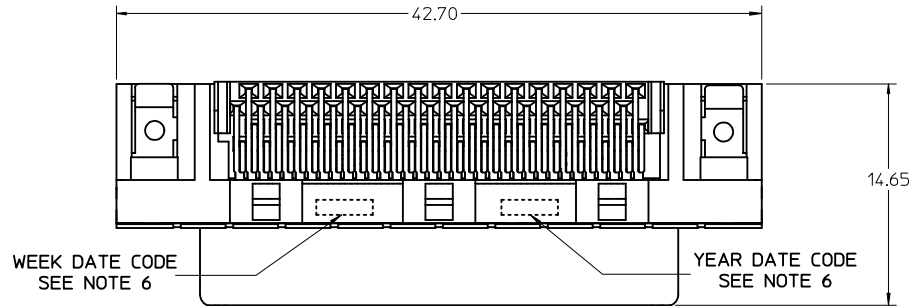


CHG THRD INSRT			DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	VHDCI RIGHT ANGLE ASSEMBLY	
EC NO: UCP2012-2552 DRWN:BBARKER 2012/02/09 CHKD:JMORGAN APPR:SMILLER 2012/03/22	REV B	mm			INCH		DRAWN BY DATE BBARKER 2011/02/17		TITLE					
		4 PLACES ± --- ± ---			3 PLACES ± --- ± ---		CHECKED BY DATE BSMART 2011/02/17		MOLEX MOLEX INCORPORATED					
		2 PLACES ± 0.13 ± ---			1 PLACE ± 0.25 ± ---		APPROVED BY DATE SMILLER 2011/02/25							
		ANGULAR ±1/2°			MATERIAL NO.		DOCUMENT NO.							SHEET NO. 1 OF 3
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE		SD-71430-3000							
SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												

PCB THICKNESS	PART NUMBER	TAIL LENGTH *T* +0.50/-0.25	ENHANCED GROUND TABS	SCREWLOCKS (SEE GUIDELINE FOR CHOOSING A SCREWLOCK ON SHEET 3)	TAIL LOCATION *A*	PCB HOLE LOCATION *B*
1.60		2.08	NO	NONE	5.50	6.50 MAXIMUM
1.60		2.08	NO	71433-2002 LOOSE IN BAGS		
1.60		2.08	YES	NONE		
1.60		2.08	YES	71433-2002 LOOSE IN BAGS		
2.36		2.71	NO	NONE		
2.36		2.71	NO	71433-2002 INSTALLED		
2.36		2.71	YES	NONE		
2.36		2.71	YES	71433-2002 INSTALLED		
2.36		2.71	NO	71433-2002 LOOSE IN BAGS		
2.36	71430-3019	2.71	YES	71433-2002 LOOSE IN BAGS	5.30	6.30 MAXIMUM
2.36		2.71	YES	NONE		
1.60		2.08	YES	NONE		

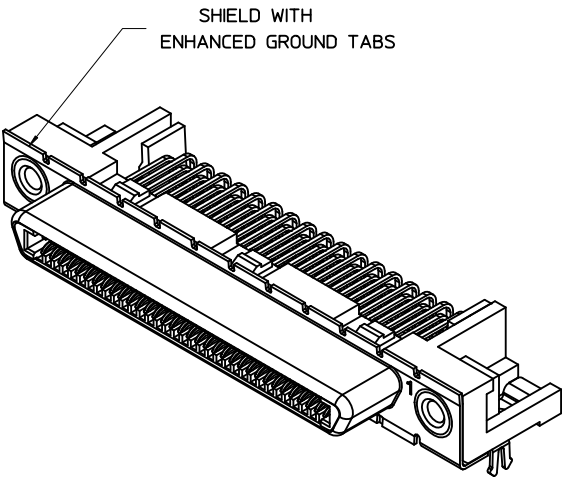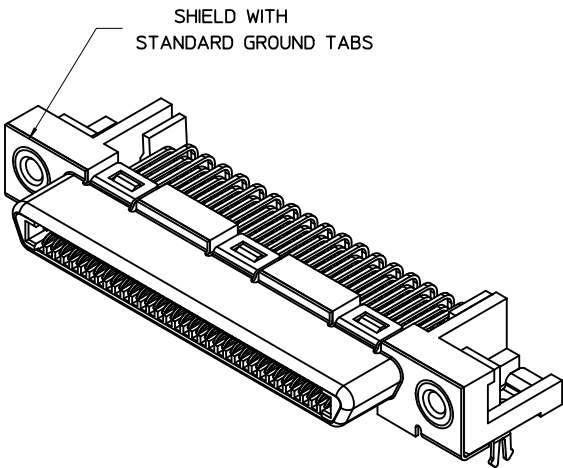

OPTIONAL SCREWLOCK
PART NUMBER 71433-2002 SHOWN
(SEE GUIDELINE FOR CHOOSING
A SCREWLOCK ON SHEET 3)

SEE SHEET 1 EC NO: UCP2012-2552 DRAWN:BBARKER 2012/02/09 CHKD:DMORGAN APPR:SMILLER 2012/03/22	REV B	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION			
						MM ONLY		4:1	METRIC				
						DRAWN BY BBARKER		DATE 2011/02/17			TITLE VHDCI RIGHT ANGLE ASSEMBLY		
						CHECKED BY BSMART		DATE 2011/02/17		MOLEX INCORPORATED			
						APPROVED BY SMILLER		DATE 2011/02/25					
						MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
						SEE TABLE		SD-71430-3000		2 OF 3			
						SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							

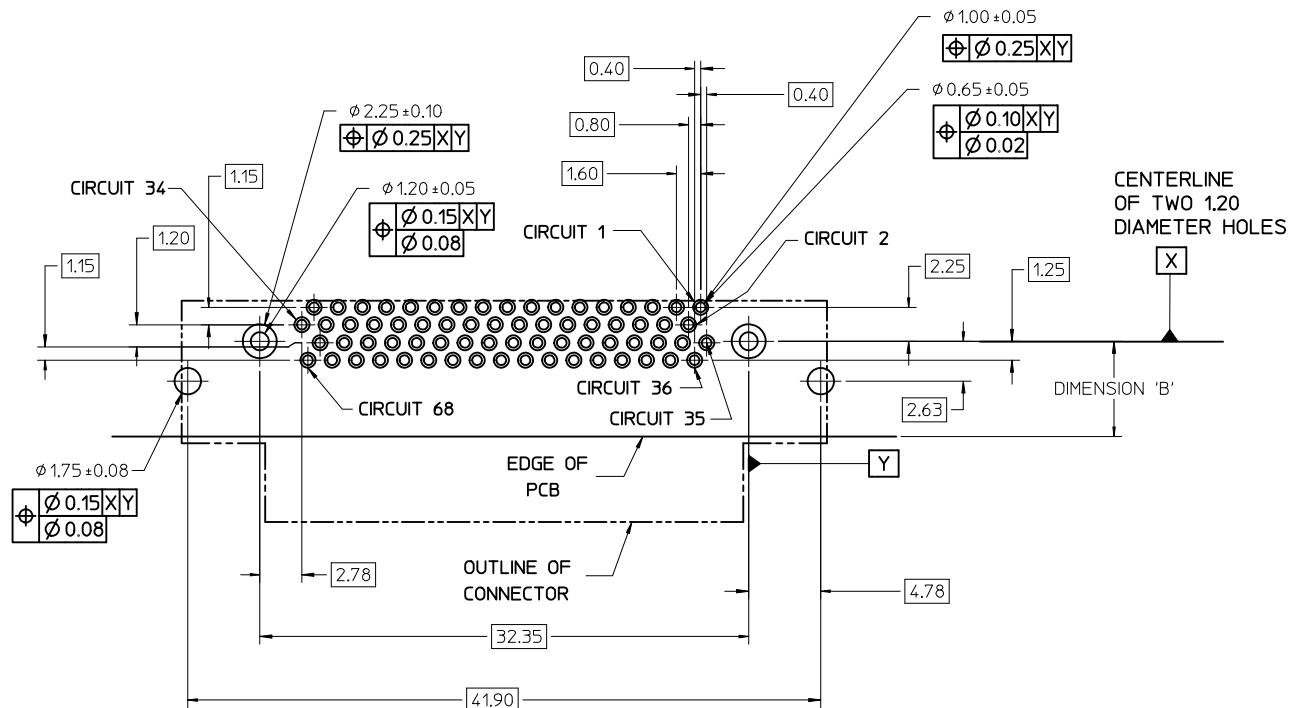


NOTES:

1. FOR FULL MATE WITH PLUG, PANEL THICKNESS SHOULD NOT EXCEED 1.0mm.

FUNCTIONAL MATING WITH MOLEX PLUG CAN STILL BE MAINTAINED WITH PANELS AS THICK AS 2.5mm (BUT PLUG AND RECEPTACLE WILL NOT BE FULLY MATED).

2. GUIDELINE FOR CHOOSING A MOLEX SCREWLOCK:

PANEL THICKNESS	RECOMMENDED SCREWLOCK
LESS THAN OR EQUAL TO 1.00 MM	71433-2002
1.01 TO 2.15 MM	71433-2010

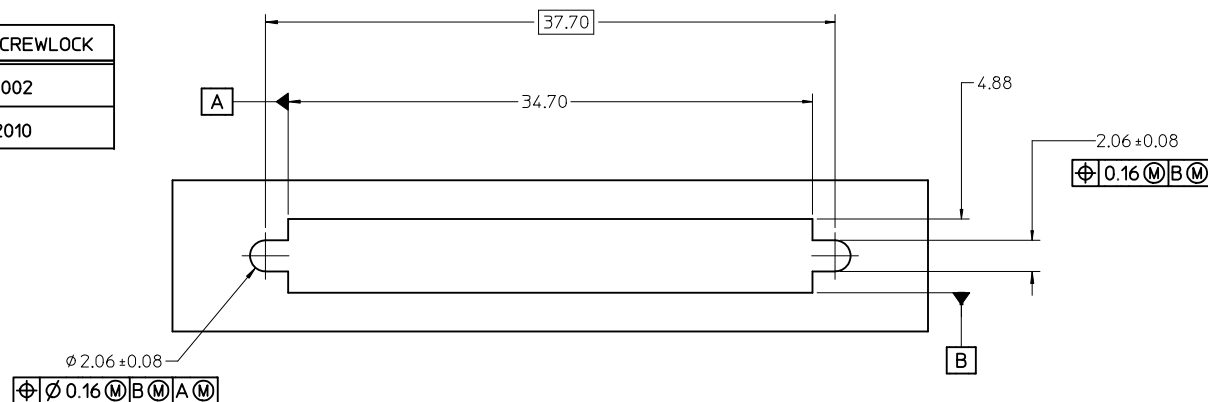

SEE SHEET 1 EC NO: UCP2012-2552 DRWN:BBARKER 2012/02/09 CHKD:JMORGAN APPR:SMILLER 2012/03/22	REV B	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
					mm	INCH	DRAWN BY BBARKER	DATE 2011/02/17	TITLE VHDCI RIGHT ANGLE ASSEMBLY			
				4 PLACES	± ---	± ---	CHECKED BY BSMART	DATE 2011/02/17				
				3 PLACES	± ---	± ---	APPROVED BY SMILLER	DATE 2011/02/25			 MOLEX INCORPORATED	
				2 PLACES	± 0.13	± ---	MATERIAL NO.		DOCUMENT NO.			SHEET NO. 3 OF 3
				1 PLACE	± 0.25	± ---	SEE TABLE		SD-71430-3000			
				ANGULAR ±1/2°		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS								

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru