
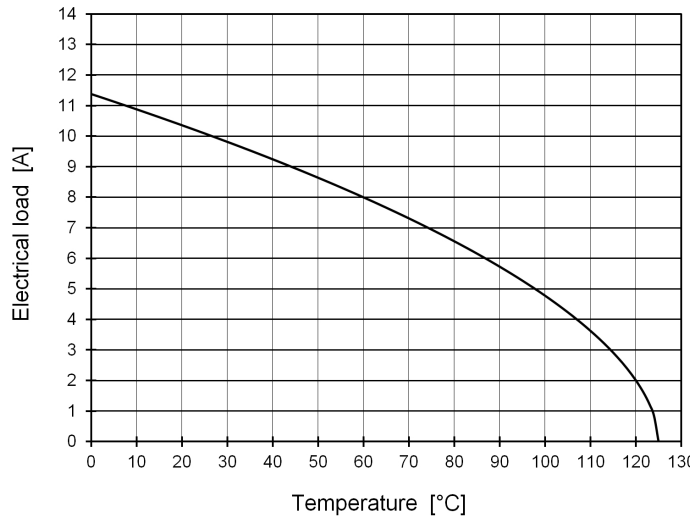


1	2	3	4	5	6	7	8																																											
A	 har-flexicon 2.54 female connector  			Connection data <table><tr><td>Conductor cross section solid min./max.</td><td>0.14mm² / 0.5mm²</td></tr><tr><td>Conductor cross section stranded min./max.</td><td>0.2mm² / 0.5mm²</td></tr><tr><td>Conductor cross section stranded, with ferrule, min./max.</td><td>0.25mm² / 0.34mm²</td></tr><tr><td>Minimum AWG</td><td>26</td></tr><tr><td>Maximum AWG</td><td>20</td></tr><tr><td>Stripping length</td><td>6 mm</td></tr><tr><td>Reconnection</td><td>10 times (only with same or larger cross section)</td></tr></table>				Conductor cross section solid min./max.	0.14mm² / 0.5mm²	Conductor cross section stranded min./max.	0.2mm² / 0.5mm²	Conductor cross section stranded, with ferrule, min./max.	0.25mm² / 0.34mm²	Minimum AWG	26	Maximum AWG	20	Stripping length	6 mm	Reconnection	10 times (only with same or larger cross section)	A																												
Conductor cross section solid min./max.	0.14mm² / 0.5mm²																																																	
Conductor cross section stranded min./max.	0.2mm² / 0.5mm²																																																	
Conductor cross section stranded, with ferrule, min./max.	0.25mm² / 0.34mm²																																																	
Minimum AWG	26																																																	
Maximum AWG	20																																																	
Stripping length	6 mm																																																	
Reconnection	10 times (only with same or larger cross section)																																																	
B	General information <table><tr><td>Design</td><td>female connector</td></tr><tr><td>No. of contacts</td><td>2-12 pole</td></tr><tr><td>Contact pitch</td><td>2,54 mm</td></tr><tr><td>Test voltage</td><td>2,5 kV</td></tr><tr><td>Rated voltage</td><td>160 V</td></tr><tr><td></td><td>overvoltage category III / pollution degree 2</td></tr><tr><td>Contact resistance</td><td>max. 20mOhm</td></tr><tr><td>Insulation resistance</td><td>min. 10^0hm</td></tr><tr><td>Working current</td><td>7.3 A at 70°C (tested with AWG20, see derating diagram)</td></tr><tr><td>Temperature range</td><td>-40°C ... +125°C</td></tr><tr><td>Termination technology</td><td>Push-In spring cage</td></tr><tr><td>Reflow processing temperature</td><td>20s at 255°C</td></tr><tr><td>Clearance & creepage distance</td><td>Clearance: 1,5 mm</td></tr><tr><td></td><td>Creepage: 1,6 mm</td></tr><tr><td>Insertion force</td><td>max. 5 N per contact</td></tr><tr><td>Withdrawal force</td><td>min. 1 N per contact</td></tr><tr><td>Mating cycles</td><td>10 cycles</td></tr><tr><td>Hot plugging</td><td>No</td></tr><tr><td>vibration</td><td>5-150Hz, 0,35mm, 5g, 2h each axis</td></tr><tr><td>RoHS - compliant</td><td>Yes</td></tr><tr><td>UL file</td><td>E 102079</td></tr></table>			Design	female connector	No. of contacts	2-12 pole	Contact pitch	2,54 mm	Test voltage	2,5 kV	Rated voltage	160 V		overvoltage category III / pollution degree 2	Contact resistance	max. 20mOhm	Insulation resistance	min. 10^0hm	Working current	7.3 A at 70°C (tested with AWG20, see derating diagram)	Temperature range	-40°C ... +125°C	Termination technology	Push-In spring cage	Reflow processing temperature	20s at 255°C	Clearance & creepage distance	Clearance: 1,5 mm		Creepage: 1,6 mm	Insertion force	max. 5 N per contact	Withdrawal force	min. 1 N per contact	Mating cycles	10 cycles	Hot plugging	No	vibration	5-150Hz, 0,35mm, 5g, 2h each axis	RoHS - compliant	Yes	UL file	E 102079	Recommended tools <table><tr><td>part number</td><td>14990000001</td></tr></table> 		part number	14990000001	B
Design	female connector																																																	
No. of contacts	2-12 pole																																																	
Contact pitch	2,54 mm																																																	
Test voltage	2,5 kV																																																	
Rated voltage	160 V																																																	
	overvoltage category III / pollution degree 2																																																	
Contact resistance	max. 20mOhm																																																	
Insulation resistance	min. 10^0hm																																																	
Working current	7.3 A at 70°C (tested with AWG20, see derating diagram)																																																	
Temperature range	-40°C ... +125°C																																																	
Termination technology	Push-In spring cage																																																	
Reflow processing temperature	20s at 255°C																																																	
Clearance & creepage distance	Clearance: 1,5 mm																																																	
	Creepage: 1,6 mm																																																	
Insertion force	max. 5 N per contact																																																	
Withdrawal force	min. 1 N per contact																																																	
Mating cycles	10 cycles																																																	
Hot plugging	No																																																	
vibration	5-150Hz, 0,35mm, 5g, 2h each axis																																																	
RoHS - compliant	Yes																																																	
UL file	E 102079																																																	
part number	14990000001																																																	
C	Insulator material <table><tr><td>Material</td><td>LCP (liquid crystalline polymer, glass fiber reinforcement 30%)</td></tr><tr><td>Color</td><td>black, white</td></tr><tr><td>UL classification</td><td>UL 94-V0</td></tr><tr><td>Material group acc. IEC 60664-1</td><td>IIIa (175 < CTI < 400)</td></tr><tr><td>NFF classification</td><td>-</td></tr></table>			Material	LCP (liquid crystalline polymer, glass fiber reinforcement 30%)	Color	black, white	UL classification	UL 94-V0	Material group acc. IEC 60664-1	IIIa (175 < CTI < 400)	NFF classification	-	Packaging <table><tr><th colspan="2">Packaging</th><th rowspan="2">MOQ</th><th colspan="2">Index</th></tr><tr><th>No. of poles (XX)</th><th>Quantity</th><th>black</th><th>white*</th></tr><tr><td>2 - 4</td><td>100</td><td>1</td><td>000</td><td>160</td></tr><tr><td>5 - 7</td><td>75</td><td>1</td><td>000</td><td>160</td></tr><tr><td>8 - 10</td><td>50</td><td>1</td><td>000</td><td>160</td></tr><tr><td>11 - 12</td><td>25</td><td>1</td><td>000</td><td>160</td></tr></table> part-number 1431XX13101XXX * only versions with 2 and 3 poles available		Packaging		MOQ	Index		No. of poles (XX)	Quantity	black	white*	2 - 4	100	1	000	160	5 - 7	75	1	000	160	8 - 10	50	1	000	160	11 - 12	25	1	000	160	C					
Material	LCP (liquid crystalline polymer, glass fiber reinforcement 30%)																																																	
Color	black, white																																																	
UL classification	UL 94-V0																																																	
Material group acc. IEC 60664-1	IIIa (175 < CTI < 400)																																																	
NFF classification	-																																																	
Packaging		MOQ	Index																																															
No. of poles (XX)	Quantity		black	white*																																														
2 - 4	100	1	000	160																																														
5 - 7	75	1	000	160																																														
8 - 10	50	1	000	160																																														
11 - 12	25	1	000	160																																														
D	Contact material <table><tr><td>Contact material</td><td>Copper alloy</td></tr><tr><td>Plating termination zone</td><td>Sn</td></tr><tr><td>Plating contact zone</td><td>Sn</td></tr></table>			Contact material	Copper alloy	Plating termination zone	Sn	Plating contact zone	Sn			D																																						
Contact material	Copper alloy																																																	
Plating termination zone	Sn																																																	
Plating contact zone	Sn																																																	
E	Derating diagram acc. to IEC 60512-5-2 (Current carrying capacity) The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature. Control and test procedures according to DIN IEC 60512-5-2  tested with AWG20					E																																												
F	 All rights reserved Department EC PD - DE HARTING Electronics GmbH D-32339 Espelkamp			Created by Inspected by Standardisation Date State ELLERMANN TADJE KOHLER 2016-03-16 Final Release Title Type Number har-flexicon 2.54 female connector DS 14312102001 Doc-Key / ECM-Nr. Rev. Page 100550636/UGD/001/D D 1/1 500000101815		F																																												
1	2	3	4	5	6	7	8																																											

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[14310313101160](#) [14310213101160](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru