

Wet Tantalum Capacitors with Hermetic Seal



Vishay STA represents a major breakthrough in Wet Tantalum capacitor technology. Its unique cathode system, also used in the ST, provides the highest capacitance per unit volume available. The STA combines the inherent reliability of wet tantalum with the capacitance stability of solid tantalum, and there are no circuit impedance restrictions. The range is exceptionally well suited for low voltage filtering and energy storage applications.


FEATURES

- Very High Capacitance
- 150 to 4700 μ F
- 6 to 15VDC
- - 55°C to + 85°C

APPLICATION NOTES

- No continuous reverse voltage permissible.
- Transient reverse voltage surges are acceptable under the following conditions:
The peak reverse voltage does not exceed 1.5 volts and the peak current times the duration of the reverse transient does not exceed 0.05 ampere seconds. In addition, the repetition frequency of the reverse voltage surge is less than 10Hz.
- The peak of the applied AC ripple and the applied DC voltage must not exceed the DC voltage rating of the capacitor.
- Ripple current ratings by part number at 85 °C and 40kHz are included in the table. Ripple current correction factors for other temperatures and frequencies are given on the next page.

DIMENSIONS in inches (millimeters)

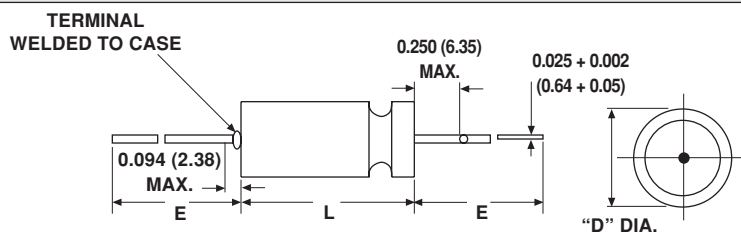

CASE CODE	D MAX. INSULATED	D $\pm$ 0.016 (0.41) UNINSULATED	L + 0.031 - 0.016 (- 0.41)	E $\pm$ 0.250 (6.35)
T1	0.219 (5.56)	0.188 (4.78)	0.453 (11.51)	1.500 (38.10)
T2	0.312 (7.92)	0.281 (7.14)	0.641 (16.28)	0.250 (57.15)
T3	0.406 (10.31)	0.375 (9.52)	0.766 (19.46)	2.250 (57.15)
T4	0.406 (10.31)	0.375 (9.52)	1.062 (26.97)	2.250 (57.15)

Approx. Weight T1: 2.3 grams, T2: 5.7 grams
 T3: 9.4 grams, T4: 14.8 grams

NOTES:

- Material at egress is tantalum.
- Insulation sleeving will lap over the ends of the capacitor case.
- Tinned nickel leads, solderable and weldable

ORDERING INFORMATION

STA	2700	15	T4	M	I
STYLE	CAPACITANCE μ F	85°C RATED DC VOLTAGE	CASE CODE	CAPACITANCE TOLERANCE	INSULATING SLEEVE
				M = $\pm$ 20% K = $\pm$ 10%	I = Insulated X = Uninsulated



RATINGS AND CASE CODES											
CAP. at 25°C & 120Hz μF	CASE CODE	Max. ESR Ω		Max. DCL μA		Max. DF at 120Hz %	Max. IMP at - 55°C & 120Hz Ω	Max. CAPACITANCE CHANGE %		AC RIPPLE 85°C 40kHz mA rms	PART NUMBER
		120Hz	40kHz	25°C	85°C			- 55°C	85°C		
6 VDC at 85°C											
470	T1	0.9	0.4	1	3	46	12	- 75	+ 10	1500	STA470-6T1MI
1500	T2	0.7	0.3	3	8	101	9	- 80	+ 10	2200	STA1500-6T2MI
3300	T3	0.5	0.2	8	30	150	7	- 90	+ 18	2800	STA3300-6T3MI
4700	T4	0.3	0.2	10	35	155	5	- 90	+ 18	3500	STA4700-6T4MI
10 VDC at 85°C											
330	T1	1.0	0.5	1	3	35	15	- 70	+ 8	1400	STA330-10T1MI
1000	T2	0.8	0.3	3	10	70	8	- 80	+ 10	2200	STA1000-10T2MI
2200	T3	0.5	0.3	5	30	109	6	- 85	+ 15	2800	STA2200-10T3MI
3300	T4	0.4	0.2	8	30	119	3	- 85	+ 18	3500	STA3300-10T4MI
15 VDC at 85°C											
150	T1	1.1	0.5	1	3	16	25	- 45	+ 8	1400	STA150-15T1MI
680	T2	0.8	0.3	2	10	49	10	- 65	+ 10	2200	STA680-15T2MI
1500	T3	0.6	0.2	5	25	81	9	- 80	+ 10	2700	STA1500-15T3MI
2700	T4	0.4	0.2	4	25	109	4	- 80	+ 15	3400	STA2700-15T4MI

RIPPLE CURRENT MULTIPLIERS VERSUS FREQUENCY, TEMPERATURE AND APPLIES PEAK VOLTAGE																										
FREQUENCY OF APPLIED RIPPLE CURRENT		120Hz				800Hz				1kHz				10kHz				40kHz				100kHz				
AMBIENT STILL AIR TEMP. IN °C		≤55	85	105	125	≤55	85	105	125	≤55	85	105	125	≤55	85	105	125	≤55	85	105	125	≤55	85	105	125	
% of 85°C rated peak voltage	100%	0.60	0.39	-	-	0.71	0.43	-	-	0.72	0.45	-	-	0.88	0.55	-	-	1.0	0.63	-	-	1.1	0.69	-	-	
	90%	0.60	0.46	-	-	0.71	0.55	-	-	0.72	0.55	-	-	0.88	0.67	-	-	1.0	0.77	-	-	1.1	0.85	-	-	
	80%	0.60	0.52	0.35	-	0.71	0.62	0.42	-	0.72	0.62	0.42	-	0.88	0.76	0.52	-	1.0	0.87	0.59	-	1.1	0.96	0.65	-	
	70%	0.60	0.58	0.44	-	0.71	0.69	0.52	-	0.72	0.70	0.52	-	0.88	0.85	0.64	-	1.0	0.97	0.73	-	1.1	1.07	0.80	-	
	66 2/3%	0.60	0.60	0.46	0.27	0.71	0.71	0.55	0.32	0.72	0.72	0.55	0.32	0.88	0.88	0.68	0.40	1.0	1.0	0.77	0.45	1.1	1.1	0.85	0.50	



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru