

Description

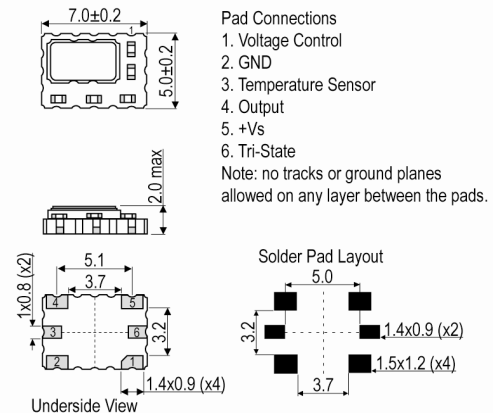
- The IQXT-316-1 uses ASIC technology and is designed to meet the short and medium term stability requirements of packet network synchronisation for Small Cells.
- Model IQXT-316-1
- Model Issue number 1

Frequency Parameters

- Frequency 19.20MHz
- Frequency Tolerance $\pm 1.00\text{ppm}$
- Tolerance Condition @ 25°C $\pm 1^\circ\text{C}$ & VC=1.4V
- Frequency Stability Max $\pm 0.25\text{ppm}$
- Operating Temperature Range -5.00 to 85.00°C
- In-service Short-term Frequency Stability (over any 24-hr timeslot @ fixed supply voltage and load):
 - 50 to 70°C: $\pm 80\text{ppb}$ max
 - 15 to 85°C: $\pm 100\text{ppb}$ max
 - 5 to 85°C: $\pm 250\text{ppb}$ max
- Ageing:
 - $\pm 20\text{ppb}$ max/day
 - $\pm 200\text{ppb}$ max/month
 - $\pm 1\text{ppm}$ max/year
 - $\pm 2\text{ppm}$ max over 3yrs
- Temperature Rate of Change (maximum rate of change of temperature condition for guaranteed stability specifications): 1°C/min max
- Frequency Slope $\Delta F/\Delta T$ (in still air): 25ppb/°C typ, 50ppb/°C max
- Acceleration Sensitivity (gamma vector of all 3 axes from 30 to 1500Hz): Typically 2ppb/G max
- Supply Voltage Variation ($\pm 2\%$ change @ 25°C, measurement referenced to frequency observed @ nominal Vs): $\pm 10\text{ppb}$ max
- Load Variation ($\pm 2\%$ change @ 25°C, measurement referenced to frequency observed @ nominal load): $\pm 5\text{ppb}$ max
- Reflow Variation (pre to post reflow ΔF , measured after 1hr recovery @ 25°C): $\pm 1\text{ppm}$ max
- Note: The characteristics of the oscillator may be temporarily affected by the processes of assembly and soldering. The in-service short term frequency stability specification applies after 48hrs continuous operation and after the first excursion over the temperature range. Nominal conditions apply unless otherwise stated.

Electrical Parameters

- Supply Voltage 2.85V $\pm 5\%$
- Current Draw 3.500mA
- Absolute Maximum Ratings:
 - Supply Voltage (Vs): -0.5V to 7V
 - Control Voltage (VC): -0.5V to 9V
 - All other inputs: -0.5V to Vs+0.5V
 - Power Dissipation: 100mW max
 - Junction Temperature: 150°C max
 - Note: Operating beyond these limits may result in change or permanent damage to the oscillator.


Outline (mm)

Sales Office Contact Details:

UK: +44 (0)1460 270200

Germany: 0800 1808 443

France: 0800 901 383

USA: +1.760.318.2824

 Email: info@iqdfrequencyproducts.com

 Web: www.iqdfrequencyproducts.com

Frequency Adjustment

- Pulling $\pm 4.5\text{ppm min to } \pm 10\text{ppm max}$
- Control Voltage $1.4\text{V } \pm 1.0\text{V}$
- Input Impedance $100\text{k}\Omega \text{ min}$
- Linearity (deviation from straight line curve fit): $1\% \text{ max}$
- Frequency Tuning Slope: $+6\text{ppm/V typ}$
- Modulation Bandwidth: 1Hz min
- Note: Pulling referenced to frequency @ $\text{VC}=1.4\text{V}$

Output Details

- Output Compatibility Clipped Sine
- Drive Capability $10\text{k}\Omega//10\text{pF}$
- Output Voltage Level: $0.8\text{V pk-pk min, } 1.1\text{V pk-pk typ}$
- Start Up Time (amplitude within 90% of specified output level): 15ms max
- Output: AC coupled
- Temperature Sensor Output (pad 3):
 $V_{\text{temp}} (@ 25^\circ\text{C}): 1.76\text{V typ}$
Slope Option: $-2.1\text{mV}/^\circ\text{C typ}$
Resistive Load: $100\text{k}\Omega \text{ min}$
Capacitive Load: 30pF max
Output Impedance (@ 25°C): $1\text{k}\Omega \text{ typ}$
Sensor Linearity: $1.5\% \text{ typ}$

Output Control

- Tri-State Mode:
Logic '0' ($20\%V_{\text{s max}}$) to pad 6 disables the oscillator output, the output goes to a high impedance state.
Logic '1' ($60\%V_{\text{s min}}$) or no connection to pad 6 enables the oscillator output.
Note: The tri-state control (enable) input pad has an internal $100\text{k}\Omega$ pull up resistor which allows it to be left unconnected if not used. When in tri-state mode, the output stage is disabled, but the oscillator and compensation circuit are still active (Current Consumption: 2mA typ).
- Output Enable Time: $100\mu\text{s max}$

Noise Parameters

- Phase Noise @ 25°C (typ) :
 $-65\text{dBc/Hz @ } 1\text{Hz}$
 $-98\text{dBc/Hz @ } 10\text{Hz}$
 $-130\text{dBc/Hz @ } 100\text{Hz}$
 $-145\text{dBc/Hz @ } 1\text{kHz}$
 $-153\text{dBc/Hz @ } 10\text{kHz}$
 $-157\text{dBc/Hz @ } 100\text{kHz}$
 $-158\text{dBc/Hz @ } 1\text{MHz}$
- Phase Jitter (12kHz to 5MHz): 330fs RMS typ

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Environmental Parameters

- Low Temperature Storage: IEC 60068-2-01, Test Ab: 1000hrs @ -55°C.
- High Temperature Storage: IEC 60068-2-02, Test Bb: 1000hrs @ 150°C.
- Mechanical Shock: JESD22-B104: 1500G, 0.5ms duration, 5 pulses in each of 6 directions.
- Vibration: JESD22-B103: 20G peak acceleration for 4hrs in each of the 3 orientations, tested from 60-2000Hz, 12hrs total.
- High Temperature Operating Life (HTOL): JESD22-A108: 1008hrs @ 125°C.
- Thermal Cycling: JESD22-A104: 500 temperature cycles, -55 to 125°C.
- Solderability: JESD22-B102, Method 1, Condition E: 245°C for 5secs (preconditioning: 150°C, 16hrs).
- Resistance to Soldering Heat: IPC/JEDEC J-STD-020: 3 reflow cycles (peak temperature 260°C).
- Humidity: JESD22-A101: After 1008hrs @ 85°C ±2°C, 85% RH non-condensing (preconditioning: 3 reflow cycles @ peak temperature 260°C).
- Ageing: MIL-PRF-55310: 1008hrs @ 85°C (preconditioning: 3 reflow cycles @ peak temperature 260°C).

Manufacturing Details

- Maximum Process Temperature: 260°C (30secs max)

Compliance

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): 1

Packaging Details

- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 500
- *Alternative packing option available*

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru