

# Ultra High Precision Bulk Metal® Z-Foil Surface Mount Voltage Divider, TCR Tracking of $< 0.1 \text{ ppm/}^{\circ}\text{C}$ , PCR of $\pm 5 \text{ ppm}$ at Rated Power and Stability of $\pm 0.005 \%$ (50 ppm)



## INTRODUCTION

Bulk Metal® Z-Foil technology out-performs all other resistor technologies available today for applications that require ultra-high precision and ultra-high stability.

The Z-Foil technology provides a significant reduction of the resistive element's sensitivity to ambient temperature variations (TCR) and to self heating when power is applied (power coefficient).

The DSMZ offers low TCR (both absolute and tracking), low PCR, excellent load life stability, tight tolerance match, excellent ratio stability, low thermal EMF, and low current noise - all in one package.

The **DSMZ** surface mount divider provides a matched pair of Bulk Metal® Z-Foil resistors in a small epoxy molded package. The electrical specification of this integrated construction offers improved performance and better real estate utilization over discrete resistors and matched pairs.

Our application engineering department is available to advise and make recommendations. For non-standard technical requirements and special applications, please contact us.

**TABLE 1 - RESISTANCE VALUES AND TOLERANCES (1)**


|                                         |                                                                                                                                                                                                                                                                                    |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>RESISTANCE VALUES</b>                | 100 $\Omega$ to 10 k $\Omega$ per resistor (2)                                                                                                                                                                                                                                     |
| <b>ABSOLUTE TOLERANCE EACH RESISTOR</b> | $\pm 0.02 \%$ , $\pm 0.05 \%$ , $\pm 0.1 \%$                                                                                                                                                                                                                                       |
| <b>RESISTANCE TOLERANCE MATCH</b>       | 0.01 %, 0.02 %, 0.05 %                                                                                                                                                                                                                                                             |
| <b>TCR</b>                              | Absolute: (typical and maximum spread): $\pm 0.2 \pm 2.0 \text{ ppm/}^{\circ}\text{C}$<br>Tracking: (maximum)<br>For $R_1/R_2 = 1$ 0.5 ppm/ $^{\circ}\text{C}$<br>For $1 < R_1/R_2 \leq 10$ 1.0 ppm/ $^{\circ}\text{C}$<br>For $10 < R_1/R_2 \leq 100$ 2.0 ppm/ $^{\circ}\text{C}$ |

### Notes

(1) Tighter performances are available

(2) 100  $\Omega$  to 12 k $\Omega$  per resistor available in DSM

**FIGURE 1 - SCHEMATIC**

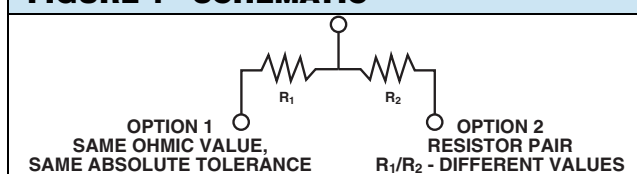

\* Pb containing terminations are not RoHS compliant, exemptions may apply

## FEATURES


- Temperature coefficient of resistance (TCR):  
Absolute:  $\pm 0.05 \text{ ppm/}^{\circ}\text{C}$  typ. ( $0^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$ )  
 $\pm 0.2 \text{ ppm/}^{\circ}\text{C}$  typ. ( $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ,  $+25^{\circ}\text{C}$  Ref.)  
Tracking: 0.1 ppm/ $^{\circ}\text{C}$  typical
- Power coefficient tracking  
"ΔR due to self heating":  $\pm 5 \text{ ppm}$  at rated power
- Power rating at  $70^{\circ}\text{C}$ : entire package: 0.1 W,  
each resistor: 0.05 W
- Tolerance: absolute:  $\pm 0.02 \%$ ; match: 0.01 %
- Ratio stability: 0.005 % (0.05 W at  $70^{\circ}\text{C}$ , 2000 h)
- Resistance range: 100  $\Omega$  to 10 k $\Omega$  per resistor
- Large variety of resistance ratios: 1:100
- Foil resistors are not restricted to standard values/ ratios; specific "as required" values/ratios can be supplied at no extra cost or delivery (e.g. 1K234/2K345 vs. 1K/2K)
- Electrostatic discharge (ESD) up to 25 000 V
- Short time overload  $\leq 0.005 \%$
- Non-inductive, non-capacitive design
- Rise time: 1 ns effectively no ringing
- Current noise:  $< -40 \text{ dB}$
- Thermal EMF: 0.05  $\mu\text{V/}^{\circ}\text{C}$  typical
- Voltage Coefficient:  $< 0.1 \text{ ppm/V}$
- Non Inductive:  $< 0.08 \mu\text{H}$
- Non Hot Spot Design
- Terminals: silver coated copper alloy
- Compliant to RoHS directive 2002/95/EC
- Prototype quantities available in just 5 working days or sooner. For more information, please contact [foil@vishaypg.com](mailto:foil@vishaypg.com)
- For better performances, please contact application engineering




**RoHS\***  
COMPLIANT





## APPLICATIONS

- Instrumentation amplifiers
- Bridge networks
- Differential amplifiers
- Ratio arms in bridge circuits
- Medical and test equipment
- Military
- Airborne etc.




**FIGURE 2 - POWER DERATING CURVE**

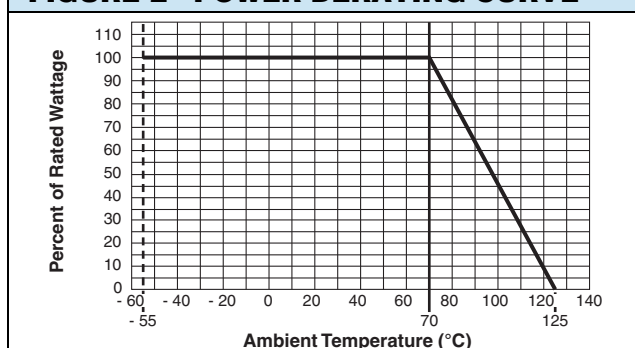

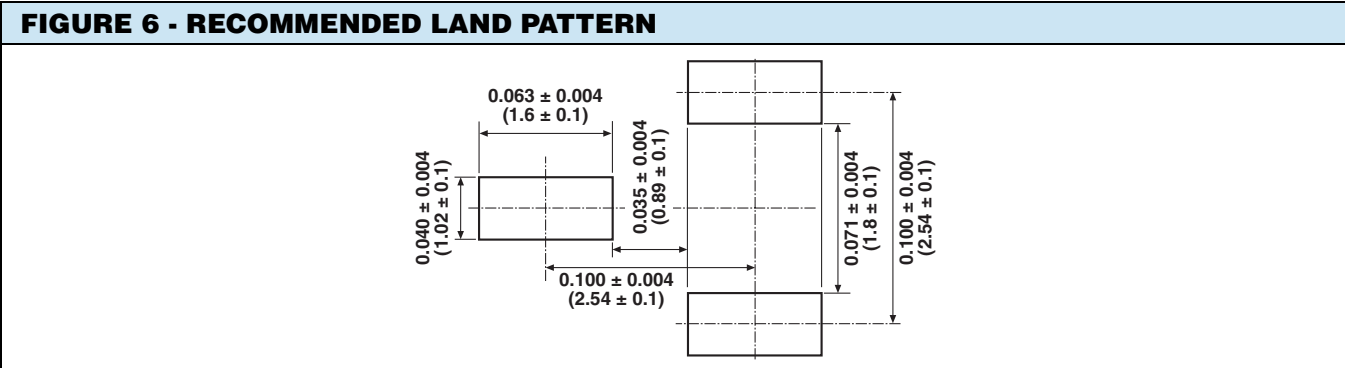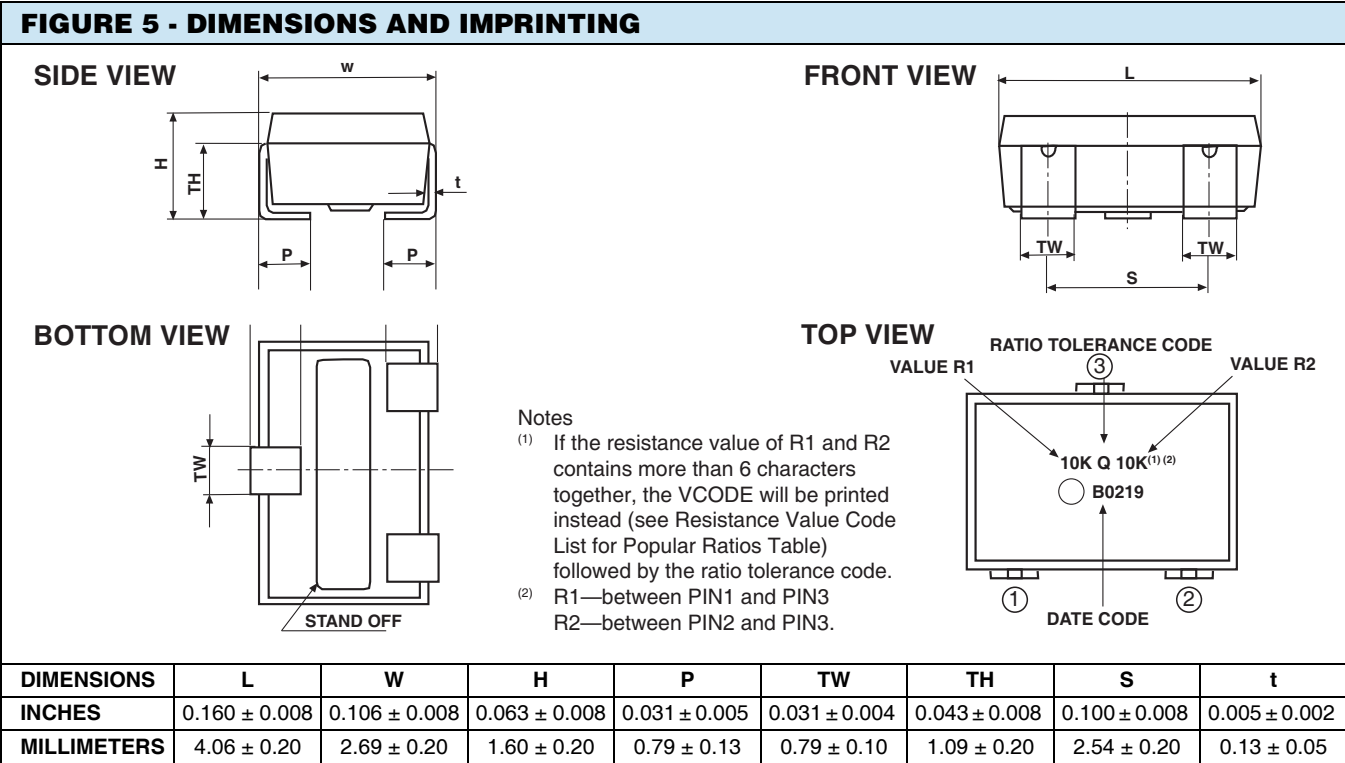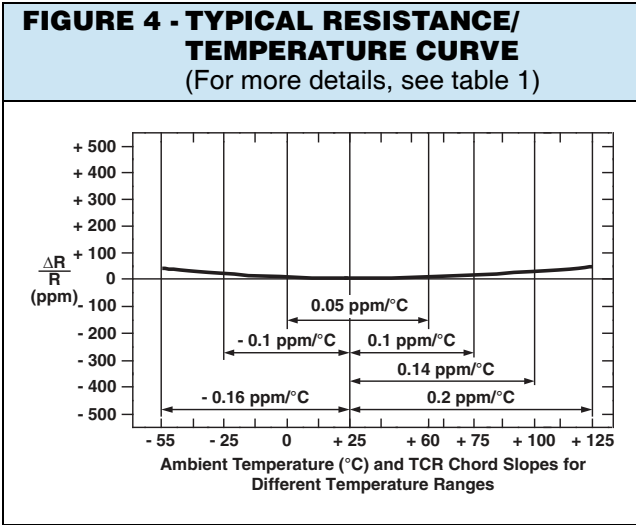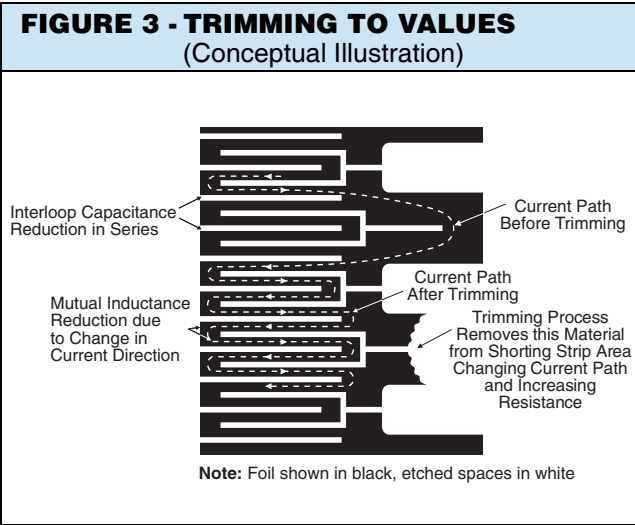

**TABLE 2 - PERFORMANCE SPECIFICATIONS** (Test Method Per MIL-PRF-914)

| SPECIFICATIONS                                                                                                            | TYPICAL LIMITS                                                             |
|---------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| <b>Power rating</b> at 70 °C                                                                                              | Entire package: 0.1 W<br>Each resistor: 0.05 W                             |
| <b>Maximum Working Voltage</b> (each resistor)                                                                            | 25 V                                                                       |
| <b>Working Temperature Range</b>                                                                                          | - 65 °C to + 125 °C                                                        |
| <b>Thermal Shock</b><br>25 x (- 65 °C to + 125 °C)                                                                        | $\Delta R = 0.01\%$ (100 ppm)<br>$\Delta \text{Ratio} = 0.005\%$ (50 ppm)  |
| <b>Thermal Shock</b><br>5 x (- 65 °C to + 125 °C) and<br><b>Power Conditioning</b><br>1.5 rated power at 25 °C, 100 hours | $\Delta R = 0.015\%$ (150 ppm)<br>$\Delta \text{Ratio} = 0.01\%$ (100 ppm) |
| <b>DWV</b> atmospheric pressure, 200 V (A.C.), 1 minute                                                                   | Successfully passed                                                        |
| <b>Insulation Resistance</b> 100 V (D.C.), 1 minute                                                                       | $> 10^4 \text{ M}\Omega$                                                   |
| <b>Resistance to Soldering Heat</b>                                                                                       | $\Delta R = 0.01\%$ (100 ppm)<br>$\Delta \text{Ratio} = 0.005\%$ (50 ppm)  |
| <b>Moisture Resistance</b><br>+ 65 °C to - 10 °C; 90 % to 98 % RH; 0.1 x rated power, 240 hours                           | $\Delta R = 0.02\%$ (200 ppm)<br>$\Delta \text{Ratio} = 0.005\%$ (50 ppm)  |
| <b>Shock (Specified Pulse)</b><br>100 G                                                                                   | $\Delta R = 0.005\%$ (50 ppm)<br>$\Delta \text{Ratio} = 0.0025\%$ (25 ppm) |
| <b>Vibration, High Frequency</b><br>(10 Hz - 2000 Hz), 20 G                                                               | $\Delta R = 0.01\%$ (100 ppm)<br>$\Delta \text{Ratio} = 0.005\%$ (50 ppm)  |
| <b>High Temperature Exposure</b><br>100 hours at 125 °C                                                                   | $\Delta R = 0.01\%$ (100 ppm)<br>$\Delta \text{Ratio} = 0.005\%$ (50 ppm)  |
| <b>Low Temperature Storage</b><br>24 hours at - 65 °C                                                                     | $\Delta R = 0.005\%$ (50 ppm)<br>$\Delta \text{Ratio} = 0.005\%$ (50 ppm)  |
| <b>Load Life Stability</b><br>2000 hours at + 70 °C; rated power                                                          | $\Delta R = 0.005\%$ (50 ppm)<br>$\Delta \text{Ratio} = 0.005\%$ (50 ppm)  |
| <b>Short Time Overload</b><br>6.25 x Rated Power; 5 seconds                                                               | $\Delta R = 0.005\%$ (50 ppm)<br>$\Delta \text{Ratio} = 0.0025\%$ (25 ppm) |
| <b>Low Temperature Operation</b>                                                                                          | $\Delta R = 0.005\%$ (50 ppm)<br>$\Delta \text{Ratio} = 0.0025\%$ (25 ppm) |
| <b>Weight</b>                                                                                                             | 0.04 g                                                                     |

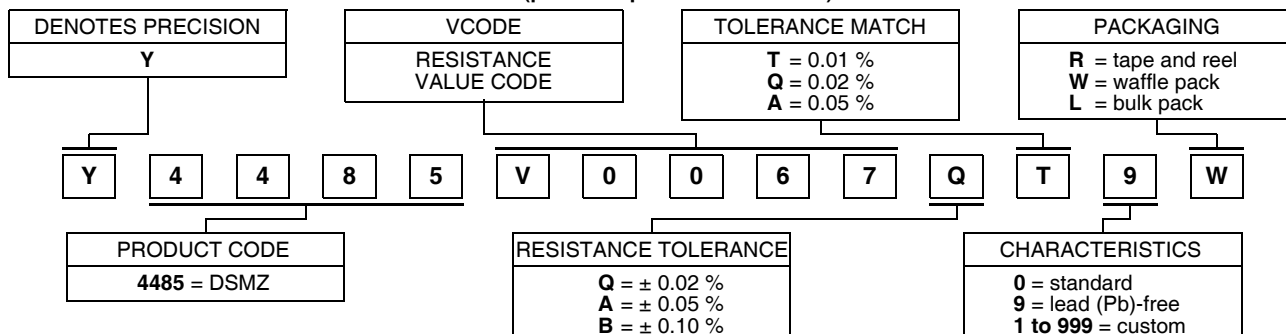**TABLE 3 - GLOBAL PART NUMBER INFORMATION (1)****NEW GLOBAL PART NUMBER: Y4485V0067QT9W (preferred part number format)**

FOR EXAMPLE: ABOVE GLOBAL ORDER Y4485 V0067 Q T 9 W:

TYPE: DSMZ

VALUES: 10K/400R

ABSOLUTE TOLERANCE: ± 0.02 %

TOLERANCE MATCH: 0.01 %

TERMINATION: lead (Pb)-free

PACKAGING: waffle pack

**HISTORICAL PART NUMBER: DSMZ 10K 400R TCR0.2 Q T S W (will continue to be used)**

|              |                                                              |                           |                                                                   |                                                             |                                                  |                                                                            |
|--------------|--------------------------------------------------------------|---------------------------|-------------------------------------------------------------------|-------------------------------------------------------------|--------------------------------------------------|----------------------------------------------------------------------------|
| <b>DSMZ</b>  | <b>10K 400R</b>                                              | <b>TCR0.2</b>             | <b>Q</b>                                                          | <b>T</b>                                                    | <b>S</b>                                         | <b>W</b>                                                                   |
| <b>MODEL</b> | <b>OHMIC VALUE</b>                                           | <b>TCR CHARACTERISTIC</b> | <b>ABSOLUTE TOLERANCE</b>                                         | <b>TOLERANCE MATCH</b>                                      | <b>TERMINATION</b>                               | <b>PACKAGING</b>                                                           |
|              | <b>R<sub>1</sub> = 10 kΩ</b><br><b>R<sub>2</sub> = 400 Ω</b> |                           | <b>Q</b> = ± 0.02 %<br><b>A</b> = ± 0.05 %<br><b>B</b> = ± 0.10 % | <b>T</b> = 0.01 %<br><b>Q</b> = 0.02 %<br><b>A</b> = 0.05 % | <b>S</b> = lead (Pb)-free<br><b>B</b> = tin/lead | <b>T</b> = tape and reel<br><b>W</b> = waffle pack<br><b>B</b> = bulk pack |

**Note**

(1) For non-standard requests or additional values, please contact application engineering.

**TABLE 4 - RESISTANCE VALUE CODE LIST FOR POPULAR RATIOS (1)**

| VCODES | R1/R2 RATIO | R1   | R2   | VCODES | R1/R2 RATIO | R1   | R2   |
|--------|-------------|------|------|--------|-------------|------|------|
| V0052  | 100         | 10K  | 100R | V0080  | 2.5         | 1K   | 400R |
| V0065  | 50          | 10K  | 200R | V0081  |             | 500R | 200R |
| V0066  |             | 5K   | 100R | V0082  |             | 10K  | 5K   |
| V0067  | 25          | 10K  | 400R | V0083  |             | 2K   | 1K   |
| V0068  |             | 5K   | 200R | V0084  | 2           | 1K   | 500R |
| V0069  |             | 10K  | 500R | V0085  |             | 400R | 200R |
| V0070  | 20          | 2K   | 100R | V0086  |             | 200R | 100R |
| V0071  |             | 10K  | 1K   | V0087  | 1.25        | 500R | 400R |
| V0072  | 10          | 2K   | 200R | V0001  |             | 10K  | 10K  |
| V0073  |             | 1K   | 100R | V0002  |             | 5K   | 5K   |
| V0074  |             | 5K   | 1K   | V0059  |             | 2K   | 2K   |
| V0075  | 5           | 2K   | 400R | V0004  | 1           | 1K   | 1K   |
| V0076  |             | 1K   | 200R | V0091  |             | 500R | 500R |
| V0077  |             | 500R | 100R | V0090  |             | 400R | 400R |
| V0246  |             | 10K  | 2K5  | V0089  |             | 200R | 200R |
| V0078  | 4           | 2K   | 500R | V0088  |             | 100R | 100R |
| V0079  |             | 400R | 100R |        |             |      |      |

**Note**

(1) Other values available upon request.

## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)