



KERSEMI

HIGH VOLTAGE POWER SCHOTTKY RECTIFIER

MBR30H100C

General Description

High voltage dual Schottky rectifier suited for switch mode power supplies and other power converters. This device is intended for use in medium voltage operation, and particularly, in high frequency circuits where low switching losses and low noise are required.

MBR30H100C is available in TO-220-3, TO-220-3 (2) and TO-220F-3 packages.

Features

- Low Forward Voltage: 0.67V @ 125°C
- High Surge Capacity
- 175°C Operating Junction Temperature
- 30A Total (15A Each Diode Leg)
- Guard-ring for Stress Protection
- Pb-free Package

Applications

- Power Supply Output Rectification
- Power Management
- Instrumentation

Main Product Characteristics

$I_F (AV)$	2×15A
V_{RRM}	100V
T_J	175°C
$V_F (max)$	0.67V

Mechanical Characteristics

- Case: Epoxy, Molded
- Epoxy Meets UL 94V-0 @ 0.125in.
- Weight (Approximately):
2Grams (TO-220-3, TO-220-3 (2) and TO-220F-3)
- Finish: All External Surfaces Corrosion Resistant and Terminal
- Leads are Readily Solderable
- Lead Temperature for Soldering Purposes:
260°C Maximum for 10 Seconds

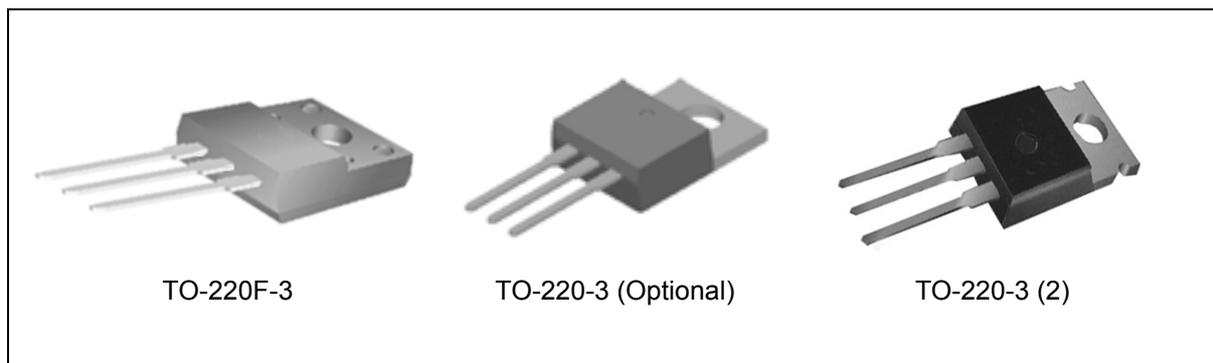


Figure 1. Package Types of MBR30H100C

Pin Configuration

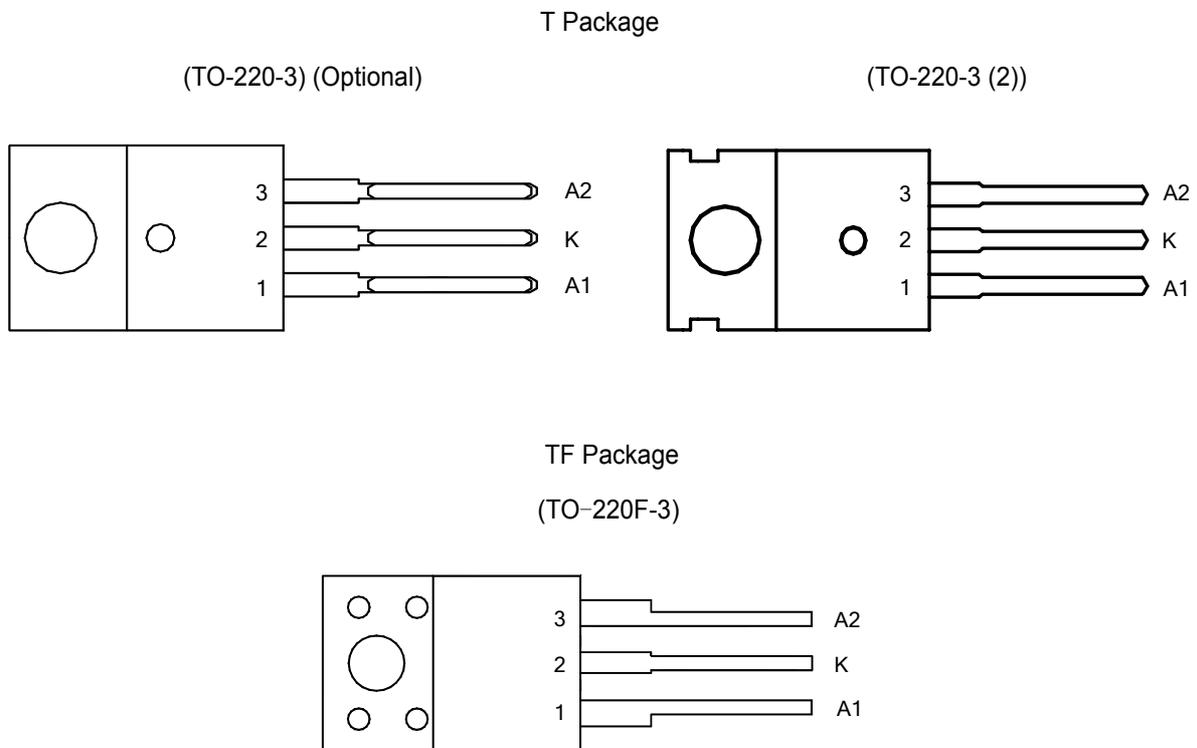


Figure 2. Pin Configuration of MBR30H100C (Front View)

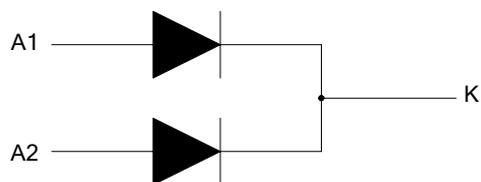


Figure 3. Internal Structure of MBR30H100C




KERSEMI

HIGH VOLTAGE POWER SCHOTTKY RECTIFIER

MBR30H100C

Ordering Information

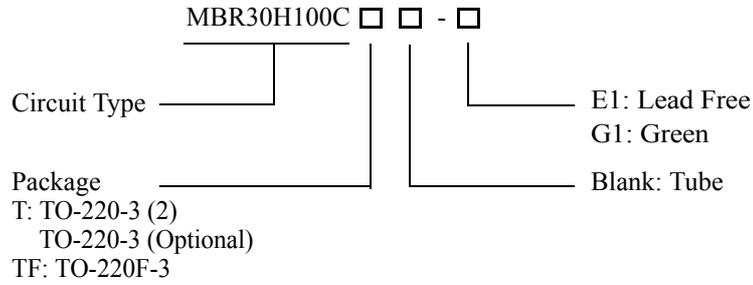

Package	Part Number		Marking ID		Packing Type
	Lead Free	Green	Lead Free	Green	
TO-220-3 (2)	MBR30H100CT-E1	MBR30H100CT-G1	MBR30H100CT-E1	MBR30H100CT-G1	Tube
TO-220F-3	MBR30H100CTF-E1	MBR30H100CTF-G1	MBR30H100CTF-E1	MBR30H100CTF-G1	Tube

Absolute Maximum Ratings (Each Diode Leg) (Note 1)

Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	100	V
Average Rectified Forward Current (Rated V_R) $T_C=162^{\circ}C$	$I_{F(AV)}$	15	A
Peak Repetitive Forward Current (Rated V_R , Square Wave, 20kHz) $T_C=150^{\circ}C$	I_{FRM}	30	A
Non Repetitive Peak Surge Current (Surge Applied at Rated Load Conditions Half Wave, Single Phase, 60Hz)	I_{FSM}	250	A
Operating Junction Temperature (Note 2)	T_J	175	$^{\circ}C$
Storage Temperature Range	T_{STG}	-65 to 175	$^{\circ}C$
Voltage Rate of Change (Rated V_R)	dv/dt	10000	V/ μs
ESD (Machine Model=C)		>400	V
ESD (Human Body Model=3B)		>8000	V

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Note 2: The heat generated must be less than the thermal conductivity from Junction to Ambient: $dP_D/dT_J < 1/\theta_{JA}$.

Thermal Characteristics

Parameter	Symbol	Condition	Value	Unit	
Maximum Thermal Resistance	θ_{JC}	Junction to Case	TO-220-3/ TO-220-3 (2)	2.0	$^{\circ}C/W$
			TO-220F-3	2.5	
	θ_{JA}	Junction to Ambient	TO-220-3/ TO-220-3 (2)	60	



KERSEMI

HIGH VOLTAGE POWER SCHOTTKY RECTIFIER

MBR30H100C

Electrical Characteristics (Each Diode Leg)

Parameter	Symbol	Condition	Value	Unit
Maximum Instantaneous Forward Voltage Drop (Note 3)	V_F	$I_F=15A, T_C=25^{\circ}C$	0.80	V
		$I_F=15A, T_C=125^{\circ}C$	0.67	
		$I_F=30A, T_C=25^{\circ}C$	0.93	
		$I_F=30A, T_C=125^{\circ}C$	0.80	
Maximum Instantaneous Reverse Current (Note 3)	I_R	Rated DC Voltage, $T_C=125^{\circ}C$	6.0	mA
		Rated DC Voltage, $T_C=25^{\circ}C$	0.0045	

Note 3: Pulse Test: Pulse Width=300 μ s, Duty Cycle \leq 2.0%.



KERSEMI

HIGH VOLTAGE POWER SCHOTTKY RECTIFIER

MBR30H100C

Typical Performance Characteristics

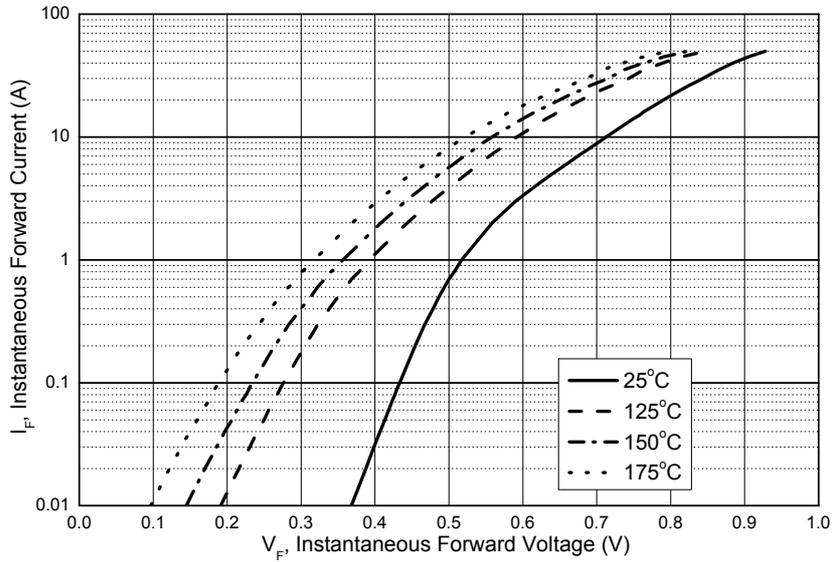


Figure 4. Typical Forward Voltage

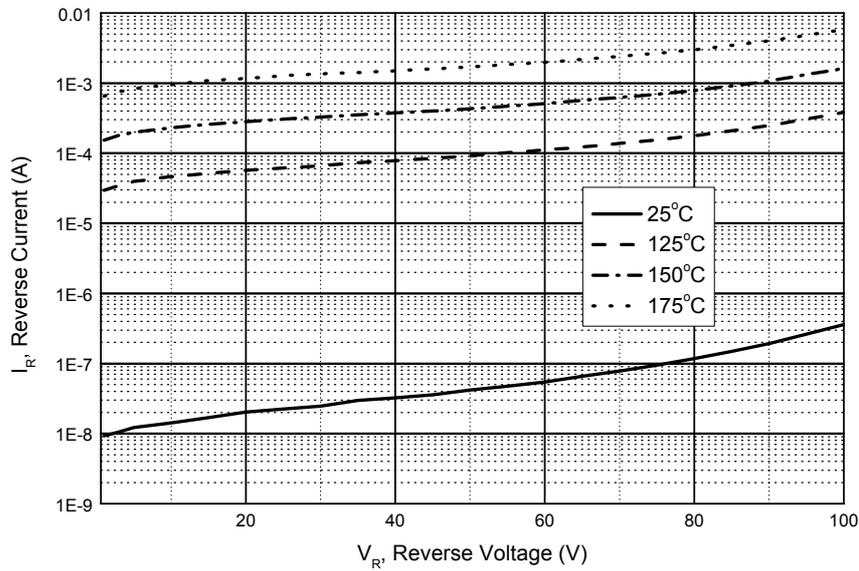


Figure 5. Typical Reverse Current

Typical Performance Characteristics (Continued)

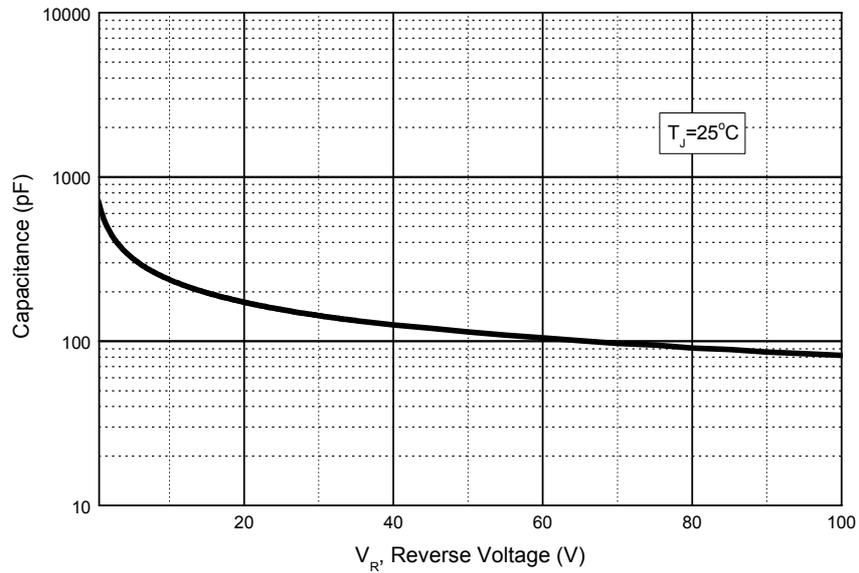


Figure 6. Capacitance vs. V_R , Reverse Voltage

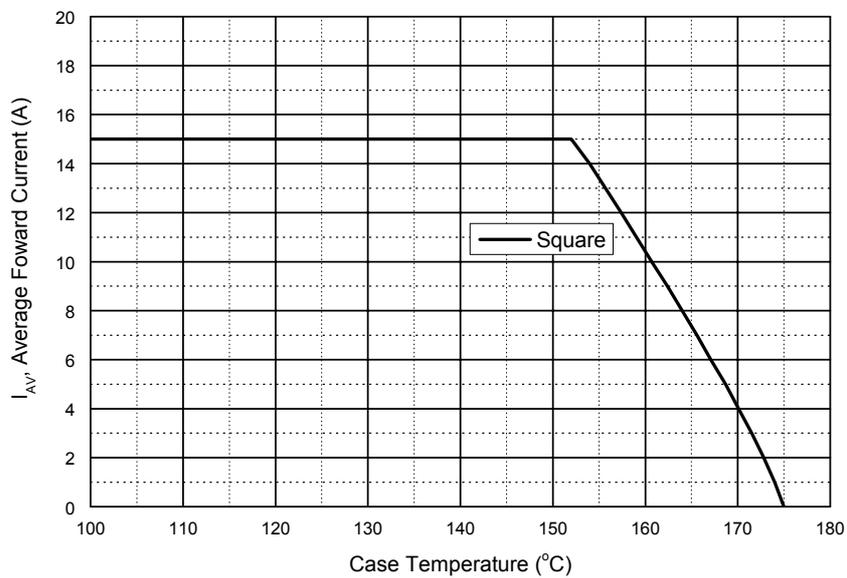


Figure 7. Average Forward Current vs. Case Temperature (Square, Each Diode)



KERSEMI


HIGH VOLTAGE POWER SCHOTTKY RECTIFIER

MBR30H100C

Mechanical Dimensions

TO-220-3
(Optional)

Unit: mm(inch)

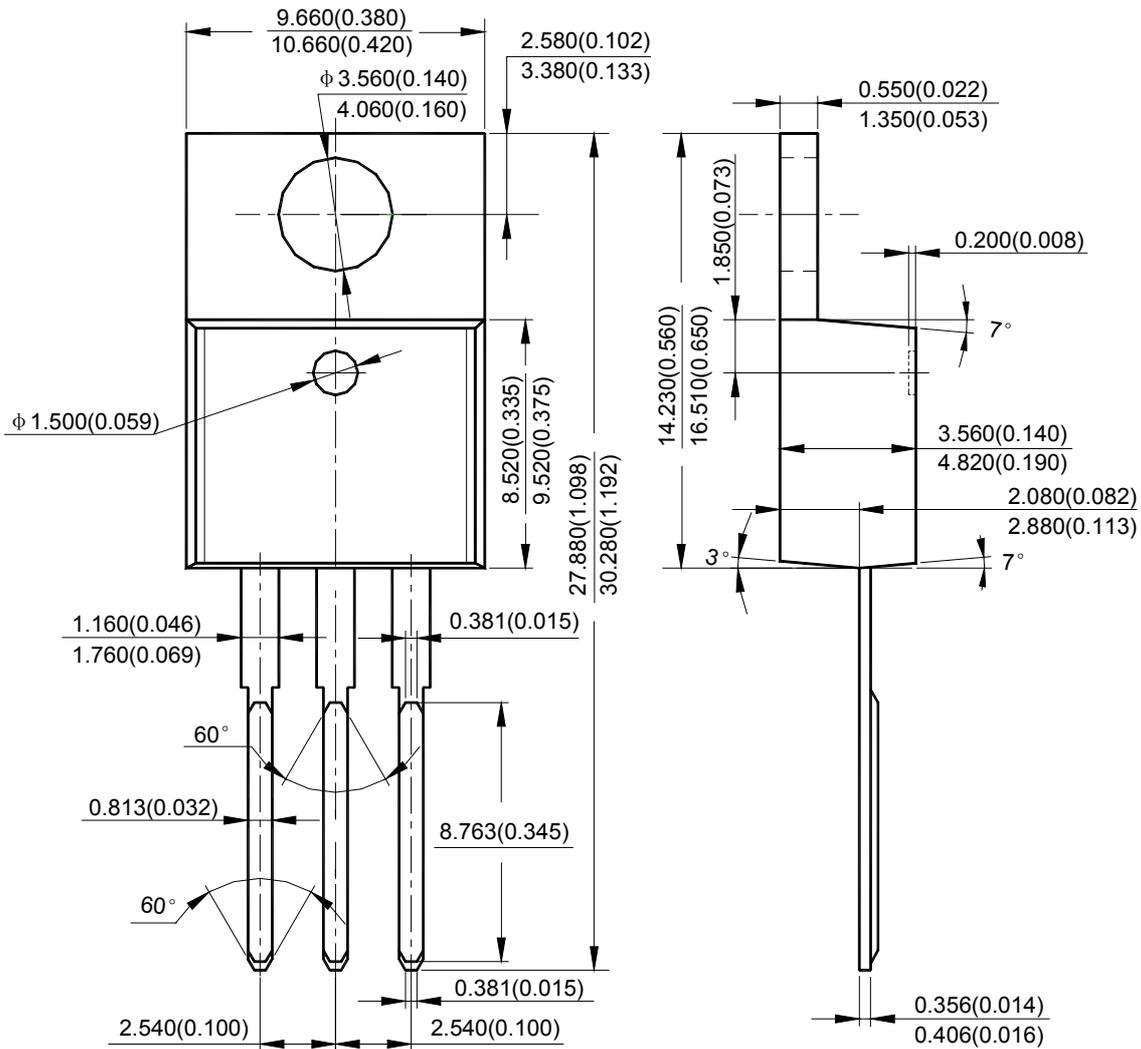



KERSEMI


HIGH VOLTAGE POWER SCHOTTKY RECTIFIER

MBR30H100C

Mechanical Dimensions (Continued)

TO-220F-3

Unit: mm(inch)

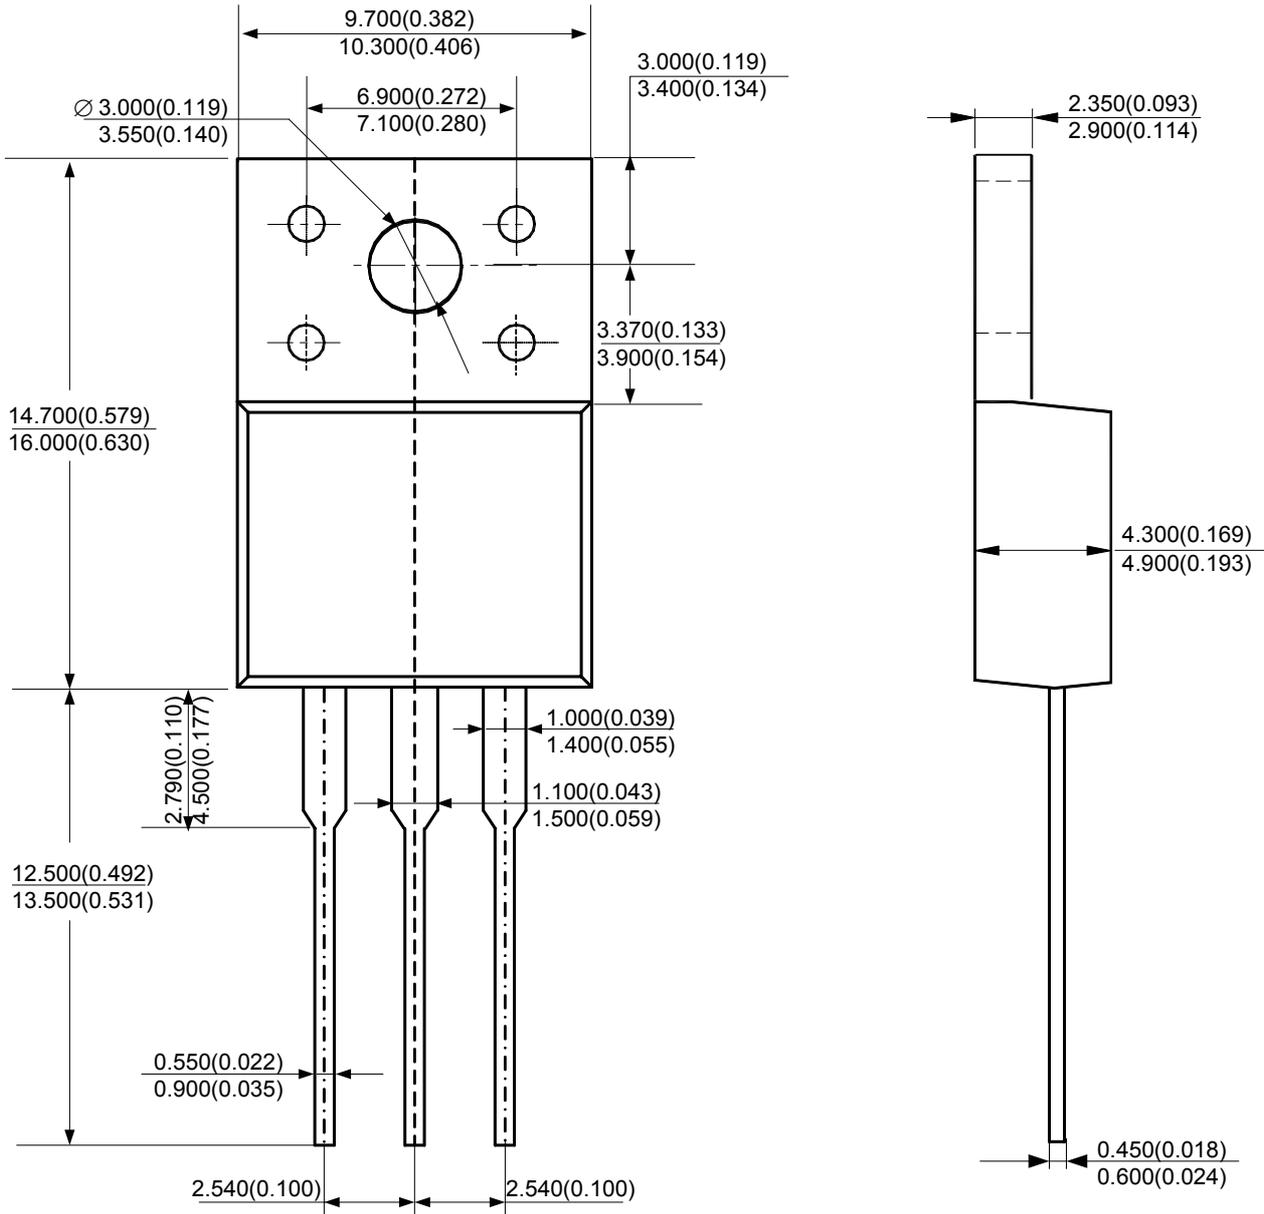

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru