

D2A


Ultra Subminiature Detection Switch

D
2
A

Ultra Subminiature Detection Switch with Slide Mechanism and Pushbutton Actuator

- Compact, light weight, and 3 mm long stroke.
- Built-in slide mechanism allows selection of shorting or non-shorting switching timing of the switch.

RoHS Compliant

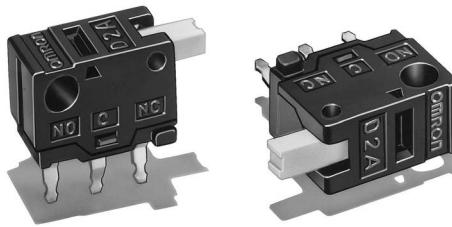


Model Number Legend

D2A-[1]1[2]0

1. **Switching timing**
1: Non-shorting Model
2: Shorting Model
2. **Maximum Operating Force (OF)**
1: 0.98 N {100 gf}
2: 0.49 N {50 gf}

Contact form

- SPDT



Contact specifications

Contact	Specification	Slide
	Material	Silver plated
Minimum applicable load (reference value) *		5 VDC 1mA

* Please refer to the "Using Micro Loads" in "Precautions" for more information on the minimum applicable load.

List of models

Operating Force (OF) Switching timing Actuator	0.98N (standard)		0.49N (low operating force)	
	Non-shorting Model	Shorting Model	Non-shorting Model	Shorting Model
Pin plunger	D2A-1110	D2A-2110	D2A-1120	D2A-2120

Ratings

Rated voltage	Resistive load
30 VDC	0.1 A

Note. The ratings values apply under the following test conditions.

- (1) Ambient temperature: 20±2°C
- (2) Ambient humidity: 65±5%
- (3) Operating frequency: 30 operations/min

Characteristics


Permissible operating speed	1 mm to 500 mm/s	
Permissible operating frequency	200 operations/min	
Mechanical	30 operations/min	
Electrical	100 MΩ min. (at 250 VDC with insulation tester)	
Insulation resistance	Between terminals of the same polarity	50 mΩ max.
Contact resistance (initial value)		250 VAC 50/60 Hz 1 min
Dielectric strength	Between current-carrying metal parts and ground	250 VAC 50/60 Hz 1 min
Vibration resistance *1	Malfunction	between 10 to 55 Hz, 1.5 mm-double amplitude
Shock resistance	Durability	1,000 m/s ² {approx. 100G} max.
	Malfunction *1	300 m/s ² {approx. 30G} max.
Durability *2	50,000 operations min. (30 operations/min)	
Degree of protection	IEC IP00	
Ambient operating temperature	-10°C to +80°C (at ambient humidity 60% max.) (with no icing or condensation)	
Ambient operating humidity	85% max. (for +5°C to +35°C)	
Weight	Approx. 0.3 g	

Note. The data given above are initial values.

*1. The values are at Free Position and Total Travel Position. Close or open circuit of contact is 1ms max.



*2. For testing conditions, consult your OMRON sales representative.

Mounting Holes (unit: mm)




Dimensions (unit: mm) and Operating Characteristics

D
2
A

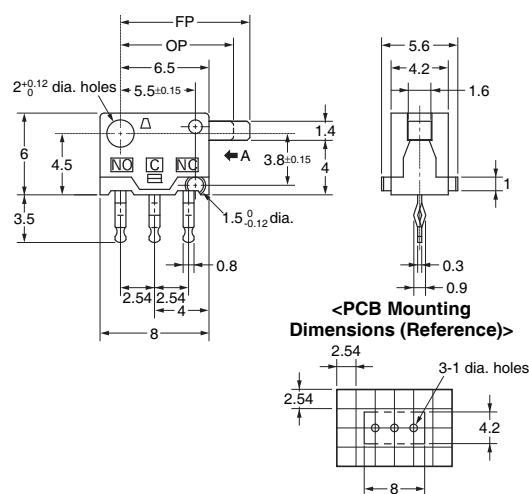D2A-1110, D2A-1120
D2A-2110, D2A-2120

Operating characteristics	Model	Non-Shorting Model		Shorting Model	
		D2A -1110	D2A -1120	D2A -2110	D2A -2120
Operating Force	OF	Max.	0.98 N {100 gf}	0.49 N {50 gf}	0.98 N {100 gf}
Releasing Force	RF	Min.	0.15 N {15 gf}	0.05 N {5 gf}	0.15 N {15 gf}
Free Position	FP	Max.	9.5 mm	9.5 mm	8.0±0.3 mm
Operating Position	OP1		8.1±0.3 mm	8.0±0.3 mm	7.4±0.3 mm
Total Travel Position	TPP		6.5±0.2 mm	6.5±0.2 mm	6.5±0.2 mm

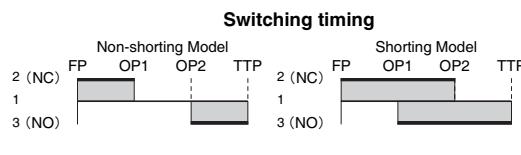

Note1. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

Note2. The operating characteristics are for operation in the A direction (→).

Precautions

★Please refer to "Common Precautions" for correct use.


Cautions

●Soldering

For soldering time, we recommend to solder within 3 seconds at a soldering iron temperature of less than 350°C. When soldering exceeds this temperature and time, or repeated soldering will degrade the Switch characteristics.

Make sure that flux and liquid surface of the solder do not flow over the edge of the board when soldering. Please complete soldering at a temperature of 260°C within 5 seconds.

It is also recommended that you apply flux guard to the mounting surface of the Switch.

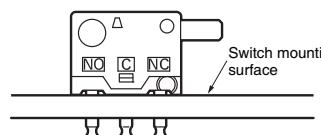


Correct Use

●Mounting

Use M2 mounting screw with plane washers or spring washers to mount the Switch. Tighten the screws to a torque of 4.9 to 9.8×10⁻²N·m (0.5 to 1kgf·cm).

●Application of Operation Force to the Actuator

Do not apply operation forces other than in the operating direction of the lever as shown in the following figure. It may damage the Switch or cause malfunction.

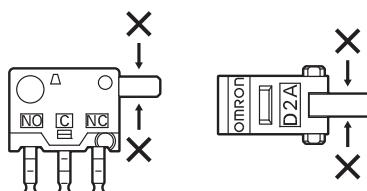


●Mounting Plate

Use materials other than ABS or polycarbonate for the mounting plate. Since grease is used for the Switch, cracks may occur if grease from the Switch comes in contact with such materials.

●Using Micro Loads

It is recommended to use the Switch in the operation range shown below. However, even when using micro load models within the following operating range, if inrush current occurs when the contact is opened or closed, it may increase the contact wear and so decrease durability. Therefore, insert a contact protection circuit where necessary. The minimum applicable load is the N-level reference value. This value indicates the malfunction reference level for the reliability level of 60% (λ_{60}). (JIS C5003)

The equation, $\lambda_{60}=0.5\times10^{-6}/\text{operation}$, indicates that the estimated malfunction rate is less than $\frac{1}{2,000,000}$ operations with a reliability level of 60%.

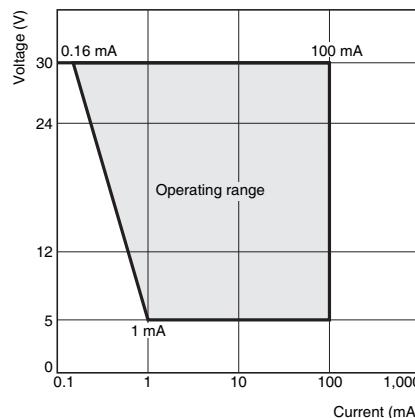

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: www.omron.com/ecb

Cat. No. B116-E1-02
0812(0207)(O)

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru