



15 Watt Interchangeable Plug Series



Features

- Double Insulated
- Class B EMI
- Level VI Efficiency Compliant
- Limited Power Source (LPS)

Applications

- Wireless Communications
- Network Equipment
- Peripherals
- Gaming

Safety Approvals

- UL/cUL 60950-1
- UL/cUL 62368-1
- AS/NZ 60950-1
- IEC60950-1
- IEC62368-1
- CE

Mechanical Characteristics

- Length: 71.7mm (2.82in)
- Width: 50mm (1.97in)
- Height: 33.2mm (1.31in)
- Weight: 115g (4.06oz)

Output Specifications

Model	DC Output Voltage	Load		Ripple1 P-P (max.)
		Min.	Max.	
PSC15R-050-R	5V	0A	3.000A	100mV
PSC15R-060-R	5.9V	0A	2.500A	100mV
PSC15R-075-R	7.5V	0A	2.000A	100mV
PSC15R-090-R	9V	0A	1.67A	120mV
PSA15R-120P6-R	12V	0A	1.250A	100mV
PSA15R-150P6-R	15V	0A	1.000A	100mV
PSA15R-240P6-R	24V	0A	0.65A	200mV
PSA15R-480P6-R	48V	0A	0.313A	400mV

Notes:

1. Ripple measured by using a 12-inch twisted pair terminated with 10uF capacitor and 0.1uF ceramic in parallel with oscilloscope set to 20Mhz measured after a warm-up of 10minutes.

INPUT:**Input Voltage Rating**

100 to 240VAC

AC Input Voltage Range

90 to 264VAC

AC Input Current

0.5A (RMS), 120VAC at maximum load
 0.25A (RMS), 240VAC at maximum load

AC Input Frequency

47 to 63Hz

In-rush Current

<40A for 120VAC at maximum load
 <60A for 240VAC at maximum load
 (cold start at ambient 25°C)

Leakage Current

0.25mA maximum

Input Power Saving

100mW max @ 230V

OUTPUT**Output Power**

15W

Efficiency²

US DoE Level VI; EU CoC Ver5 Tier1
 ErP 2009/125/EC (EU 2019/1782)

Hold up time

8mS minimum at maximum load, 120VAC

ENVIRONMENTAL:**Temperature**

Operation	0°C to +40°C
Non-operation	-40°C to +85°C
Humidity	20 to 90%

EMI

Complies with FCC class B
 Complies with EN55032 Class B

Immunity

EN61000-4-2
 EN61000-4-3
 EN61000-4-4
 EN61000-4-5 Level 3
 EN61000-4-6
 EN61000-4-11

Isolation (HI-POT test)

Input to Output: 3000VAC for 1 minute, 10mA

Insulation Resistance

Input to Output: 500VDC 500M Ohm minimum

FEATURES:**Over Current Protection**

>2A Short Circuit Auto-restart

Short Circuit Protection

Output can be shorted without damage

Over Voltage Protection

<13V

Dielectric Withstand (Hi-pot) Test

Pri. to Sec.: 3000V AC for 1 min., 10mA

DC Cord

1500mm (18~24AWG)

DC Output Connector (Tuning Fork Type)

5.5mm x 2.1mm x 10mm Center Positive

Interchangeable AC Clips

(Sold Separately)


RPA – US
 RPB – Brazil
 RPC – China
 RPE – Europe
 RPH – Korea
 RPI – India
 RPK – UK
 RPN – Argentina
 RPS – Australia
 RPX – IEC320 C8

Notes:

1. The characteristics defined are at ambient temperature of 25°C unless otherwise specified
2. Efficiency is measured after 30 minutes burn-in

PSX15R

Dimension Diagram Unit: mm

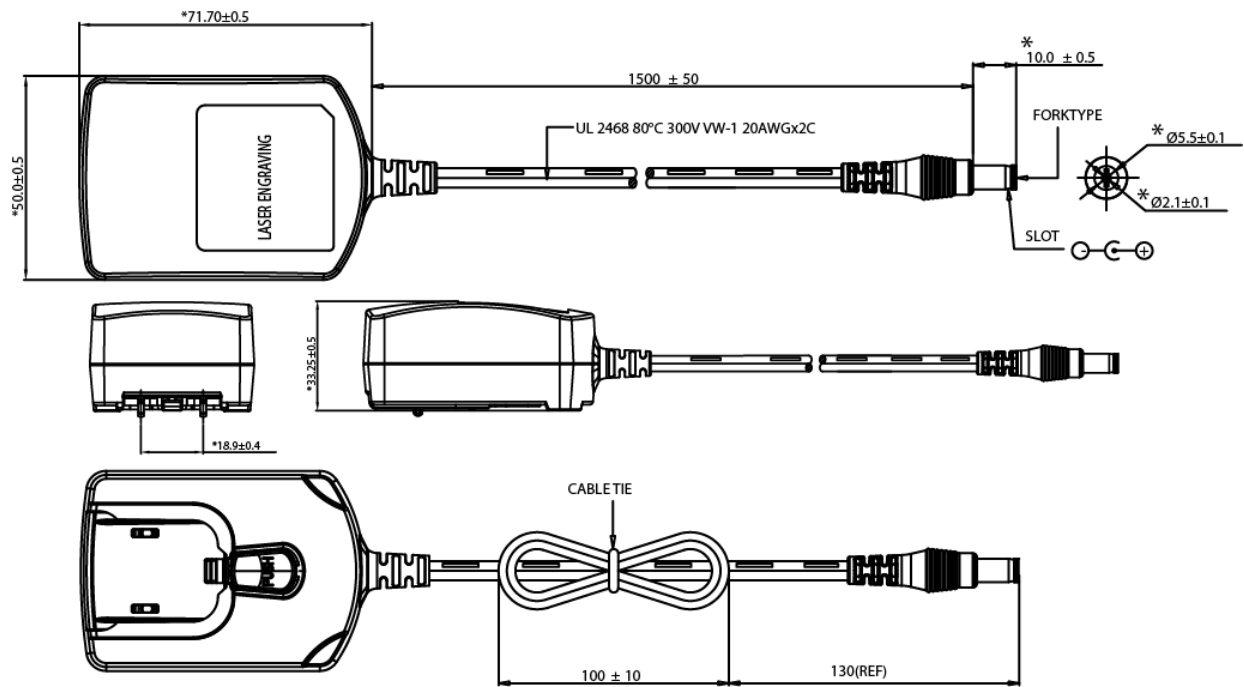

**Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information**

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

NOTE: This model has/The models in this product series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru