

## OCVU Series

### Features

- 125°C, 1,000 ~ 2,000 hours assured
- Ultra low ESR, solid capacitors of SMD type
- RoHS Compliance




Marking color: Blue

### Specifications

Items	Performance										
Category Temperature Range	-55°C ~ +125°C										
Capacitance Tolerance	±20% (at 120Hz, 20°C)										
Leakage Current (at 20°C)*	Rated voltage applied, after 2 minutes at 20°C. See Standard Ratings										
Tanδ (at 120Hz, 20°C)	See Standard Ratings										
ESR (at 100k ~ 300k Hz, 20°C)	See Standard Ratings										
Endurance	<table border="1"> <tr> <td>Test Time</td> <td>1,000 Hrs for 2.5 ~ 4V; 2,000 Hrs for 6.3 ~ 16V</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>ESR</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table>	Test Time	1,000 Hrs for 2.5 ~ 4V; 2,000 Hrs for 6.3 ~ 16V	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 200% of specified value	ESR	Less than 200% of specified value	Leakage Current	Within specified value
	Test Time	1,000 Hrs for 2.5 ~ 4V; 2,000 Hrs for 6.3 ~ 16V									
	Capacitance Change	Within ±20% of initial value									
	Tanδ	Less than 200% of specified value									
	ESR	Less than 200% of specified value									
Leakage Current	Within specified value										
* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for specified hours at 125°C.											
Moisture Resistance	<table border="1"> <tr> <td>Test Time</td> <td>1,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>ESR</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table>	Test Time	1,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 150% of specified value	ESR	Less than 150% of specified value	Leakage Current	Within specified value
	Test Time	1,000 Hrs									
	Capacitance Change	Within ±20% of initial value									
	Tanδ	Less than 150% of specified value									
	ESR	Less than 150% of specified value									
Leakage Current	Within specified value										
* The above specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them at 60°C, 90 to 95% RH for 1,000 hours. Leakage current should be tested after voltage treatment*.											
Resistance to Soldering Heat * (Please refer to page 25 for reflow soldering conditions)	<table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±10% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Within specified value</td> </tr> <tr> <td>ESR</td> <td>Within specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table>	Capacitance Change	Within ±10% of initial value	Tanδ	Within specified value	ESR	Within specified value	Leakage Current	Within specified value		
	Capacitance Change	Within ±10% of initial value									
	Tanδ	Within specified value									
	ESR	Within specified value									
Leakage Current	Within specified value										
* For any doubt about measured values, measure the leakage current again after the following voltage treatment. Voltage treatment: DC rated voltage is applied to the capacitors for 2 hours at 105°C.											
Ripple Current and Frequency Multipliers	<table border="1"> <tr> <th>Frequency (Hz)</th> <th>120 ≤ f &lt; 1k</th> <th>1k ≤ f &lt; 10k</th> <th>10k ≤ f &lt; 100k</th> <th>100k ≤ f &lt; 500k</th> </tr> <tr> <td>Multiplier</td> <td>0.05</td> <td>0.3</td> <td>0.7</td> <td>1.0</td> </tr> </table>	Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k	Multiplier	0.05	0.3	0.7	1.0
	Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k						
Multiplier	0.05	0.3	0.7	1.0							

\* For any doubt about measured values, measure the leakage current again after the following voltage treatment.  
Voltage treatment: DC rated voltage is applied to the capacitors for 2 hours at 105°C.


### Diagram of Dimensions

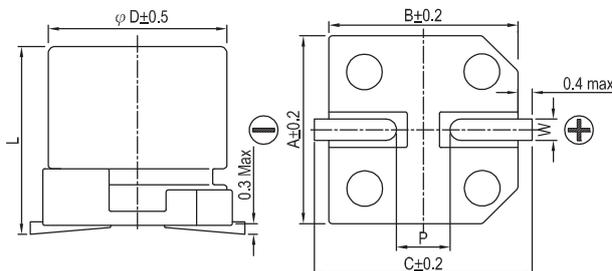

### Lead Spacing and Diameter

φ D	L	A	B	C	W	P ± 0.2
8	12.0 ± 0.5	8.4	8.4	9.0	0.7 ~ 1.1	3.1
10	9.9 + 0.1/-0.3	10.4	10.4	11.0	0.7 ~ 1.3	4.7
10	12.6 + 0.1/-0.4	10.4	10.4	11.0	0.7 ~ 1.3	4.7

### Marking

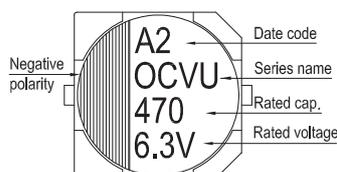

Dimension:  $\phi$  D×L(mm)  
Ripple Current: mA/rms at 100k Hz

Standard Ratings

W. V. (V)	Surge Voltage (V)	Capacitance (μF)	Size $\phi$ D×L(mm)	Tanδ (120Hz, 20°C)	L C (μA)	ESR (mΩ/at 100k ~ 300k Hz, 20°C Max)	Rated R. C. (mA/rms at 100k Hz)	
							T ≤ 105°C	105°C < T ≤ 125°C
2.5V (0E)	2.9	680	8 × 12	0.18	340	13	4,520	1,430
		1,000	10 × 9.9	0.18	500	13	5,200	1,645
		1,500	10 × 12.6	0.18	750	13	5,440	1,721
4V (0G)	4.6	560	8 × 12	0.18	448	13	4,520	1,430
		820	10 × 9.9	0.18	656	13	5,200	1,645
		1,200	10 × 12.6	0.18	960	12	5,440	1,721
6.3V (0J)	7.2	470	8 × 12	0.15	592	15	4,210	1,332
		560	10 × 9.9	0.15	706	16	4,700	1,487
		820	10 × 12.6	0.15	1,033	12	5,440	1,721
10V (1A)	12.0	330	8 × 12	0.15	660	17	3,950	1,250
		470	10 × 9.9	0.15	940	18	4,400	1,392
		560	10 × 12.6	0.15	1,120	13	5,230	1,655
16V (1C)	18.0	180	8 × 12	0.15	576	20	3,640	1,151
		220	10 × 9.9	0.15	704	20	4,200	1,330
		330	10 × 12.6	0.15	1,056	16	4,720	1,493

OP-CAP

Part Numbering System

OCVU Series	470μF	±20%	6.3V	Carrier Tape		8 $\phi$ × 12L	Pb-free and PET coating case
<b>OVU</b>	<b>471</b>	<b>M</b>	<b>0J</b>	<b>IR</b>	<b>-</b>	<b>0812</b>	
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case size	Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 15.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)