



VSC8224

VITESSE

Quad Port 10/100/1000BASE-T and 1000BASE-X PHY with RGMII and RTBI MAC Interfaces



Copper + Optical Media (RGMII to SerDes)

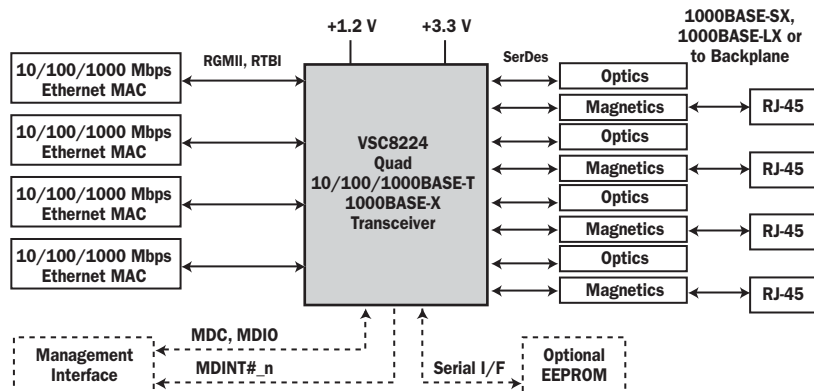

FEATURES:

- ▶ Lowest Power Consumption in the Industry at Less Than 640m W/port (1000BASE-T mode)
- ▶ Patented, Low EMI Line Driver with Integrated Line Side Termination Resistors
- ▶ Supports RGMII v1.3 (2.5V & 3.3V) & v2.0 (1.5V HSTL)
- ▶ User-programmable RGMII Timing Compensation
- ▶ High Performance 1.25 Gbps SerDes
- ▶ Auto-media Sense Detects and Configures to Support Fiber or Copper Media on a Per Port Basis
- ▶ User-configurable Copper or Fiber Link Selection Preference with Programmable Interrupt and Signal Detect I/O Pins on Each Port
- ▶ Compliant with IEEE 802.3 (10BASE-T, 100BASE-TX, 1000BASE-T, 1000BASE-X) Specifications
- ▶ >10kB Jumbo Frame Support with Programmable Synchronization FIFOs
- ▶ Five Direct Drive LEDs with On-chip Filtering
- ▶ Serial LED Interface Option
- ▶ VeriPHY™ Cable Diagnostics Software Suite
- ▶ Full Suite of BIST, MAC, and Far-end Loopback Modes

BENEFITS:

- ▶ Eliminates Heatsinks and Fans for Gigabit to the Desktop LAN Switches
- ▶ Removes 576 Passive Components in 48-port Switch Applications
- ▶ Compatible with a Wide Variety of Parallel I/F Switch ICs
- ▶ Simplifies PCB Layout; Eliminates PCB Trombones
- ▶ Supports CAT-5, Fiber Optic, and Backplane Interfaces from a Single Device
- ▶ Single Chip Solution for Flexible Media Support
- ▶ Ensures Plug-n-play Link Configuration when Connected to Any Copper, Fiber, or Backplane Link Partner
- ▶ Ensures Seamless Deployment Throughout Copper and Optical Networks with Industry's Highest Tolerance to Noise and Substandard Cable Plants
- ▶ Provides for Maximum Jumbo Frame Sizes in Custom SAN and LAN Systems
- ▶ Eliminates External Components and EMI Issues
- ▶ Provides Maximum System Design Flexibility
- ▶ Enables Network Manufacturers to Simplify Deployment and Improve Network Management Capabilities of Gigabit Ethernet Links
- ▶ Simplifies Comprehensive In-system Test to Ensure the Highest Product Quality

APPLICATIONS:

- ▶ High Density 10/100/1000BASE-T and 1000BASE-X LAN & MAN Switches and Routers
- ▶ Workgroup LAN Switches and Routers
- ▶ PICMG 2.16 and 3.0 Backplane Applications
- ▶ Gigabit Ethernet-based SAN, NAS, and MAN Systems
- ▶ High Performance Workstations and Multi-Port Server NICs
- ▶ Multi-Port Fiber to Copper Media Converters

GENERAL DESCRIPTION:




The VSC8224 is the industry's smallest, lowest power quad port Gigabit Ethernet transceiver and is ideal for multi-port switch and router applications. In 1000BASE-T mode, the VSC8224's power consumption is 30% lower than the next best competitor. In RGMII-to-SerDes applications, its best-in-class power consumption of 145mW per port is more than 40% lower than that of competitors. The device's compact 19mm x 19mm BGA package makes it ideal for high-density switch applications. Vitesse's mixed signal and DSP architecture yields robust performance, supporting both full and half duplex 10BASE-T, 100BASE-TX, and 1000BASE-T over >140m of Category 5, unshielded twisted pair (UTP) cable, with industry leading tolerance to NEXT, FEXT, Echo, and system noise.

SPECIFICATIONS:

PARAMETER	TYP	UNIT	COMMENTS
P_D	<640	mW	Steady state power consumption per port (1000BASE-T)
Serial Data Rate	1.25	Gbps	SerDes interface data rate
VDD I/O	3.3, 2.5, 1.5	V	I/O power supply voltage options
VDDA	3.3	V	Analog supply voltage
VDDDIG	1.2	V	Core power supply voltage
F_{TOL} (REFERENCE)	25	MHz	Crystal parallel resonant frequency (+/- 100ppm tolerance)

BLOCK DIAGRAM:

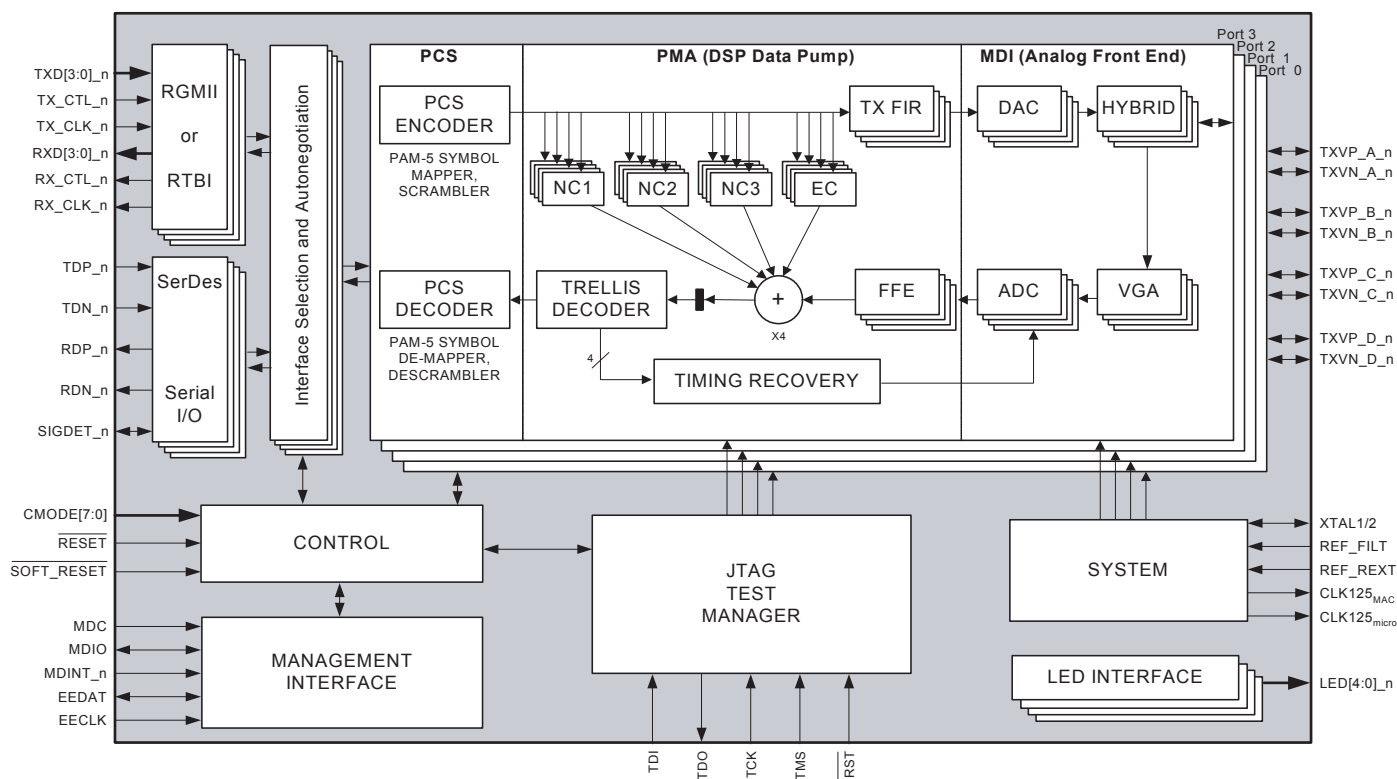

For more information on Vitesse Products visit the Vitesse web site at www.vitesse.com or contact Vitesse Sales at (800) VITESSE or sales@vitesse.com

Vitesse, ASIC-Friendly, FibreTimer, TimeStream and Snoop Loop are trademarks of Vitesse Semiconductor Corporation. All other trademarks or registered trademarks mentioned herein are the property of their respective holders. Vitesse Semiconductor Corporation ("Vitesse") retains the right to make changes to its products or specifications to improve performance, reliability or manufacturability. All information in this document, including descriptions of features, functions, performance, technical specifications and availability, is subject to change without notice at any time.

741 Calle Plano
Camarillo, CA 93012, USA
Tel: +1 805.388.3700
Fax: +1 805.987.5896
www.vitesse.com

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru