



PRODUCT NO.	CABLES
62435-001	RG196A/U
-001LF	RG178B/U
	0.8DS-PBE
62435-101	RG196A/U
-101LF	RG178B/U
	0.8DS-PBE



① INNER CONTACT

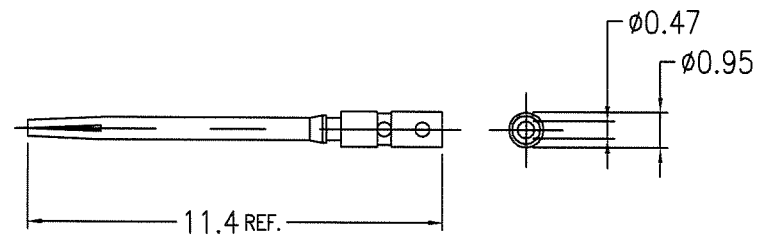

② BODY

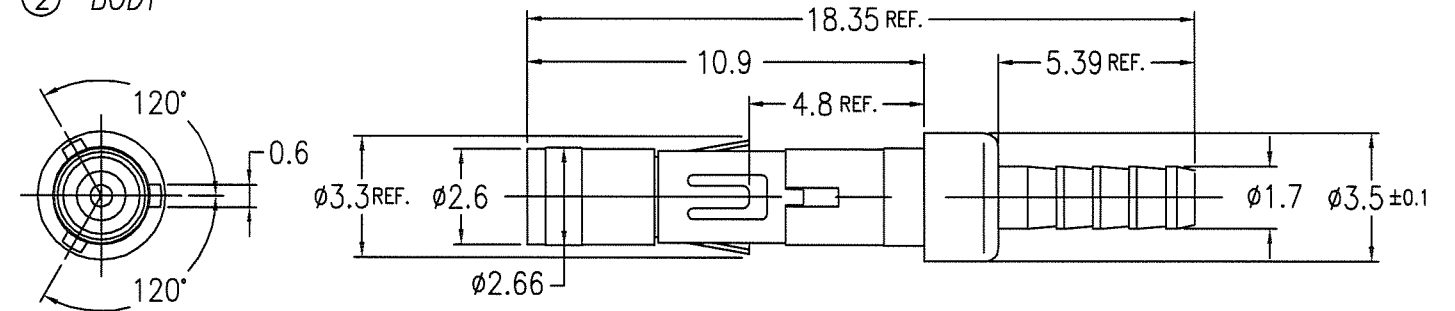

③ CRIMP SLEEVE

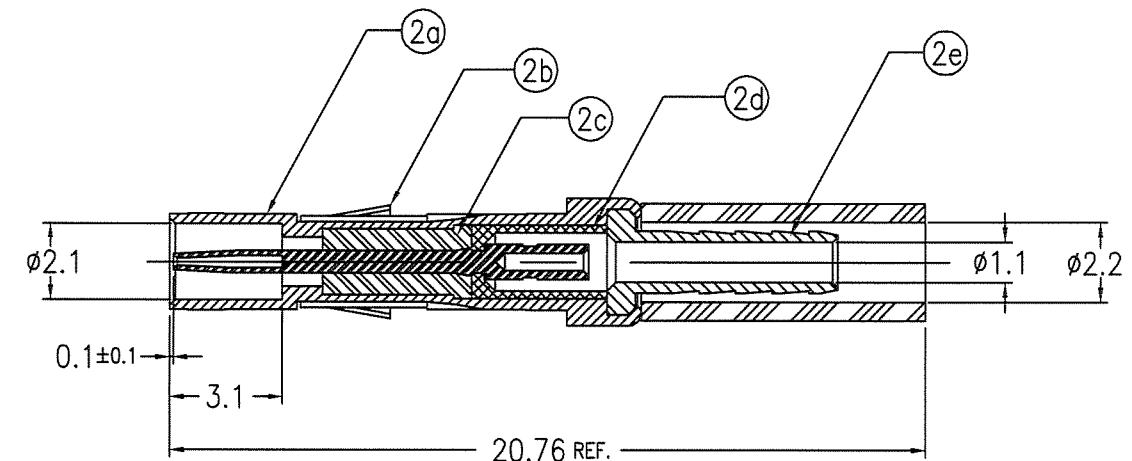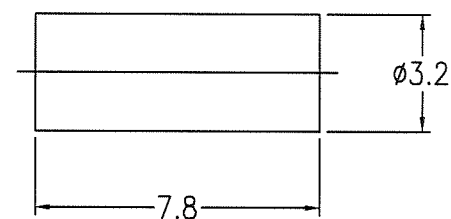


AFTER ASSY

NOTES


- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -001) Au 0.8um MIN. (FOR -101)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -001) Au 0.8um MIN. (FOR -101)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -001) Ni 1.27um MIN. (FOR -101)


mat'l. code ---					surface ISO 1302 ✓			tolerance ISO 406 ISO 1101		projection 	product family METRAL					CODE JP	
ltr	description	ecn no	dr	date	tolerances unless otherwise specified							title METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE					
D	REVISED	J00331	Y.K	5/10/'00	angles linear			O.X	±0.2	scale 5:1		dwg no sheet 1 of 8 size A3					
E	REVISED	J00951	Y.K	12/12/'00				O.XX	±0.2								
F	REVISED	J10393	Y.K	7/6/'01		0°±3'		O.XXX	±0.2								
G	REVISED	J20204	Y.K	4/10/'02	dr	Y.KODAIRA		1/28/'99			Customer Drawing						
H	REVISED	J03-0172	Y.K	4/10/'03	engr	S.OKUDAIRA		1/22/'07									
J	REVISED	J05-0670	T.S	10/21/'05	chr	R. Shoji		4/22/'07									
K	REVISED	J07-0039	S.O	1/22/'07	appd	S. Okudaira		1/22/'07									
sheet	revision	K	F	E	E	D	C	C	C								Rev. K
index	sheet	1	2	3	4	5	6	7	8								

PRODUCT NO.	CABLES
62435-002	RG188A/U RG316/U
-002LF	
62435-102	RG188A/U RG316/U
-102LF	



① INNER CONTACT

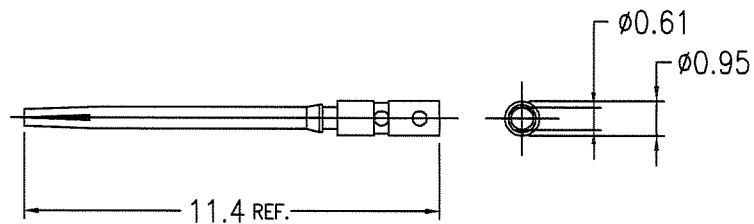

② BODY

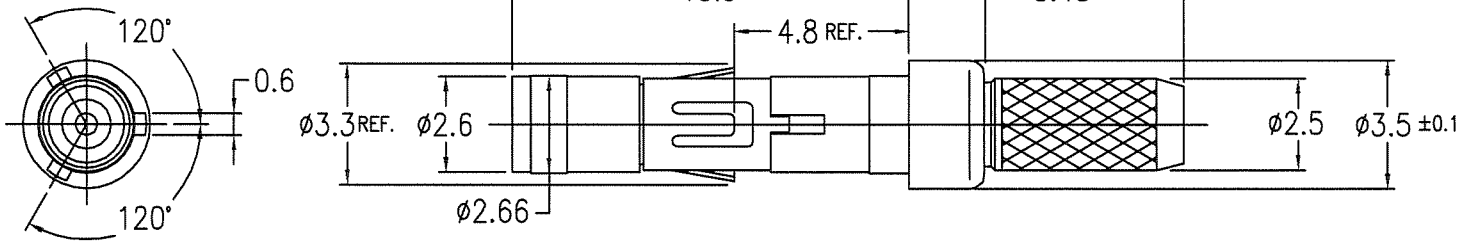

③ CRIMP SLEEVE

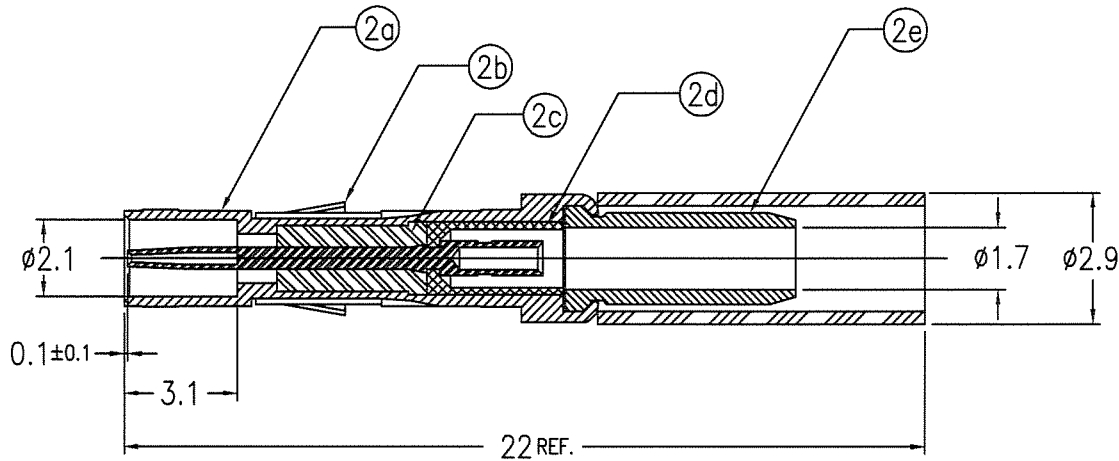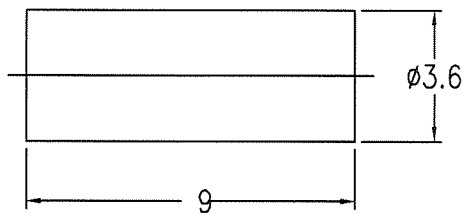




NOTES

- 1.PULL OUT FOR OF CENTER CONTACT MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430 USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

No.	DESCRIPTION	MATERIAL	
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -002) Au 0.8um MIN. (FOR -102)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -002) Au 0.8um MIN. (FOR -102)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -002) Ni 1.27um MIN. (FOR -102)

mat'l. code ---					surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection MM	product family METRAL	CODE JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified		MM	scale 5:1	title METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE
A	REVISED	J90110	Y.K	3/31/'99	angles	linear			
B	REVISED	J00062	Y.K	1/21/'00	0°±3'				
C	REVISED	J00331	Y.K	5/10/'00					
D	REVISED	J20204	Y.K	4/10/'02	dr	Y.KODAIRA	3/31/'99		
E	REVISED	J05-0670	T.S	10/21/'05	enr	S.OKUDAIRA	1/22/'07		
F	REVISED	J07-0039	S.O	1/22/'07	chr	R. Shoyi	1/22/'07		
					appd	J. Okada	1/22/'07		
sheet index	revision sheet								Rev. F

PRODUCT NO.	CABLES CABLES
62435-003	DOUBLE SHIELDED TYPE M17/152-0001(HARBOUR INDUSTRIES)
-003LF	
62435-103	DOUBLE SHIELDED TYPE M17/152-0001(HARBOUR INDUSTRIES)
-103LF	

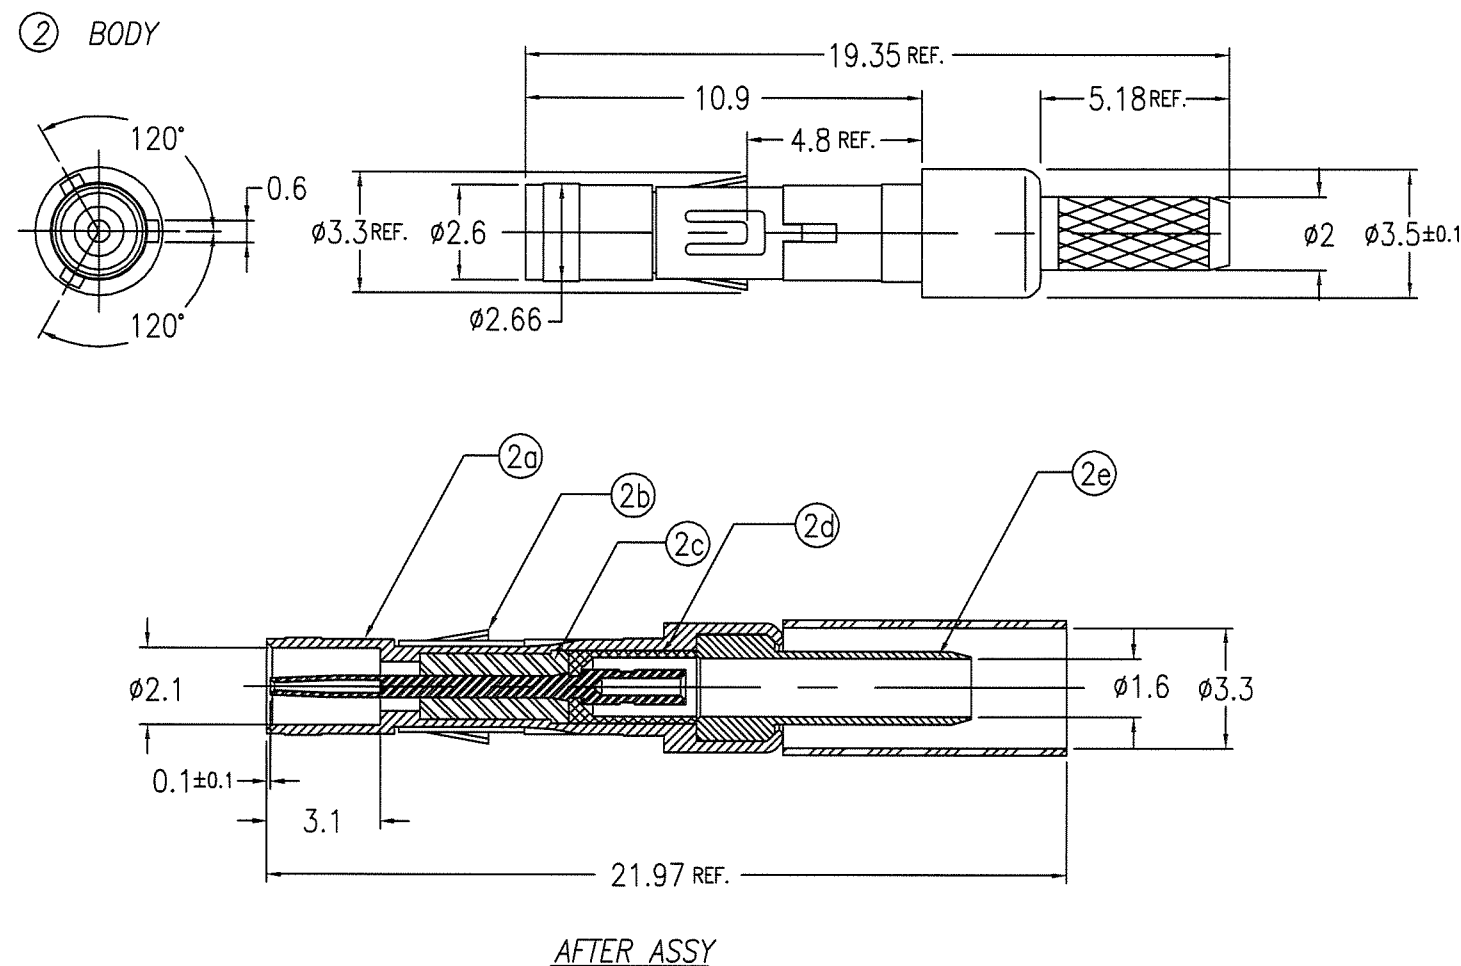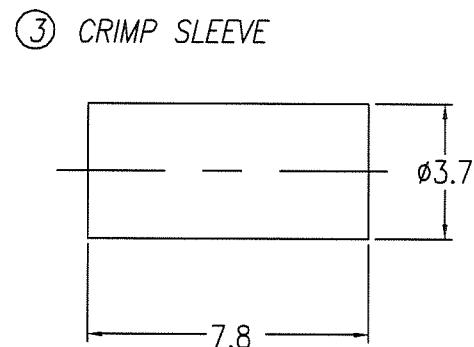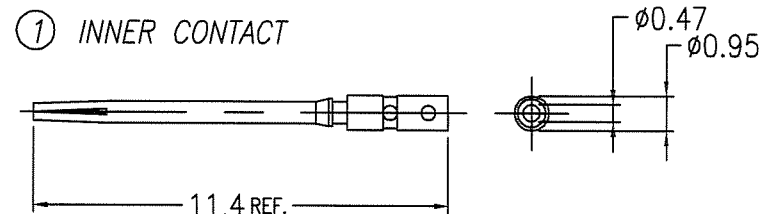

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -003) Au 0.8um MIN. (FOR -103)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -003) Au 0.8um MIN. (FOR -103)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -003) Ni 1.27um MIN. (FOR -103)


NOTES

- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.


mat'l. code					surface		tolerance		projection		product family				CODE	
---					ISO 1302 ✓		ISO 406 ISO 1101				METRAL				JP	
ltr	description	ecn no	dr	date	tolerances unless otherwise specified				 MM scale 5:1		title METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE					
A	RELEASED	J90036	Y.K	1/28/'99	angles	linear	0.X	±0.2								
B	REVISED	J00062	Y.K	1/21/'00			0.XX	±0.2								
C	REVISED	J00331	Y.K	5/10/'00			0°±3'	0.XXX								
D	REVISED	J05-0670	T.S	10/21/'05	dr	Y.KODAIRA		1/28/'99				dwg no		sheet 3 of		size
E	REVISED	J07-0039	S.O	1/22/'07	engr	S.OKUDAIRA		1/22/'07				62435				A3
					chr	R. Shown		1/22/'07								
					appd	S. Okudaira		1/22/'07								
sheet index		revision sheet														Rev. F

PRODUCT NO.	CABLES
62435-004	1.5C-XV (SUMITOMO)
-004LF	1.5C-QEV.CW (FUJIKURA)
62435-104	1.5C-XV (SUMITOMO)
-104LF	1.5C-QEV.CW (FUJIKURA)



① INNER CONTACT

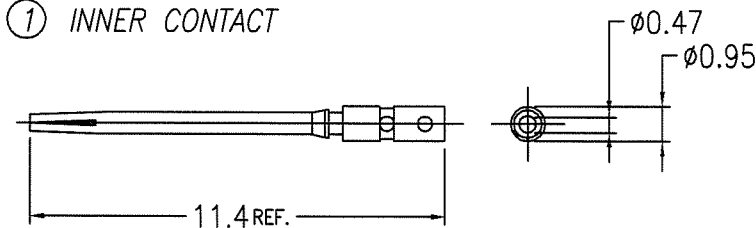

② BODY

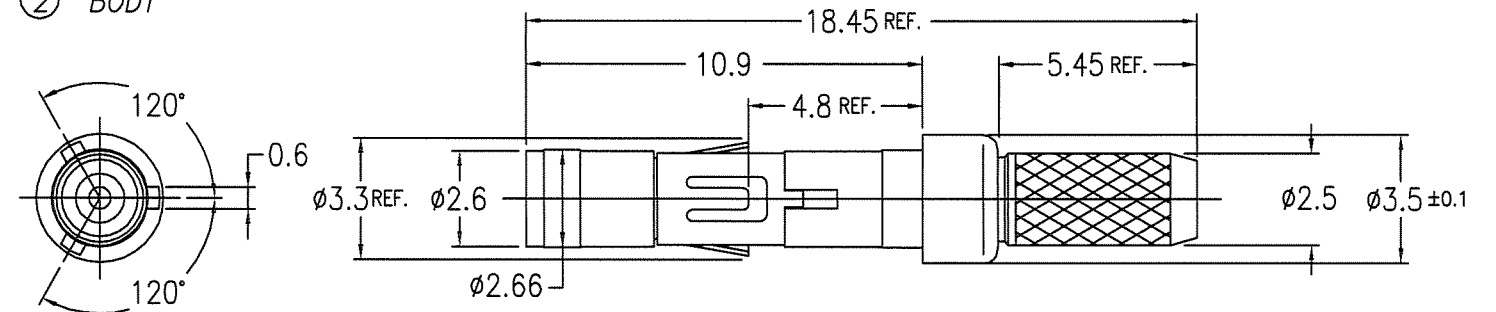

③ CRIMP SLEEVE

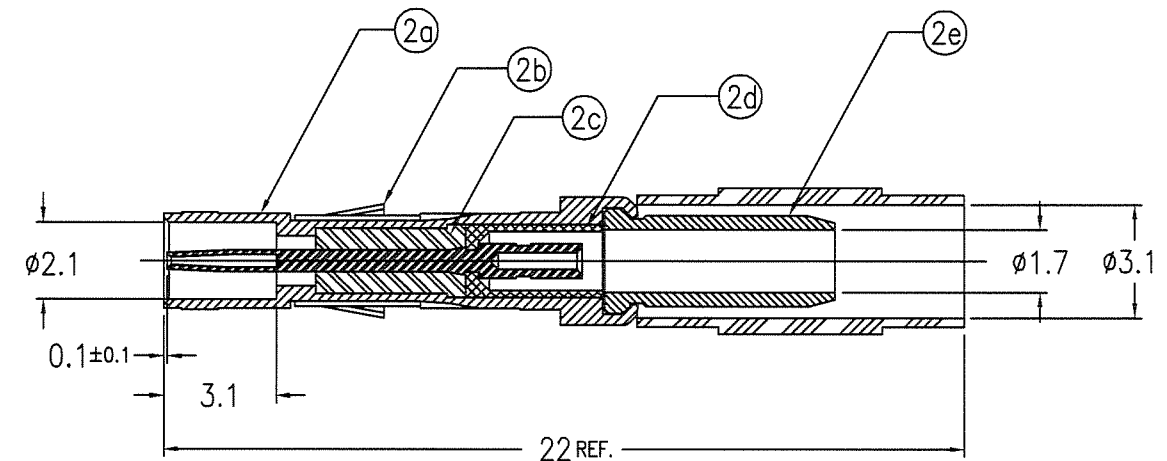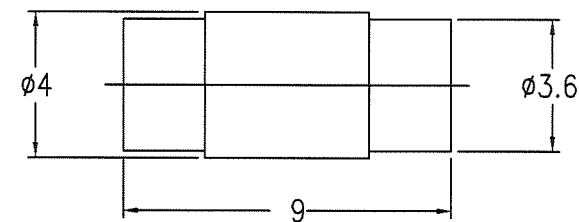

AFTER ASSY

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -004) Au 0.8um MIN. (FOR -104)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -004) Au 0.8um MIN. (FOR -104)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -004) Ni 1.27um MIN. (FOR -104)


NOTES

- PULL OUT FOR OF CENTER CONTACT MUST BE 0.2N MIN. / 0.8N MAX.
- ASSEMBLE PRODUCT WITH TOOL HT430 USE INSERTS EPL 193460-001
- FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.


mat'l. code					surface		tolerance		projection		product family		CODE												
---					ISO 1302		ISO 406 ISO 1101				METRAL		JP												
ltr		description		ecn no		dr		date		tolerances unless otherwise specified		title													
A		RELEASED		J90036		Y.K		1/28/'99		angles		METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE													
B		REVISED		J00062		Y.K		1/21/'00		linear															
C		REVISED		J00331		Y.K		5/10/'00		0°±3'															
D		REVISED		J05-0670		T.S		10/21/'05		dr		Y.KODAIRA		1/28/'99		MM		scale 5:1							
E		REVISED		J07-0039		S.O		1/22/'07		enrg		S.OKUDAIRA		1/22/'07											
										chr		R. Shoyji		1/22/'07				dwg no		sheet 4 of		size			
										appd		S. Shoyji		1/22/'07											
sheet		revision																						Rev.	
index		sheet																						F	

PRODUCT NO.	CABLES
62435-005	1.5C-XW (SUMITOMO)
-005LF	
62435-105	1.5C-XW (SUMITOMO)
-105LF	



① INNER CONTACT

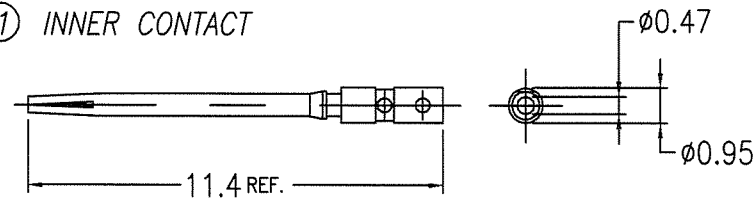

② BODY

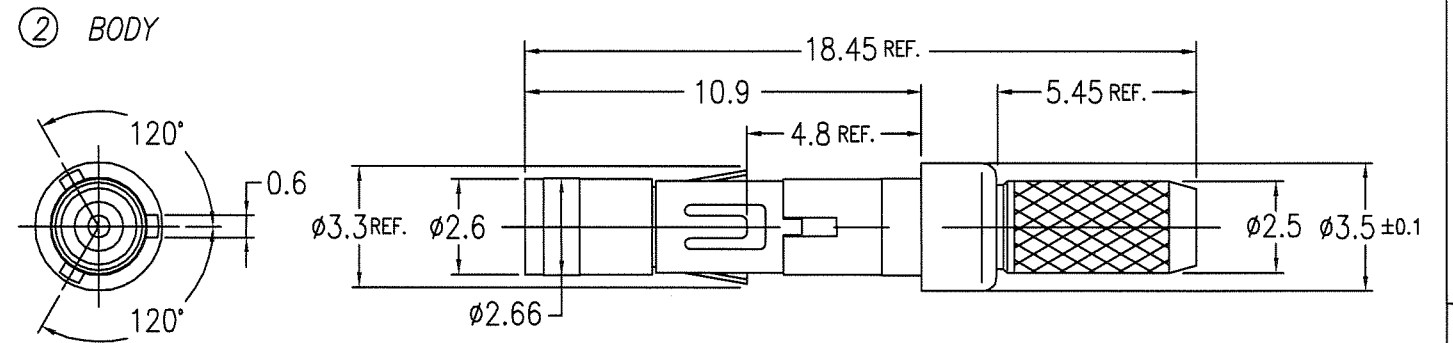

② CRIMP SLEEVE

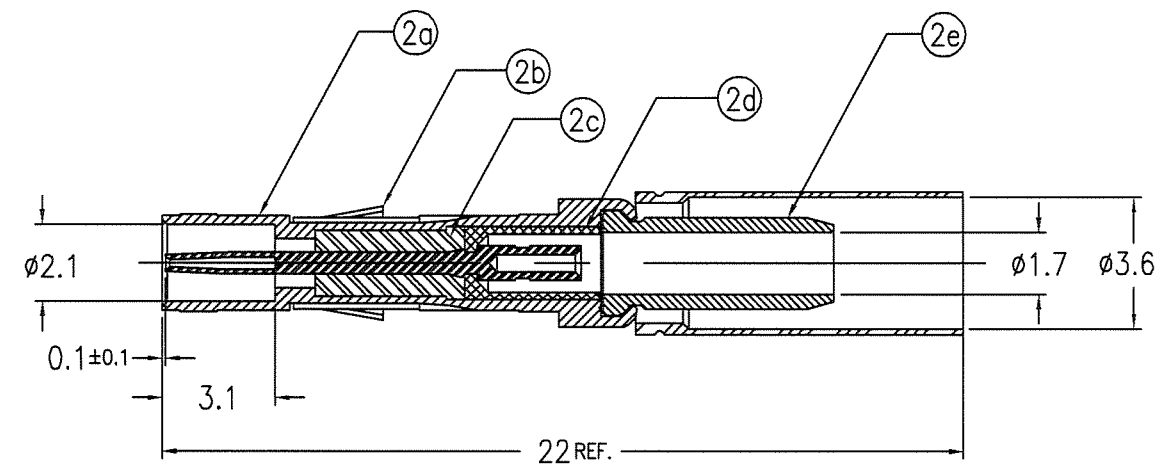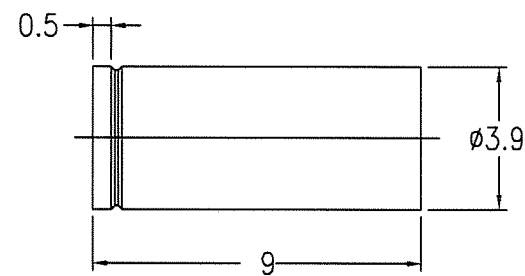

AFTER ASSY

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -005) Au 0.8um MIN. (FOR -105)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -005) Au 0.8um MIN. (FOR -105)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -005) Ni 1.27um MIN. (FOR -105)


NOTES

- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.1N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.


mat'l. code					surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family METRAL	CODE JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified		 MM	title METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE	sheet 5 of 62435 A3
A	RELEASED	J00062	Y.K	1/21/'00	angles	linear			
B	REVISED	J00331	Y.K	5/10/'00	0'±3'				
C	REVISED	J05-0670	T.S	10/21/'05	dr	Y.KODAIRA			
D	REVISED	J07-0039	S.O	1/22/'07	engr	S.OKUDAIRA	1/22/'07	dwg no	sheet 5 of
					chr	R. Shoyi	1/22/'07	62435	A3
					appd	S. Shoyi	1/22/'07	type	Customer Drawing
sheet index	revision sheet								Rev. D

PRODUCT NO.	CABLES
62435-006	RG187A/U
-006LF	RG179B/U
62435-106	RG187A/U
-106LF	RG179B/U



① INNER CONTACT

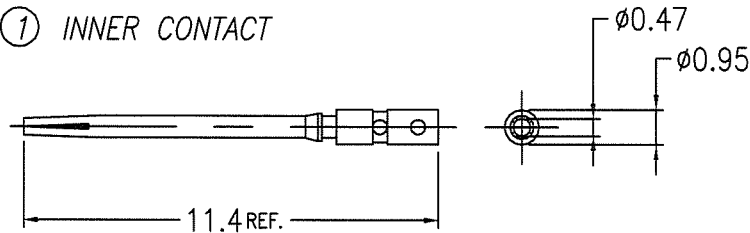

② BODY

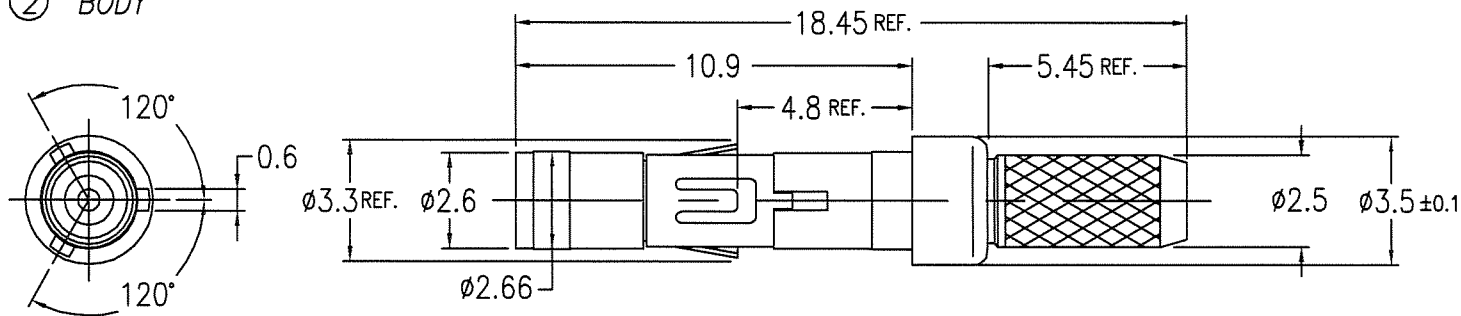

③ CRIMP SLEEVE

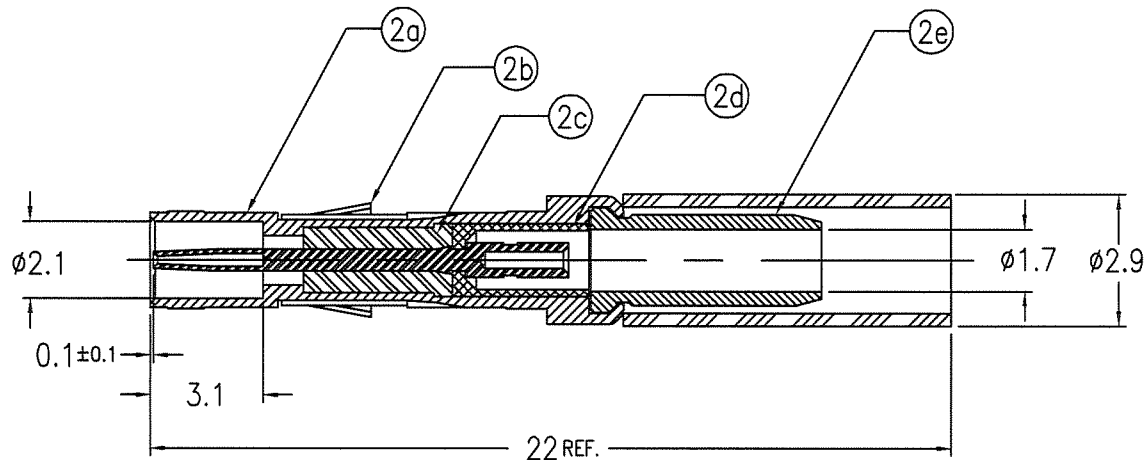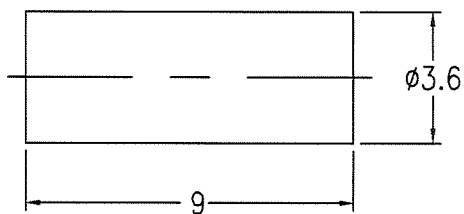

AFTER ASSY

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -006) Au 0.8um MIN. (FOR -106)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -006) Au 0.8um MIN. (FOR -106)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -006) Ni 1.27um MIN. (FOR -106)


NOTES

- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.



mat'l. code ---					surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family METRAL					CODE JP		
ltr	description	ecn no	dr	date	tolerances unless otherwise specified						title METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE							
A	RELEASED	J00951	Y.K	12/12/'00	angles	linear	0.X ±0.2											
B	REVISED	J05-0670	T.S	10/21/'05			0.XX ±0.2											
C	REVISED	J07-0039	S.O	1/22/'07			0.XXX ±0.2											
					dr	Y.KODAIRA		12/12/'00				dwg no 62435					sheet 6 of A3	
					enr	S.OKUDAIRA		1/22/'07										
					chr	R. Shouji		1/22/'07										
					appd	S. Shouji		1/22/'07				type Customer Drawing						
sheet index	revision sheet															Rev. C		

PRODUCT NO.	CABLES
62435-007	1.5DS-PBP
-007LF	
62435-107	1.5DS-PBP
-107LF	



① INNER CONTACT

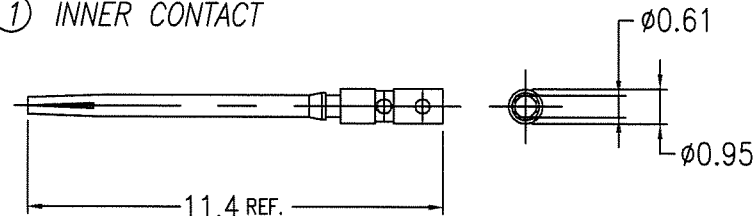

② BODY

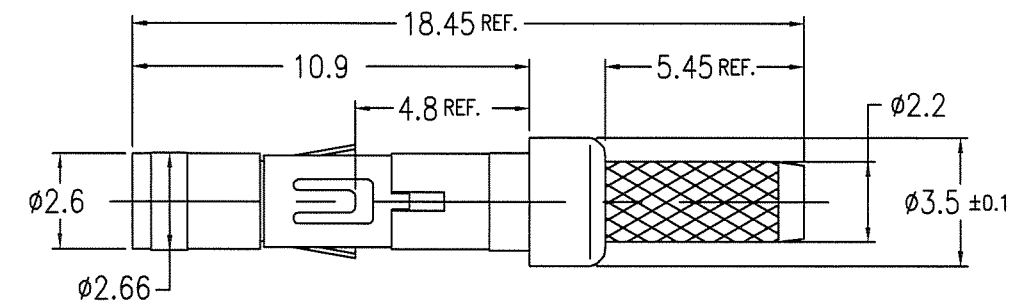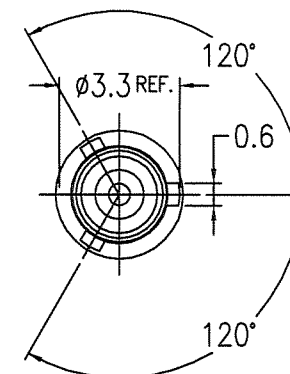

③ CRIMP SLEEVE

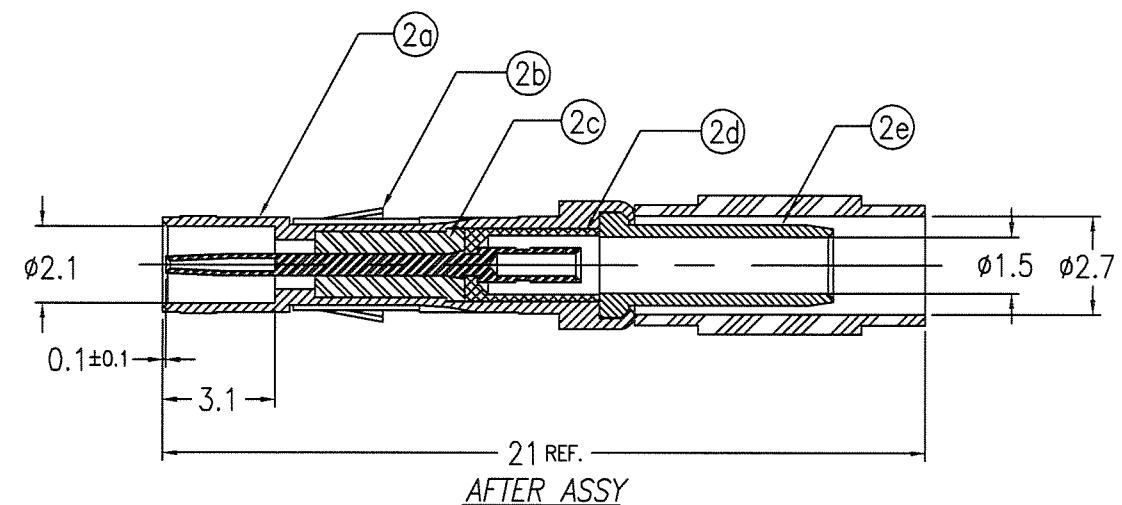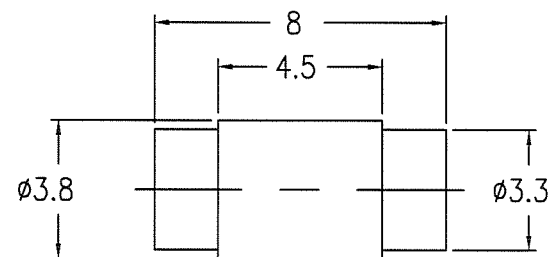

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -001) Au 0.8um MIN. (FOR -101)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -001) Au 0.8um MIN. (FOR -101)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -001) Ni 1.27um MIN. (FOR -101)


NOTES

- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.


mat'l. code					surface	tolerance	projection	product family	CODE
---					ISO 1302	ISO 406 ISO 1101		METRAL	JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified		 MM	title METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE	
A	RELEASED	J10393	Y.K	7/6/'01	angles	linear			
B	REVISED	J05-0670	T.S	10/21/'05					
C	REVISED	J07-0039	S.O	1/22/'07	0'±3'				
					dr	Y.KODAIRA	7/6/'01	dwg no	sheet 7 of
					enr	S.OKUDAIRA	1/22/'07	62435	A3
					chr	R.Shoyi	1/22/'07	type Customer Drawing	
					appd	S.Chandana	1/22/'07		
sheet index	revision sheet							Rev. C	

PRODUCT NO.	CABLES
62435-108	1.5DS-xx, 1.5D-xx
-108LF	



① INNER CONTACT

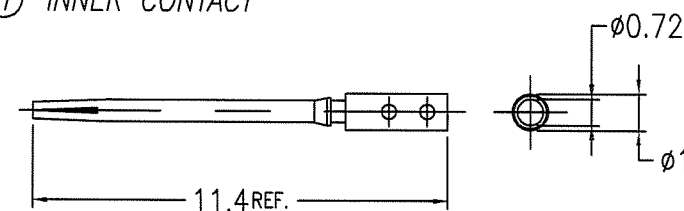

② BODY

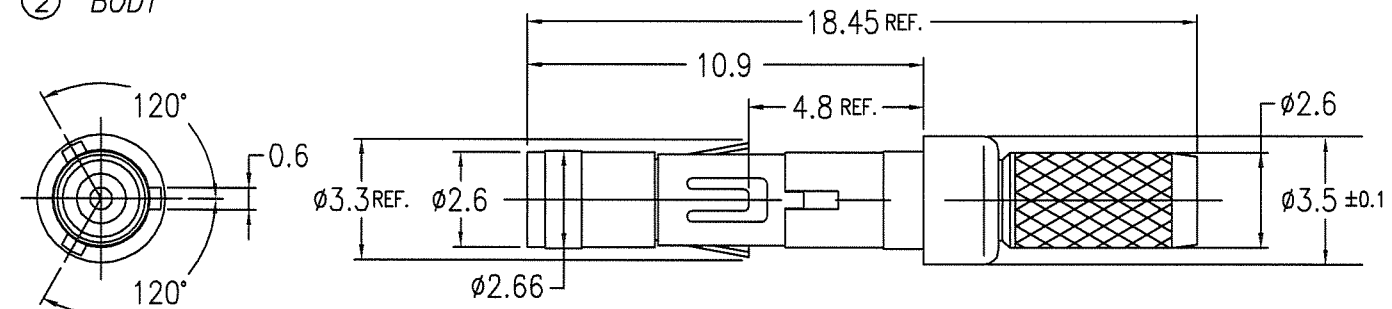

③ CRIMP SLEEVE

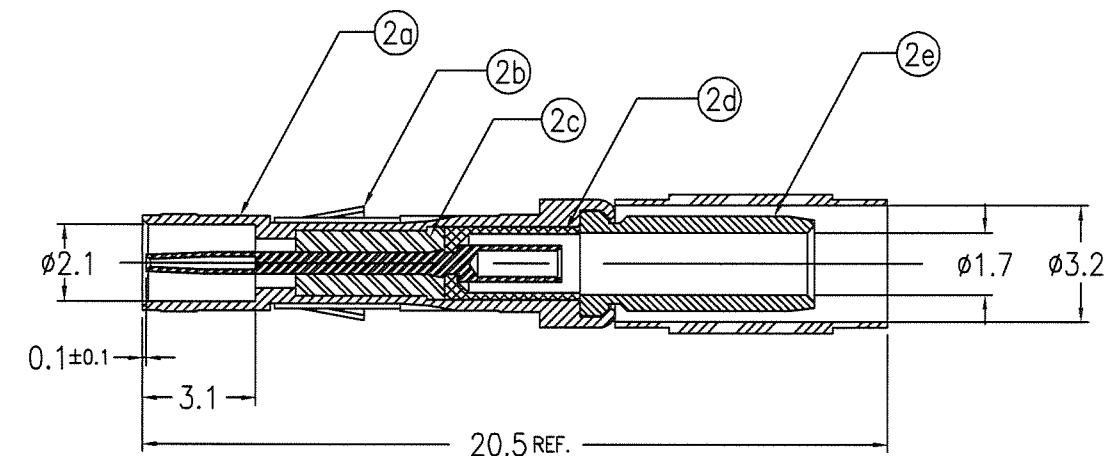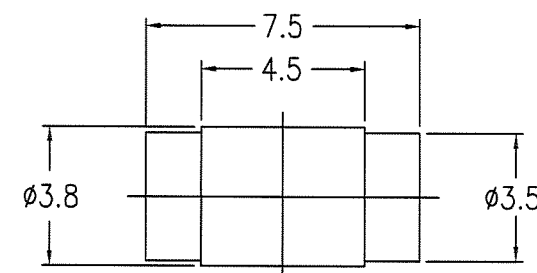

AFTER ASSY

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 0.8um MIN.
②	BODY		
②a	SHELL	BRASS	Au 0.8um MIN.
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Ni 1.27um MIN.

NOTES

- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

mat'l. code					surface	tolerance	projection	product family	CODE
---					ISO 1302	ISO 406	ISO 1101	METRAL	JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified		 MM	title METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE	
A	RELEASED	J03-0172	Y.K	4/10/03	angles	0.X	±0.2		
B	REVISED	J05-0670	T.S	10/21/05		0.XX	±0.2		
C	REVISED	J07-0039	S.O	1/22/07		0.XXX	±0.2		
					dr	Y.KODAIRA	4/10/03	dwg no 62435	
					enrg	S.OKUDAIRA	1/22/07		
					chr	R. Shoyi	1/22/07		
					appd	S. Mochi	1/22/07		
sheet	revision							type Customer Drawing	
index	sheet								
								Rev. C	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru