



PRODUCT NO.	CABLES
62435-001	RG196A/U
-001LF	RG178B/U
	0.8DS-PBE
62435-101	RG196A/U
-101LF	RG178B/U
	0.8DS-PBE



① INNER CONTACT

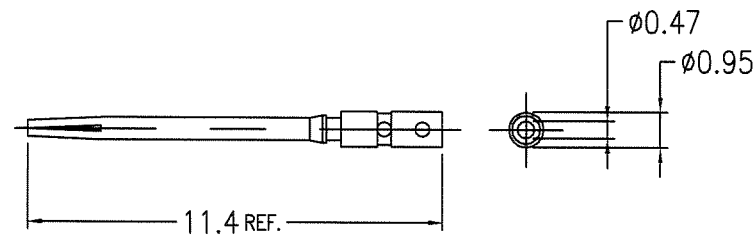

② BODY

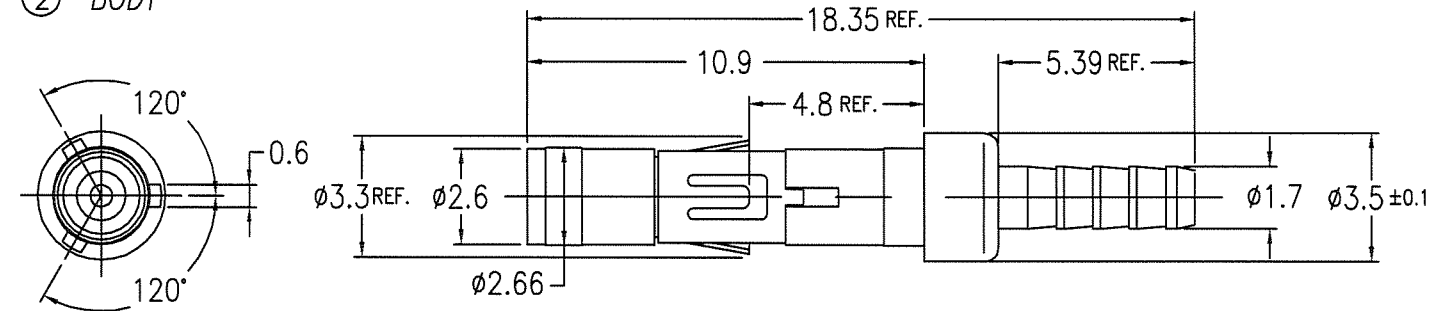

③ CRIMP SLEEVE

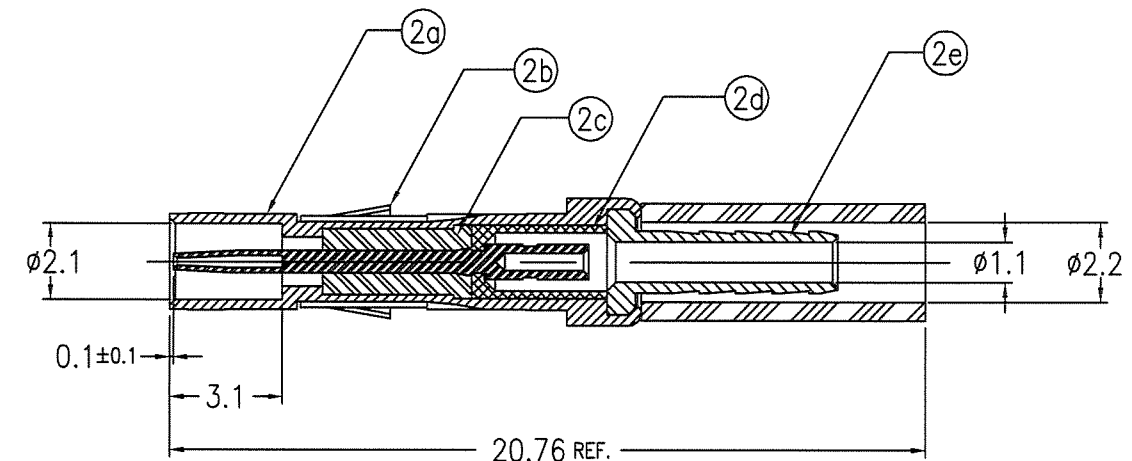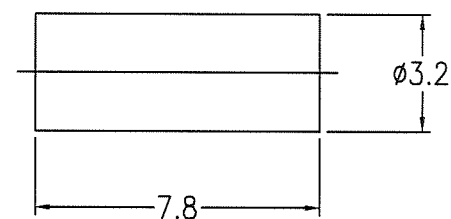

AFTER ASSY

NOTES


- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -001) Au 0.8um MIN. (FOR -101)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -001) Au 0.8um MIN. (FOR -101)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -001) Ni 1.27um MIN. (FOR -101)


mat'l. code ---					surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection MM	product family METRAL	CODE JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified			title	
D	REVISED	J00331	Y.K	5/10/'00	angles	0.X ±0.2		METRAL MINICOAX CONTACT KIT	
E	REVISED	J00951	Y.K	12/12/'00	linear	0.XX ±0.2		FEMALE SOLDER-TO-WIRE	
F	REVISED	J10393	Y.K	7/6/'01	0°±3'	0.XXX ±0.2	scale 5:1		
G	REVISED	J20204	Y.K	4/10/'02	dr	Y.KODAIRA	1/28/'99	dwg no	sheet 1 of 8 size
H	REVISED	J03-0172	Y.K	4/10/'03	enr	S.OKUDAIRA	1/22/'07	62435	A3
J	REVISED	J05-0670	T.S	10/21/'05	chr	R. Shoji	1/22/'07		
K	REVISED	J07-0039	S.O	1/22/'07	appd	S. Okada	1/22/'07	type	Customer Drawing
sheet	revision	K	F	E	E	D	C		Rev.
index	sheet	1	2	3	4	5	6	7	K

PRODUCT NO.	CABLES
62435-002	RG188A/U RG316/U
-002LF	
62435-102	RG188A/U RG316/U
-102LF	



① INNER CONTACT

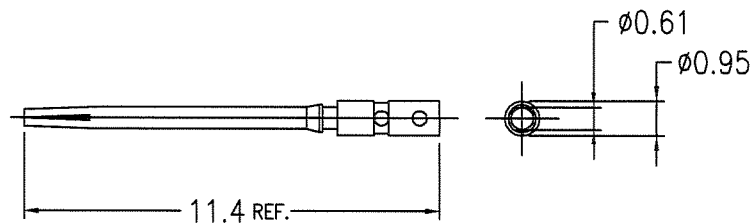

② BODY

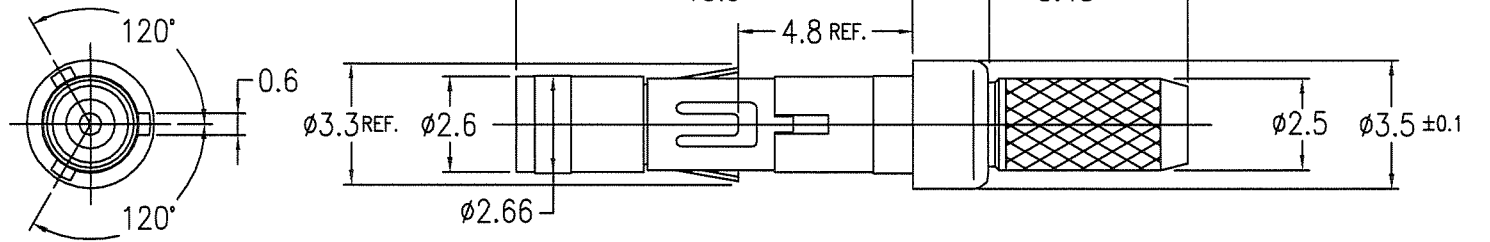

③ CRIMP SLEEVE

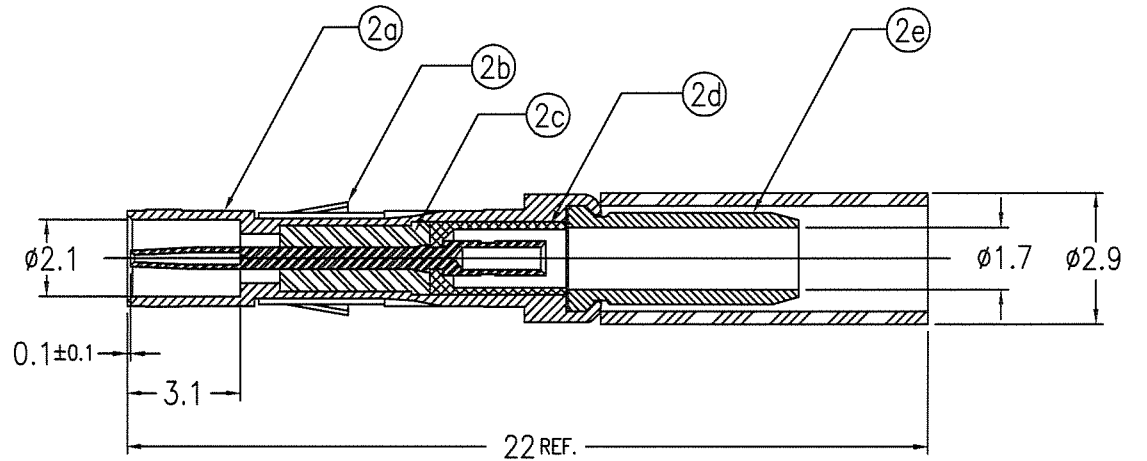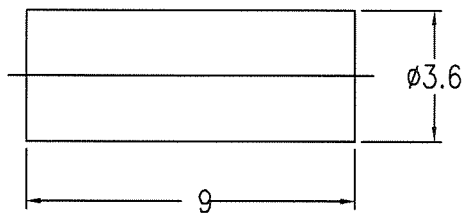

NOTES




- 1.PULL OUT FOR OF CENTER CONTACT MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430 USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

AFTER ASSY

No.	DESCRIPTION	MATERIAL	
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27 μ m MIN. (FOR -002) Au 0.8 μ m MIN. (FOR -102)
②	BODY		
②a	SHELL	BRASS	Au 1.27 μ m MIN. (FOR -002) Au 0.8 μ m MIN. (FOR -102)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27 μ m MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05 μ m MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05 μ m MIN. (FOR -002) Ni 1.27 μ m MIN. (FOR -102)

mat'l. code ---					surface ISO 1302 ☒	tolerance ISO 406 ISO 1101	projection 	product family METRAL	CODE JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified		MM	scale 5:1	title METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE
A	REVISED	J90110	Y.K	3/31/'99	angles	linear			
B	REVISED	J00062	Y.K	1/21/'00	0° $\pm 3^\circ$				
C	REVISED	J00331	Y.K	5/10/'00					
D	REVISED	J20204	Y.K	4/10/'02	dr	Y.KODAIRA	3/31/'99		
E	REVISED	J05-0670	T.S	10/21/'05	enr	S.OKUDAIRA	1/22/'07		
F	REVISED	J07-0039	S.O	1/22/'07	chr	R. Shoyi	1/22/'07		
					appd	J. Okada	1/22/'07		
sheet index	revision sheet								Rev. F

PRODUCT NO.	CABLES CABLES
62435-003	DOUBLE SHIELDED TYPE M17/152-0001(HARBOUR INDUSTRIES)
-003LF	
62435-103	DOUBLE SHIELDED TYPE M17/152-0001(HARBOUR INDUSTRIES)
-103LF	

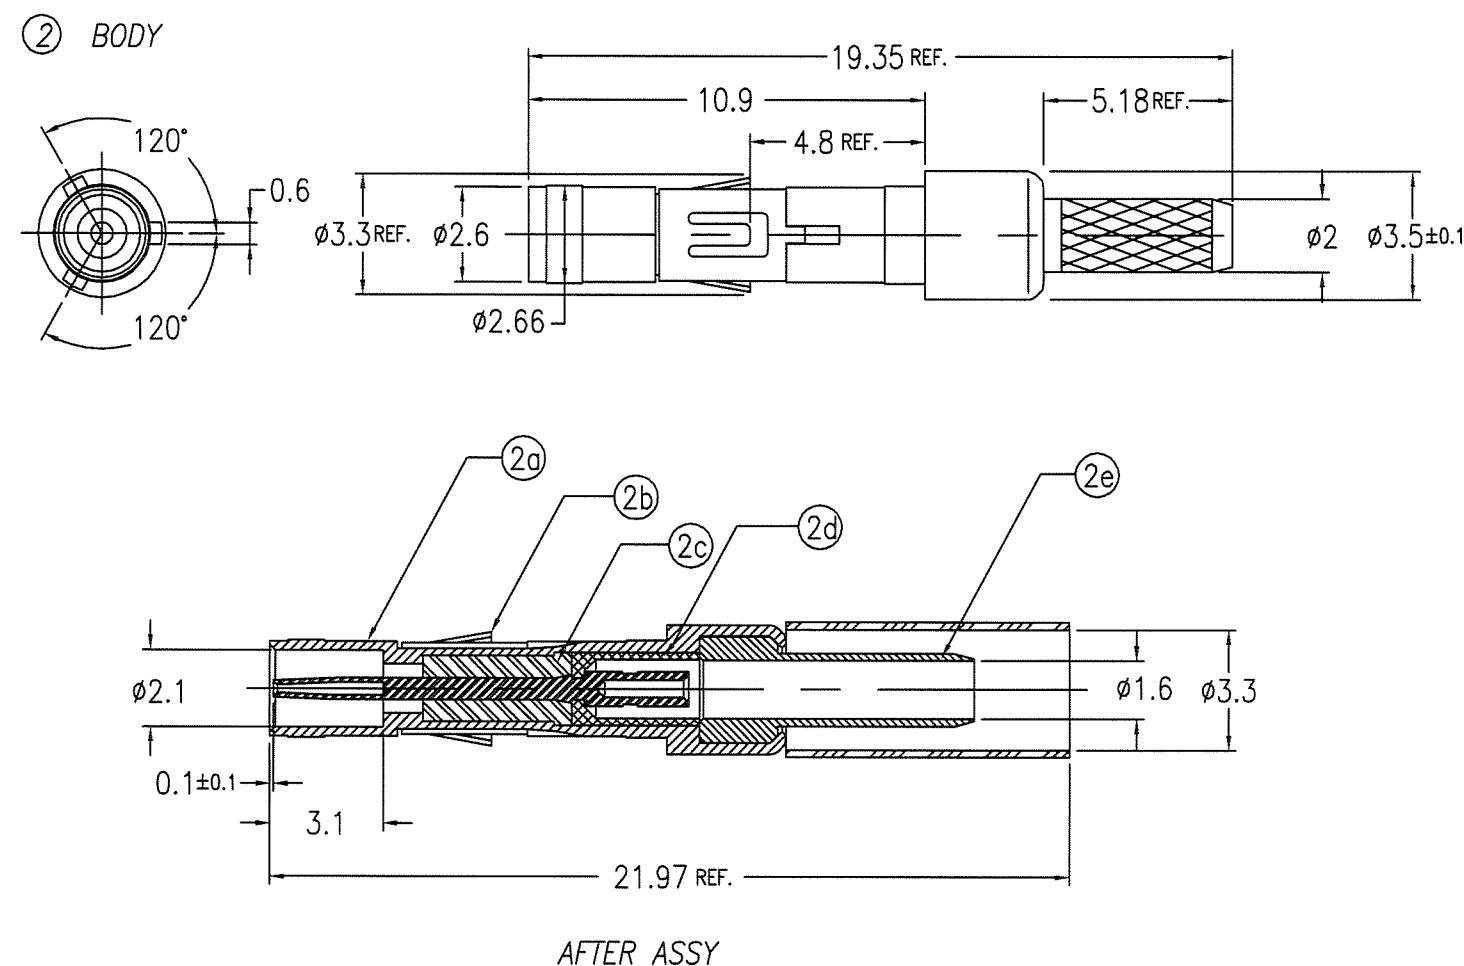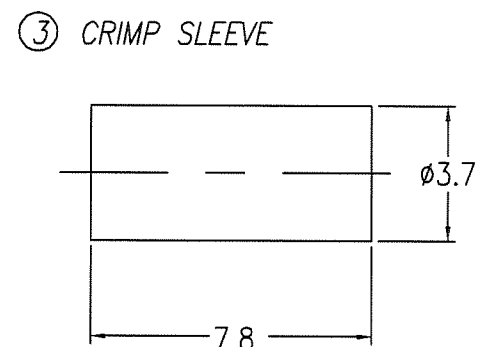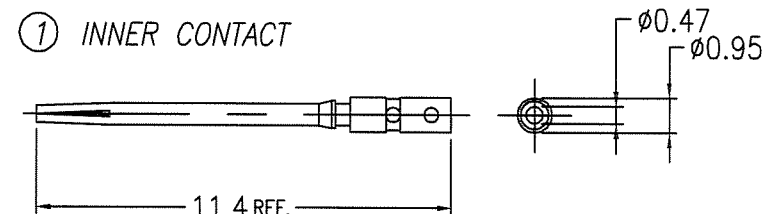

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -003) Au 0.8um MIN. (FOR -103)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -003) Au 0.8um MIN. (FOR -103)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -003) Ni 1.27um MIN. (FOR -103)


NOTES

- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.


mat'l. code					surface		tolerance		projection		product family				CODE	
---					ISO 1302 ✓		ISO 406 ISO 1101				METRAL				JP	
ltr	description	ecn no	dr	date	tolerances unless otherwise specified						title METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE					
A	RELEASED	J90036	Y.K	1/28/'99	angles linear	0.X ±0.2		scale 5:1								
B	REVISED	J00062	Y.K	1/21/'00		0.XX ±0.2										
C	REVISED	J00331	Y.K	5/10/'00		0.XXX ±0.2										
D	REVISED	J05-0670	T.S	10/21/'05	dr	Y.KODAIRA		1/28/'99			dwg no		sheet 3 of		size	
E	REVISED	J07-0039	S.O	1/22/'07	enrg	S.OKUDAIRA		1/22/'07			62435				A3	
					chr	R. Shown		1/22/'07								
					appd	S. Shown		1/22/'07				type		Customer Drawing		
sheet index	revision sheet														Rev. F	

PRODUCT NO.	CABLES
62435-004	1.5C-XV (SUMITOMO)
-004LF	1.5C-QEV.CW (FUJIKURA)
62435-104	1.5C-XV (SUMITOMO)
-104LF	1.5C-QEV.CW (FUJIKURA)



① INNER CONTACT

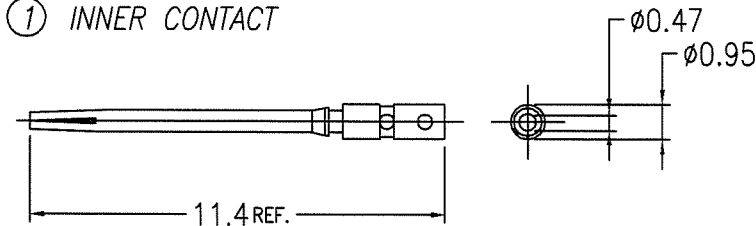

② BODY

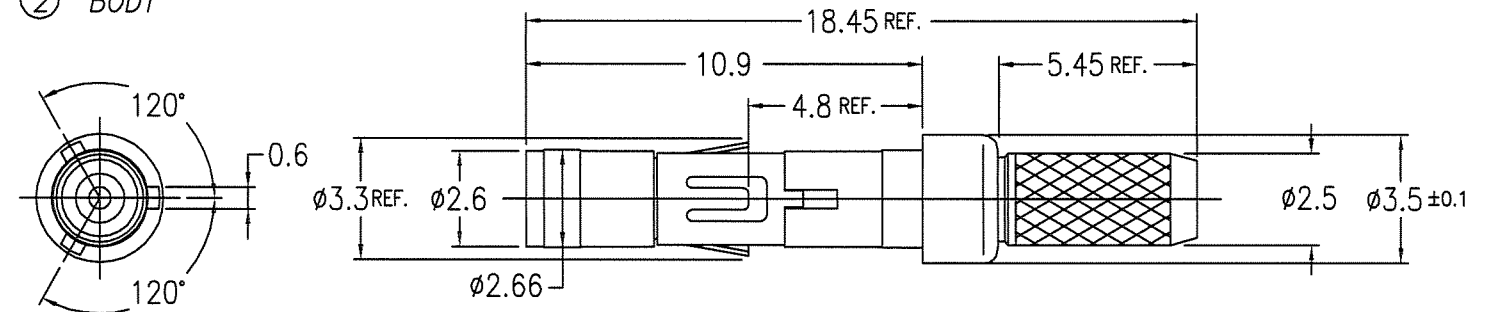

③ CRIMP SLEEVE

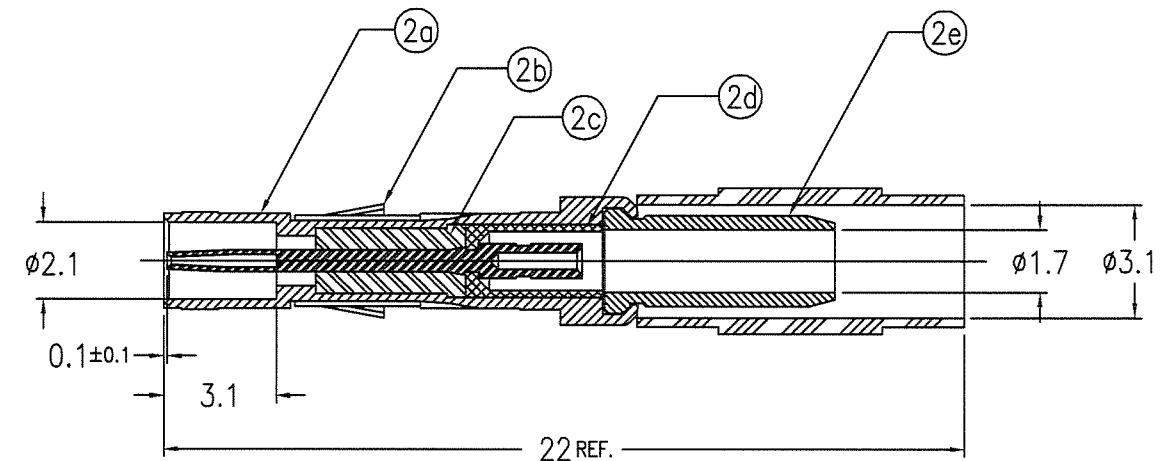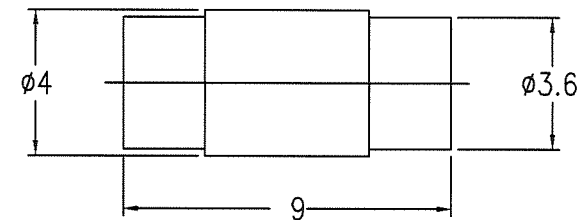

AFTER ASSY

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -004) Au 0.8um MIN. (FOR -104)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -004) Au 0.8um MIN. (FOR -104)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -004) Ni 1.27um MIN. (FOR -104)


NOTES

- PULL OUT FOR OF CENTER CONTACT MUST BE 0.2N MIN. / 0.8N MAX.
- ASSEMBLE PRODUCT WITH TOOL HT430 USE INSERTS EPL 193460-001
- FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.


mat'l. code					surface	tolerance	projection	product family	CODE
---					ISO 1302	ISO 406 ISO 1101		METRAL	JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified			title	
A	RELEASED	J90036	Y.K	1/28/'99	angles	linear	0.X ±0.2	METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE	
B	REVISED	J00062	Y.K	1/21/'00			0.XX ±0.2		
C	REVISED	J00331	Y.K	5/10/'00			0.XXX ±0.2		
D	REVISED	J05-0670	T.S	10/21/'05	dr	Y.KODAIRA	1/28/'99	dwg no 62435 sheet 4 of size A3	
E	REVISED	J07-0039	S.O	1/22/'07	enr	S.OKUDAIRA	1/22/'07		
					chr	R. Shoyji	1/22/'07		
					appd	S. Okada	1/22/'07	type Customer Drawing	
sheet index	revision sheet								
								Rev. E	

PRODUCT NO.	CABLES
62435-005	1.5C-XW (SUMITOMO)
-005LF	
62435-105	1.5C-XW (SUMITOMO)
-105LF	



① INNER CONTACT

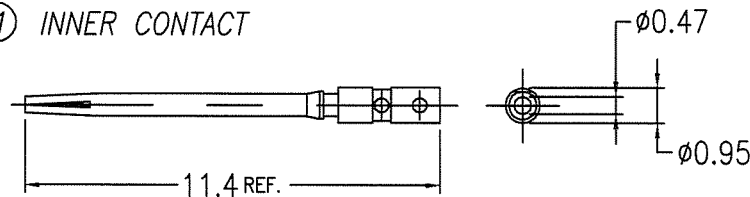

② BODY

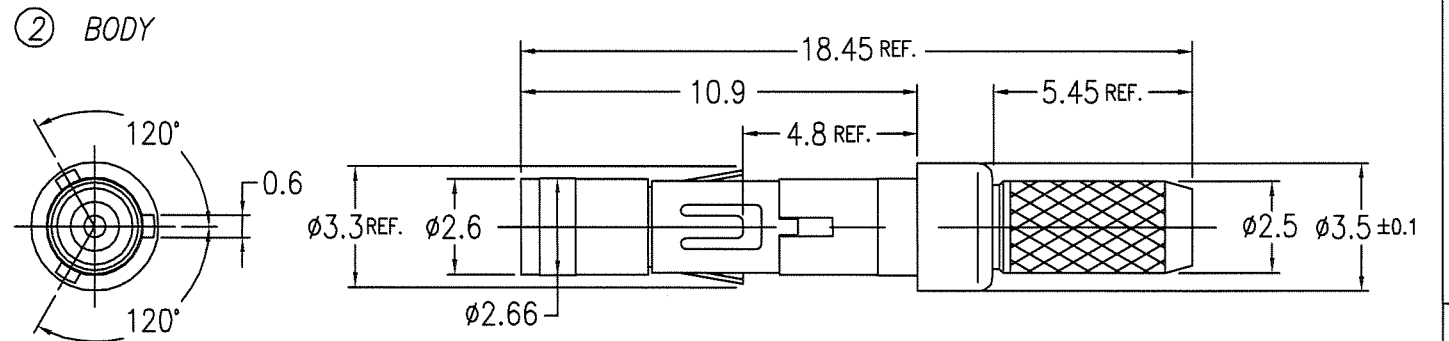

② CRIMP SLEEVE

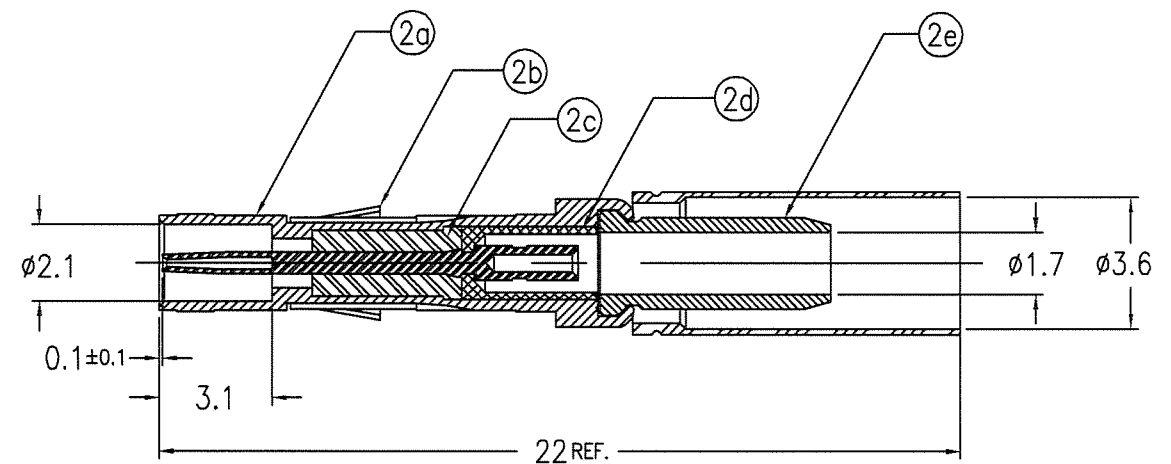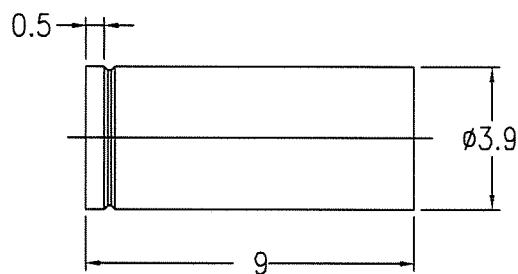

AFTER ASSY

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -005) Au 0.8um MIN. (FOR -105)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -005) Au 0.8um MIN. (FOR -105)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -005) Ni 1.27um MIN. (FOR -105)


NOTES

- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.1N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.


mat'l. code					surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family METRAL	CODE JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified		 MM	title METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE	dwg no 62435 sheet 5 of A3
A	RELEASED	J00062	Y.K	1/21/'00	angles	0.X ±0.2			
B	REVISED	J00331	Y.K	5/10/'00	linear	0.XX ±0.2			
C	REVISED	J05-0670	T.S	10/21/'05	0'±3'	0.XXX ±0.2			
D	REVISED	J07-0039	S.O	1/22/'07	dr	Y.KODAIRA	1/21/'00	 type Customer Drawing	Rev. D
					engr	S.OKUDAIRA	1/22/'07		
					chr	R. Khouri	1/22/'07		
					appd	S. Khouri	1/22/'07		
sheet index	revision sheet								

PRODUCT NO.	CABLES
62435-006	RG187A/U
-006LF	RG179B/U
62435-106	RG187A/U
-106LF	RG179B/U



① INNER CONTACT

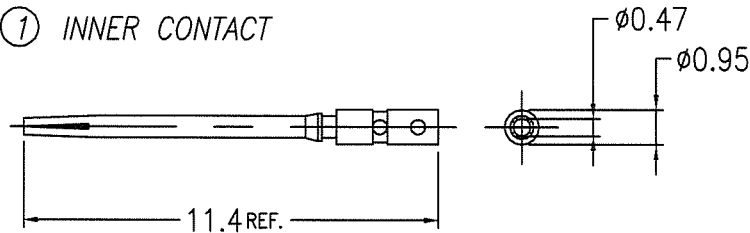

② BODY

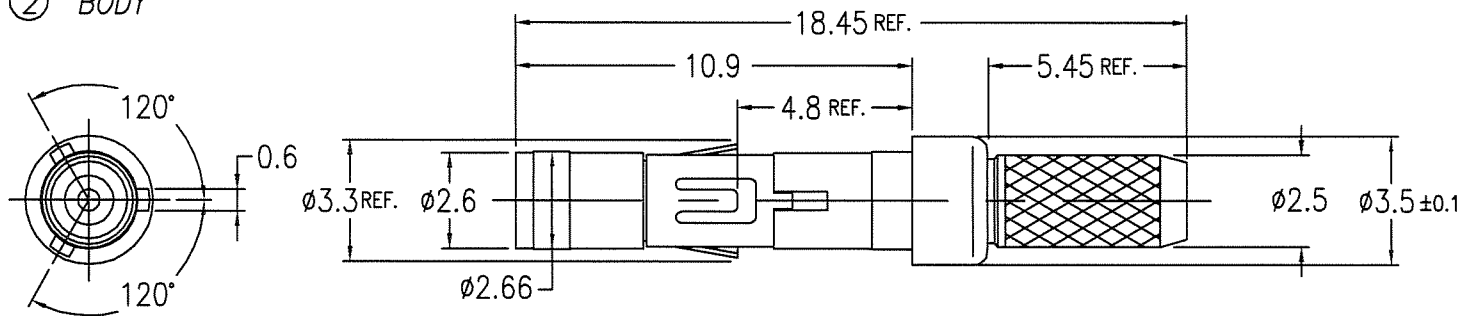

③ CRIMP SLEEVE

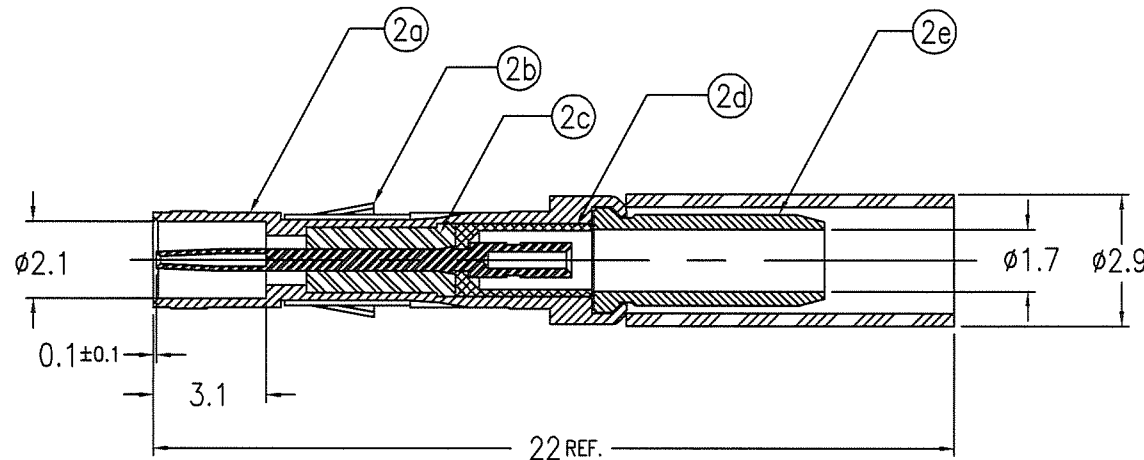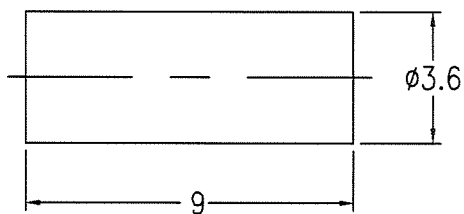

AFTER ASSY

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -006) Au 0.8um MIN. (FOR -106)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -006) Au 0.8um MIN. (FOR -106)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -006) Ni 1.27um MIN. (FOR -106)


NOTES

- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.


mat'l. code					surface ISO 1302 ✓		tolerance ISO 406 ISO 1101	projection MM	product family METRAL	CODE JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified				title	
A	RELEASED	J00951	Y.K	12/12/'00	angles	linear	0.X ±0.2		METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE	
B	REVISED	J05-0670	T.S	10/21/'05			0.XX ±0.2			
C	REVISED	J07-0039	S.O	1/22/'07	0°±3'		0.XXX ±0.2	scale 5:1		
					dr	Y.KODAIRA	12/12/'00		dwg no	
					enr	S.OKUDAIRA	1/22/'07		sheet 6 of	
					chr	R.Shouji	1/22/'07		62435	
					appd	S.Shodama	1/22/'07		A3	
sheet index	revision sheet								type Customer Drawing	
									Rev. C	

PRODUCT NO.	CABLES
62435-007	1.5DS-PBP
-007LF	
62435-107	1.5DS-PBP
-107LF	




① INNER CONTACT

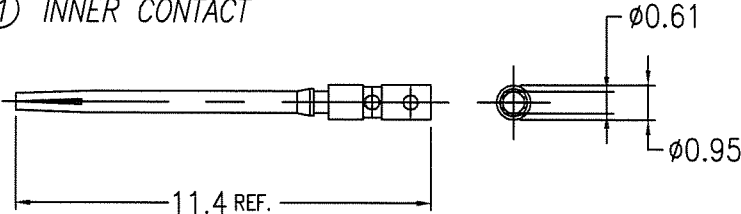

② BODY

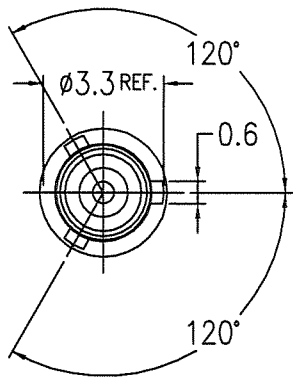

③ CRIMP SLEEVE

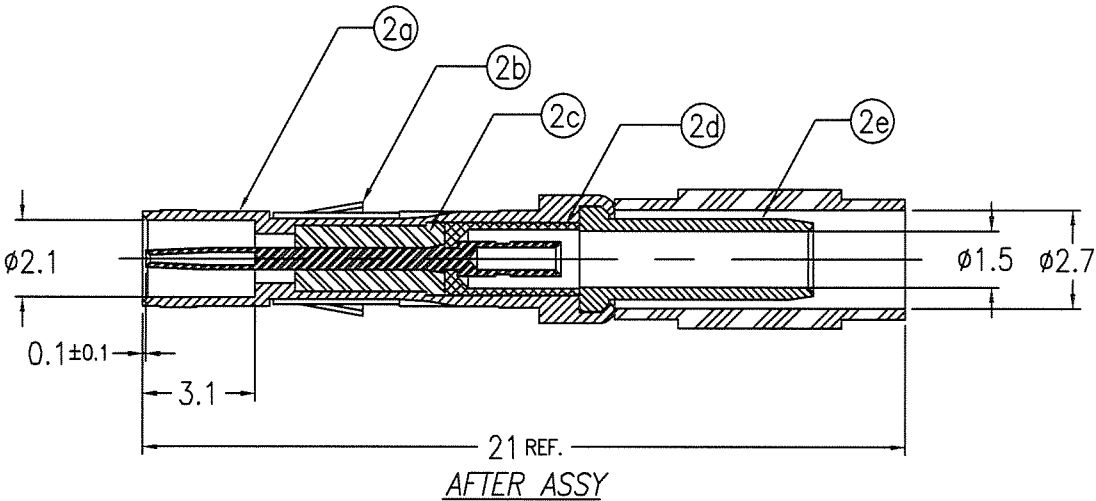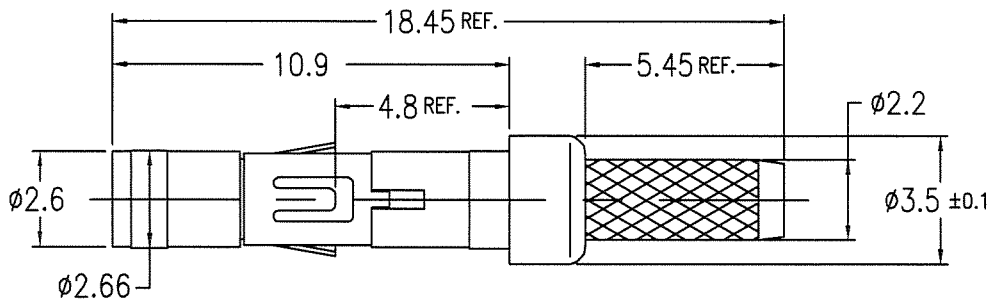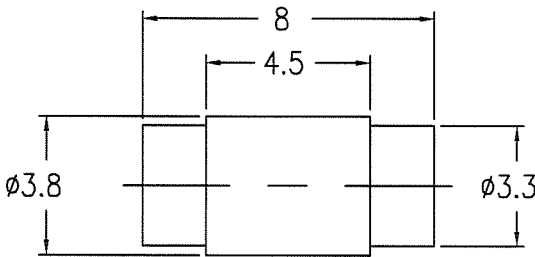

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 1.27um MIN. (FOR -001) Au 0.8um MIN. (FOR -101)
②	BODY		
②a	SHELL	BRASS	Au 1.27um MIN. (FOR -001) Au 0.8um MIN. (FOR -101)
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Au 0.05um MIN. (FOR -001) Ni 1.27um MIN. (FOR -101)


NOTES

- PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.


mat'l. code					surface	tolerance	projection	product family	CODE
---					ISO 1302	ISO 406 ISO 1101		METRAL	JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified		MM	title	
A	RELEASED	J10393	Y.K	7/6/'01	angles	linear			
B	REVISED	J05-0670	T.S	10/21/'05	0'±3'				
C	REVISED	J07-0039	S.O	1/22/'07					
					dr	Y.KODAIRA	7/6/'01	METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE	
					enr	S.OKUDAIRA	1/22/'07		
					chr	R.Shoyi	4/22/'07		
					appd	S.Chandana	4/22/'07		
sheet	revision							dwg no	sheet 7 of
index	sheet							62435	size
								Customer Drawing	A3
								type	Rev.
									C

PRODUCT NO.	CABLES
62435-108	1.5DS-xx, 1.5D-xx
-108LF	



① INNER CONTACT

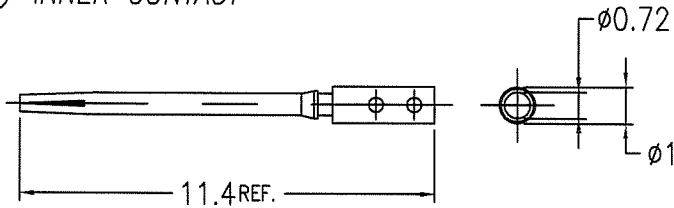

② BODY

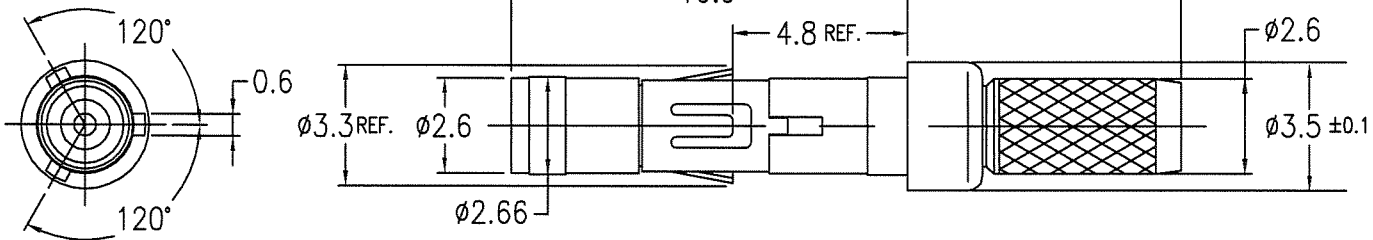

③ CRIMP SLEEVE

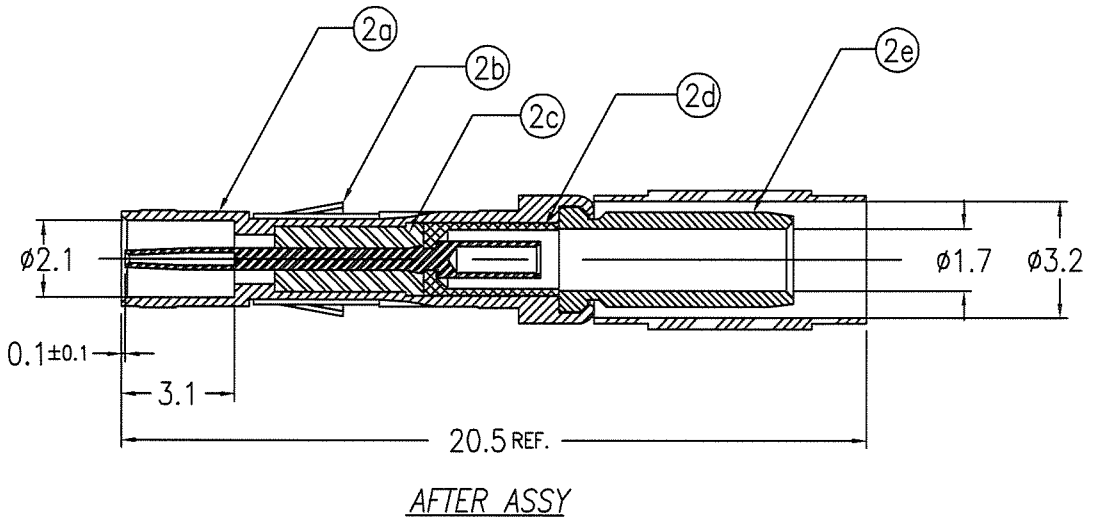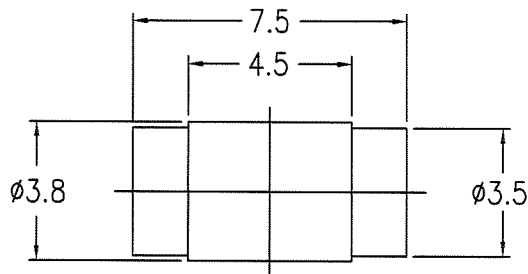

No.	DESCRIPTION	MATERIAL	PLATING
①	INNER CONTACT	BERYLLIUM COPPER	Au 0.8um MIN.
②	BODY		
②a	SHELL	BRASS	Au 0.8um MIN.
②b	SPRING CLIP	BERYLLIUM COPPER	Ni 1.27um MIN.
②c	FRONT INSULATOR	PTFE	
②d	REAR INSULATOR	PTFE	
②e	FERRULE	BRASS	Au 0.05um MIN.
③	CRIMP SLEEVE	BRASS	Ni 1.27um MIN.

NOTES

- 1.PULL OUT FOR OF CENTER CONTACT
MUST BE 0.2N MIN. / 0.8N MAX.
- 2.ASSEMBLE PRODUCT WITH TOOL HT430
USE INSERTS EPL 193460-001
- 3.FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 4.THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.

mat'l. code ---					surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family METRAL						CODE JP		
ltr	description		ecn no	dr	date		tolerances unless otherwise specified					title METRAL MINICOAX CONTACT KIT FEMALE SOLDER-TO-WIRE							
A	RELEASED		J03-0172	Y.K	4/10/'03		angles	linear	O.X ±0.2		 MM								
B	REVISED		J05-0670	T.S	10/21/'05				O.XX ±0.2										
C	REVISED		J07-0039	S.O	1/22/'07				O.XXX ±0.2										
							dr	Y.KODAIRA		4/10/'03				dwg no 62435				sheet 8 of A3	
							enrg	S.OKUDAIRA		1/22/'07									
							chr	R. Shoyi		1/22/'07									
							appd	S. Mochizuki		1/22/'07									
sheet index		revision sheet											type Customer Drawing				Rev. C		

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru