



# TPP25011

Application Specific Discretes  
A.S.D.<sup>TM</sup>

OVERVOLTAGE and OVERCURRENT  
PROTECTION for TELECOM LINE

## FEATURES

- UNIDIRECTIONAL FUNCTION
- PROGRAMMABLE BREAKDOWN VOLTAGE UP TO 250 V
- PROGRAMMABLE CURRENT LIMITATION FROM 40 mA TO 500 mA
- SURGE CURRENT CAPABILITY  $I_{PP} = 30A$  10/1000  $\mu s$

## DESCRIPTION


Dedicated to sensitive telecom equipment protection, this device can provide both voltage and current triggered protection with a very tight tolerance. The breakdown voltage can be easily programmed by using an external zener diode.

A multiple protection mode can be also performed when using several zener diodes, providing to each line interface an optimized protection level. The current limiting function is achieved with the use of a resistor between the gate and the cathode. The value of the resistor will determine the level of the desired current.


## COMPLIES WITH THE FOLLOWING STANDARDS :

CCITT K17 :	10/700	$\mu s$	1.5 kV
	5/310	$\mu s$	38 A
VDE 0433 :	10/700	$\mu s$	2k V
	5/310	$\mu s$	40 A (*)
CNET :	0.5/700	$\mu s$	1.5 kV
	0.2/310	$\mu s$	38 A
FCC part 68 :	2/10	$\mu s$	2.5 kV
	2/10	$\mu s$	75 A (*)
BELLCORE TR-NWT-000974 :	10/1000	$\mu s$	1 kV
	10/1000	$\mu s$	30 A (*)

(\*) with series resistors or PTC.

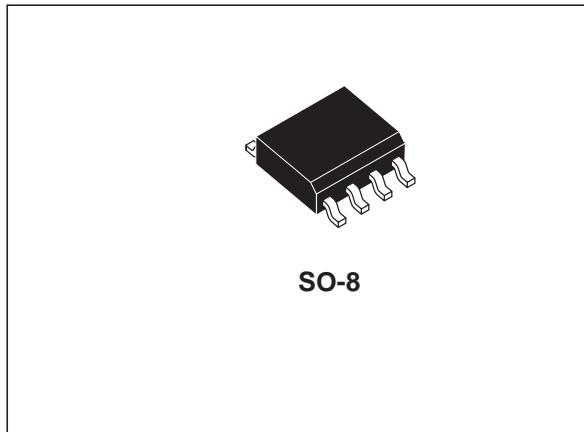

## SCHEMATIC DIAGRAM

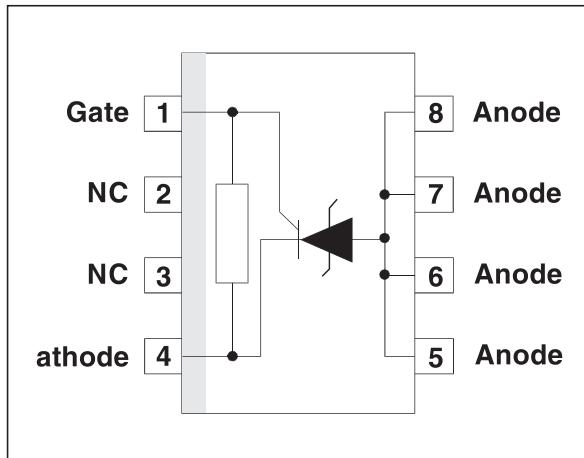


## TPP25011

### ABSOLUTE MAXIMUM RATINGS ( $T_{amb} = 25^{\circ}\text{C}$ )

Symbol	Parameter	Value	Unit
$I_{PP}$	Peak pulse current (see note 1)	10/1000μs 5/310μs 2/10μs	30 40 75
$I_{TSM}$	Non repetitive surge peak on-state current ( $F = 50\text{Hz}$ )	$t_p = 10\text{ms}$ $t = 1\text{s}$	5 3.5
$T_{stg}$ $T_j$	Storage temperature range Maximum junction temperature	- 55 to + 150 150	°C

Note 1 : Pulse waveform :

$$\begin{array}{lll} 10/1000\mu\text{s} & t_r=10\mu\text{s} & t_p=1000\mu\text{s} \\ 5/310\mu\text{s} & t_r=5\mu\text{s} & t_p=310\mu\text{s} \\ 2/10\mu\text{s} & t_r=2\mu\text{s} & t_p=10\mu\text{s} \end{array}$$

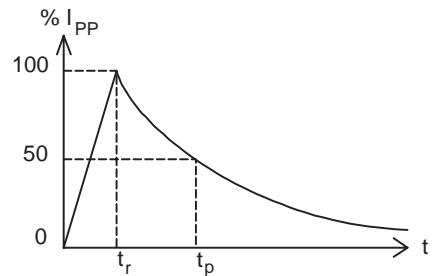


### THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-a)}$	Junction to ambient	170	°C/W

ELECTRICAL CHARACTERISTICS ( $T_{amb} = 25^\circ C$ )

Symbol	Parameter
$V_{RM}$	Stand-off voltage
$I_{RM}$	Leakage current at stand-off voltage
$V_{BR}$	Breakdown voltage
$V_{BO}$	Breakover voltage
$I_H$	Holding current
$I_{BO}$	Breakover current
$I_{PP}$	Peak pulse current
$V_{GN}$	Gate voltage
$I_G$	Gate triggering current
C	Capacitance

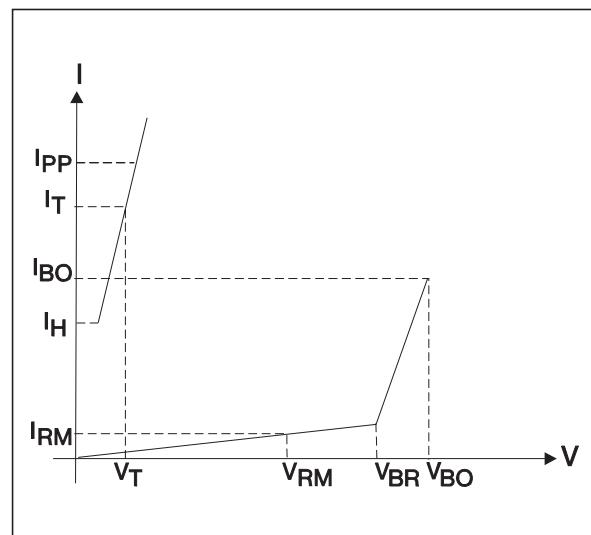

## 1 - OPERATION WITHOUT GATE

Type	$I_{RM} @ V_{RM}$		$V_{BR} @ I_R$		$V_{BO} @ I_{BO}$			$I_H$ min. note 2	C max. note 3
	μA	V	V	mA	V	mA	mA		
TPP25011	6	60	250	1	340	15	200	180	100

## 2 - OPERATION WITH GATE

Type	$V_{GN} @ I_{GN} = 30 \text{ mA}$				$I_G$	
	min.		max.		$V_{A-C} = 100 \text{ V}$	
	note 4					
	V		V		mA	
TPP25011	1.05		1.35		5	
					40	


Note 1: See the reference test circuit 1.

Note 2: See test circuit 2.


Note 3:  $V_R = 5\text{V}$ ,  $F = 1\text{MHz}$

## TPP25011

### REFERENCE TEST CIRCUIT 1 :

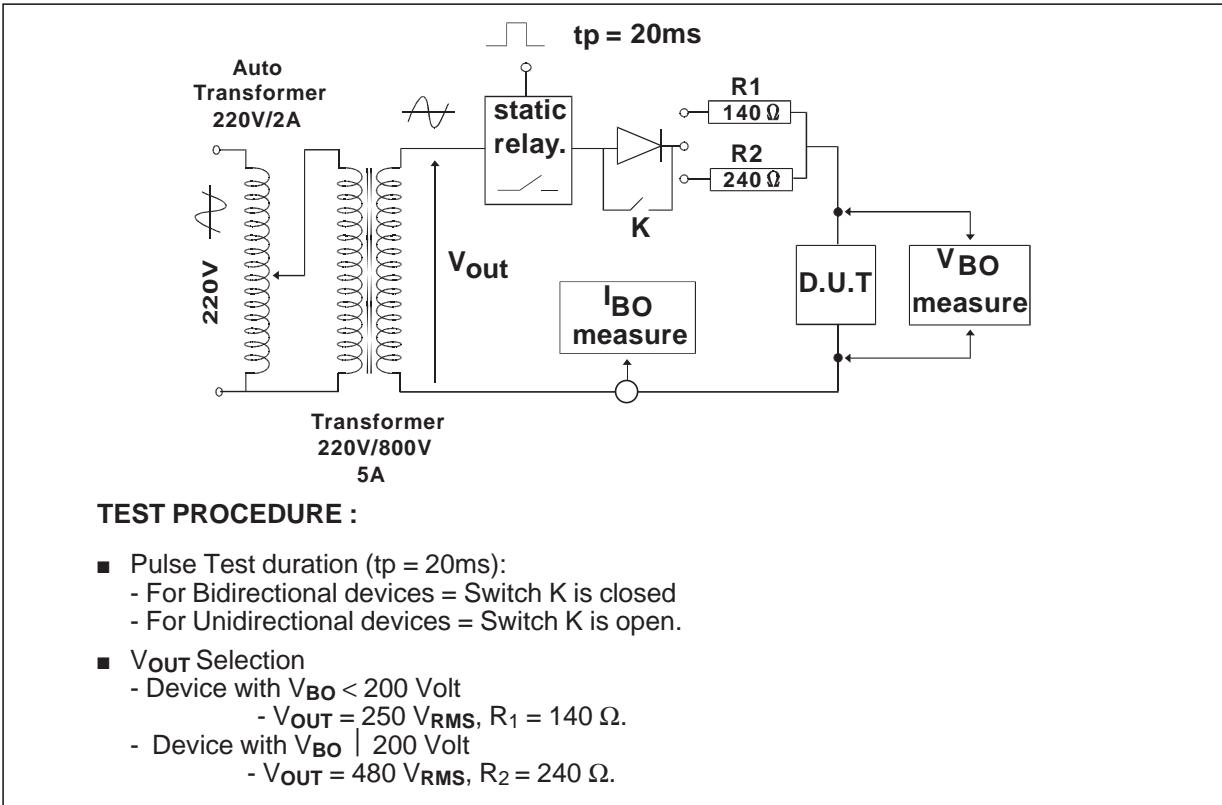

### FUNCTIONAL HOLDING CURRENT ( $I_H$ ) TEST CIRCUIT 2 = GO - NOGO TEST

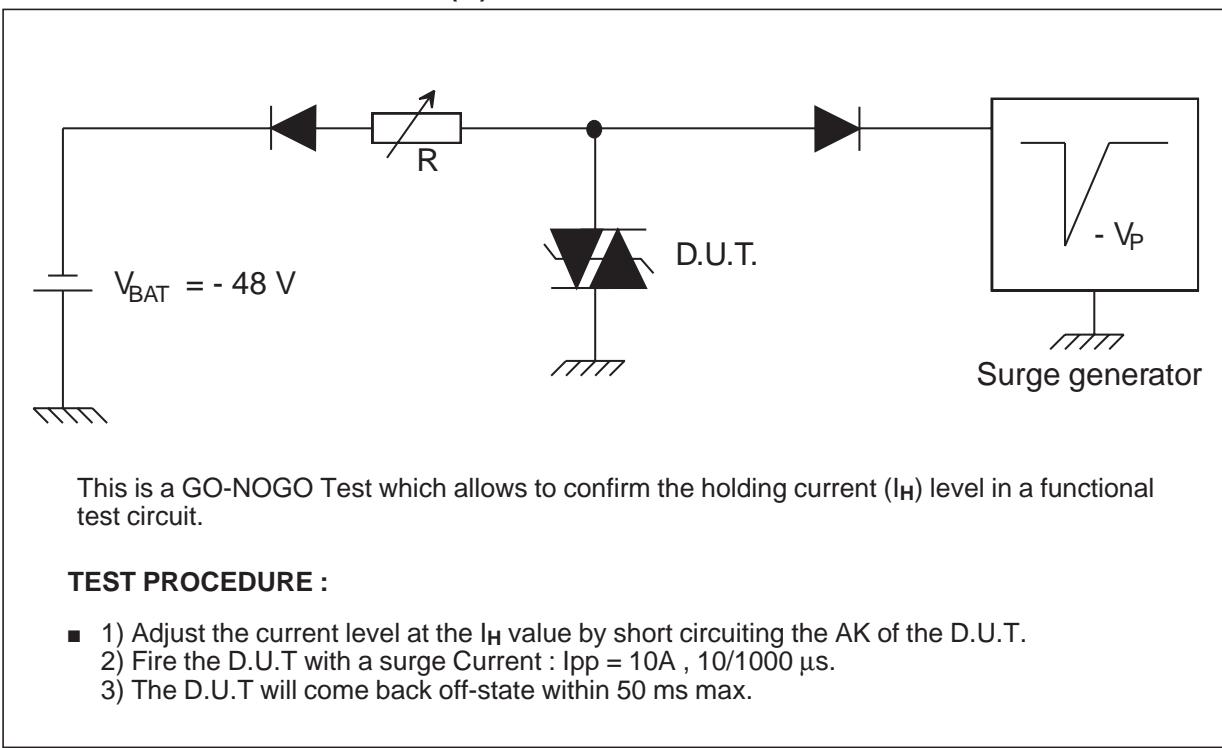


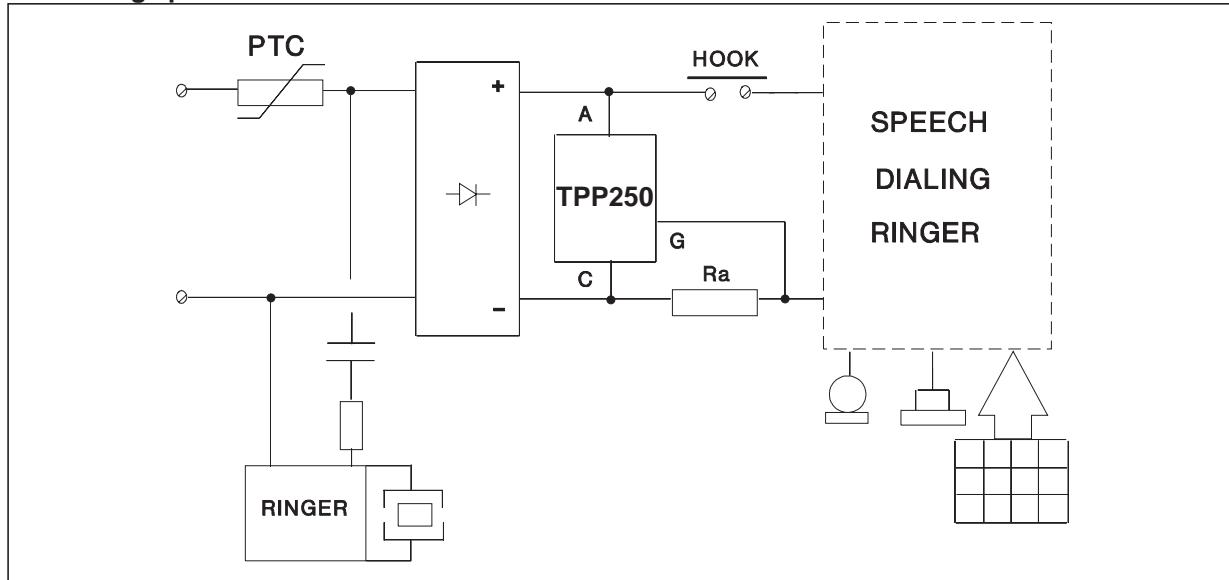
**APPLICATION CIRCUIT****Otvoltage protection and current limitation**


Table below gives the tolerance of the limited current  $I_T$  for each standardized resistor value.

CURRENT TOLERANCE		
R Ω ( ± 5%)	$I_T$ mA min	$I_T$ mA max
3.00	338	514
3.30	308	471
3.60	283	435
3.90	261	404
4.30	238	370
4.70	218	342
5.10	201	319
5.60	184	294
6.20	166	269
6.80	152	249
7.50	138	229
8.20	127	213
9.10	115	196
10.10	104	181
11.00	96	169
12.00	88	158
13.00	82	149
15.00	72	135
16.00	68	129
18.00	61	119
20.00	55	111
22.00	50	105
24.00	47	99
27.00	42	93
30.00	38	87

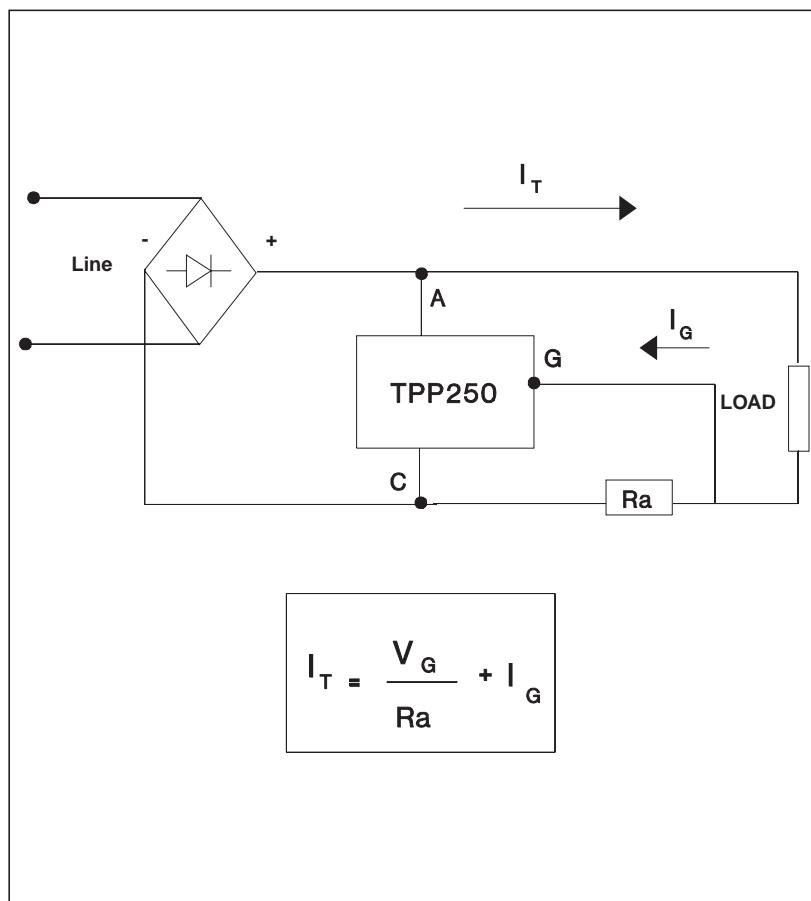

## TPP25011

### Telephone set protection

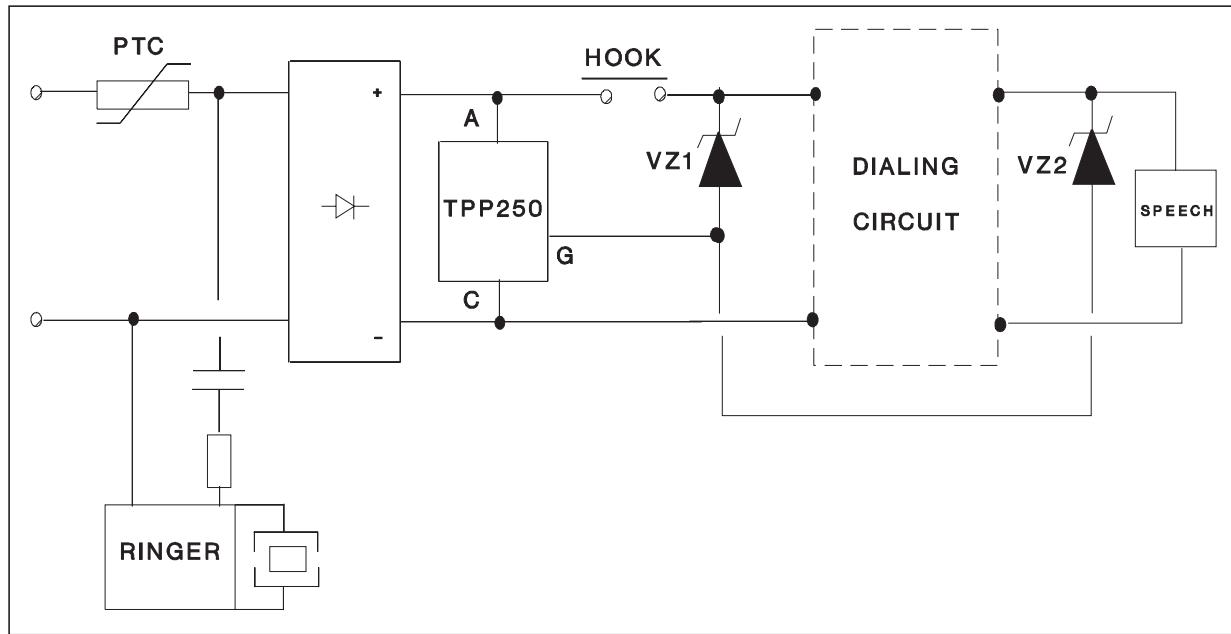


### **PROTECTION MODES :**

**OFF HOOK** = Ringer circuit protection is insured with intrinsic breakdown voltage at 250 V

**ON HOOK** = In dialing mode and in conversation mode, the breakdown voltage of TPP250 can be adapted at different levels with zener diodes.

### ORDER CODE

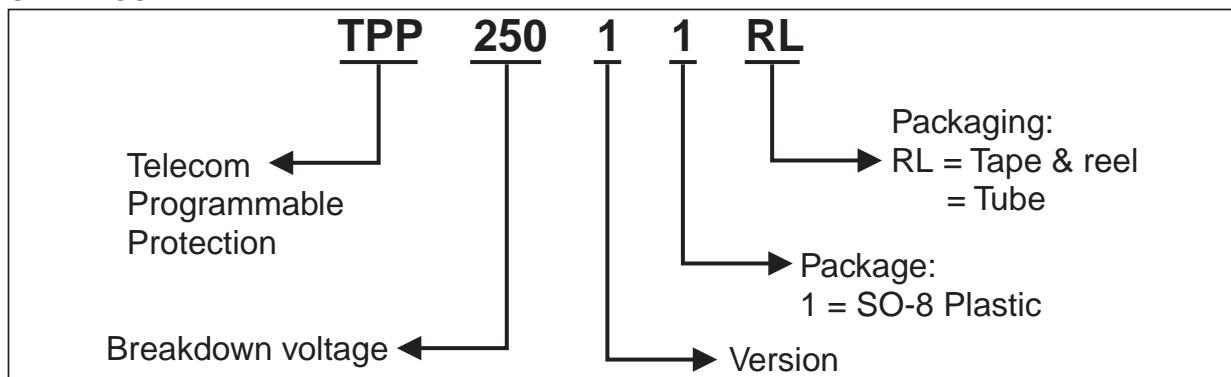


**MARKING**

Package	Type	Marking
SO-8	TPP25011	TPP250

**PACKAGE MECHANICAL DATA**

SO-8 Plastic

REF.	DIMENSIONS					
	Millimetres			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.75			0.069
a1	0.1		0.25	0.004		0.010
a2			1.65			0.065
b	0.35		0.48	0.014		0.019
b1	0.19		0.25	0.007		0.010
C		0.50			0.020	
c1	45° (typ)					
D	4.8		5.0	0.189		0.197
E	5.8		6.2	0.228		0.244
e		1.27			0.050	
e3		3.81			0.150	
F	3.8		4.0	0.15		0.157
L	0.4		1.27	0.016		0.050
M			0.6			0.024
S	8° (max)					

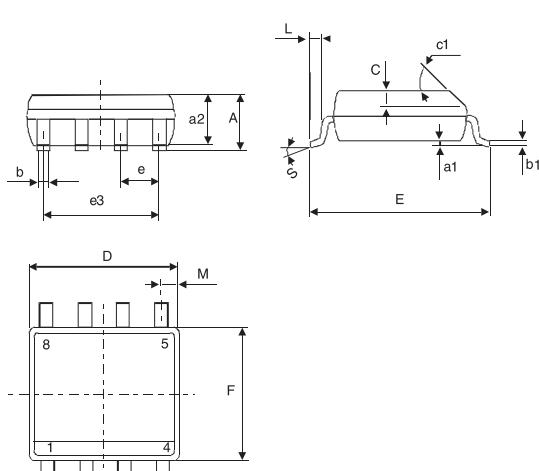

The technical drawings provide three views of the SO-8 package: a top view showing the eight pins numbered 1 through 8, a side view showing lead height (L), lead width (c1), and lead thickness (a1), and a cross-sectional view showing lead thickness (a1), lead width (c1), and lead height (L).

**Packaging :** Products supplied antistatic tubes or tape and reel.

**Weight :** 0.08g

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.

All other names are the property of their respective owners.

© 2003 STMicroelectronics - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany -  
Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain -  
Sweden - Switzerland - United Kingdom - United States

[www.st.com](http://www.st.com)



ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru