

# EL8302

## 500MHz Rail-to-Rail Amplifier


FN7348  
Rev 2.00  
May 6, 2005

The EL8302 represents a triple rail-to-rail amplifier with a -3dB bandwidth of 500MHz and slew rate of 600V/ $\mu$ s. Running off a very low supply current of 5.6mA per channel, the EL8302 also features inputs that go to 0.15V below the  $V_{S-}$  rail.

The EL8302 includes a fast-acting disable/power-down circuit. With a 25ns disable and a 200ns enable, the EL8302 is ideal for multiplexing applications.

The EL8302 is designed for a number of general purpose video, communication, instrumentation, and industrial applications. The EL8302 is available in an 16-pin SO and 16-pin QSOP packages and is specified for operation over the -40°C to +85°C temperature range.

### Pinout

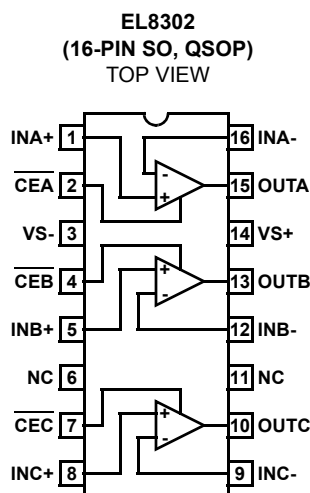

### Features

- 500MHz -3dB bandwidth
- 600V/ $\mu$ s slew rate
- Low supply current = 5.6mA per amplifier
- Supplies from 3V to 5.5V
- Rail-to-rail output
- Input to 0.15V below  $V_{S-}$
- Fast 25ns disable
- Low cost
- Pb-Free available (RoHS compliant)

### Applications

- Video amplifiers
- Portable/hand-held products
- Communications devices

### Ordering Information

| PART NUMBER                 | PACKAGE                  | TAPE & REEL | PKG. DWG. # |
|-----------------------------|--------------------------|-------------|-------------|
| EL8302IS                    | 16-Pin SO                | -           | MDP0027     |
| EL8302IS-T7                 | 16-Pin SO                | 7"          | MDP0027     |
| EL8302IS-T13                | 16-Pin SO                | 13"         | MDP0027     |
| EL8302ISZ<br>(See Note)     | 16-Pin SO<br>(Pb-free)   | -           | MDP0027     |
| EL8302ISZ-T7<br>(See Note)  | 16-Pin SO<br>(Pb-free)   | 7"          | MDP0027     |
| EL8302ISZ-T13<br>(See Note) | 16-Pin SO<br>(Pb-free)   | 13"         | MDP0027     |
| EL8302IU                    | 16-Pin QSOP              | -           | MDP0040     |
| EL8302IU-T7                 | 16-Pin QSOP              | 7"          | MDP0040     |
| EL8302IU-T13                | 16-Pin QSOP              | 13"         | MDP0040     |
| EL8302IUZ<br>(See Note)     | 16-Pin QSOP<br>(Pb-free) | -           | MDP0040     |
| EL8302IUZ-T7<br>(See Note)  | 16-Pin QSOP<br>(Pb-free) | 7"          | MDP0040     |
| EL8302IUZ-T13<br>(See Note) | 16-Pin QSOP<br>(Pb-free) | 13"         | MDP0040     |

NOTE: Intersil Pb-free products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate termination finish, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

**Absolute Maximum Ratings** ( $T_A = 25^\circ\text{C}$ )

Supply Voltage from  $V_{S+}$  to  $V_{S-}$  ..... 5.5V  
 Input Voltage .....  $V_{S+} + 0.3\text{V}$  to  $V_{S-} - 0.3\text{V}$   
 Differential Input Voltage ..... .2V  
 Continuous Output Current ..... 40mA

Power Dissipation ..... See Curves  
 Storage Temperature .....  $-65^\circ\text{C}$  to  $+125^\circ\text{C}$   
 Ambient Operating Temperature .....  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$   
 Operating Junction Temperature .....  $+125^\circ\text{C}$

**CAUTION:** Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

**IMPORTANT NOTE:** All parameters having Min/Max specifications are guaranteed. Typ values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore:  $T_J = T_C = T_A$

**Electrical Specifications**  $V_{S+} = 5\text{V}$ ,  $V_{S-} = \text{GND}$ ,  $T_A = 25^\circ\text{C}$ ,  $V_{CM} = 2.5\text{V}$ ,  $R_L$  to 2.5V,  $A_V = 1$ , Unless Otherwise Specified

| PARAMETER                | DESCRIPTION                                          | CONDITIONS                                                      | MIN                    | TYP  | MAX                    | UNIT  |
|--------------------------|------------------------------------------------------|-----------------------------------------------------------------|------------------------|------|------------------------|-------|
| INPUT CHARACTERISTICS    |                                                      |                                                                 |                        |      |                        |       |
| V <sub>OS</sub>          | Offset Voltage                                       |                                                                 | -7                     | -0.8 | +7                     | mV    |
| TCV <sub>OS</sub>        | Offset Voltage Temperature Coefficient               | Measured from T <sub>MIN</sub> to T <sub>MAX</sub>              |                        | 3    |                        | μV/°C |
| I <sub>B</sub>           | Input Bias Current                                   | V <sub>IN</sub> = 0V                                            | -10                    | -6   |                        | μA    |
| I <sub>OS</sub>          | Input Offset Current                                 | V <sub>IN</sub> = 0V                                            |                        | 0.1  | 0.6                    | μA    |
| TCI <sub>OS</sub>        | Input Bias Current Temperature Coefficient           | Measured from T <sub>MIN</sub> to T <sub>MAX</sub>              |                        | 2    |                        | nA/°C |
| CMRR                     | Common Mode Rejection Ratio                          | V <sub>CM</sub> = -0.15V to +3.5V                               | 70                     | 95   |                        | dB    |
| CMIR                     | Common Mode Input Range                              |                                                                 | V <sub>S</sub> - -0.15 |      | V <sub>S</sub> + - 1.5 | V     |
| R <sub>IN</sub>          | Input Resistance                                     | Common Mode                                                     |                        | 7    |                        | MΩ    |
| C <sub>IN</sub>          | Input Capacitance                                    |                                                                 |                        | 0.5  |                        | pF    |
| AVOL                     | Open Loop Gain                                       | V <sub>OUT</sub> = +1.5V to +3.5V, R <sub>L</sub> = 1kΩ to GND  | 75                     | 100  |                        | dB    |
|                          |                                                      | V <sub>OUT</sub> = +1.5V to +3.5V, R <sub>L</sub> = 150Ω to GND |                        | 80   |                        | dB    |
| OUTPUT CHARACTERISTICS   |                                                      |                                                                 |                        |      |                        |       |
| R <sub>OUT</sub>         | Output Resistance                                    | A <sub>V</sub> = +1                                             |                        | 30   |                        | mΩ    |
| V <sub>OP</sub>          | Positive Output Voltage Swing                        | R <sub>L</sub> = 1kΩ                                            | 4.85                   | 4.9  |                        | V     |
|                          |                                                      | R <sub>L</sub> = 150Ω                                           | 4.65                   | 4.7  |                        | V     |
| V <sub>ON</sub>          | Negative Output Voltage Swing                        | R <sub>L</sub> = 150Ω                                           |                        | 150  | 200                    | mV    |
|                          |                                                      | R <sub>L</sub> = 1kΩ                                            |                        | 50   | 70                     | mV    |
| I <sub>OUT</sub>         | Linear Output Current                                |                                                                 |                        | 65   |                        | mA    |
| I <sub>SC</sub> (source) | Short Circuit Current                                | R <sub>L</sub> = 10Ω                                            | 50                     | 80   |                        | mA    |
| I <sub>SC</sub> (sink)   | Short Circuit Current                                | R <sub>L</sub> = 10Ω                                            | 90                     | 150  |                        | mA    |
| POWER SUPPLY             |                                                      |                                                                 |                        |      |                        |       |
| PSRR                     | Power Supply Rejection Ratio                         | V <sub>S</sub> + = 4.5V to 5.5V                                 | 70                     | 95   |                        | dB    |
| I <sub>S-ON</sub>        | Supply Current - Enabled per Amplifier               |                                                                 |                        | 5.6  | 6.2                    | mA    |
| I <sub>S-OFF</sub>       | Supply Current - Disabled per Amplifier              |                                                                 |                        | 40   | 90                     | μA    |
| ENABLE                   |                                                      |                                                                 |                        |      |                        |       |
| t <sub>EN</sub>          | Enable Time                                          |                                                                 |                        | 200  |                        | ns    |
| t <sub>DS</sub>          | Disable Time                                         |                                                                 |                        | 25   |                        | ns    |
| V <sub>IH-ENB</sub>      | $\overline{\text{ENABLE}}$ Pin Voltage for Power-up  |                                                                 |                        | 0.8  |                        | V     |
| V <sub>IL-ENB</sub>      | $\overline{\text{ENABLE}}$ Pin Voltage for Shut-down |                                                                 |                        | 2    |                        | V     |

**Electrical Specifications**  $V_{S+} = 5V$ ,  $V_{S-} = GND$ ,  $T_A = 25^{\circ}C$ ,  $V_{CM} = 2.5V$ ,  $R_L = 2.5V$ ,  $A_V = 1$ , Unless Otherwise Specified

| PARAMETER             | DESCRIPTION                      | CONDITIONS                                                 | MIN | TYP  | MAX | UNIT           |
|-----------------------|----------------------------------|------------------------------------------------------------|-----|------|-----|----------------|
| $I_{IH-ENB}$          | ENABLE Pin Input Current High    |                                                            |     | 8.6  |     | $\mu A$        |
| $I_{IL-ENB}$          | ENABLE Pin Input for Current Low |                                                            |     | 0.01 |     | $\mu A$        |
| <b>AC PERFORMANCE</b> |                                  |                                                            |     |      |     |                |
| BW                    | -3dB Bandwidth                   | $A_V = +1$ , $R_F = 0\Omega$ , $C_L = 1.5pF$               |     | 500  |     | MHz            |
|                       |                                  | $A_V = -1$ , $R_F = 1k\Omega$ , $C_L = 1.5pF$              |     | 140  |     | MHz            |
|                       |                                  | $A_V = +2$ , $R_F = 1k\Omega$ , $C_L = 1.5pF$              |     | 165  |     | MHz            |
|                       |                                  | $A_V = +10$ , $R_F = 1k\Omega$ , $C_L = 1.5pF$             |     | 18   |     | MHz            |
| BW                    | $\pm 0.1dB$ Bandwidth            | $A_V = +1$ , $R_F = 0\Omega$ , $C_L = 1.5pF$               |     | 36   |     | MHz            |
| Peak                  | Peaking                          | $A_V = +1$ , $R_L = 1k\Omega$ , $C_L = 1.5pF$              |     | 1    |     | dB             |
| GBWP                  | Gain Bandwidth Product           |                                                            |     | 200  |     | MHz            |
| PM                    | Phase Margin                     | $R_L = 1k\Omega$ , $C_L = 1.5pF$                           |     | 55   |     | $^{\circ}$     |
| SR                    | Slew Rate                        | $A_V = 2$ , $R_L = 100\Omega$ , $V_{OUT} = 0.5V$ to $4.5V$ | 500 | 600  |     | $V/\mu s$      |
| $t_R$                 | Rise Time                        | $2.5V_{STEP}$ , 20% - 80%                                  |     | 4    |     | ns             |
| $t_F$                 | Fall Time                        | $2.5V_{STEP}$ , 20% - 80%                                  |     | 2    |     | ns             |
| OS                    | Overshoot                        | 200mV step                                                 |     | 10   |     | %              |
| $t_{PD}$              | Propagation Delay                | 200mV step                                                 |     | 1    |     | ns             |
| $t_S$                 | 0.1% Settling Time               | 200mV step                                                 |     | 15   |     | ns             |
| dG                    | Differential Gain                | $A_V = +2$ , $R_F = 1k\Omega$ , $R_L = 150\Omega$          |     | 0.01 |     | %              |
| dP                    | Differential Phase               | $A_V = +2$ , $R_F = 1k\Omega$ , $R_L = 150\Omega$          |     | 0.01 |     | $^{\circ}$     |
| $e_N$                 | Input Noise Voltage              | $f = 10kHz$                                                |     | 12   |     | $nV/\sqrt{Hz}$ |
| $i_{N+}$              | Positive Input Noise Current     | $f = 10kHz$                                                |     | 1.7  |     | $pA/\sqrt{Hz}$ |
| $i_{N-}$              | Negative Input Noise Current     | $f = 10kHz$                                                |     | 1.3  |     | $pA/\sqrt{Hz}$ |
| $e_S$                 | Channel Separation               | $f = 100kHz$                                               |     | 95   |     | dB             |

**Pin Descriptions**

| PIN        | NAME                                                   | FUNCTION                                  |
|------------|--------------------------------------------------------|-------------------------------------------|
| 1, 5, 8    | INA+, INB+, INC+                                       | Non-inverting input for each channel      |
| 2, 4, 7    | $\overline{CEA}$ , $\overline{CEB}$ , $\overline{CEC}$ | Enable and disable input for each channel |
| 3          | VS-                                                    | Negative power supply                     |
| 6, 11      | NC                                                     | Not connected                             |
| 9, 12, 16  | INC-, INB-, INA-                                       | Inverting input for each channel          |
| 10, 13, 15 | OUTC, OUTB, OUTA                                       | Amplifier output for each channel         |
| 14         | VS+                                                    | Positive power supply                     |

## Typical Performance Curves

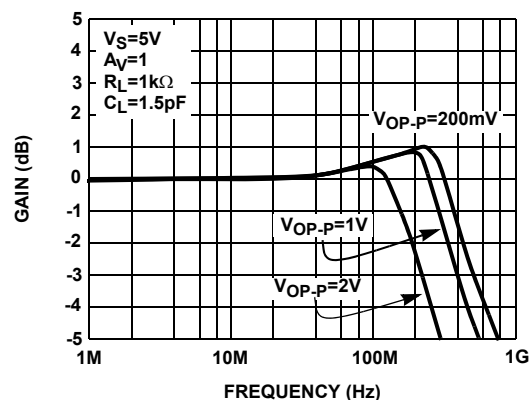


FIGURE 1. FREQUENCY RESPONSE FOR VARIOUS OUTPUT VOLTAGE LEVELS

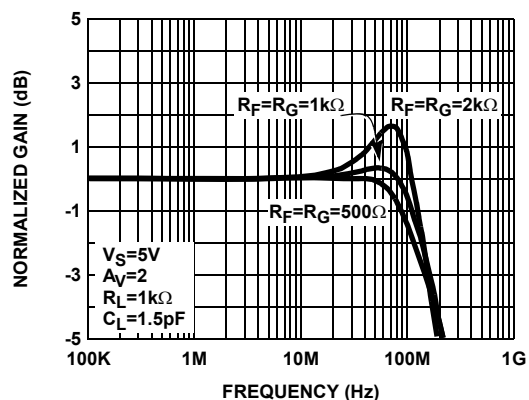


FIGURE 2. SMALL SIGNAL FREQUENCY RESPONSE vs  $R_F$  AND  $R_G$

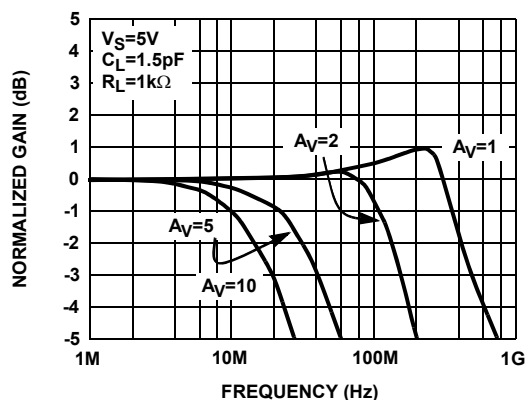


FIGURE 3. SMALL SIGNAL FREQUENCY RESPONSE FOR VARIOUS NON-INVERTING GAINS

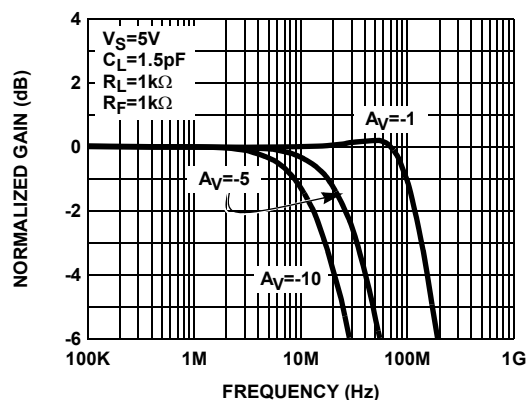


FIGURE 4. SMALL SIGNAL FREQUENCY RESPONSE FOR VARIOUS INVERTING GAINS

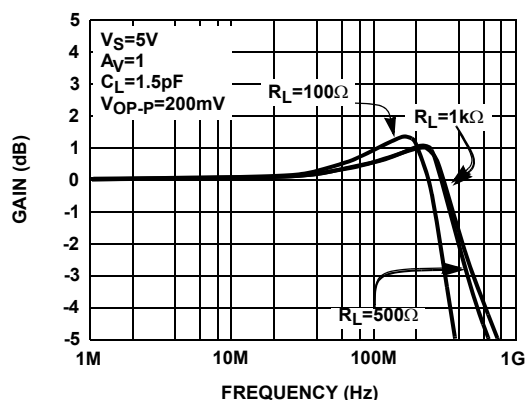


FIGURE 5. SMALL SIGNAL FREQUENCY RESPONSE FOR VARIOUS  $R_{LOAD}$

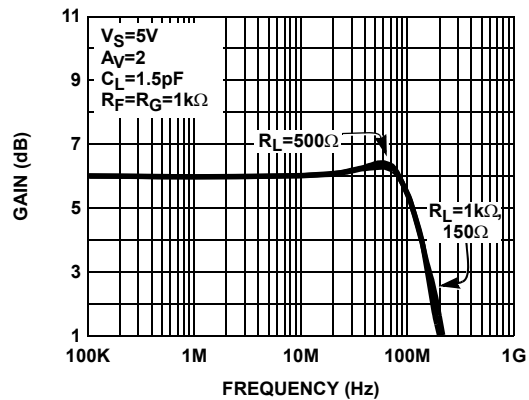


FIGURE 6. SMALL SIGNAL FREQUENCY RESPONSE vs VARIOUS  $R_{LOAD}$

## Typical Performance Curves (Continued)

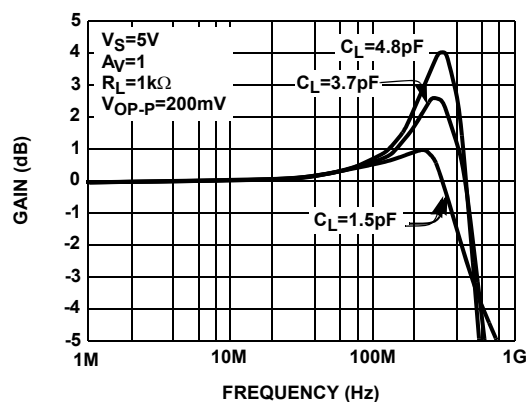
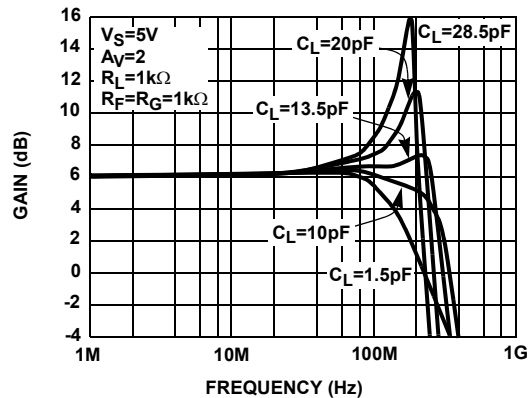
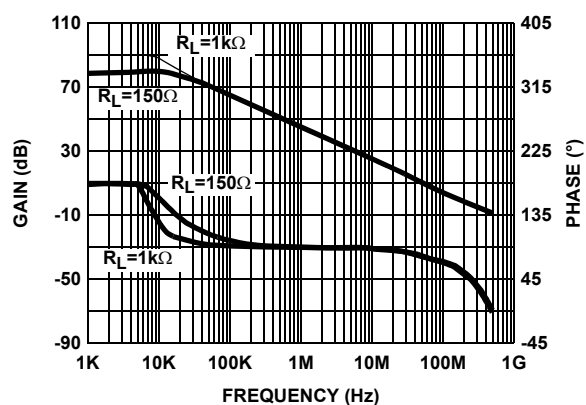
FIGURE 7. SMALL SIGNAL FREQUENCY RESPONSE vs  $C_L$ FIGURE 8. SMALL SIGNAL FREQUENCY RESPONSE FOR VARIOUS  $C_L$ 

FIGURE 9. OPEN LOOP GAIN AND PHASE vs FREQUENCY

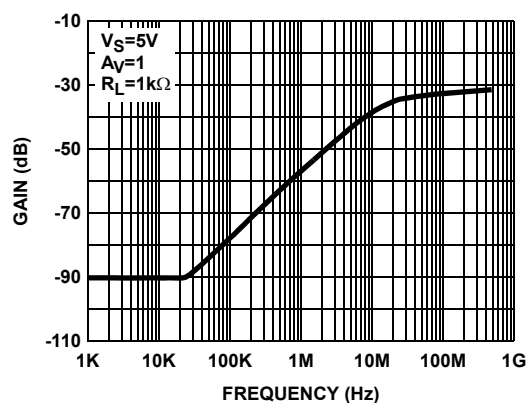


FIGURE 10. DISABLED OUTPUT ISOLATION FREQUENCY RESPONSE

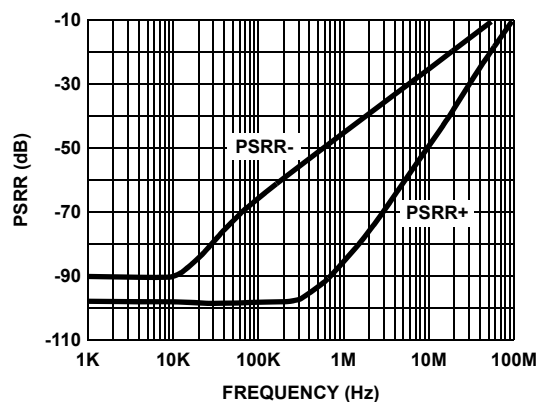


FIGURE 11. POWER SUPPLY REJECTION RATIO vs FREQUENCY

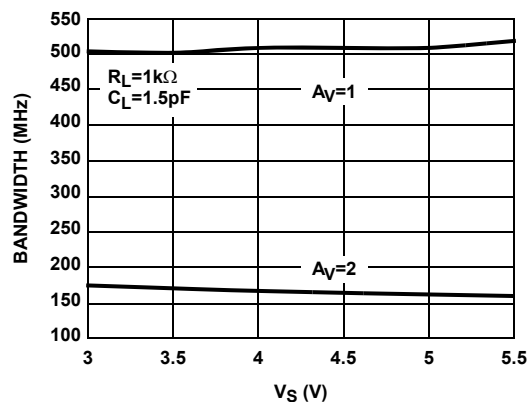


FIGURE 12. SMALL SIGNAL BANDWIDTH vs SUPPLY VOLTAGE

# Typical Performance Curves (Continued)

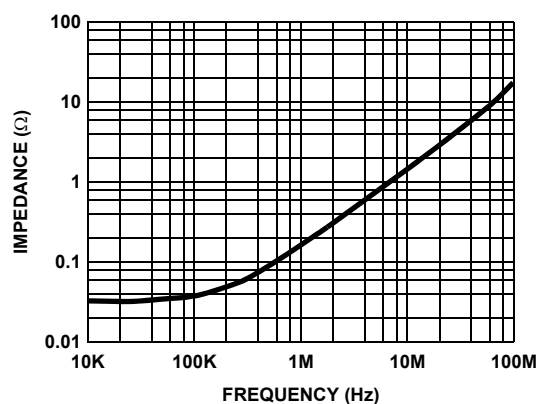


FIGURE 13. OUTPUT IMPEDANCE vs FREQUENCY

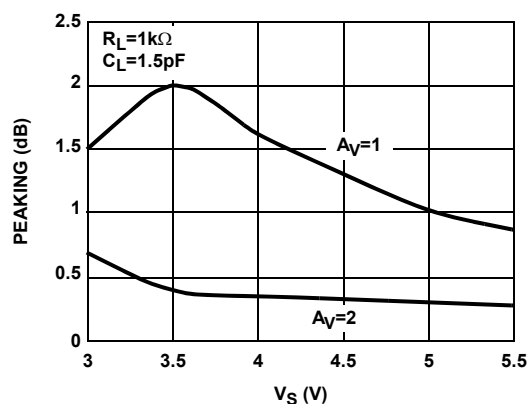


FIGURE 14. SMALL SIGNAL PEAKING vs SUPPLY VOLTAGE

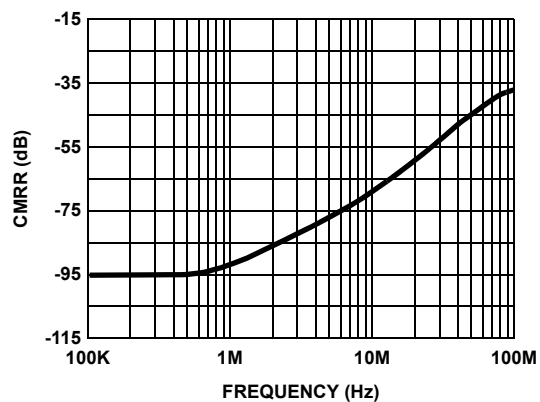


FIGURE 15. COMMON-MODE REJECTION RATIO vs FREQUENCY

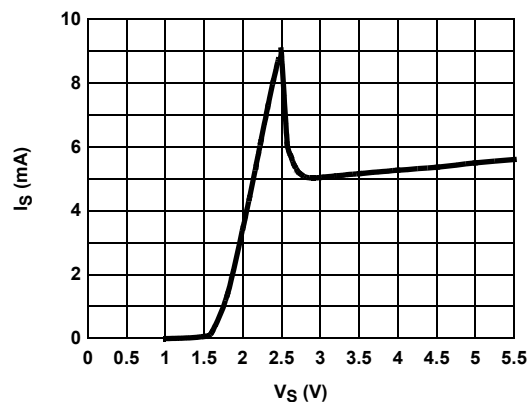


FIGURE 16. SUPPLY CURRENT vs SUPPLY VOLTAGE (PER AMPLIFIER)

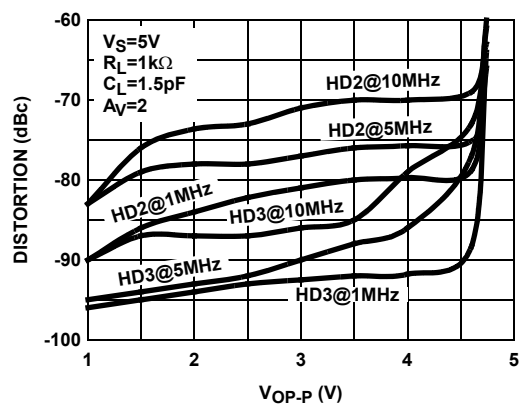


FIGURE 17. HARMONIC DISTORTION vs OUTPUT VOLTAGE

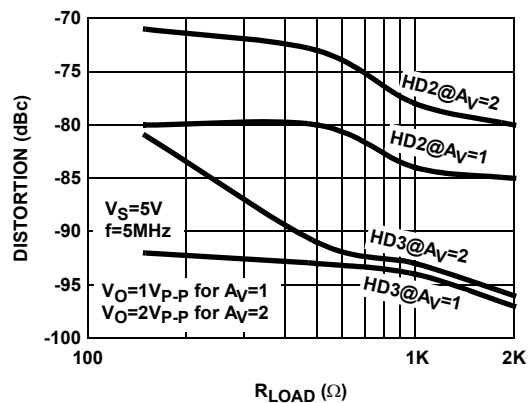


FIGURE 18. HARMONIC DISTORTION vs LOAD RESISTANCE

## Typical Performance Curves (Continued)

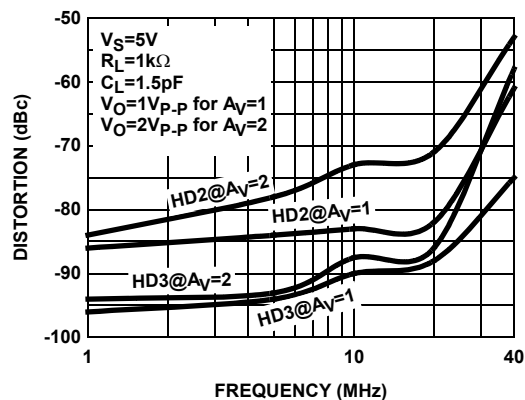


FIGURE 19. HARMONIC DISTORTION vs FREQUENCY

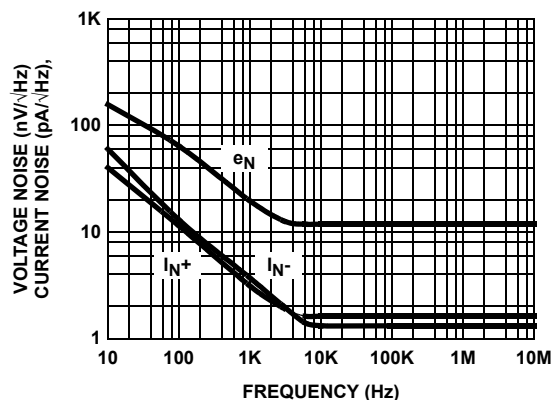


FIGURE 20. VOLTAGE AND CURRENT NOISE vs FREQUENCY

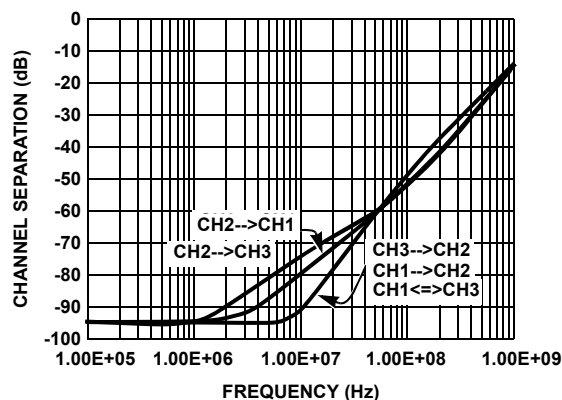


FIGURE 21. CHANNEL SEPARATION vs FREQUENCY

$V_S=5V$ ,  $A_V=1$ ,  $R_L=1k\Omega$  TO  $2.5V$ ,  $C_L=1.5pF$

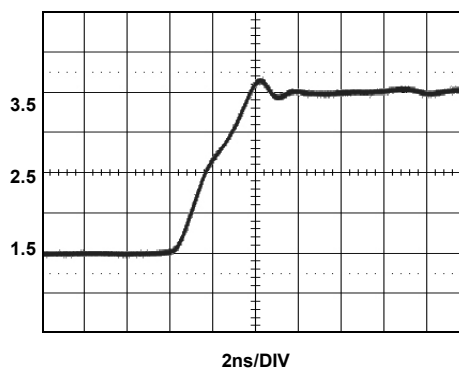


FIGURE 22. LARGE SIGNAL TRANSIENT RESPONSE - RISING

$V_S=5V$ ,  $A_V=1$ ,  $R_L=1k\Omega$  TO  $2.5V$ ,  $C_L=1.5pF$

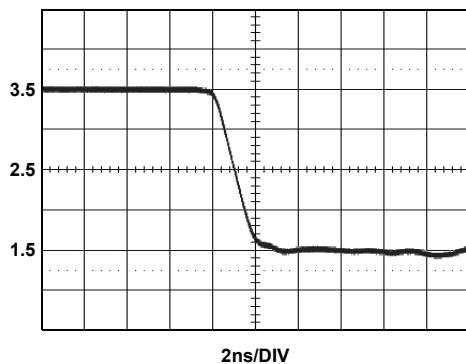


FIGURE 23. LARGE SIGNAL TRANSIENT RESPONSE - FALLING

$V_S=5V$ ,  $A_V=1$ ,  $R_L=1k\Omega$  TO  $2.5V$ ,  $C_L=1.5pF$

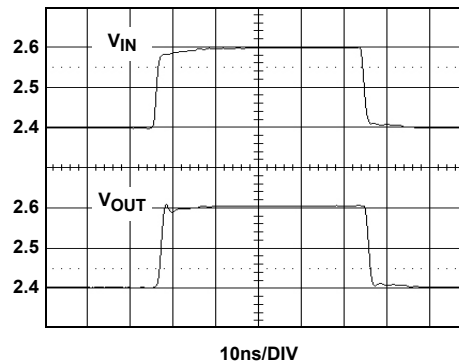


FIGURE 24. SMALL SIGNAL TRANSIENT RESPONSE

## Typical Performance Curves (Continued)

$V_S=5V$ ,  $A_V=5$ ,  $R_L=1k\Omega$  TO 2.5V

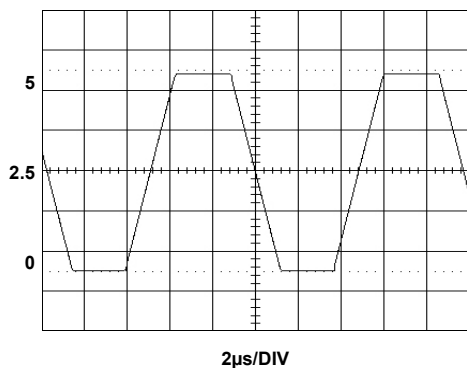


FIGURE 25. OUTPUT SWING

$V_S=5V$ ,  $A_V=5$ ,  $R_L=1k\Omega$  TO 2.5V



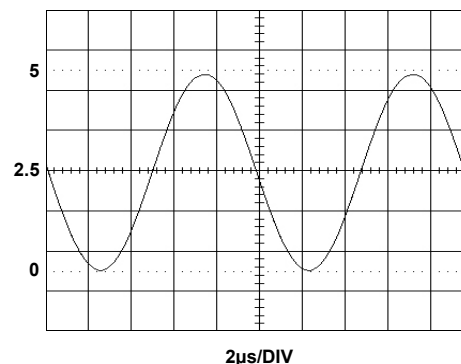


FIGURE 26. OUTPUT SWING

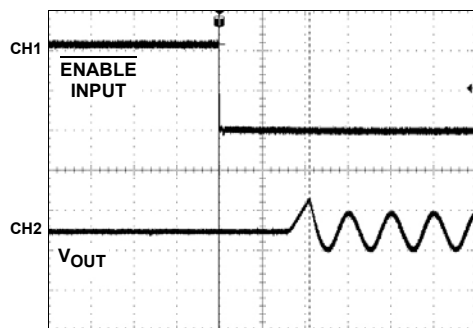

CH1, CH2, 1V/DIV, M=100ns

FIGURE 27. ENABLED RESPONSES

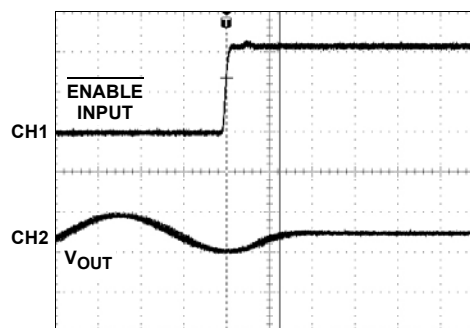

CH1, CH2, 0.5V/DIV, M=20ns

FIGURE 28. DISABLED RESPONSE

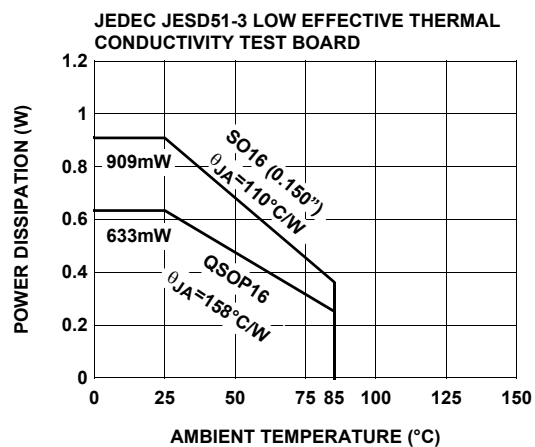


FIGURE 29. PACKAGE POWER DISSIPATION vs AMBIENT TEMPERATURE


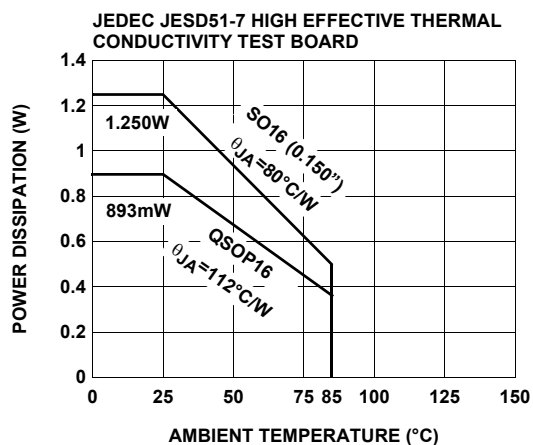


FIGURE 30. PACKAGE POWER DISSIPATION vs AMBIENT TEMPERATURE



## Simplified Schematic Diagram

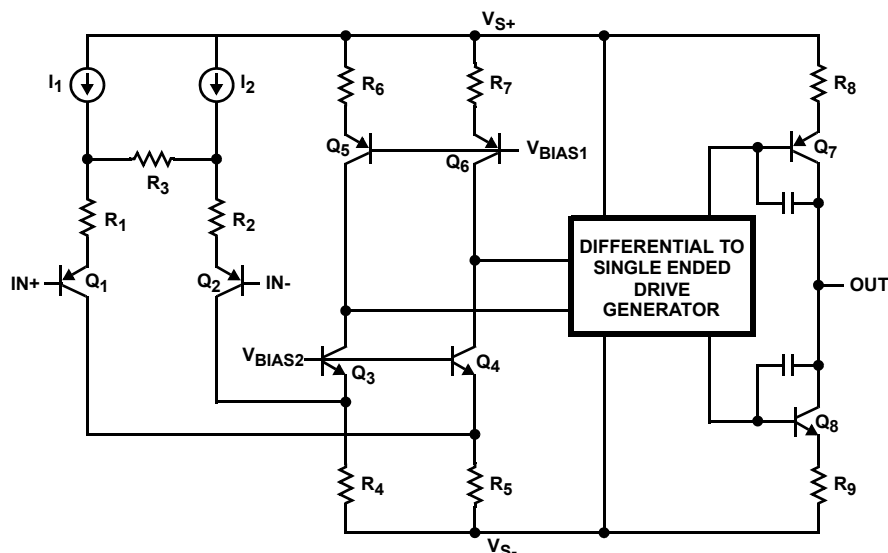

## Description of Operation and Application Information

### Product Description

The EL8302 is wide bandwidth, single supply, low power and rail-to-rail output voltage feedback operational amplifiers. The amplifiers are internally compensated for closed loop gain of +1 or greater. Connected in voltage follower mode and driving a 1k $\Omega$  load, the EL8302 has a -3dB bandwidth of 500MHz. Driving a 150 $\Omega$  load, the bandwidth is about 350MHz while maintaining a 600V/ $\mu$ s slew rate. The EL8302 is available with a power down pin for each channel to reduce power to 30 $\mu$ A typically while the amplifier is disabled.

### Input, Output and Supply Voltage Range

The EL8302 has been designed to operate with a single supply voltage from 3V to 5.0V. Split supplies can also be used as long as their total voltage is within 3V to 5.0V. The amplifiers have an input common mode voltage range from 0.15V below the negative supply ( $V_{S-}$  pin) to within 1.5V of the positive supply ( $V_{S+}$  pin). If the input signal is outside the above specified range, it will cause the output signal to be distorted.

The output of the EL8302 can swing rail to rail. As the load resistance becomes lower, the ability to drive close to each rail is reduced. For the load resistor 1k $\Omega$ , the output swing is about 4.9V at a 5V supply. For the load resistor 150 $\Omega$ , the output swing is about 4.6V.

### Choice of Feedback Resistor and Gain Bandwidth Product

For applications that require a gain of +1, no feedback resistor is required. Just short the output pin to the inverting input pin. For gains greater than +1, the feedback resistor forms a pole with the parasitic capacitance at the inverting input. As this pole becomes smaller, the amplifier's phase margin is reduced. This causes ringing in the time domain and peaking in the

frequency domain. Therefore,  $R_F$  has some maximum value that should not be exceeded for optimum performance. If a large value of  $R_F$  must be used, a small capacitor in the few pF range in parallel with  $R_F$  can help to reduce the ringing and peaking at the expense of reducing the bandwidth.

As far as the output stage of the amplifier is concerned, the output stage is also a gain stage with the load.  $R_F$  and  $R_G$  appear in parallel with  $R_L$  for gains other than +1. As this combination gets smaller, the bandwidth falls off. Consequently,  $R_F$  also has a minimum value that should not be exceeded for optimum performance. For gain of +1,  $R_F=0$  is optimum. For the gains other than +1, optimum response is obtained with  $R_F$  between 300 $\Omega$  to 1k $\Omega$ .

The EL8302 has a gain bandwidth product of 200MHz. For gains  $\geq 5$ , its bandwidth can be predicted by the following equation:

$$\text{Gain} \times \text{BW} = 200\text{MHz}$$

### Video Performance

For good video performance, an amplifier is required to maintain the same output impedance and the same frequency response as DC levels are changed at the output. This is especially difficult when driving a standard video load of 150 $\Omega$ , because the change in output current with DC level. Special circuitry has been incorporated in the EL8302 to reduce the variation of the output impedance with the current output. This results in dG and dP specifications of 0.01% and 0.01°, while driving 150 $\Omega$  at a gain of 2. Driving high impedance loads would give a similar or better dG and dP performance.

### Driving Capacitive Loads and Cables

The EL8302 can drive 5pF loads in parallel with 1k $\Omega$  with less than 5dB of peaking at gain of +1. If less peaking is desired in applications, a small series resistor (usually between 5 $\Omega$  to 50 $\Omega$ ) can be placed in series with the output to eliminate most

peaking. However, this will reduce the gain slightly. If the gain setting is greater than 1, the gain resistor  $R_G$  can then be chosen to make up for any gain loss which may be created by the additional series resistor at the output.

When used as a cable driver, double termination is always recommended for reflection-free performance. For those applications, a back-termination series resistor at the amplifier's output will isolate the amplifier from the cable and allow extensive capacitive drive. However, other applications may have high capacitive loads without a back-termination resistor. Again, a small series resistor at the output can help to reduce peaking.

### Disable/Power-Down

The EL8302 can be disabled and placed its output in a high impedance state. The turn off time is about 25ns and the turn on time is about 200ns. When disabled, the amplifier's supply current is reduced to 30µA typically, thereby effectively eliminating the power consumption. The amplifier's power down can be controlled by standard TTL or CMOS signal levels at the ENABLE pin. The applied logic signal is relative to  $V_{S-}$  pin. Letting the ENABLE pin float or applying a signal that is less than 0.8V above  $V_{S-}$  will enable the amplifier. The amplifier will be disabled when the signal at ENABLE pin is 2V above  $V_{S-}$ .

### Output Drive Capability

The EL8302 does not have internal short circuit protection circuitry. They have a typical short circuit current of 80mA sourcing and 150mA sinking for the output is connected to half way between the rails with a 10Ω resistor. If the output is shorted indefinitely, the power dissipation could easily increase such that the part will be destroyed. Maximum reliability is maintained if the output current never exceeds ±40mA. This limit is set by the design of the internal metal interconnections.

### Power Dissipation

With the high output drive capability of the EL8302, It is possible to exceed the 125°C absolute maximum junction temperature under certain load current conditions. Therefore, it is important to calculate the maximum junction temperature for the application to determine if the load conditions or package types need to be modified for the amplifier to remain in the safe operating area.

The maximum power dissipation allowed in a package is determined according to:

$$PD_{MAX} = \frac{T_{JMAX} - T_{AMAX}}{\theta_{JA}}$$

Where:

$T_{JMAX}$  = Maximum junction temperature

$T_{AMAX}$  = Maximum ambient temperature

$\theta_{JA}$  = Thermal resistance of the package

The maximum power dissipation actually produced by an IC is the total quiescent supply current times the total power supply voltage, plus the power in the IC due to the load, or:

For sourcing:

$$PD_{MAX} = V_S \times I_{SMAX} + \sum_{i=1}^3 (V_S - V_{OUTi}) \times \frac{V_{OUTi}}{R_{Li}}$$

For sinking:

$$PD_{MAX} = V_S \times I_{SMAX} + \sum_{i=1}^3 (V_{OUTi} - V_{S-}) \times I_{LOADi}$$

Where:

$V_S$  = Total supply voltage

$I_{SMAX}$  = Maximum quiescent supply current

$V_{OUTi}$  = Maximum output voltage of the application for each channel

$R_{LOADi}$  = Load resistance tied to ground for each channel

$I_{LOADi}$  = Load current for eachh channel

By setting the two  $PD_{MAX}$  equations equal to each other, we can solve the output current and  $R_{LOAD}$  to avoid the device overheat.

### Power Supply Bypassing and Printed Circuit Board Layout

As with any high frequency device, a good printed circuit board layout is necessary for optimum performance. Lead lengths should be as short as possible. The power supply pin must be well bypassed to reduce the risk of oscillation. For normal single supply operation, where the  $V_{S-}$  pin is connected to the ground plane, a single 4.7µF tantalum capacitor in parallel with a 0.1µF ceramic capacitor from  $V_{S+}$  to GND will suffice. This same capacitor combination should be placed at each supply pin to ground if split supplies are to be used. In this case, the  $V_{S-}$  pin becomes the negative supply rail.

For good AC performance, parasitic capacitance should be kept to a minimum. Use of wire wound resistors should be avoided because of their additional series inductance. Use of sockets should also be avoided if possible. Sockets add parasitic inductance and capacitance that can result in compromised performance. Minimizing parasitic capacitance at the amplifier's inverting input pin is very important. The feedback resistor should be placed very close to the inverting input pin. Strip line design techniques are recommended for the signal traces.

### Typical Applications

#### VIDEO SYNC PULSE REMOVER

Many CMOS analog to digital converters have a parasitic latch up problem when subjected to negative input voltage levels. Since the sync tip contains no useful video information and it is

a negative going pulse, we can chop it off. Figure 31 shows a gain of 2 connections for EL8302. Figure 32 shows the complete input video signal applied at the input, as well as the output signal with the negative going sync pulse removed.

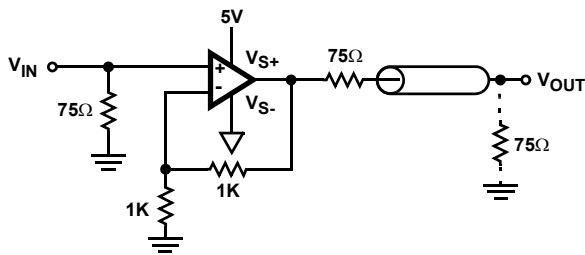


FIGURE 31. SYNC PULSE REMOVER

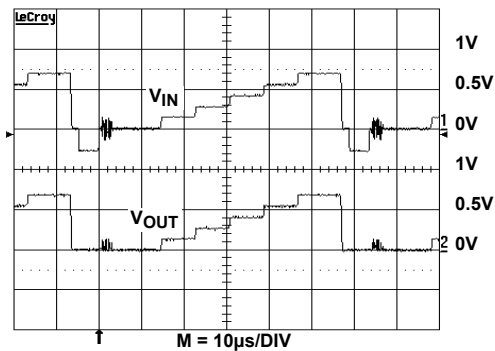


FIGURE 32. VIDEO SIGNAL

### MULTIPLEXER

Besides the normal power down usage, the  $\overline{\text{ENABLE}}$  pin of the EL8302 can be used for multiplexing applications. Figure 33 shows two channels with the outputs tied together, driving a back terminated 75Ω video load. A 2V<sub>P-P</sub> 2MHz sine wave is applied to Amp A and a 1V<sub>P-P</sub> 2MHz sine wave is applied to Amp B. Figure 34 shows the  $\overline{\text{ENABLE}}$  signal and the resulting output waveform at V<sub>OUT</sub>. Observe the break-before-make operation of the multiplexing. Amp A is on and V<sub>IN1</sub> is passed through to the output when the  $\overline{\text{ENABLE}}$  signal is low and turns off in about 25ns when the  $\overline{\text{ENABLE}}$  signal is high. About 200ns later, Amp B turns on and V<sub>IN2</sub> is passed through to the output. The break-before-make operation ensures that more than one amplifier isn't trying to drive the bus at the same time.

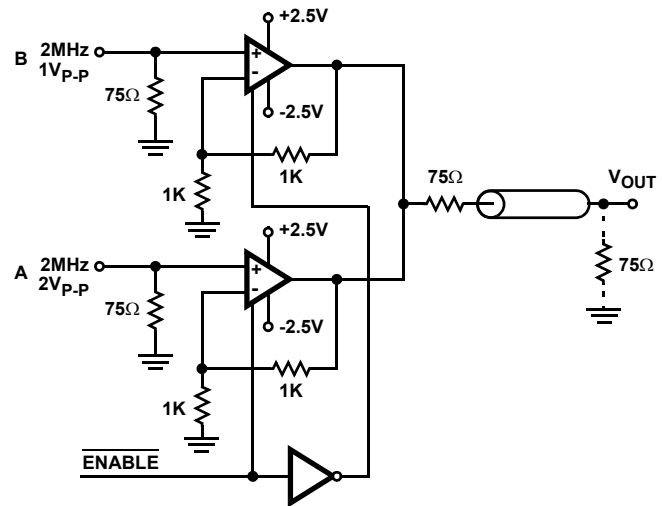


FIGURE 33. TWO TO ONE MULTIPLEXER

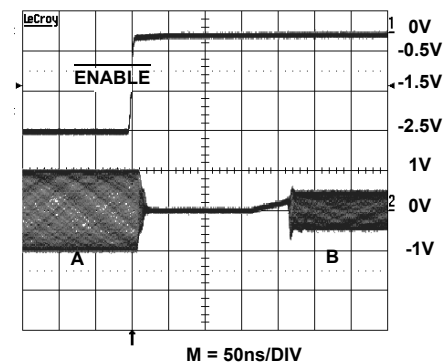


FIGURE 34.

### SINGLE SUPPLY VIDEO LINE DRIVER

The EL8302 is wideband rail-to-rail output op amplifiers with large output current, excellent dG, dP, and low distortion that allow them to drive video signals in low supply applications. Figure 35 is the single supply non-inverting video line driver configuration and Figure 36 is the inverting video line driver configuration. The signal is AC coupled by C<sub>1</sub>. R<sub>1</sub> and R<sub>2</sub> are used to level shift the input and output to provide the largest output swing. R<sub>F</sub> and R<sub>G</sub> set the AC gain. C<sub>2</sub> isolates the virtual ground potential. R<sub>T</sub> and R<sub>3</sub> are the termination resistors for the line. C<sub>1</sub>, C<sub>2</sub> and C<sub>3</sub> are selected big enough to minimize the droop of the luminance signal.

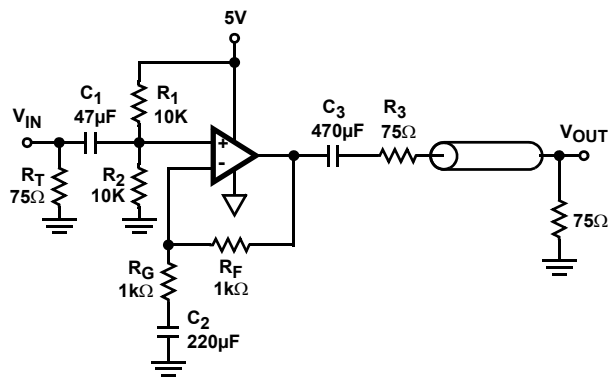


FIGURE 35. 5V SINGLE SUPPLY NON INVERTING VIDEO LINE DRIVER

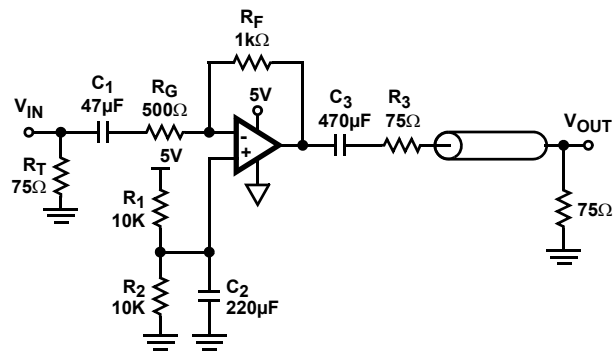


FIGURE 36. SINGLE SUPPLY INVERTING VIDEO LINE DRIVER



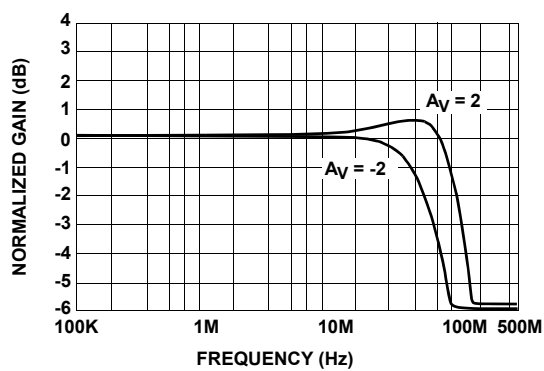


FIGURE 37. VIDEO LINE DRIVER FREQUENCY RESPONSE

SO Package Outline Drawing

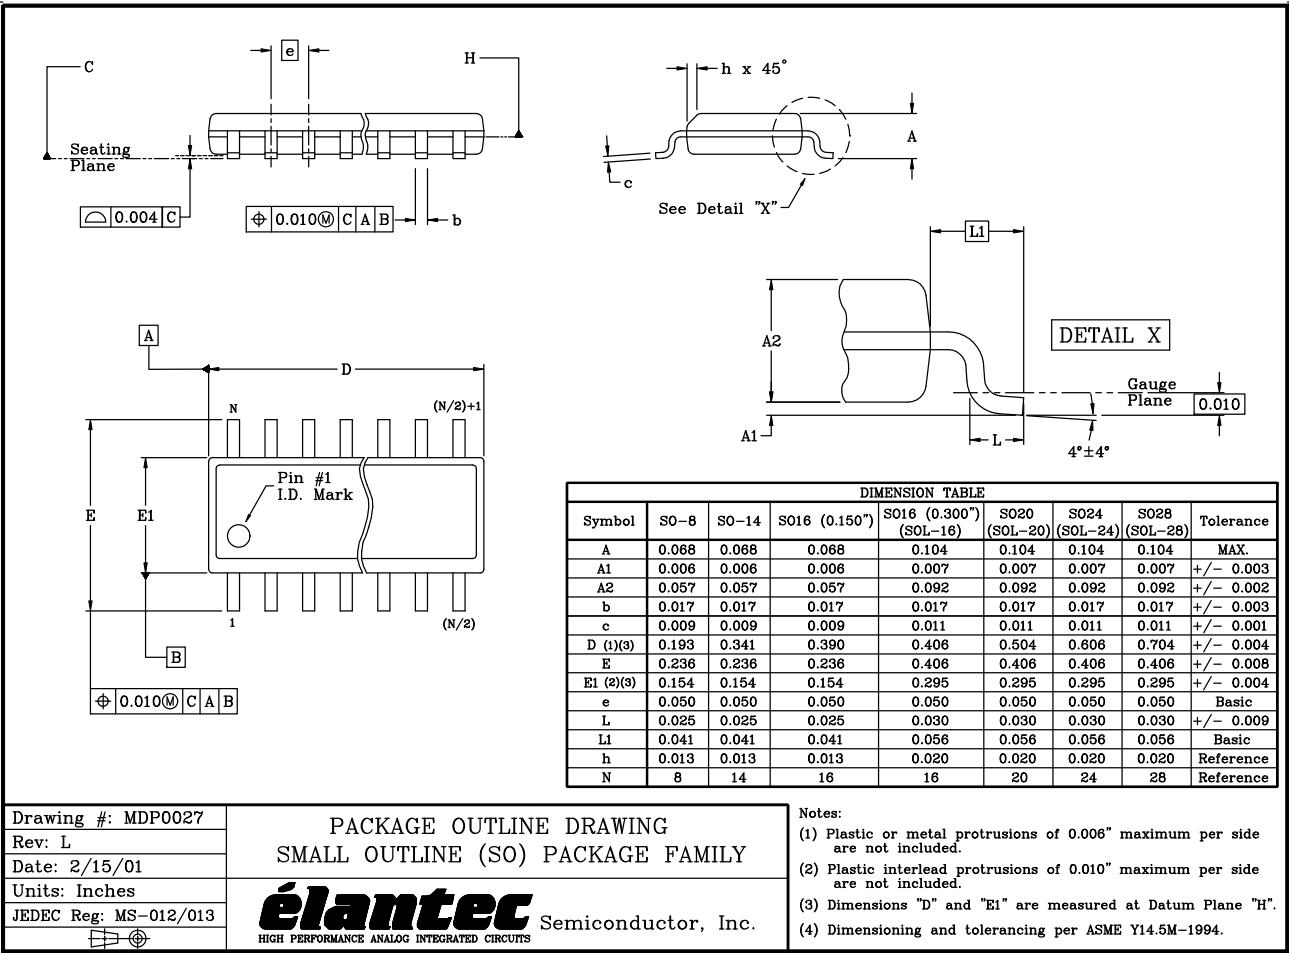

QSOP Package Outline Drawing

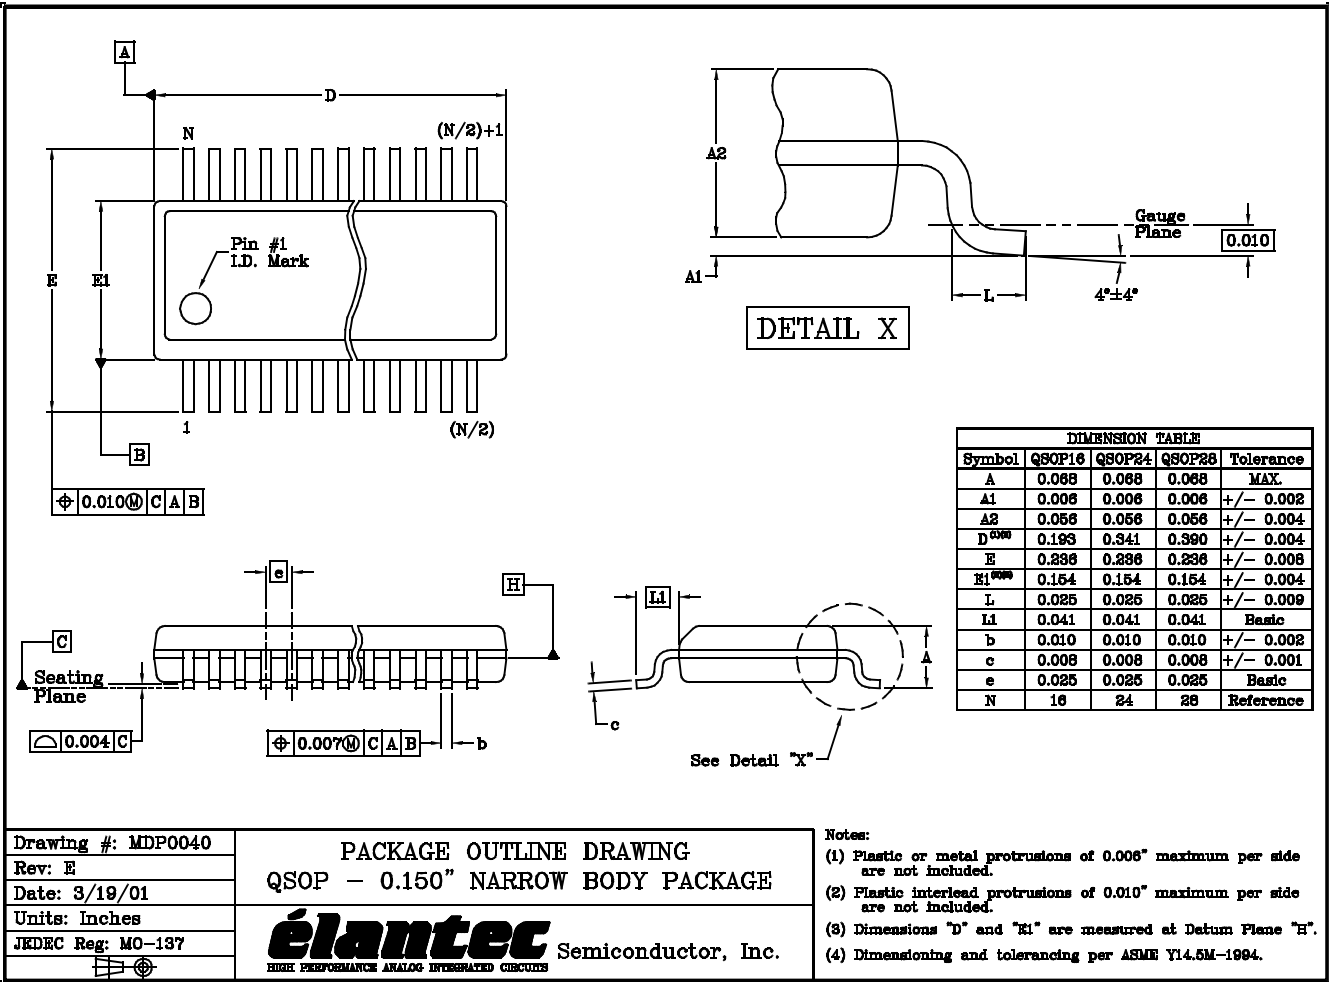

NOTE: The package drawing shown here may not be the latest version. To check the latest revision, please refer to the Intersil website at <http://www.intersil.com/design/packages/index.asp>

© Copyright Intersil Americas LLC 2003-2005. All Rights Reserved.  
All trademarks and registered trademarks are the property of their respective owners.

For additional products, see [www.intersil.com/en/products.html](http://www.intersil.com/en/products.html)

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at [www.intersil.com/en/support/qualandreliability.html](http://www.intersil.com/en/support/qualandreliability.html)

Intersil products are sold by description only. Intersil may modify the circuit design and/or specifications of products at any time without notice, provided that such modification does not, in Intersil's sole judgment, affect the form, fit or function of the product. Accordingly, the reader is cautioned to verify that datasheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)