



## Main

|                               |   |
|-------------------------------|---|
| Range of product              | OsiSense XU   |
| Series name                   | Application food and beverage multimode   |
| Electronic sensor type        | Photo-electric sensor   |
| Sensor name                   | XUB   |
| Sensor design                 | Cylindrical M18   |
| Detection system              | Multimode   |
| Material                      | Stainless steel   |
| Line of sight type            | Axial   |
| Type of output signal         | Discrete  |
| Supply circuit type           | DC  |
| Wiring technique              | 3-wire  |
| Discrete output type          | NPN   |
| Discrete output function      | 1 NO or 1 NC programmable   |
| Electrical connection         | Cable   |
| Cable length                  | 6.56 ft (2 m)   |
| Product specific application  | -   |
| Emission                      | Infrared diffuse<br>Infrared diffuse with background suppression<br>Infrared thru beam<br>Red polarised reflex  |
| [Sn] nominal sensing distance | 0.39 ft (0.12 m) diffuse with background suppression<br>0.98 ft (0.3 m) diffuse<br>9.84 ft (3 m) polarised reflex need reflector<br>XUZC50<br>65.62 ft (20 m) thru beam need a transmitter<br>XUB0SKSNL2T |

## Complementary

|                           |   |
|---------------------------|---|
| Enclosure material        | Stainless steel : 304 CU  |
| Lens material             | PMMA  |
| Maximum sensing distance  | 0.39 ft (0.12 m) diffuse with background suppression<br>1.31 ft (0.4 m) diffuse<br>98.43 ft (30 m) thru beam<br>14.76 ft (4.5 m) polarised reflex |
| Output type               | Solid state   |
| Wire insulation material  | PvR   |
| Status LED                | 1 LED (green) output state<br>1 LED (red) supply on<br>1 LED (yellow) stability   |
| [Us] rated supply voltage | 12...24 V DC with reverse polarity protection   |
| Supply voltage limits     | 10...36 V DC  |
| Switching capacity in mA  | <= 100 mA (overload and short-circuit protection)   |
| Switching frequency       | <= 250 Hz   |
| Voltage drop              | 1.5 V (closed state)  |
| Current consumption       | 35 mA (no-load)   |
| Delay first up            | < 200 ms  |
| Delay response            | < 2 ms  |
| Delay recovery            | < 2 ms  |
| Setting-up                | Self-training   |
| Diameter                  | 0.71 in (18 mm)   |
| Length                    | 3.07 in (78 mm)   |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Product weight 0.23 lb(US) (0.105 kg)

## Environment

|                                       |   |
|---------------------------------------|---|
| product certifications                | CE<br>CSA<br>UL   |
| ambient air temperature for operation | -13...131 °F (-25...55 °C)  |
| ambient air temperature for storage   | -40...158 °F (-40...70 °C)  |
| vibration resistance                  | 7 gn, amplitude = +/- 1.5 mm (f = 10...55 Hz) conforming to IEC 60068-2-6   |
| shock resistance                      | 30 gn (duration = 11 ms) conforming to IEC 60068-2-27   |
| IP degree of protection               | IP65 double insulation conforming to IEC 60529<br>IP67 double insulation conforming to IEC 60529<br>IP69K double insulation conforming to DIN 40050 |


## Offer Sustainability

|  |  |
|--|--|
| Not Green Premium product  | Not Green Premium product  |
| Compliant - since 0821 - Schneider Electric declaration of conformity  | Compliant - since 0821 - Schneider Electric declaration of conformity  |
| Reference not containing SVHC above the threshold  | Reference not containing SVHC above the threshold  |
| WARNING: This product can expose you to chemicals including:   | WARNING: This product can expose you to chemicals including:   |
| Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and                                | Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and                                |
| Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              |

## Contractual warranty


|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

## Dimensions



## Wiring Schemes

### NPN




BU : Blue

BN : Brown


BK : Black (out / output)

## Detection Curves

### With Thru-beam Accessory (Thru-beam)

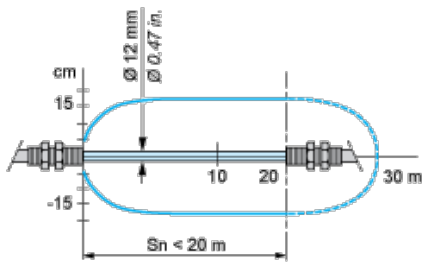


**Without Accessory (Diffuse)**




- 1 : White 90%
- 2 : Grey 18%
- Object: 10 x 10 cm

**Without Accessory (Diffuse with Background. Suppression)**




- 1 : White 90%
- 2 : Grey 18%
- Object: 10 x 10 cm

**With Reflector XUZC50 (Polarised Reflex)**




**Variation of Usable Sensing Distance Su (Without Accessory, with Adjustable Background Suppression)**

Teach mode at minimum



Teach mode at maximum



- (1) Black
- (2) Grey
- (3) White
- (4) Sensing range
- (5) Non sensing zone (matt surfaces)

A-B :Object reflection coefficient

- (1) Black 6%
- (2) Grey 18%
- (3) White 90%
- (4) Sensing range
- (5) Non sensing zone (matt surfaces)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)