HEYCO

NO O-RING REQUIRED!

Heyco®-Tite Liquid Tight Cordgrips

Pigtail™, PG* Hubs with Integral Sealing Ring

The Ultimate in Liquid Tight Strain Relief Protection

CABLE DIA. RANGE				PART NO.			DESCRIPTION	UL or CSA	PART DIMENSIONS							
Minimum		Maximum		Including Nylon Nut**		No Nut			A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		E Wrenching Nut Flats	
				Black	Gray	Black ††										
in.	mm.	in.	mm.						in.	mm.	in.	mm.	in.	mm.	in.	mm.
.065	1,7	.210	5,3	M3464	M3465	M4780	Flex RLTCG 7	CSA	.492	12,5	2.44	62,0	.32	8,1	.63	16,0
.115	2,9	.250	6,4	M3237	M3238	M4778	Flex LTCG 7									
.065	1,7	.230	5,8	M3466	M3467	M4784	Flex RLTCG 9	CSA	.599	15,2	2.77	70,4	.32	8,1	.82	20,8
.105	2,7	.315	8,0	M3240	M3241	M4782	Flex LTCG 9									
.069	1,8	.250	6,6	M3468	M3469	M4788	Flex RLTCG 11	CSA	.733	18,6	3.46	87,9	.38	9,7	.94	23,9
.230	5,8	.400	10,2	M3243	M3244	M4786	Flex LTCG 11									
.095	2,4	.290	7,4	M4526	M4527	M4530	Flex RLTCG 13.5	UL	.804	20,4	3.89	98,8	.41	10,4	.98	24,9
.170	4,3	.450	11,4	M3246	M3247	M4790	Flex LTCG 13.5									
.180	4,6	.400	10,2	M4528	M4529	M4532	Flex RLTCG 16	UL	.886	22,5	4.37	111,0	.44	11,2	1.06	26,9
.260	6,6	.545	13,8	M3249	M3250	M4792	Flex LTCG 16									
.250	6,4	.490	12,4	M3478ST	M3479ST	-	Flex RLTCG 21 ST	UL	1.115	28,3	4.95	125,7	.43†	10,9	1.30	33,0
.435	11,1	.705	17,9	M3245ST	M3248ST	-	Flex LTCG 21 ST									
.250	6,4	.490	12,4	M3478	M3479	M4796	Flex RLTCG 21	UL	1.115	28,3	5.04	128,0	.52	13,2	1.30	33,0
.435	11,1	.705	17,9	M3245	M3248	M4794	Flex LTCG 21									

Standard colors black and gray.
*Steel conduit threads per DIN 40430, see page 3-56
**Nylon locknuts shipped unassembled
†.43″ (10,9 mm) Shorty LTCG Thread Length.
††For No Nut Part Nos. in gray color please visit our Cordgrip product section at heyco.com

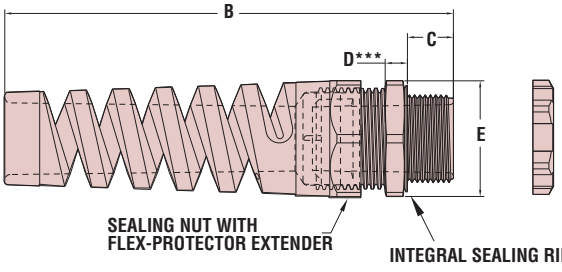



***Consult Heyco for Wrenching Nut Thickness "D"

- Flexible Pigtail extender prevents sharp bends and extends cable life.
- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters.
- IP 68 rated.
- Approved for **NEMA 4, 4X, 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065″ (1,7 mm) to .705″ (17,9 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Unassembled Nylon Locknuts INCLUDED.**
- For Heyco Liquid Tight Threaded Plugs, see page 3-49.
- Consult Heyco for cordgrips molded in other colors.

Material		Nylon 6/6 w/Buna N or TPE Sealing Gland
Certifications	UL	Listed under Underwriters' Laboratories File E51579
	CSA	Recognized under Components Program of Underwriters' Laboratories File E51579
	CSA	Certified by Canadian Standard Association File 93876C
		Approved for NEMA 4, 4X, 6 and 6P Applications
Flammability Rating		94V-2
Temperature Range		Static -40°F (-40°C) to 239°F (115°C)
		Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating		IP 68 (70 PSI, 5 BAR)

Quick Specs

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru