



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
CE	16	C	ECR-14-011637	14AUG2014	HZ RZ	

1. MAXIMUM CONNECTOR INSERTION LOSS IS 0.5dB PLUS CABLE ATTENUATION OF 3.5dB/km AT 850nm. MEASURE AGAINST A REFERENCE LEAD
2. TEST DATA PROVIDED WITH EACH ASSEMBLY.
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

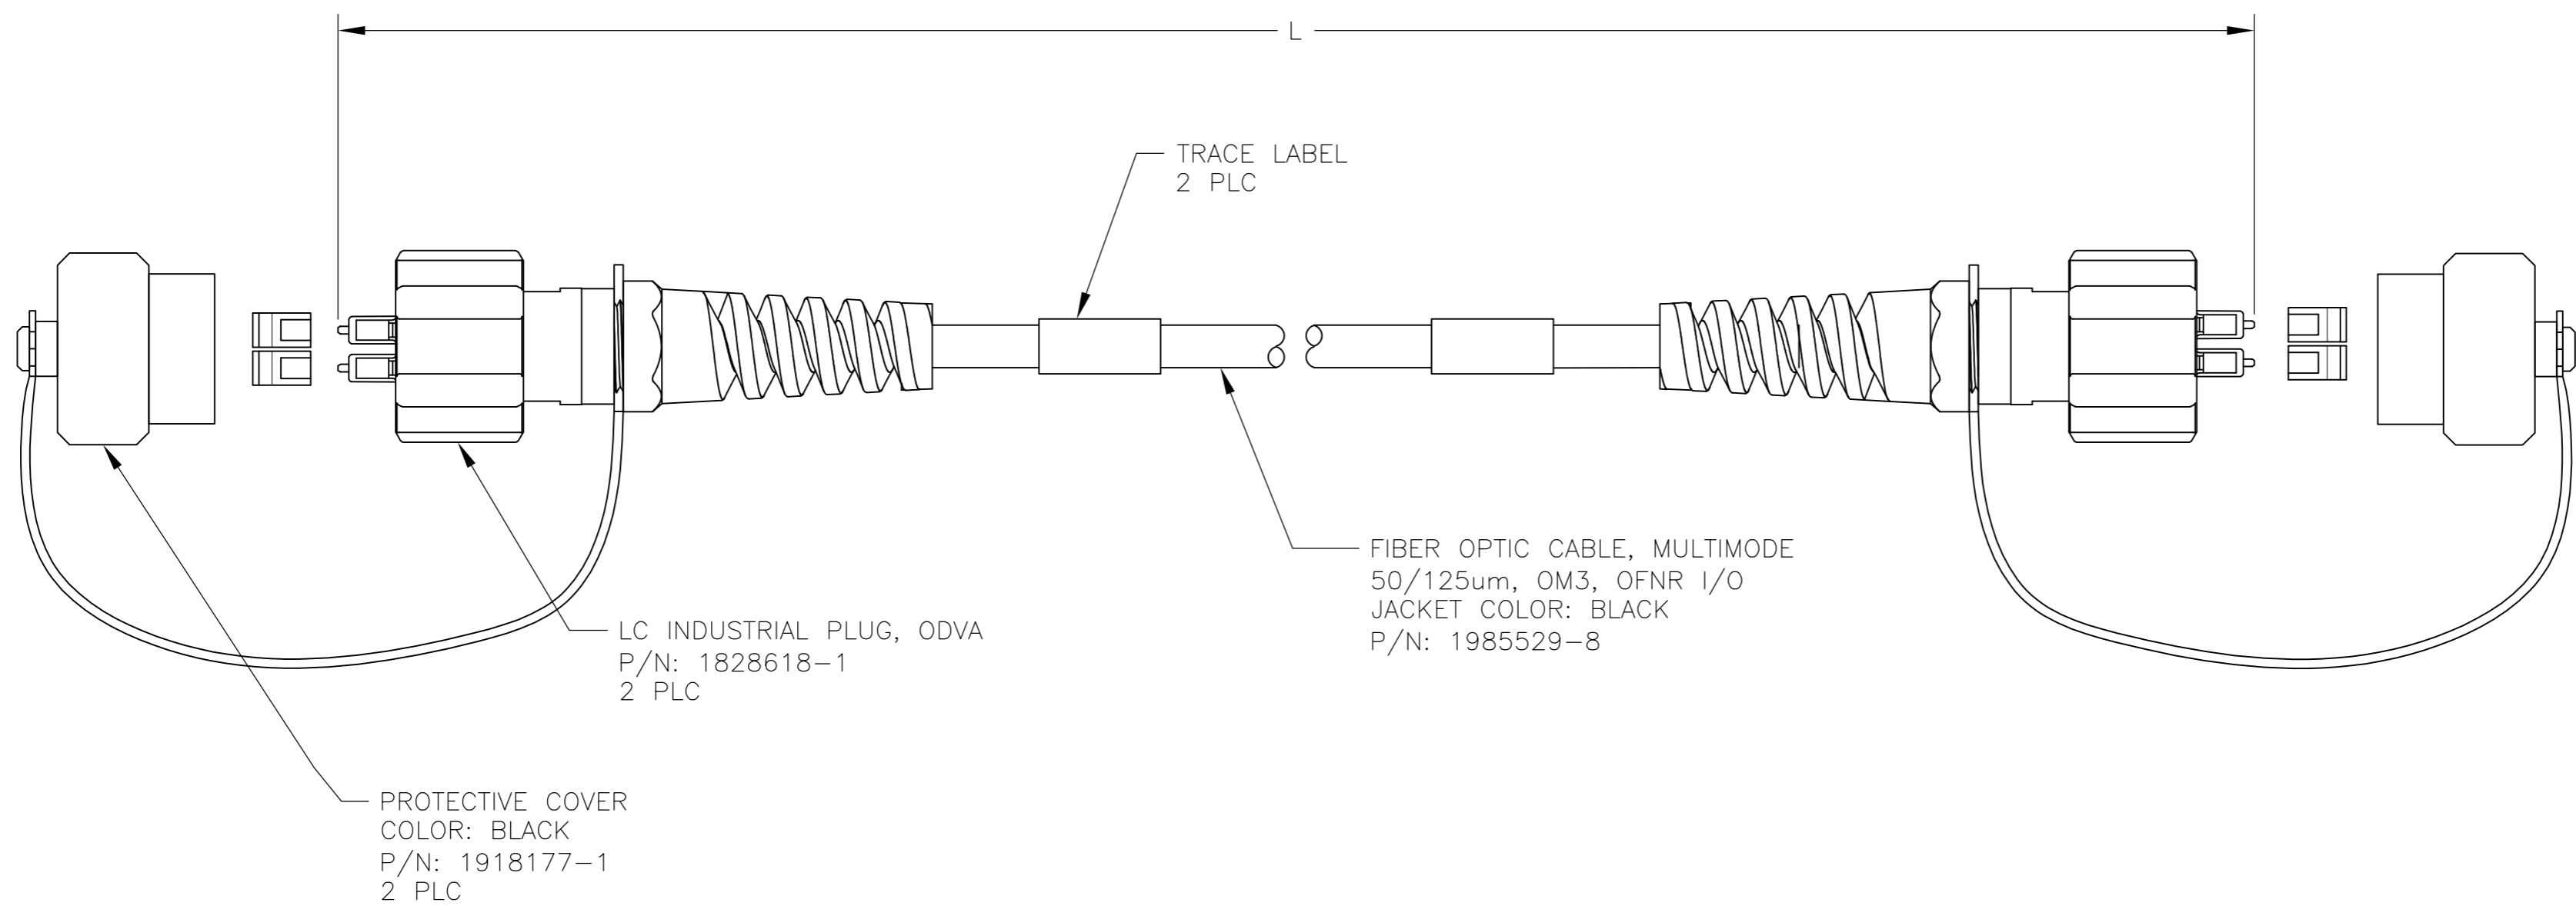

FIBER PATH DETAIL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN LG EBY 23MAR09	STE TE Connectivity													
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 23MAR09														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. BAECHTLE 23MAR09	NAME CABLE ASSEMBLY, FIBER OPTIC, 50/125, OM3, 2 FIBER BREAKOUT CABLE, SEALED CIRCULAR LC DUPLEX (ODVA), BOTH ENDS													
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	PRODUCT SPEC -	APPLICATION SPEC -	RESTRICTED TO
0 PLC	± -															
1 PLC	± -															
2 PLC	± -															
3 PLC	± -															
4 PLC	± -															
ANGLES	± -															
MATERIAL -	FINISH -	WEIGHT -	SIZE A2	CAGE CODE 00779												
CUSTOMER DRAWING			DRAWING NO C-2064915	SCALE NTS												
			SHEET 1 of 2	REV C												

2064915

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	-	-	SEE SHEET 1	-	-	-

1.38	250.0±2.50	[9842.5±98.4]	8-2064915-2
0.85	100.0±1.00	[3937.0±39.4]	8-2064915-1
1.03	152.40±1.50	[6000.0±60.0]	8-2064915-0
0.77	76.00±0.76	[2992.1±29.9]	7-2064915-6
0.76	75.00±0.75	[2953.0±30.0]	7-2064915-5
0.71	61.00±0.61	[2400.0±24.0]	6-2064915-1
0.68	50.00±0.50	[1969.0±20.0]	5-2064915-0
0.64	40.00±0.40	[1574.80±15.75]	4-2064915-0
0.64	39.00±0.35	[1535.43±13.78]	3-2064915-9
0.63	38.00±0.35	[1496.06±13.78]	3-2064915-8
0.63	37.00±0.35	[1456.69±13.78]	3-2064915-7
0.63	36.00±0.35	[1417.32±13.78]	3-2064915-6
0.62	35.00±0.35	[1377.95±13.78]	3-2064915-5
0.62	34.00±0.30	[1338.58±11.81]	3-2064915-4
0.62	33.00±0.30	[1299.21±11.81]	3-2064915-3
0.61	32.00±0.30	[1259.84±11.81]	3-2064915-2
0.61	31.00±0.30	[1220.47±11.81]	3-2064915-1
0.61	30.00±0.30	[1181.10±11.81]	3-2064915-0
0.60	29.00±0.30	[1141.73±11.81]	2-2064915-9
0.60	28.00±0.30	[1102.36±11.81]	2-2064915-8
0.59	27.00±0.30	[1062.99±11.81]	2-2064915-7
0.59	26.00±0.30	[1023.62±11.81]	2-2064915-6
0.59	25.00±0.30	[984.25±11.81]	2-2064915-5
0.58	24.00±0.30	[944.88±11.81]	2-2064915-4
0.58	23.00±0.30	[905.51±11.81]	2-2064915-3
0.58	22.00±0.30	[866.14±11.81]	2-2064915-2
0.57	21.00±0.30	[826.77±11.81]	2-2064915-1
0.57	20.00±0.30	[787.40±11.81]	2-2064915-0
0.57	19.00±0.30	[748.03±11.81]	1-2064915-9
0.56	18.00±0.30	[708.66±11.81]	1-2064915-8
0.56	17.00±0.30	[669.29±11.81]	1-2064915-7
0.56	16.00±0.30	[629.92±11.81]	1-2064915-6
0.55	15.00±0.15	[590.55±5.91]	1-2064915-5
0.55	14.00±0.15	[551.18±5.91]	1-2064915-4
0.55	13.00±0.15	[511.81±5.91]	1-2064915-3
0.54	12.00±0.15	[472.44±5.91]	1-2064915-2
0.54	11.00±0.15	[433.07±5.91]	1-2064915-1
0.54	10.00±0.15	[393.70±5.91]	1-2064915-0
0.53	9.00±0.15	[354.33±5.91]	2064915-9
0.53	8.00±0.15	[314.96±5.91]	2064915-8
0.52	7.00±0.08	[275.59±3.15]	2064915-7
0.52	6.00±0.08	[236.22±3.15]	2064915-6
0.52	5.00±0.08	[196.85±3.15]	2064915-5
0.51	4.00±0.08	[157.48±3.15]	2064915-4
0.51	3.00±0.05	[118.11±1.97]	2064915-3
0.51	2.00±0.05	[78.74±1.97]	2064915-2
0.50	1.00±0.05	[39.37±1.97]	2064915-1

MAX IL (dB) 1 L METERS [INCHES] PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	23MAR09		TE Connectivity																
DIMENSIONS: METERS [INCHES]		CHK	23MAR09																		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		J. DUNCAN																			
<table border="0"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>-</td></tr> <tr><td>3 PLC</td><td>±</td><td>-</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> </table>		0 PLC	±			-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	-	4 PLC	±	-	ANGLES	±	-
0 PLC	±	-																			
1 PLC	±	-																			
2 PLC	±	-																			
3 PLC	±	-																			
4 PLC	±	-																			
ANGLES	±	-																			
MATERIAL	FINISH	APVD	23MAR09	NAME	CABLE ASSEMBLY, FIBER OPTIC, 50/125, OM3, 2 FIBER BREAKOUT CABLE, SEALED CIRCULAR LC DUPLEX (ODVA), BOTH ENDS																
		PRODUCT SPEC		SIZE	A2																
		APPLICATION SPEC		CAGE CODE	00779																
		WEIGHT	-	DRAWING NO	C-2064915																
CUSTOMER DRAWING			SCALE	NTS	SHEET 2 OF 2																
			REV	C																	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru